QUALITY
INNOVATION
ENJOYMENT
HEALTH

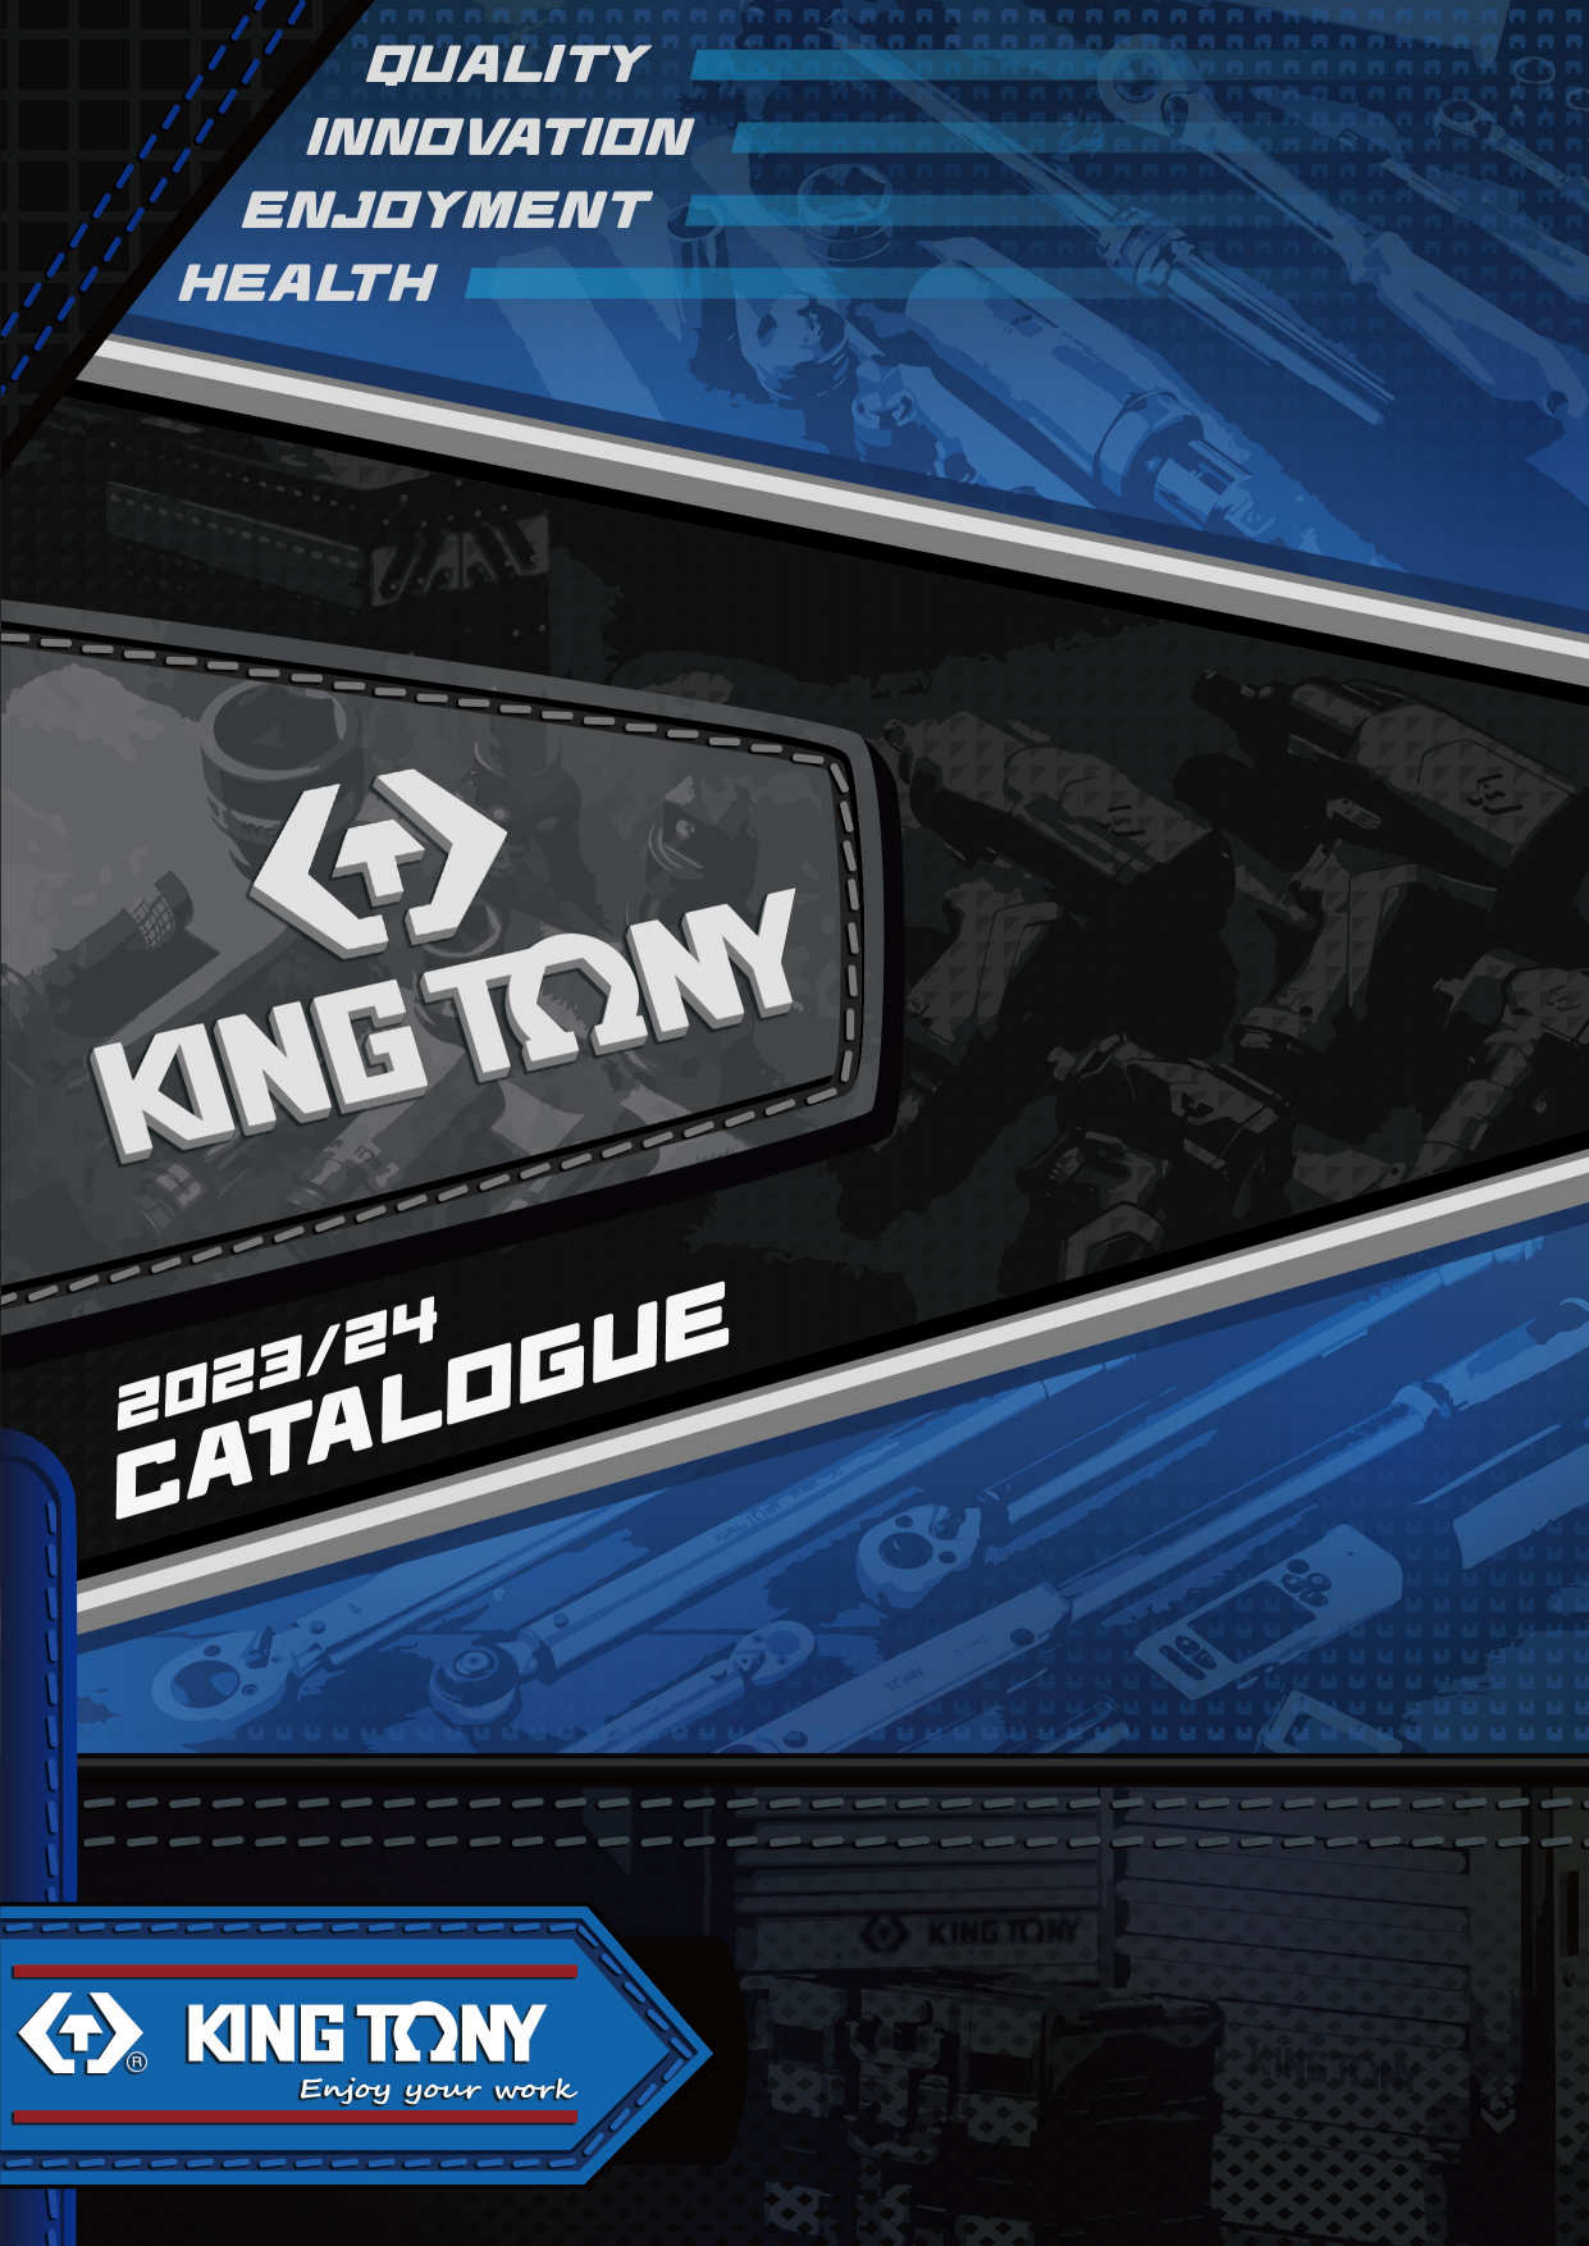



New products

- Tools Storage & Tools System Sets
- Hand Sockets & Accessories
- Impact Sockets & Accessories
- Pneumatic Tools
- Torque Control & Multipliers
- Wrenches
- Pliers
- Pipe Tools
- Screwdrivers & L-wrenches & Bits
- VDE Insulated Tools
- Electronic & Electrical
- Hammers & Striking Tools
- Workshop Tools
- Lighting
- Automotive Tools
- ST Series Tools

N1

NEW

16
128
218
250
276
300
334
348
358
404
414
446
454
476
490
588



KING TONY

Company Profile

In 1976, amidst a lack of capital and technology in Taiwan, Mr. Charles Lai & Mr. Tony Lin founded a hot forge factory specializing in making hand tools for the DIY market. Eight years later, many other companies had followed their lead and although the market grew quickly, quality suffered. With pricing, costs and quality nearing a state of chaos it became clear to KING TONY's founders that they needed to seek a new direction.

Mr. Lai & Mr. Lin found their new direction; making professional quality hand tools built to compete with the best in the world. They set their standards high and in the years since, have consistently exceeded the requirements of the world's toughest standards. KING TONY tools don't just meet the DIN (German) standard and the ANSI (U.S.A.) standard, they routinely exceed them. In fact, we test every torque make to a standard 30% higher than that prescribed by DIN and our pneumatic impact tools to a 50% higher standard. That's true commitment to quality!

To further underscore our determination to compete with the best in the world we have achieved certification with ISO on three separate standards. First, in January 1998, ISO 9002, followed by ISO 9001 and more recently we have qualified for the environmental safety standard, ISO 14001. We believe that is our responsibility to the world and we will always dedicate to reduce the harm to the earth during our manufacturing process in the future.

You might sense that King Tony Tools is about much more than a world-class tool. The ideals of KING TONY's management are fulfilled daily by our hundreds of employee's at our branches and offices around the world. You will find KING TONY Tools and its branches in: France, Spain, Belgium, Mexico, China. Each of our local branch offices is tasked with insuring that you, our customer, are happy not just with our quality but with the experience of being a KING TONY customer.





KING TONY

VISION

KING TONY engaged in supplying professional tools for more than 38 years, we always focus on supplying quality tools to our customers to make sure the quality satisfies the working requirement. To finish a professional job is a dream and target for every mechanic, and to finish it more easily and perfectly is even a better achievement. Thus, every mechanic can really enjoy their work. From this motive we have a goal that is to make every mechanic know, when they use KING TONY professional tools, they will quickly, perfectly and easily finish their work. They may feel more of confidence and enjoy what they do. To achieve this goal, we will continue to supply tools that is easy to take, easy to use, save time and strength. Our future vision is to tell every mechanic who uses KING TONY tools "enjoy your work", which contains the meaning to use good tools to do good jobs and have real enjoyment in the process. Why not find your enjoyment from your job, take KING TONY professional tools and you will start to experience it.



1993
Super
Standard



1996
Close
Tolerance



1999
VDE
Safety
Grip



2007
Masters
of Torque



2012
Dual
Colors
Stripe

BE INSPIRED & MILESTONES

KING TONY

KING TONY

Enjoy your work



Distribution

Branches :

- **France :**
  3 Rue des imprimeurs, ZI République Nord, 86000 Poitiers, France
- **Spain :**
  Calle Valderribas, 14, Local Comercial Modo, 28007 Madrid, España
- **Belgium :**
  Avenue Louise 143, Boîte 4, 1050 Bruxelles
- **Mexico :**
  Av San Jose No. 15-A,Col. , Zona Industrial La Presa, C.P. 54187 Tiainepantia, Edo. De Mexico
- **China :**
  No. 3 Building,No.285 Jingmao Rd., Industrial Park of Suzhou, Suzhou, Jiangsu, China



TAIWAN SUPERIOR BRANDS



NATIONAL BRAND YUSHAN AWARD



BUSINESS MERIT AWARD NATIONAL QUALITY AWARD

ISO 14001



Create to improve,
protect where we live,
balance environment and human.



TAIWAN EXCELLENCE



DESIGN AWARD 2016

Intellectual Property

New Registered Trademark

Please recognize KING TONY's official registered trademark.



Metric size *Imperial size*



Trademark Worldwide Registration

KING TONY

Inspection Equipment

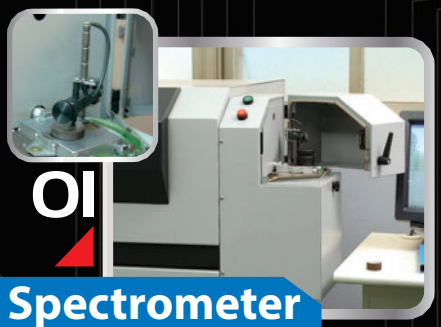

01

Spectrometer

Metal material elements analysis



02

Gauge measurement

Measure the screw tap to meet LEVEL I tolerance of DIN standard



03

Rockwell hardness tester

Test the product's hardness to meet KING TONY quality standard



06

Torque tester

Fracture test to check the max. torque to ensure excess of DIN standard



07

Precise cutting machine

Cut for a smooth section



11

Environmental simulation test of temperature & humidity

Simulate temperature from 70 ℃ ~ - 20℃ to test product reaction and durability while obvious change of temperature



12

Tension tester

Test pulling force of product especially for joint workpiece according to DIN standard



13

Hammering tester

Test the lifetime of striking hammer and security of the joint of hammer& wooden shaft



16

Micro- torque tester

Test products with smaller torque such as bits for their durability



17

Vision measuring machine

Measure parts for difficult angle or in the narrow space

KING TONY



04

Salt-water spray tester

48 HRs environmental simulation test to check product's durability from being rusty



05

Thickness test of plating

Apply special chemical to check thickness of plating and ensure it reaches KING TONY 's standard



08

Mounting press machine

In order to fix tiny and multilateral workpiece



09

Grinding & polishing machine

Make surface of workpiece smoother and clearer for further observation



10

Micro- hardness tester

Analyze the change of metallography after heat treatment and the difference of hardness between surface and central location



14

Pliers class measure tester

Test the cutting force and durability



15

Torque wrench tester

Follow the DIN ISO & ASME standard to test torque tolerance by 3 points of the lowest point, 60%, and 100% of max. scale



18

Carton busting strength tester

Test the strength of carton in order to assure good packing quality



19

Insulated tester

Ensure products are insulated under the voltage 1000V

KING TONY

Production Process



01

Hot forge

Heat to take shape and complete fibers to improve durability



02

Lathing

Control sockets external diameter and the roundness



03

Drilling

Drilling pin hole on the groove to offer socket safety operation



06

Punching & Broaching

Make accurate dimension for the spanner



07

Marking

Stamp dimensions, material and manufacturer



11

Grinding

Remove oxide layer and ensure sockets roundness for follow process precision



12

Plating

Nickel-chrome plated to protect product from corrosion and improve finish



13

Phosphate sunk

Increase impact sockets wear resistant and prevent corrosion to improve the durability



04

Machining (CNC)

Finish complicated process to ensure the precision of product



05

De-burring

Remove the burrs and chamfer on square hole



08

Heat treatment

Enhance product performance to achieve max. hardness



09

Vibrating

Remove oxide layer and burrs for surface coating



10

Sand blast

Remove oxide layer and burrs for surface coating



14

Silk printing

The unique bi-colors silk printing design and is easy to distinguish metric and imperial dimension



15

Rubber stripe assembly

The unique bi-colors rubber stripe design and is easy to distinguish metric and imperial dimension

KING TONY


KING TONY


KING TONY
Enjoy your work
www.kingtony.com


KING TONY


KING TONY
Enjoy your work
HYDAC
rayflex
KING TONY

Exhibitions





Sponsor & Partnership







KINETONY


KING-TONY.COM.AU
E GET IT
lifetime guarantee.


KING TONY
GARCAREK
ALMAR


KING TONY


KING TONY


KING TONY
KING TONY

KING TONY


KING TONY
Enjoy your work
14 · XL · 91
MS GROUP
MARQUES DOS SANTOS
www.kingtony.com
• Quality • Innovation • Health • Enjoyment

Branding to Target Users

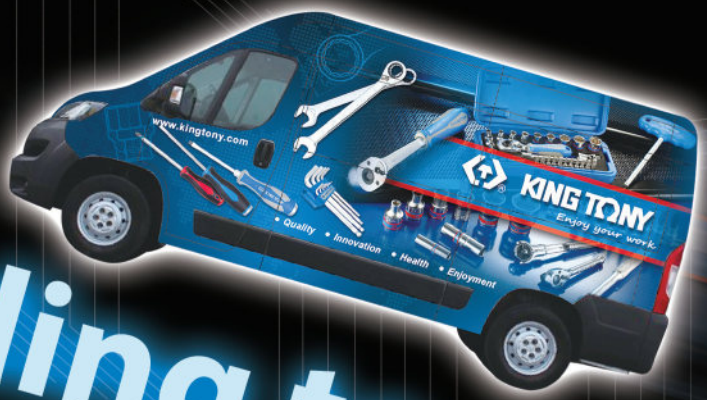





KING TONY


KING TONY

OBJECT-ORIENTED ORGANIZATION ACCESSORIES

NEW





Extra Wide Wall Cabinet

87D11-21A-KG

87D11-21A-KB

- Increase 100% of width, easy to storage and access
- Open door test for more than 500 times



87D11-21A-KG



87D11-21A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-21A-KG 87D11-21A-KB	1360 x 281 x 350	17	7.24

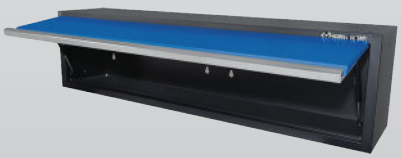



NEW

Two Door Wall Cabinet

87D11-22A-KG

87D11-22A-KB



87D11-22A-KG



87D11-22A-KB







KT NO.	Overall (mm)	Kg	CUFT
87D11-22A-KG 87D11-22A-KB	680 x 281 x 350	9	3.72

Washbasin Cabinet

87D11-19A-KG

87D11-19A-KB

- Water tap & Stainless steel sink, easy to clean
- Convenient two door cabinet



87D11-19A-KG



87D11-19A-KB









KT NO.	Overall (mm)	Kg	CUFT
87D11-19A-KG 87D11-19A-KB	680 x 464 x 948	33	14.23

9 Drawer Bottom Cabinet

87D11-23A-KG

87D11-23A-KB

- 53 inch wide cabinet, with one wide drawer, six drawers, two big drawer
- Content with garage bin & storage box*18 PC.



87D11-23A-KG



87D11-23A-KB



• Storage box



• Garage bin



• Safety mechanism



KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-23A-KG 87D11-23A-KB	Overall	1141 x 730 x 725	112	29.77
	1 Drawers	1248 x 403 x 84		
	5 Drawers	783 x 403 x 58		
	1 Drawers	783 x 403 x 137		
	2 door	284 x 371 x 531		



Workbench Frame

87D11-24A-K

- Workbench frame is able to combine with tool cabinet 87D11-25A-KG
- Suitable for use with workbench table(87D11-08A)

The workbench table is not included ×

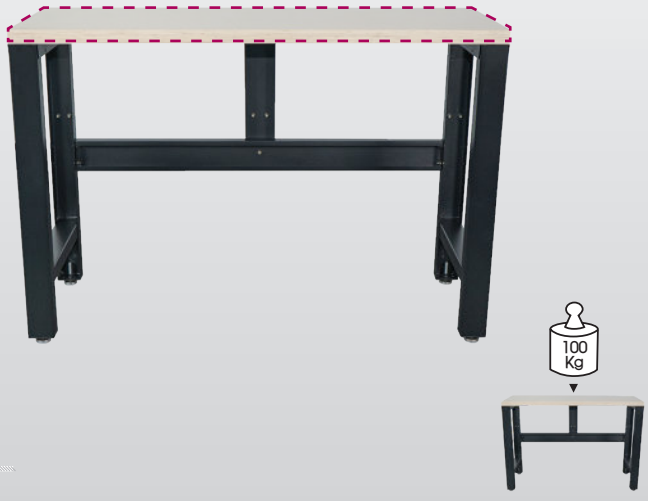

KT NO.	Overall (mm)	Kg	CUFT
87D11-24A-K	1361 x 458 x 895	19.5	4.22

NEW

NEW

7 Drawer Tool Cabinet With Casters

87D11-25A-KG

- Suitable for use with workbench 87D11-24A-K
- 35in wide drawer, increasing the storage space
- Four swivel casters(one is with brake mechanism)



87D11-25A-KG

87D11-25A-KB



87D11-25A-KB

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-25A-KG 87D11-25A-KB	1 Drawer	785 x 403 x 137	65	14.07
	6 Drawer	785 x 403 x 58		





- The groove design is easy to pull out the cabinet

Storage Shelves

87D11-20A-K

- Multi-layer to storage
- Suitable for combine with 87D11 tool cabinet system

KT NO.	Overall (mm)	Kg	CUFT
87D11-20A-K	680 x 458 x 2000	41	5.94
87D11-20LA-K	1200 x 458 x 2000	55	5.94

87D11-20LA-K



87D11-20A-K

87D11-20LA-K



Wall Tray

87D11-26A-K

- Wall tray for back panel, easy to storage

KT NO.	Overall (mm)	Kg		CUFT
87D11-26A-K	602 x 281 x 178	2.6	1 / 4	1.71



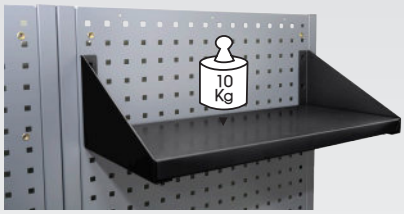





Drawer (579 x 380 mm)

Tool Set Content

9-30909AYV

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly

Contents		Kg 0.89	1 / 12
43250115Y	43350175Y		
43260115Y	43360175Y		
43270115Y	43370175Y		
43290115Y	43390175Y		
43240115Y			



9 PC.

Tray category #8 (375 x 187mm)

Roller Seat

87C34-3B-B

- Material : PVC leather + foam cushion + finishing powder coating steel
- 3 ball bearing drawers : 274 x 148 x 35 mm
- 3 bottle side holder



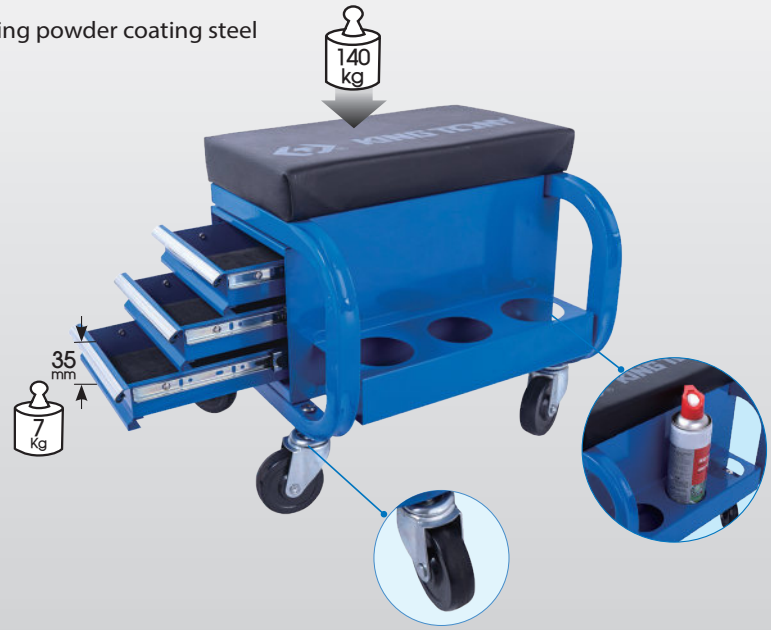

- Four 360° rotation 3"x1" casters

KT NO.	Dimension(mm) Width x Depth x Height	Kg		CUFT
87C34-3B-B	370 x 400 x 365	8.8	1	2.43

NEW

Tool Trolley

87G33-7H-KB

- Multi-functional stainless working top
- One drawer open only, prevent unstable center of gravity
- 100% pull out ball bearing drawer with auto-return system
- TPR corner protection bumpers
- More space for hanging
- 5"x2" Heavy duty casters (2 Fixed and 2 swivel with stop function)



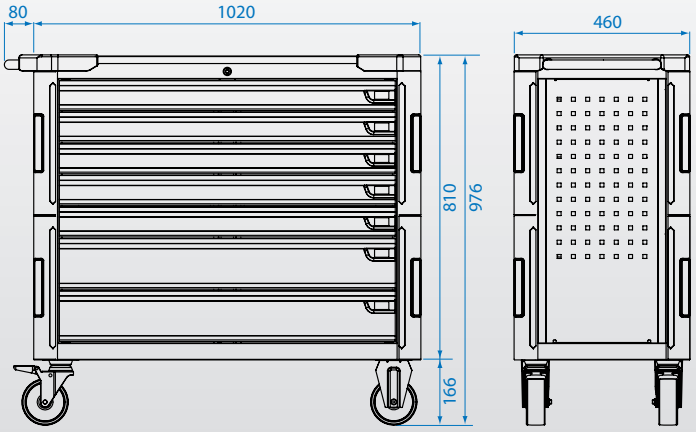



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G33-7H-KB	Overall	1020 x 460 x 810	5" x 2"	1000 Kg	80.0	22.60
	Overall+4 Casters	1020 x 460 x 976				
	5 Drawers	850 x 390 x 80				
	2 Drawers	850 x 390 x 135				

Tool Box Set

37 PC.

9052-001MRV

8.69 CUFT 1.16

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)



Pouch 1 — 6 PC.



Pouch 2 — 21 PC.



EVA foam — 10 PC.



Pouch 1

Contents



6CB21 | 6716-06A | 6216-06A | 6336-08A



6318-08A | 6146-08A

Pouch 2

Contents

	1471	PH0 x 75, PH1 x 100, PH2 x 100
	1472	3 x 75, 4 x 100, 5.5 x 125, 6.5 X 150
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	20002UB	5 x 6mm, 8 x 10mm



6CB02 | 3611VE-08 | 79095-05M

EVA foam

Contents



6511-10 | 3611-10R | 76223-08 | 76210-10



7821-50 | 67B3-55 | 9CJ1120 | 6AG11-20



6311-08 | 67A1-07

NEW

Tool Box Set

112 PC.

9052-002MRV

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)

10.46 CUFT 1.16



Pouch 1 — 13 PC.



Pouch 2 — 7 PC.



EVA foam — 92 PC.



Pouch 1

Contents

1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22
9TA281	

Pouch 2

Contents

3611-10R	6AB31-75	6211-06	6111-07
6311-08	6511-10	79095-05M	

EVA foam

Contents

2335MR	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	10, 13, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
1147PR	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
20002UB	5 x 6mm, 8 x 10mm

1032CQ	1005APR	2792 4791R	4251-10R	2179DF
7821-30	4773-10GS	2755-55G	2142	

Portable Storage Box

8714101B

- Adjustable compartment is suitable for arranging different size of parts and accessories
- Transparent cover make it easy to find the parts you need
- The box is stackable design, you can combine two boxes together easily
- Durable material, easy to carry



• Adjustable compartment



• Suitable for arranging parts & accessories



• Stackable design



• Slide to lock



KT NO.	Size mm	g	
8714101B	376 x 290 x 67	790	1 / 16

Tool Bag

87724D

- External and internal side pockets
- Removable shoulder strap
- 600D Nylon Oxford







KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87724D	250 x 250 x 125	0.52	20

Travel Bag

87732D

- For travelling, gyms
- Shoe compartment with a waterproof material
- Multi-layered and able to carry all types of protective gear
- Durable hard bumpers on base corners
- Inner flat zippered mesh pocket on flap and main compartment separation

► CONSTRUCTION :

- 2 ventilation holes on the side
- 2 big webbing handle on top and the side to be able to move and carry the bag
- 2 strap handles to lift up the bag and carry on the shoulder
- 2 mesh pockets on internal sides of the bag
- 2 small front pockets
- 2 side pockets with zippers









KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87732D	210 x 500 x 260	1.00	20

Backpack

87731D

- Multi-layered, easy to organize
- Extra side pocket



- The breathable and comfortable shoulder straps foam is added inside



- External USB charge port design



KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87731D	440 x 310 x 150	0.6	40

Waist bag

87733D

- Durable fabric, smooth zipper and soft padding back
- Comfortable and Long-Lasting Usage
- Adjustable Waist Belt max to 130cm
- With 3 zippered pockets
- Convenient Earphone Hole
- Glow-in-the-dark logo keep you safe in the dark









KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87733D	420 x 120 x 150	0.22	50

NEW

NEW

Multi-use Backpack

- Material: 600D polyester
- Max Load: 20kg
- Includes 14 pockets

1.6

87723B





The pads on the back of the product can absorb vibrations and increase breathability, making it more comfortable to carry

Product Dimensions :
49 x 35 x 21(cm)



The backpack has a water-proof and wear-resistant PVC base





The main bag has a large capacity for easy access to tools. Multiple pockets can hold various tools within the backpack

4773-22GS

1/2" DR. Telescopic Ratchet Wrench



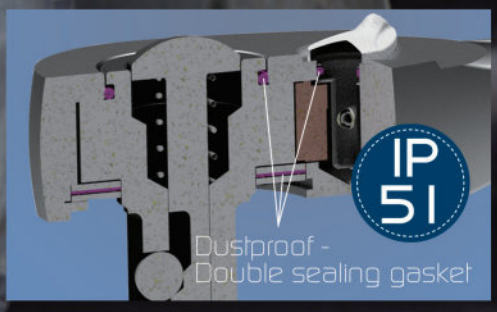





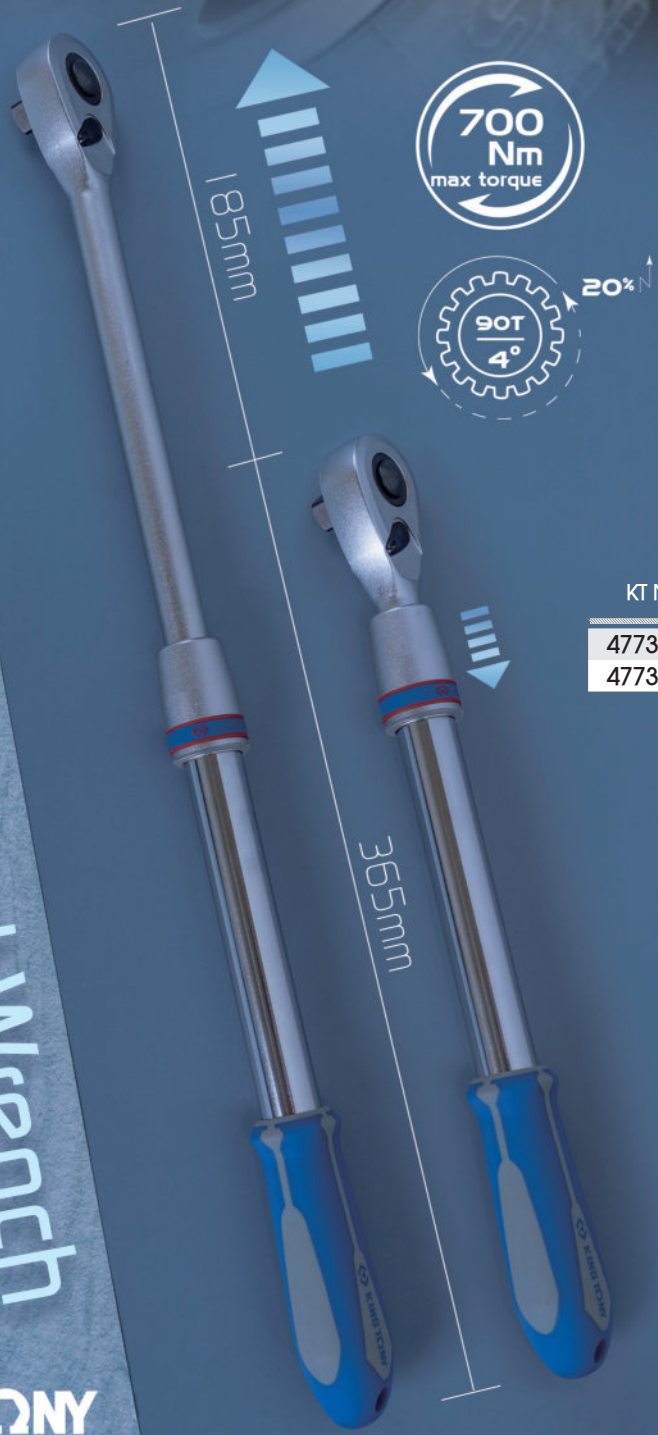

KT NO.	Max.L mm	Min.L mm		
4773-22GS	550	365	1200	1 / 20
4773DK	renewal kits			

- Special telescopic design saves storage space
- Pull down to unlock, fix, and quickly adjust
- Dust-proof design to increase product life.
- 700Nm torque value, which far exceeds the standard.
- Higher torque, less effort. Extra long lever for increased power : max 550 mm
- The long plastic handle has a hook at its end for hanging and working at height
- 4° gear action degree (90 teeth)

KING TONY

Socket Set

4524MRV04 1/2"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)

Contents		5.08	1 / 4
4335MR		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 28, 30, 32	
4251R		5, 10	
4793			
4572-12			
4773-22GS			

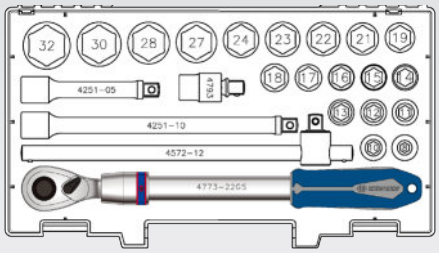

Tray category #8 (375 x 187mm)

24 PC.

3055CR 3/8"

Metal case size (mm) :
490 x 205 x 52 (0.185 cuft)

Contents		6	1 / 3
3330M		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
3230M		10, 11, 12, 13, 14, 15, 16, 17, 18, 19	
3330S		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8	
3230S		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	
363516	363521	3792	
3771-08G	3452-10F		
3293-06	3221-03 3221-10		



55 PC.

4223MR 1/2"

Metal case size (mm) :
490 x 205 x 52 (0.185 cuft)

Contents		4.7	1 / 3
4330MR		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32, 34	
4771-10G	4461-24G		
4791R	4251-05R		



22 PC.

Swivel Palm Ratchet

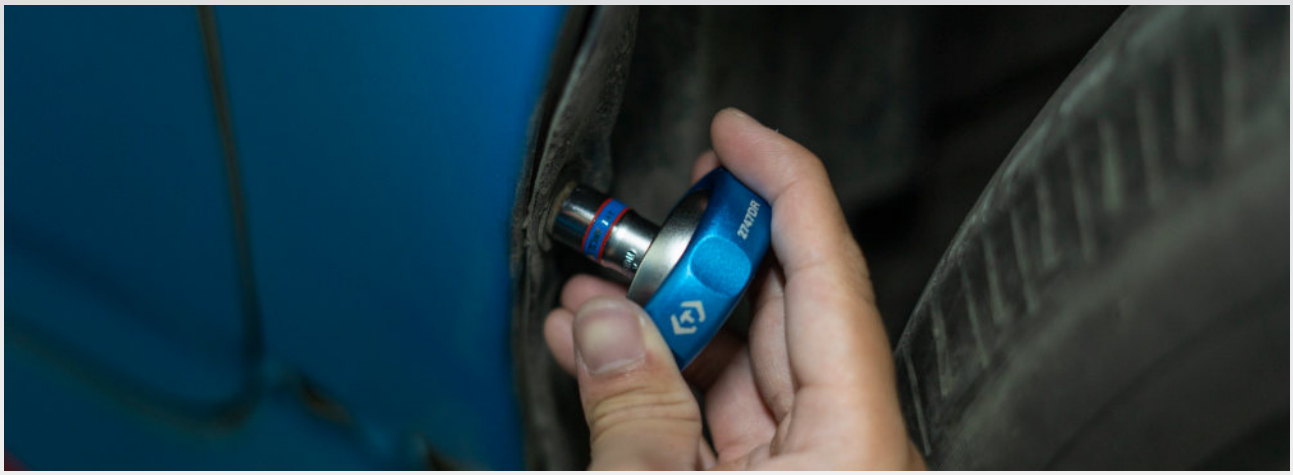

2747 1/4"

- 72-teeth ratcheting mechanism gives a 5° ratcheting arc allowing you to quickly tighten or loosen fasteners.
- Anodized aluminum finish for protection and easy wipe down





- The special gyroscope-like structure allows you to loosen or lock objects with various angles







2747DR



2747

KT NO.	Ø (mm)	H (mm)	Teeth	g	
○ 2747	50	25	72	88	12 / 72
■ 2747DR	50	25	72	90	12 / 72

Ratchet & Set

KT No. & D1

7773GS 1/4" 1/2" IP51 2 PC. PAT.

- 1/4" DR. & 1/2" DR. 90 teeth reversible ratchet
- 90 teeth ratchet mechanism, allowing ratchet action in very tight spaces
- IP51, dustproof design



2773DK/4773DK



1 New slimline I-Beam shank offers superior strength with less effort



2 Dustproof - Double Sealing gasket

4773-10GS (IP51)



3 Screwless design - Easy to repair

Contents	kg 0.70	1 / 36
2773-55GS	140mm	
4773-10GS	262mm	



1/4" DR. Spinner Handle

2176DF 1/4"

- 2 in 1 design Spinner handle + Bit holder
- NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10



• Attached with 1/4" bit



• Attached with 1/4"DR. socket



• Easy to switch



• Attached with 1/4"DR. ratchet, compact size & easy to use



KT NO.	Overall length inch	Overall length mm	g	
2176DF	6	150	105	6 / 60

Universal Joint & Set

KT No. & D1

2793 1/4"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	
2793	1-1/4	31	18	20 / 600

3793 3/8"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	
3793	1-3/4	43	55	15 / 300

4793 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	
4793	2-3/8	59	125	5 / 180

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces



3 PC.

Contents 0.20 6 / 108



2793	31mm
3793	43mm
4793	59mm



Socket Rail Set

2114TR 1/4" 1/4" 14 PC.

- For torx intermal screw
- DIN 3120



Contents		0.30 kg	6 / 72
2033		T8, T9, T10, T15, T20, T25, T27, T30, T40	
2275M		E4, E5, E6, E7, E8	
8721114			

Bit Socket

KT No. & D1

2035S 1/4"

- Hexagon head
- DIN 7422 / 3120





KT NO.	inch	L mm	g	
203504S	H1/8	37	15	20 / 600
203505S	H5/32	37	15	20 / 600
203506S	H3/16	37	16	20 / 600
203507S	H7/32	37	17	20 / 600
203508S	H1/4	37	18	20 / 600
203510S	H5/16	37	19	20 / 600
203512S	H3/8	37	22	20 / 600

Socket Rail Set

2127SR 1/4" 7 PC.

- Socket rail 130mmL
- For hex head screw
- H : 37mm



Contents		0.36 kg	50
2035S		H1/8, H5/32, H3/16, H7/32, H1/4, H5/16, H3/8	
8720507			

Extension Wrench

3893EW 1/4" 3/8"

- Length extension drive bar enables easier works in confined spaces
- Provided with two square drive adapters in 1/4" and 3/8"
- Chain-driven mechanism enhances working durability and smoothness
- Max torque allowed: 130 N m / 96 ft lb





► 3/8"
3893EW-01





► 1/4"
3893EW-02



KT NO.	Overall length inch	mm	g	
3893EW	13.4	340	410	20 / 40
3893EW-01	-	-	20	10 / 160
3893EW-02	-	-	20	10 / 160







NEW

NEW

TORX Plus Socket

3E07PR 3/8"

- Socket rail 210mmL



7 PC.

Contents		0.42 kg	40
333E	EP10, EP11, EP12, EP14, EP16, EP18, EP20		
8730808			

4E08PR 1/2"

- Socket rail 280mmL



8 PC.

Contents		1.00 kg	20
433E	EP18, EP20, EP22, EP24, EP26, EP28, EP30, EP32		
8741110			

CAUTION Please wear proper safety gear while working.

Impact Driver Set

4116FR01 3/4"

- 3/4"DR. impact driver with knurled grip
- Instant impact force releases rusted or frozen screws without damaging them
- Forward and reverse drive direction
- Comfortable handle with non-slip knurled handle
- Can be used anywhere, no air or power source required
- Max torque: 512N.m for 1/2" DR. convert adapter

Kg 1.27 / 1 / 20







Extendable Breaker Bar

4461-24G 1/2"

- Extends from 18 in. to 24 in.
- This breaker bar has a 180° swivel head and an ergonomically designed handle
- Break free stubborn or stuck fasteners
- Flexible head for multiple angles of use









4462DK

KT NO.	Max.L mm	Min.L mm	g	/
4461-24G	600	450	1185	1 / 10
4462DK	renewal kits			

Flexible Handle

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

6462-40P 3/4"

- Flexible Handle
- Action degree-180
- DIN3122



6462DK



KT NO.	Overall length inch	mm	g	/
6462-40P	40	1020	3900	1 / 6
6462DK	renewal kits			

8462-40P 1"

- Flexible Handle
- Action degree-180
- DIN3122



8462DK



KT NO.	Overall length inch	mm	g	/
8462-40P	40	1020	3950	1 / 6
8462DK	renewal kits			

Impact Socket & Wrench Set

44106AMP01 1/2"



Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

17 PC.

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar & with ball
- 1 PC. universal joint
- 1 PC. air inlet adapter

Contents			6.32 kg	1 / 2
	4535M	9, 10, 11, 13, 14, 17, 19, 22, 24, 27		
	4415M	17, 19, 21		
	4260-05P	5"		
	4799P			
	33411-050			
	SY-211M	(1/4"BSPT)		

44108AMP01 1/2"



Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

19 PC.

- 14 PC. deep impact sockets 8~27mm
- 1 PC. impact wrench
- 2 PC. extension bar & with ball, 3" & 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter

Contents			7.92 kg	1 / 2
	4435M	8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27		
	4260P	3", 5"		
	4799P			
	33411-050			
	SY-211M	(1/4"BSPT)		

Wheel Nut Impact Socket Set

44904MP 1/2" 1/2" 4 PC.

- Material - chrome molybdenum alloy steel
- Idling type protective sleeve design, reduce sheath wear and avoid damage to aluminum alloy rims
- With color management, easy to recognize the sizes

1.08 kg 1 / 20

Contents		DR.	Applicable vehicle	Size mm	L mm
	494515M	1/2"	Smart	15	85.0
	494522M	1/2"	Opel	22	85.0
	9BW4501	1/2"	Mercedes Benz	17	85.5
	9BW4502	1/2"	Hyundai/Kia	21	85.5





494515M 494522M 9BW4501 9BW4502

NEW

Wheel Nut Impact Socket Set

4405MXL 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Contents			1.20 kg / 1 / 20
○		495517MX	17 mm
○		495519MX	19 mm
○		495521MX	21 mm



3 PC.

Blow case size (mm) :
206 x 147 x 50 (0.053 cuft)

Insert Adapter

34505102R

KT NO.	▭ mm	▬ mm	L1 mm	L mm	g	
34505102R	9 x 12	14 x 18	20.5	45.5	82.2	12 / 144





34505201R

KT NO.	▭ mm	▬ mm	L1 mm	L mm	g	
34505201R	14 x 18	9 x 12	33.5	49.5	131.8	12 / 144





Hook Wrench Head & Set

345042M

- Square drive size: 14 x 18

KT NO.	Size mm	Capacity mm	Maximum Torque N·m	Lw* mm	L mm	g	
34504236M	36	28-36	354	77	121	248.20	12 / 72
34504245M	45	40-45	377	77	129	274.00	12 / 72
34504255M	55	50-55	398	77	129	263.20	12 / 72
34504262M	62	58-62	421	77	134	278.20	12 / 72
34504275M	75	68-75	444	77	139	294.60	12 / 72
34504290M	90	80-90	465	77	142	288.80	12 / 72

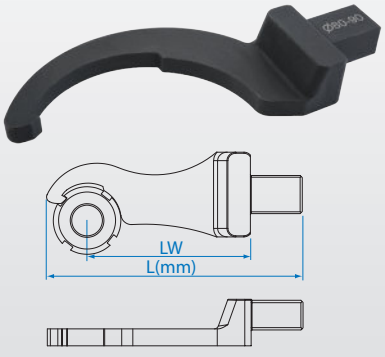

3452407MR

- Suitable for tightening round nuts with radial notches
- Applied with interchangeable torque wrench
- Widely used in automobile, machine tool building and petroleum industries

Contents			2.48 kg / 1 / 6
		34505102R	9 x 12(F) → 14 x 18(M)
		345042M	36, 45, 55, 62, 75, 90



7 PC.



Window Type Adjustable Torque Wrench

Adjustable torque wrench with window dual scale
Tolerance of torque ± 3% clockwise
Dual scale in N·m and ft·lb conversion table on window
Grip handle and large number NM on center handle for setup required torque
Simple lock and unlock knob for quick in adjustment
Durable mechanism with over 10,000 cycles within accuracy
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
The 3/4" torque wrenches have a cylinder body

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

NEW



34X66-XFG

Dual Scale - Newton Meter & English (N·m / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g	
34266-1FG	24	1/4"	5-25 N·m	0.1 N·m	3.6-18 ft·lb	296	410	1 / 12
34366-1FG	32	3/8"	10-50 N·m	0.25 N·m	7.4-37 ft·lb	333	470	1 / 12
34466-1FG	32	1/2"	20-100 N·m	0.5 N·m	15-75 ft·lb	398	820	1 / 12
34466-2FG	32	1/2"	40-200 N·m	1 N·m	30-150 ft·lb	500	1300	1 / 12
34466-3FG	32	1/2"	60-300 N·m	1 N·m	45-220 ft·lb	633	1470	1 / 12
34666-1FG	24	3/4"	100~600 N·m	2 N·m	75~440 ft·lb	1040	4650	1 / 2
34666-2FG	24	3/4"	150~800 N·m	2 N·m	110~590 ft·lb	1235	5450	1 / 2
34666-3FG	24	3/4"	200~1000 N·m	2 N·m	150~740 ft·lb	1238	5450	1 / 2


34666-1DK
34666-3DK

CAUTION
1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.



Torque Angle Adapter

34417-1A 1/2"

▪ Specifications:

Accuracy	Clockwise:±2% Anti-Clockwise:±2%				
Memory	10				
Unit Selection	N·m	ft·lb	In·lb	Kgf·m	Kgf·cm
Display Resolution	0.1	0.1	1	0.01	1
Operation Mode	Torque / Angle / Torque+Angle				
Battery	DC3V, CR2032				
Battery Life	4hrs (continuous operation)				
Operating Ambient Temperature	-10°C - 60°C (14°F - 140°F)				
Storage Temperature	-20°C - 70°C (-4°F - 158°F)				
Operating Relative Humidity	15 to 90% noncondensing				
Switch Off Automatically	100 seconds				
Warning Light	Green, Yellow, Red				
Overload Alarm	240 N·m (177 ft·lb)				



4 PC.









- The LED screen is backlit for easier reading



- The ring-shaped warning light can provide an immediate visual cue for the torque values



- The body can be rotated 240° for easier reading

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m		
34417-1A	1/2"	40 ~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	620	1 / 12

Wrench Display Rack

87157

- Including display rack and hanging hook x2
- Suitable for all kinds of display board

KT NO.	PC.	Dimension(mm) Width x Depth x Height	Applied Sizes		
87157-06	6	100 x 100 x 46	1060, 1061, 1062 (23~32mm)	0.22	4 / 24
			1900 (21 x 23~41 x 46mm)		
87157-09	9	100 x 100 x 46	1060, 1061, 1062 (9~23mm)	0.22	4 / 24
			1900 (5.5 x 7~21 x 23mm)		



87157-06





87157-09



NEW

Rapid Pipe Wrench

3616S

- Multi-purpose for all shape of fasteners and pipes
- Anti-slip teeth effective on worn screws
- Strong and durable CR-MO material



KT NO.	Capacity mm	g	
3616S-08P	12-28	345	1 / 48
3616S-14P	20-48	883	1 / 20



- Easy and quick to operate by one hand



- Rapid ratcheting action



- Special Jaw design provides extra strong grip

Combination Wrench Set

12D21MRN



Protection cover

KT NO.	PC.	Contents		Package		
12D21MRN	21	 1062	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	Tetoron	4.1	1 / 6



► MRN : Tetoron pouch bag

Portable Wrench Set

- Wrench safely locked in support



- Easy to recognize



- One-handed carry



- Quick storage



- Elastic structure design



- Hanging hole

12A2MRS02 **12A09MRS01** **12D12MRS**
12D12MRS01 **12D09MRS01** **12112MRS02**
12109MRS01 **122A12MRS02** **122A09MRS01**
122A08SRS



KT NO.	PC.		Contents	Package	Kg	
12A2MRS02	12	1061	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.8	1 / 8
12A09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	1.20	1 / 20
12D12MRS	12	1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22	color box	1.4	1 / 12
12D12MRS01	12		8, 9, 10, 11, 12, 13, 14, 16, 17,18, 19, 21	color box	1.4	1 / 12
12D09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	0.85	1 / 24
12112MRS02	12	3731M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
12109MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	0.95	1 / 24
122A12MRS02	12	373AM	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
122A09MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	1.00	1 / 24
122A08SRS	8	373AS	5/16", 3/8", 7/16",1/2", 9/16", 5/8", 11/16", 3/4"	color box	0.90	1 / 24

Atom Series

Asymmetrical line design

2539MR-AM

Plastic case size (mm) :
170 x 95 x 51(0.029 cuft)

39 PC.

PAT.





▪ Push mechanism





▪ Easy to pick up









Contents

0.86 kg | 1 / 24

	2335M	5, 5.5, 6, 7, 8, 9, 10 ,11, 12, 13, 14
	1025P	PH1, PH2, PH3
	102512P	
	1025Z	PZ1, PZ2, PZ3
	1025U	T10H, T15H, T20H, T25H, T27H,T30H, T40H
	1025S	4.0, 5.0, 6.0
	1025H	H2.5, H3, H4, H5, H6
	2773-55GS	 2176DF
	2141  2793	2221-02 2221-04



▪ Automatic raising bit rack

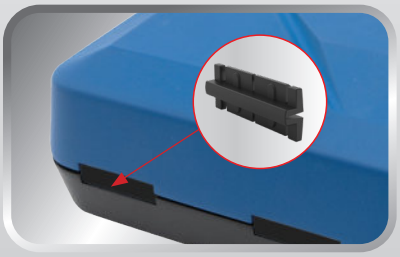

▪ Built-in rotation axis design

NEW

9 PC. Color Coded Extra Long Arm Ball End Hex Key Set

20109MW

- Color coded according to size makes it easy to distinguish and allows for faster work
- This professional ball hex key is made of S2 material
- The unique design at the bottom of the ball head has an inclination angle of 25 degrees that allows for easy operation in narrow spaces
- The rack can be opened, and the wrenches are easy to take out
- Easy to identify with the internal engravings





color	mm	L mm
	H1.5	92
	H2	102
	H2.5	115
	H3	129
	H4	144
	H5	165
	H6	186
	H8	208
	H10	234



KT NO.	PC.	Spec.	Contents	Kg	
20109MW	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	6 / 36

20109MW-S

Paper display stand size(mm) :
238 x 95 x 303 (0.24 CUFT)

8 Sets



Contents		Kg	
 20109MW	x 8 Sets	3.57	1 / 4



Ratchet Screwdriver Set



32540MR

Contents		0.58	1 / 12
	1025S	3.0, 4.0, 5.0, 6.0	
	1025P	PH1, PH2 x 2, PH3	
	1025Z	PZ1, PZ2 x 2, PZ3	
	1025T	T10, T15, T20, T25, T27, T30, T40	
	1025H	H3, H4, H5, H6	
	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
	7702-25		
	753-63		
	1025P	PH1, PH2	
	1025Z	PZ2	
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2	
	2155-06		
	2155DF		

- Suitable for fixing, repairing and installation work, and can also be used with power tools, with ratchet driver included to complete the work without power tools



40 PC.

+



2539MRV04

39 PC.

- Suitable for fixing, repair and installation work

Contents		1.25	1 / 16
	2335M	5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2	
	1025P	PH1, PH2	
	1025Z	PZ2	
	1025H	H1.5, H2, H2.5, H3, H4, H5, H6	
	1025U	T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	
	7702-25		
	2155-06		
	2155DF		
1317012PN	PH1		PH2
1317046SN	4.0		6.0
1317057SN	5.0		7.0



4-way Control Cabinet Key

7HA21

- For all standard cabinets and shut-off systems
- For control cabinets and shut-off systems in the supply of gas, water and electricity
- For technical installations in buildings, e. g. air conditioning and ventilation systems, shut-off valves, mains switch-boards, etc.



- Outer ring : diameter 11.9 mm
- Inner ring : 6 x 6 mm



- Outer ring : diameter 14 mm
- Inner ring : 8 x 8 mm

- Outer ring : diameter 14 mm
- Inner ring : triangle height 9 mm



- Outer ring : 14 x 9 mm
- Inner ring : diameter 5.5 mm

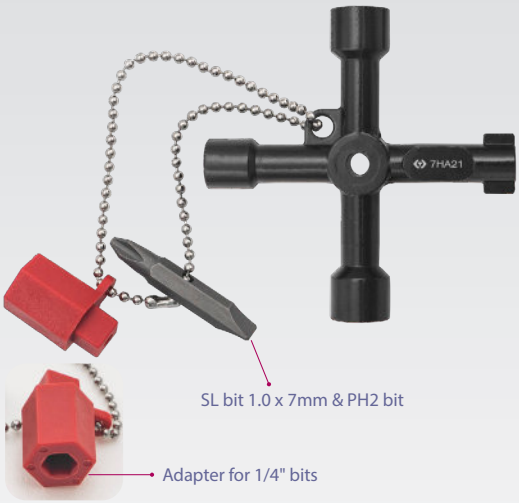





KT NO.	mm	mm	mm	No.	mm	g	
7HA21	6, 8	9	3-5	PH2	1.0 x 7	89	20 / 200

Impact Construction Socket Set

1010CMR 1/4"

Plastic case size (mm) :
257 x200 x 52 (0.095 cuft)

Contents	Kg 1.66	1 / 8
76C	8, 10, 12, 13, 14, 17, 19, 21, 23, 24	





10 PC.

Premium HSS Metal Drills Bit & Set

7E121 1/4"

- Material : Premium high speed steel
- Application: Stainless steel, alloy steel, metal
- Fast removal rate using high cutting speeds and fast short chip evacuations
- 130 degrees split point enables accurate positioning
- Cobalt-containing provide superior performance for steel drill

KT NO.	Diameter mm	Length mm	g	
7E12115M-1	1.5	72	9	1 / 500
7E12120M-1	2.0	77	10	1 / 500
7E12125M-1	2.5	82	10	1 / 500
7E12130M-1	3.0	92	11	1 / 500
7E12132M-1	3.2	93	12	1 / 500
7E12135M-1	3.5	95	12	1 / 500
7E12140M-1	4.0	105	14	1 / 500
7E12145M-1	4.5	109	16	1 / 500
7E12150M-1	5.0	114	18	1 / 500
7E12155M-1	5.5	118	20	1 / 500

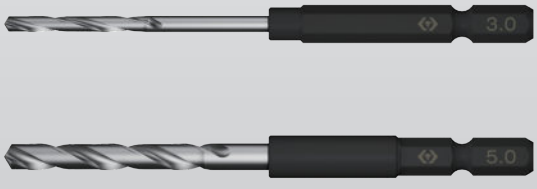

Power Driving Set



1045MR01-EB

45 PC.

Contents		0.97	1 / 12
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2	
	1025P	PH2 x 2 ø4.7mm	
	1025T	T10, T15, T20, T25, T27, T30, T35, T40	
	1025H	H2, H3, H4, H5, H6	
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H	
	1025Z	PZ1, PZ2, PZ3	
	1025R	RB1, RB2, RB3	
	1550P	PH1, PH2 x 2, PH3	
	7150P	PH2	
	7E111	3, 4, 5	
	761M x 65L	8, 10, 13	
	750-50A	1/4"	
	7702-50	1/4"	
	759-140		







Socket Set

2547MR-EB

47 PC.

Contents		1.0	1 / 12
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
	2375M	E4, E5, E6, E7, E8, E10	
	2031	PH1, PH2, PH3	
	2032	3.5, 4, 5.5, 6.5, 8	
	2033	T8, T9, T10, T15, T20, T25, T27, T30, T40	
	2035	H3, H4, H5, H6, H8	
	2038	PZ1, PZ2	
	2813	1/4"F x 3/8"M	
	7702-50	1/4" DR.	
	7703-50	3/8" DR.	
	7704-50	1/2" DR.	







Socket Set



2549MR-EB

49 PC.

Contents	1.28	1 / 12
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 x2, 11, 12, 13, 14
2235M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2275M		E4, E5, E6, E7, E8
2375M		E4, E5, E6, E7, E8, E10
2031		PH1, PH2
2032		4, 5.5
2035		H3, H4, H5, H6, H8
2221-02		







Bit Set

1041CQ-EB

41 PC.

Contents	2.1	1 / 12
1636M		M5, M6, M8, M9, M10, M12, M14
1636U		T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H
1636H		H5, H6, H8, H10
1680M		M5, M6, M8, M9, M10, M12, M14
1680U		T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H
414810M		











NEW

Tool Set Content



Drawer (579 x 380 mm)

9-25VE01MRV

Contents			Kg 1.30 / 1 / 10
○	2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14,	
◉	2035VE	H3, H4, H5, H6	
	2221VE	4, 6	
	2771VE-55	2178VE-05	



18 PC.

Tray category #7 (280 x 187mm)



Drawer (579 x 380 mm)

9-35VE01MRV

Contents			Kg 2.16 / 1 / 6
○	3335VE	10, 11, 12, 13, 14, 17, 19	
◉	3025VE	5, 6, 8,	
	3221VE	6, 10,	
	3771VE-08	3178VE-08	



14 PC.

Tray category #8 (375 x 187mm)

9-45VE01MRV

Contents			Kg 3.22 / 1 / 6
○	4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24	
◉	4025VE	H8, H10	
	4251VE	5, 10	
	4771VE-10	4178VE-08	



16 PC.

Tray category #8 (375 x 187mm)

Tool Set Content

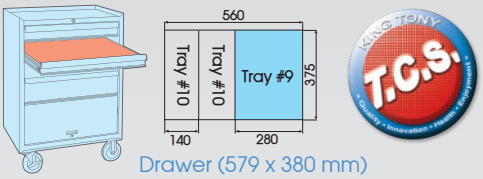

Drawer (579 x 380 mm)

9-55VE01MRV

38 PC.

Contents		kg 2.34 / 1 / 5
2335VE		5, 6, 7, 8, 9, 10, 11, 12, 13, 14,
2035VE		H3, H4, H5, H6
2221VE		4, 6
3335VE		10, 11, 12, 13, 14, 15, 16, 17, 18, 19
3235VE		8, 10, 12, 14
3025VE		H8, H10
3221VE		6, 10
2771VE-55	2178VE-05	
3771VE-08	3178VE-08	

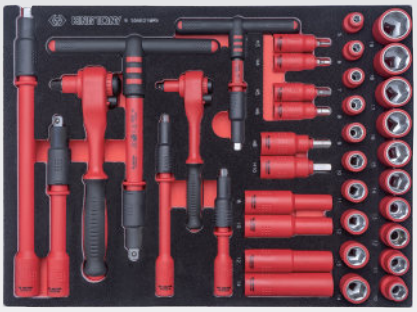
Tray category #9 (375 x 280mm)

9-12FVE15MRV

15 PC.

Contents		kg 1.96 / 1 / 10
10F0		7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24


Tray category #9 (375 x 280mm)

9-12FVG15MRV

15 PC.

Contents		kg 2.86 / 1 / 5
10G0		7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24


Tray category #9 (375 x 280mm)

9-30612MRV

12 PC.

Contents		kg 1.30 / 1 / 10
1471		PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150
1472		3 x 75, 4 x 100, 8 x 175, 3.5 x 100, 5.5 x 125, 6.5 x 150,
1474		1 x 125, 2 x 150

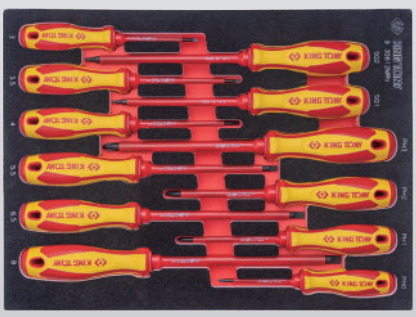
Tray category #9 (375 x 280mm)

Tool Set Content

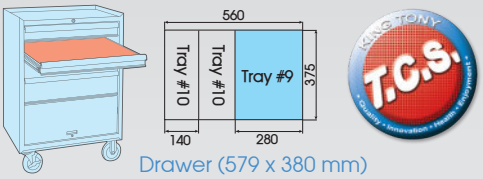

Drawer (579 x 380 mm)

9-40605GPV

Contents				1.77 kg	1 / 10
	6216-06A		6116-07A		
	6318-08A		6336-08A		
	6516-10A				

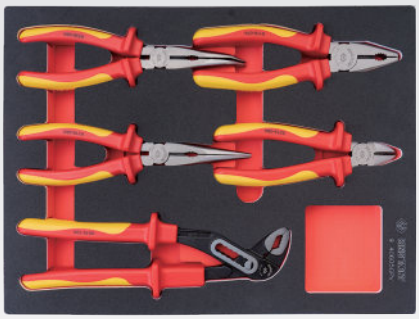

5 PC.

Tray category #9 (375 x 280mm)

9-40606GPV

Contents				1.88 kg	1 / 10
	6216-06A		6116-07A		
	6318-08A		6336-08A		
	6716-06A		6146-08A		

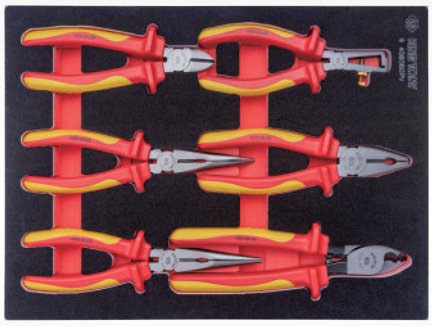

6 PC.

Tray category #9 (375 x 280mm)

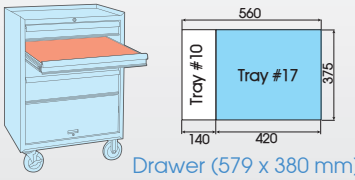

Drawer (579 x 380 mm)

9-45VE02MRV

Contents			3.96 kg	1 / 4
	4335VE	22, 24, 27, 30, 32		
	4025VE	H4, H5, H6, H8, H10		
	4035VE	H4, H5, H6, H8, H10		
	4251VE	5, 10		
	4771VE-10	4178VE-08		

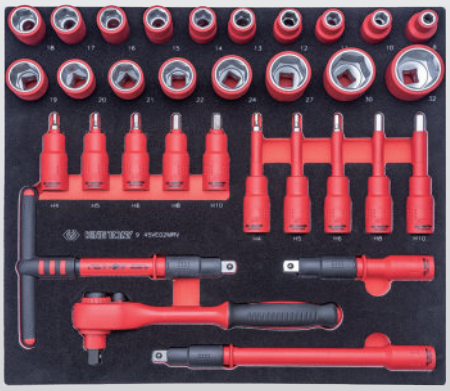

32 PC.

Tray category #17 (375 x 420mm)

NEW

5 in 1 Multi-functional Electrician Scissors

6AB14-06

- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel


• Crimping terminal of cable


• Scraping




• Welding cable 100mm²


• Wire stripper 1.5-4mm²



KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	Wire stripper AWG	Wire stripper mm²	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm2	g	
6AB14-06	6-3/8	161	24	1/0	50	14, 12	1.5, 2.5	14	2.5	193	12 / 48

6AB14-65

- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel


• Wire stripper 1.5-4mm²


• Crimping terminal of cable


• Crimping terminal of cable


• Welding cable 100mm²


• Scraping



KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	Wire stripper AWG	Wire stripper mm²	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm2	g	
6AB14-65	6-3/4	170	21	3/0	80	16, 14, 12	1.5, 2.5, 4	14	2.5	228	12 / 48

Multi-purpose Scissors

6AB33-95

- Ergonomically-designed handles are comfortable and durable during usage
- For cutting soft materials such as tin sheets, plastics, CD, cards and papers...etc
- The stainless steel blade and the curve-blade design makes it steady and saves strength while cutting
- The big angle design between blades and the handles of the scissors makes it so your hand never touches any object while operating
- Designed to conveniently adjust blades
- The blade is made of 420J2 stainless steel material
- PP+TPR handle material



• Large angle of blades



• Small angle of blades



• Big angle design between blades and the handles of the scissors



• Iron wire cutter

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Wire cutting Aluminum / Copper mm	Cutting capacities (mm) Cardboard	Carpet	Copper (soft)	Aluminium (soft)	g	
6AB33-95	9-3/4	246	73	2.5	10	5	0.5	0.6	312	6 / 48

Cable Stripping Knife

7935-08

- Blades are made from high tensile steel, allowing for excellent strength and performance
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for comfortable and durable usage
- The Cable Stripping Knife has a protection sheath
- The protection sheath can also be used for assisting stripping wires
- The V-shaped groove can be used to position wires, and can prevent sliding while you peel wires
- Nylon handle
- The blade is made of 4034 stainless steel



• Cable stripping



• Scraping





• Protection set locked



• Protection set unlocked



KT NO.	L mm	g	
7935-08	204	109	12 / 72

NEW

NEW

Retractable Safety Cutter

7946-07

- Multifunctional safety cutters with trapezium blades 60x18 mm premium quality robust and resistant
- Upper slider for blade extraction with automatic retraction
- Container with 2 replacement blades integrated in the handle
- Integrated device for cutting nylon threads and films
- Structure in zinc alloy, anti-slip ergonomic grip handle in TPR Soft-Grip
- High quality blades in carbon steel SK5 extremely sharp and long duration




7945-07P01
(62mm, 10 PC.)


• Auto return butto


• Auto lock button


• 2 blades in storage


• Blade replace button

KT NO.	L mm	g	
7946-07	180	200	12 / 72

7946-07-S

Paper display stand size(mm) :
243 x 199 x 217 (0.37 CUFT)

KT NO.	Contents	Kg	
7946-07-S	 7946-07 x 12 PC.	2.75	1 / 4





12 PC.

Multifunctional Electrician Pliers

67BA1-08

- Surface finish : Phosphate finish & Normal polished finish
- Multifunctional pliers with crimping, stripping and copper cable cutting functions
- Smooth gripping surface near the tips without damaging material
- Serrated gripping surfaces and pipe grip for gripping flat and round material


• Cut


• Strip


• Crimping



KT NO.	Wire cutter	Wire stripper mm^2	Crimping Capacity mm^2	g	
67BA1-08	Ø15mm 50 mm^2	0.7-1.5/2.5	0.5-2.5	0.28	6 / 60

Soldering Iron

6BC141A

- 220V~240V, 20W / 40W
- For electrical and stained glass work
- Lightweight handle
- Replaceable tip





KT NO.	Voltage V	Rating W	g	
6BC141A	220-240	20 / 40	204	25 / 50
6BC141-1	Soldering iron tip			

Butane Torch

6BB11



- Adjustable flame length with a maximum temperature of 1300°C /2450°F and will operate on a single fill for 60~90 minutes
- Quick and easy to refill gas only 5 seconds
- A ceramic partition in the nozzle, fast heat dissipation and high safety
- Aluminium body, lightweight and portable
- Built in child proof safety lock system
- Applications include soldering, brazing, heat shrink tubing, frozen locks, fusing rope ends, camping, etc…
- Suitable for workshops, factories and daily professional use
- Anti-flare gas flow tube
- Piezo ignition for instant flame



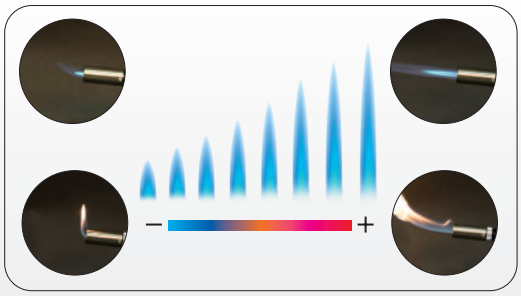



- Push the safety latch up



- Turn the gas flow control switch counter-clockwise



- Press the ignition button



- Refilling gas



- Turn the air flow control switch to change the fire type

KT NO.	Gas Capacity (ml)	Operation Time (min)	Gas Type	flame Temp °C/°F	Dimension L x W x H (mm)	g	
6BB11	34	60~90	Butane	1300 / 2450	122 x 70 x 168	400	12 / 24

Cordless Butane Hot Air Gun

6BH21

- Quick and easy to refill gas only 3s, keeps running for approximately 1 hours
- Maximum temperature 550°C
- Portable and cordless for convenient application
- Gas control knob for heat adjustment
- Suitable for heat shrink, paint stripping and plastic welding, etc
- Optional 2 nozzle deflectors 6BH21-01 and 6BH21-02 for different operate
- Upright stand for heat shrink and hands free working with our stable and durable stand
- Instant use without needing time to preheat and cool down



► Here are some common uses for hot air gun along with the temperature needed to complete

150~200°C	250~300°C	350~400°C	450~500°C

► Application	► temperature	► Distance
• Shrinking plastic film	200°C ~300°C	(5~10cm)
• Bending plastic pipes	200°C ~300°C	(5~10cm)
• Softening Adhesives	300°C ~400°C	(1~5cm)
• Welding plastic	330°C ~400°C	(1~5cm)
• Stripping paint	500°C	(1cm)


6BH21-01


6BH21-02


• Refilling gas


• Adjustable head for 4 angle


• Pull the switch and Turn the gas on


• Press the ignition button

KT NO.	Gas Capacity (ml)	Operation Time (min)	Gas Type	Operating Temp °C	Dimension(mm) L x W x H	g	
6BH21	34	60	Butane	550	168 x 66 x 198	576	1 / 20
6BH21-01	-	-	-	-	-	33	50 / 200
6BH21-02	-	-	-	-	-	21	20 / 200

Cordless Butane Gas Glue Gun

6BJ

- Self-regulating temperature system, avoiding the glue keeping coming out to stuck the nozzle or drip everywhere
- Fast-heating in 1 to 2 Minutes
- Quick and easy to refill gas only 3s, keeps running for approximately 1.5 hours
- Front top heater design for safety usage
- Portable and cordless for convenient application
- Passed the 250 hour continuous work durability test
- Included 2 PC. 11mm glue stick
- Suitable for wood workings, household repairs, artficial flowers, models, art and decorations etc…
- Optional glue stick 6BJ901, pack by 10 PC.
- Ergonomic comfort grip


► 6BJ21


• Refilling gas


• Turn the gas switch on


• Press the ignition button and wait 2-3 min (Make sure the indicator on)


• Automatic temperature control turns off at 180° and turns on under 160°


► 6BJ901

KT NO.	Gas Capacity (ml)	Operation Time (min)	Glue size (mm)	Gas Type	Operating Temp °C	Dimension(mm) L x W x H	g	
6BJ21	6.8	90	11	Butane	160-180	175 x 36 x 155	241	1 / 10
6BJ901	-	-	11	-	-	Ø11 x 150mm	140	10

Lightweight PU Work Gloves

9TH41

- PU leather offers high dexterity, sensitivity, excellent grip and good comfort
- Mesh fabric provides good breathability
- Elastic band cuff with label velcro provides firm fitting
- EN388 2121X



Non-slip Ventilation Sensitivity

EN 388 2121X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH41-L	L	105	230	67	120
9TH41-XL	XL	110	240	72	120

Vibration Resistant Work Gloves

9TH42

- Goat leather palm provides high dexterity and comfort with EVA padding for anti-vibration
- Touch screen capable fingertips
- Mesh fabric provides good breathability
- Neoprene cuff with velcro adjustment ensures firm fitting
- EN388 2111X



Abrasion Resistance Shock Absorption Touch Screen Ventilation

EN 388 2111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH42-XL	XL	115	250	98	120
9TH42-XXL	XXL	120	260	102	120

Silicone Non-slip Work Gloves

9TH43

- Durable palm with anti-slip silicone for excellent grip. EVA padding for anti-vibration
- Reflective piping ensure safe work in dark
- Elastic band cuff with label velcro provides firm fitting
- EN388 2111X



Abrasion Resistance Shock Absorption Non-slip Ventilation

EN 388 2111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH43-XL	XL	115	247	102	120
9TH43-XXL	XXL	120	257	108	120

NEW

NEW

Cold Protection Work Gloves

9TH44

- Nubuck leather palm is breathable, foam insert for extra comfort and anti-vibration
- Reflective piping ensure safe work in the dark
- Neoprene cuff with velcro adjustment ensures firm fitting
- Thinsulate insulation lining offers extra warmth
- EN388 2111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH44-XL	XL	120	250	105	120
9TH44-XXL	XXL	125	260	113	120

Magnetic Work Gloves

9TH45

- Durable palm with magnetic index finger
- Powerful magnetic on back for storing metal parts & fasteners
- Elastic band cuff with label velcro to ensure firm fitting
- EN388 3111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH45-XL	XL	120	250	92	120
9TH45-XXL	XXL	125	260	98	120

Steel Wire Brush Set

9CZ201-S

20 PC.

Contents		Kg	/
9CZ201	x 20 PC.	2.70	1 / 8



Micro Bearing Puller

7965-02

- Applications include: alternators, generators, domestic appliances, power tools and pumps

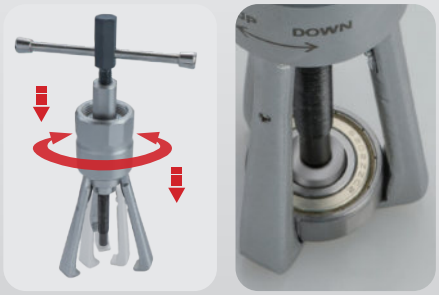

- Adjust the jaws by turning the screw



KT NO.	Capacity (Tons)	Spread A(mm)	Reach B(mm)	g	/
7965-02	2T	19-45	73	905	1 / 12

Screw Extractor Set



11406SQ

- For stripped, broken, stuck or damaged screw removal
- Size includes: #0, #1, #2, #2, #3, #4
- High hardness HSS material makes drilling easier and faster
- The screw extractor set is tested with quality, efficiency, durability and stability

82 g | 12 / 96



Specifications	Drill Size Ø H1	Screw Capacity Ø H2
HSS #0	2.5	2-3mm
HSS #1	3.0	3-5mm
HSS #2	3.5	4-8mm
HSS #2	3.5	4-8mm
HSS #3	4.0	5-10mm
HSS #4	6.0	6-12mm



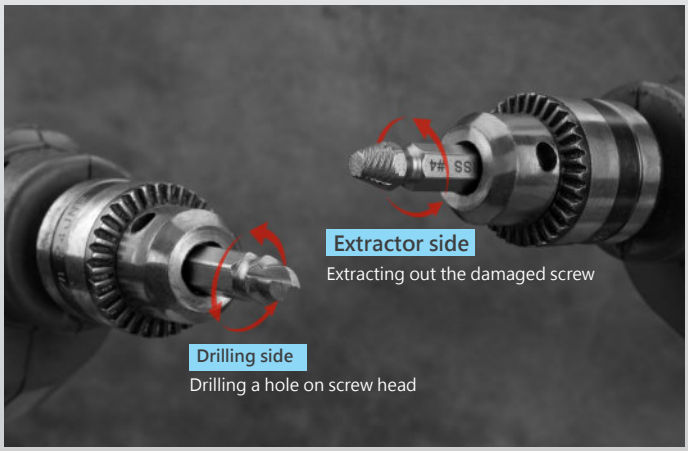

3 steps:

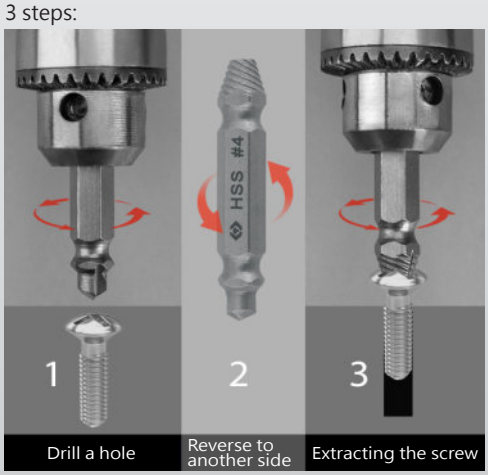

NEW

NEW

Silicone Trowel & Scraper

7AA105

- Suitable for removing old caulking and replacing new caulking
- The trowel head with chamfer which is easy for smooth sealing lines
- The stainless tip prevent the surface from being damaged





KT NO.	Size	Overall length mm	g	
7AA105	3R, 6R, 10R, 13R, 17R	204	100	24 / 48

5 PC.



- Includes Five different nozzle pad head

High Thrust Caulking Gun

7CA81-30H

- Suitable for 310ml cartridges
- Professional caulk gun with 26:1 high thrust ratio
- Easy and fast to replace the cartridges
- 450kgs maximum thrust power, perfect for applying thicker materials, adhesives
- Application: glass, windowsill, bathroom, etc.





- Adjustable nut




KT NO.	Overall length mm	g	
7CA81-30H	357	814	1 / 10

High Thrust Aluminum Tube Caulking Gun

7CA82-30

- Suitable for 310ml cartridges or bulk
- Professional caulk gun with 18:1 high thrust ratio
- Includes nozzle and pad
- 350kgs maximum thrust power, perfect for applying thicker materials, adhesives
- Application: glass, windowsill, bathroom, etc.





KT NO.	Overall length mm	g	
7CA82-30	352	965	1 / 10

7W+4W Inspection Light



- Chips:
  High quality 7W COB LED,6500K
  High quality 4W SMD LED,6500K
- Switch model: Top Torch-Main Light(Low-Mid-High)-Off
- Brightness and work Time:
  Top light: 200 lm/5hr
  Main light low: 150 lm/8hr
  Main light mid: 350 lm/4hr
  Main light high: 700 lm/2hr
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4hr by charger
- IP65 waterproof and IK07 vandalproof
- Features:
  180° swivel base+Two 360° functional hooks
  Two super strong magnets on the back and one on the base
  Three LED battery indicators show the charging and working
- Working temperature: -10°C to + 40°C
- Accessory: Type-C fast charging cable



- Two super strong magnets on the back and one on the base
- Two 360° functional hooks



- Type-C USB charger port



- 180° swivel base



- Top Torch



KT NO.	Applicable area	L mm	g	
9TA242A	Europe	260	396	1 / 12
9TA242B	America & Asia	260	396	1 / 12
9TA242D	Australia & New Zealand	260	396	1 / 12

Contents

Inspection lamp		x 1 PC.
Type-C USB cable		x 1 PC.
USB charger		x 1 PC.

Wireless Charging Slim Lamp

9TA267W



- 10W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- Switch Mode :
  One light 250 ~ 500 lumen(lm)/ 12~6 hours
  Two light 500 + 500 Lumen(lm) / 3 hours
- Top light 100 Lumen(lm) / 15 hours
- Material : Nylon+PC+TPE
- 360° Adjustable base
  +180° hiding hook + Strong magnetic base
- Rechargeable battery : 3.7V - 4500mAh Li-ion battery
- Accessory :Type-C USB charging cable
- Four leds battery indicator
- Charging time : 4 hours by charger and 6~8 hours by wireless charging base
- Can be used with wireless charging pad
  (KT NO.9TA91W / 9TA92W)

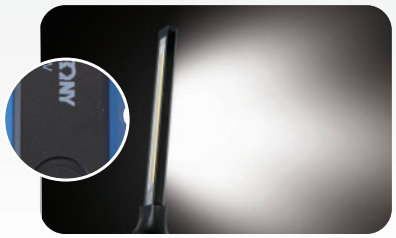

• One light source

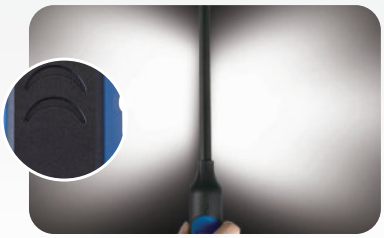

• Two light sources

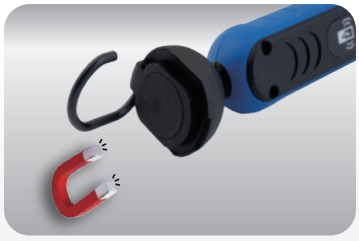

• 180° hiding hook

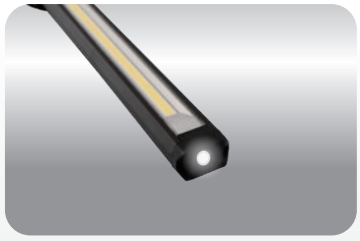

• Top light



• 360° swivel head in vertical



• Wireless charging design



KT NO.	L mm	g	
9TA267W	400	335	1 / 20

Contents

Wireless Charging Slim Lamp	x 1 PC.
Type-C USB cable	x 1 PC.

Aluminum Folding Slim Lamp

9TA268

- White light color, kelvin : 6500K
- Switch Model / Luminous flux / Run time:
  Top Spotlight: 120 lm / 8 hours
  Side 1 Floodlight: Low/High: 150 / 800 lm: 8/2.5 hours
  Side 2 Floodlight: Low/High: 120 / 400 lm: 9/4 hours
- Material : PA + Rubber + Aluminum housing
- 180°swivel head in vertical
  + Strong magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory :Type-C USB Charging cable and 5V 1A USB charger
- Three leds battery indicator
- Charging time : 4 hours



• Three leds battery indicator



• 180°swivel head in vertical



• Super strong magnets on the bottom



• Top light



KT NO.	Applicable area	L mm	g	
9TA268A	Europe	200	193	1 / 40
9TA268B	America & Asia	200	193	1 / 40
9TA268D	Australia & New Zealand	200	193	1 / 40

Contents

Pro Aluminium Rechargeable Slimlight	x 1 PC.
Type-C USB cable	x 1 PC.
Charger	x 1 PC.

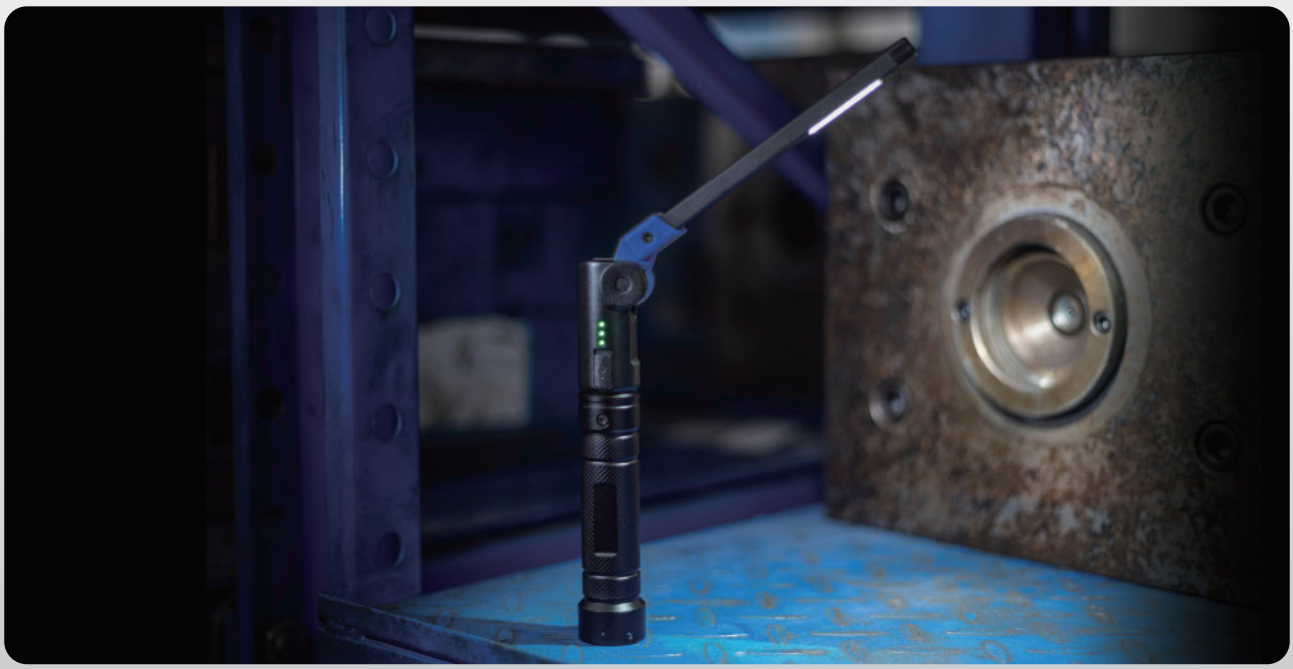

LED Rechargeable Underhood Light

9TA34

- 20W SMD
- White color, 50x Super bright SMD LED, 6500K
- Brightness :
  Low Mode: 500 lm / 6.5 hours
  Mid Mode: 1000 lm / 4.0 hours
  High Mode: 2000 lm / 2.0 hours
- Material : Aluminum body + PA
- IP20 waterproof and dustproof, IK07 vandalproof
- Features :
  Durable housing,Hooks with Rubber, and lens
  3 leds battery level indicator
- Battery: 3.6V4800mAh Li-ion battery with Type-C USB socket
- Charger: USB 110V -240V AC/DC charger, Output: 5V 2A
- Accessory : 1m Type-C USB Charging cable
- Charging time : 4 hours

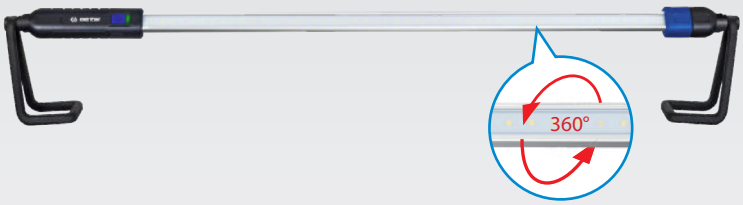





KT NO.	Applicable area	L mm	g	
9TA34A	Europe	1170	1110	1 / 6
9TA34B	America & Asia	1170	1110	1 / 6
9TA34D	Australia & New Zealand	1170	1110	1 / 6
9TA34P01	3.6V4800mAh		70	1 / 1

Contents		
360° Rotational Bar		x 1 PC.
5V/2A charger		x 1 PC.
Type-C USB		x 1 PC.
4800mAh Battery	21700	x 1 PC.

Twin-Beam Multifunctional Head Lamp

9TA53

- 4 lighting modes:
  Spot-light: 20~400lm / 60~5 hours
  Flood light: 20~200lm / 60~4 hours
  Red LED: 0.5~20lm / 70~10 hours
  SOS mode: strobe
- IP65 waterproof and IK07 dustproof
- Materials : High impact ABS + PC housing + PC lens & non-skid grip belt
- Feature : 10 cm Smart motion sensor + 60° adjustment
- Battery : AAA alkaline battery (included)



• Inductive light switch



• 60° Adjustable lighting





KT NO.	L mm	g	
9TA53	68.8	89	1 / 12

Contents		
COB LED lamp		x 1 PC.
Headband	KING TONY	x 1 PC.
AAA alkaline battery	AAA	x 3 PC.

Lightweight Rechargeable Neck Light

9TA54

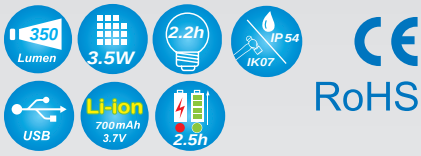

RoHS

- Brightness : 350 Lumen (lm), white light color, kelvin : 6500K
- Switch Model / Luminous flux / Run time:
  Low Mode : 180 lm/ 5.2 hours
  High Mode: 350 lm / 2.2 hours
- IP54 waterproof and dustproof, IK07 vandalproof
- Features:
  The Neck light is lightweight, adjustable and comfortable around your neck
  The 2 light head can be adjusted independently up to 120° for a wider Lighting
  Circuit protection prevents battery from over-charging or over-discharging
- Rechargeable battery : Rechargeable high quality 3.7V 700mAh Li-ion
- 3 colors LED battery level indicator show the battery level
  Red Blinking: Low battery power warning
  Green Blinking: charging
  Green: Fully charged
- Charging time : 2.5 hours
- Temperature: -10°C to +40





• 120° Adjustable light head



• Type - C USB port



• Lightweight, adjustable, comfortable



• 3 Colors LED indicator

KT NO.	L mm		
9TA54	230 x 130 x 45	140	1 / 12

Contents

Lightweight Rechargeable Neck Light		x 1 PC.
Type-C USB cable		x 1 PC.

Rechargeable LED Beanie Hat

9TA56



- Switch Mode :
  High – 170 Lumen (lm) / 2 hours
  Mid – 60 Lumen (lm) / 4 hours
  Low – 30 Lumen (lm) / 6 hours
- Made of 100% acrylic, help you resist the cold wind, keep your head and ear warm
- Elastic material, fits for most of head circumference
- 3.7V 250mAh rechargeable Li-Polymer battery
- 4 built-in LED bulbs with 3 adjustable brightness level
- With reflective strip to make you easily be noticed in the dark
- Suitable for all kinds of outdoor activities
- Charging time : 2 hours





• reflective strip



• Simply pop it out and chargeit



• Socket



• Laptop



• Car Charger



• Power Bank

NEW

NEW

10W Wireless Charging Flashlight

9TA71W

- Chips: High quality 10w LED, 6500K
- Switch mode:
  Spot Light mode (Eco-Low-Mid-High)
  Strobe mode: press and hold the switch for two seconds
- Brightness and work Time:
  Spot Light eco: 5 lm/200hr
  Spot Light low: 30 lm/25hr
  Spot Light mid: 400 lm/4hr
  Spot Light high: 1000 lm/2hr
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4 hours by charger and 6~8 hours by wireless charging base
  (The specific charging time depends on the power of the charging base)
- IP68 waterproof and IK07 vandalproof
- Features:
  Wireless charging function
  Super strong magnets on the light
  Three LED battery indicators show the charging and working
- Working temperature: -10°C to +40°C
- Accessory: type-C fast charging cable




• Main switch


• Type-C USB charger port


• Wireless charging


• Hanging hole



• Press and hold the switch for two seconds


• Super strong magnets on the light

KT NO.	L mm	g	
9TA71W	160	215	1 / 24

Contents

Flashlight		x 1 PC.
Type-C USB cable		x 1 PC.

Wireless Charging Pad

9TA92W

- Output power: 5W
- IP20 waterproof and IK07 vandalproof
- Features:
  Built-in screw holes for wall mounting
  Super strong magnets in the front and back
  LED battery indicator shows the charging and working
- Working temperature:-10°C to +40°C
- Accessory: Type-C charging cable and 5V1A USB adapter


• Built-in screw holes for wall mounting


• LED battery indicator shows the charging and working

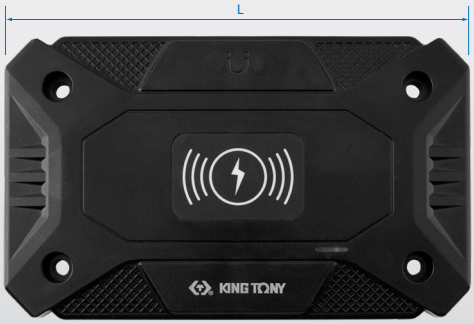

KT NO.	Applicable area	L mm	g	
9TA92WA	Europe	164	335	1 / 12
9TA92WB	America & Asia		335	1 / 12
9TA92WD	Australia & New Zealand		335	1 / 12

Contents

5W output charger base		x 1 PC.
Type-C USB cable		x 1 PC.
5V1A USB charger		x 1 PC.

Cylinder Head Surface Rectifier

9AH41

- Precise test for engine block and cylinder head when reassembling or overhauling an engine
- Work with a feeler gauge
- Suitable for 4 and 6 cylinder engine
- Refer to automotive manufacturer's service manual for the minimum clearance
- Size : 600(L) x 36(W) x 16(H) mm

4.08 kg | 1 / 5

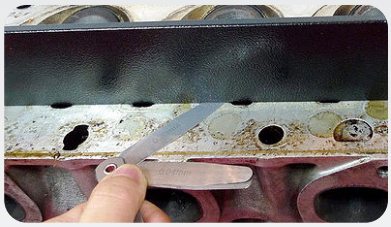

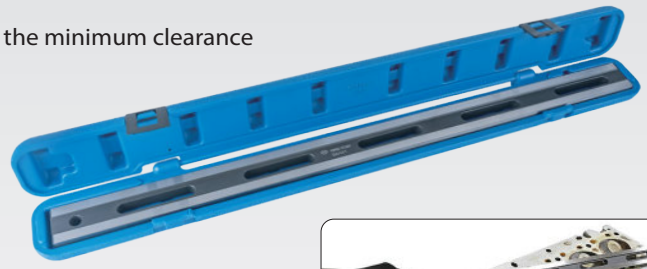



Coil Spring Compressor Set

9BF33

3 PC.

- Suitable for BMW, Audi, Chevrolet, Citroen, Fiat, Ford, Honda, Hyundai, Kia, Lancia, Mazda, Benz, Mitsubishi, Nissan, Opel, Peugeot, Renault, Seat, Tesla, Toyota, Volvo
- Can be operated with impact wrench
- Spring specification/use:75~155 mm
- Stroke: 106~293 mm
- Max load: 6,400 kgf·m (62,765 N·m)

5.5 kg | 1 / 4



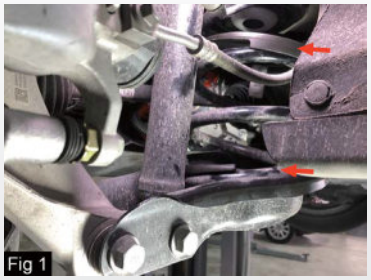

• Place upper and lower discs on spring



• Insert the main tool body into the spring

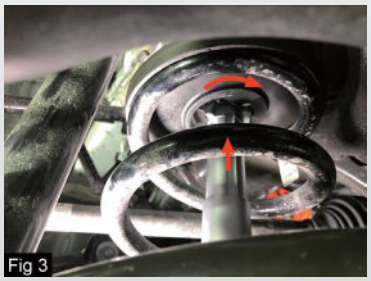

• Insert through the disc and make a half turn to connect the tool and disc

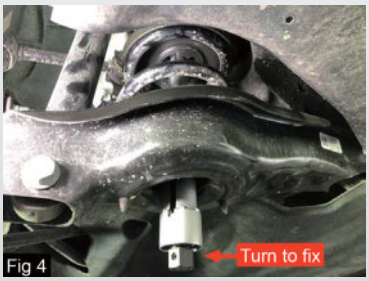

• Turn the hex nut on the main tool body lower end to fix all parts

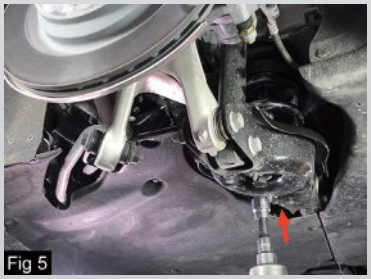

• Use an air/impact wrench to compress the spring





• Special pins on tool body to mesh with grooves on discs to create a secure connection

NEW

Brake Bleeder Wrench Set

9BC5001MR

6 PC.

- Wrench size : 7, 8, 9, 10, 11mm
- Use on any vehicle, SUV, light truck or motorcycle brake caliper
- Combine wrench & socket to make loosening and tightening easily
- Ideal for bleeding brake system and hydraulic clutch system without removing the wheels
- High quality material internal seal to upgrade durability
- Silicone tube has the characteristics of acid and alkali proof, corrosion resistance, wear resistance, high and low temperature resistance
- Brake bleeder socket wrench prevents air backflow into brake system

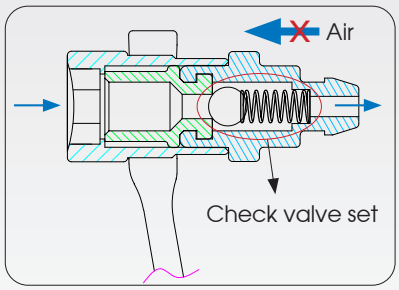



Blow case size (mm) :
260 x 160 x 60 (0.08 cuft)

Contents	Kg 0.73	1 / 10
9BC5107M	7mm	
9BC5108M	8mm	
9BC5109M	9mm	
9BC5110M	10mm	
9BC5111M	11mm	
9BC32P021		



Diesel injection Socket

9AN4128 1/2"

- Suitable for Alfa Romeo, Chrysler, Land Rover, Rover, etc…



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4128	28	38.1	35.2	15	83	339	5/60



9AN4227 1/2"

- Suitable for BMW, Fiat, Ford, etc…



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4227	27	36.5	32.2	12.7	78	209	5/60



Man & Benz Truck Diesel Injection Valve Socket

9AN43 1/2"

- The tool is designed to remove and install diesel injection valve
- Application: MAN 422/403, BENZ Truck, SCANIA

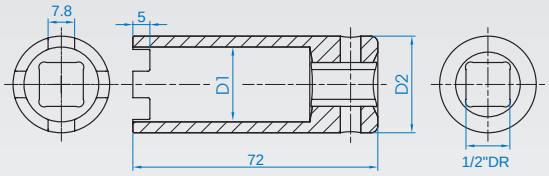





KT NO.	D1 mm	D2 mm	Tooth	g	
9AN43	22	28.4	4	181	10 /80

Long Twist sockets set

- For removing damaged wheel nuts and locking nuts. Especially useful on deep seated wheel nuts on modern alloys
- Twisting socket design is easily to remove stripped lug nut
- Length:146mm



9TD164MR

4 PC.

Contents		kg 1.36	1 / 8
9TD406	17, 19, 21		
7641206P			



9TD165MR

5 PC.

Contents		kg 1.70	1 / 8
9TD406	17, 19, 21, 22		
7641206P			



NEW

NEW

Engine Cylinder Hone 50~175mm

9AC231-54

- For engine cylinders bores from 50mm to 175mm
- Adjustable spring tension and spread limiter easy to remove carbon
- The hone stones is 220 grit, coarse grade









KT NO.	Ø Capacity mm	g	
9AC231-54	50~175	700	6 / 24

Pneumatic Disc Brake Wind-Back Tool

9BC251A01

- Designed to make disc brake services faster and energy saving
- Tool can be turned left-and right-ward - suitable for regular and reverse-threaded pistons
- Pneumatic powered tool is able to wind pistons back simply pressing a button

Kg 1.35 / 1 / 10





Increase the use of space



Magnetic



Anti-freeze & Coolant Tester

9DD22

- Use to check condition of antifreeze and coolant (Ethylene Glycol)
- Ideal for avoiding winter freeze-ups and summer overheating

g 85 / 10 / 100



Refillable Pressure Sprayer

9TBA600

- Suitable for lubrication, cleaning brake systems, removing dust and applying anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and difficult to reach areas
- Do not use with strong chemical or corrosive fluid tool
- The aluminum alloy material uses a one-piece seamless structure to withstand high pressure
- Increase in thickness makes the product less prone to deformation and stronger
- The trigger is not affected by recoil force and is easy to operate
- Max pressure 350 Psi (25Kg /cm²)
- Safety valve pressure : 140Psi (9.84 Kg /cm²)

CAUTION Always wear eye protection while using this tool



KT NO.	L inch	L mm	capacity	g	
9TBA600	11	280	600 c.c.	330	1 / 12







• Interchangeable nozzle

Optional accessories

	9TBA600P031	Ø0.5mm
	9TBA600P032	Ø0.8mm
	9TBA600P033	Ø1.0mm
	9TBA600P034	Ø1.2mm
	9TBA600P035	Ø1.5mm



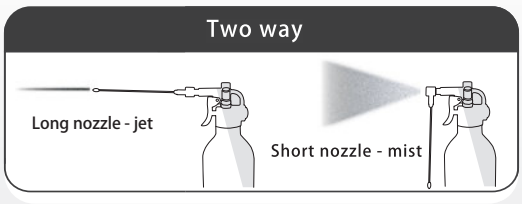





NEW

Videoscope

- 5.5mm lens with 6 LED, can be used for shooting video or taking photo (1080P HD Camera 1920 x 1080 resolution)
- The videoscope is suitable for visually inspecting areas that are difficult to access over a great distance
- CE / ROSH / FCC certification
- IP67 waterproof rating

9TQ11

- Handheld version
- 4.3 inch LCD display with 1080P resolution
- Equipped with 2600mAh Li-ion battery, can be continuous use for 3 hours
- UN38.8 certification

740 g | 1 / 8





Contents	
	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable



9TQ12

- Wifi version
- Before use, download the inskam APP, both IOS & Android are applicable
- Equipped with 1800mAh Li-ion battery, can be continuous use for 4 hours

331 g | 1 / 45





Contents	
	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable

Vehicle Battery Tester

9DC51

- Test a 12V lead-acid battery of any vehicle
- CCA testing(SAE/DIN/EN/IEC/CA standard)
  -Working voltage: DC 9~15V
- Engine starting voltage test
  -Measures the minimum voltage when the engine starts
- Charging voltage test
  -About 14 volts
- CCA Level bar indication
  -LOW / MID / HIGH
- LCD with background light



KT NO.	Test range(V)	Size(mm) L x W x H	g	
9DC51	9 ~ 15	135 x 78 x 33	374	1 / 30

Available set up range of cold cranking ampere	CA(MCA) : 250~1190	
	DIN : 105~600	EN : 185~900
	SAE : 200~950	IEC : 125~710
Range	Voltage : 0.01V	
	CCA : 1CCA	
Accuracy	Voltage : +/- 0.05V	
Type of battery available	Available for voltage 12V (9~15V) normal lead-acid battery (lead calcium alloy) below: Sealed maintenance free battery, maintenance free battery, standard type battery, EFB(Enhanced flooded cell battery), AGM (Absorbent glass mat) battery. Not available for lithium iron battery.	
Reverse polarity protection	Reverse protection<20V DC	
Operation temperature	0° C~50° C (32° F~122° F)	
Storage temperature	-30° C~70° C (-22° F~158° F)	



NEW

NEW

Wheel Nut Repair Set

- Ideal set for wheel nut removing and tightening
- Spinner cross wrench, removable design, easy to carry
- Industrial type torque wrench, 40-200Nm
- Impact wheel nut socket, 17, 19, 21mm*PU working gloves

P34462-1DG02

Contents


34462-1DG


44905MP


9TH41-XL


19980416



Wall Clock

TC001

- Mute no tick wall clock: precise quartz sweep frequency movement ensures accurate time, providing you with an absolutely quiet rest and working environment
- Easy to use: 1 hook for the strap, lightweight and wide slot for easy and fast hanging. Please use 1 "AA" carbon battery (not included) instead of high-load battery
- 35 cm diameter





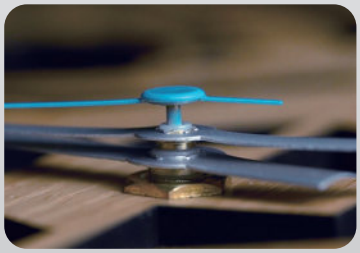

Beach Towel

- Efficient water absorption
- High quality fabric
- Easy to clean
- Size: 74x140mm



- 80% Polyester
- 20% Nylon

ZS155

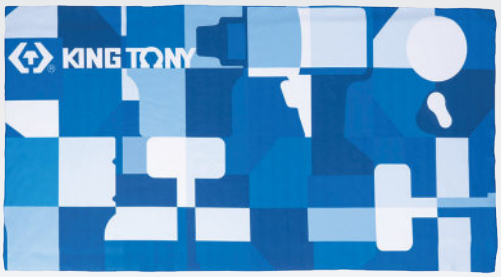





ZS155A







NEW

TOOLS STORAGE & TOOLS SYSTEM SETS




KING TONY
KING TONY

OBJECT-ORIENTED ORGANIZATION





5 Flexible / adjustable shelves



Ball bearing slides



Steel panel for tool storage



Concealed handle



Hidden knob



Double volume



Front centralized locks



Stainless steel work surface



Cupboard with gas spring



The drawer with capacity 30kg

OBJECT-ORIENTED ORGANIZATION

87D11X01SA-KG

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

Stainless Steel





87D11X01SA-KB

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

Stainless Steel





OBJECT-ORIENTED ORGANIZATION

87D11X02SA-KG

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

Stainless Steel





87D11X02SA-KB

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

Stainless Steel





OBJECT-ORIENTED ORGANIZATION

87D11X03A-KG

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39

Wooden Top





87D11X03A-KB

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39

Wooden Top





OBJECT-ORIENTED ORGANIZATION

87D11X04A-KG

Overall: 2640 x 460 x 2000 mm

248.60 CUFT 64.91

Wooden Top



87D11X04A-KB

Overall: 2640 x 460 x 2000 mm

248.60 CUFT 64.91

Wooden Top





87D11X05A-KG

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

Wooden Top



87D11X05A-KB

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

Wooden Top





OBJECT-ORIENTED ORGANIZATION

87D11A-KG

Overall: 3920 x 460 x 2000 mm

351.57 CUFT 89.35

Wooden Top





87D11A-KB

Overall: 3920 x 460 x 2000 mm

351.57 CUFT 89.35

Wooden Top





OBJECT-ORIENTED ORGANIZATION ACCESSORIES

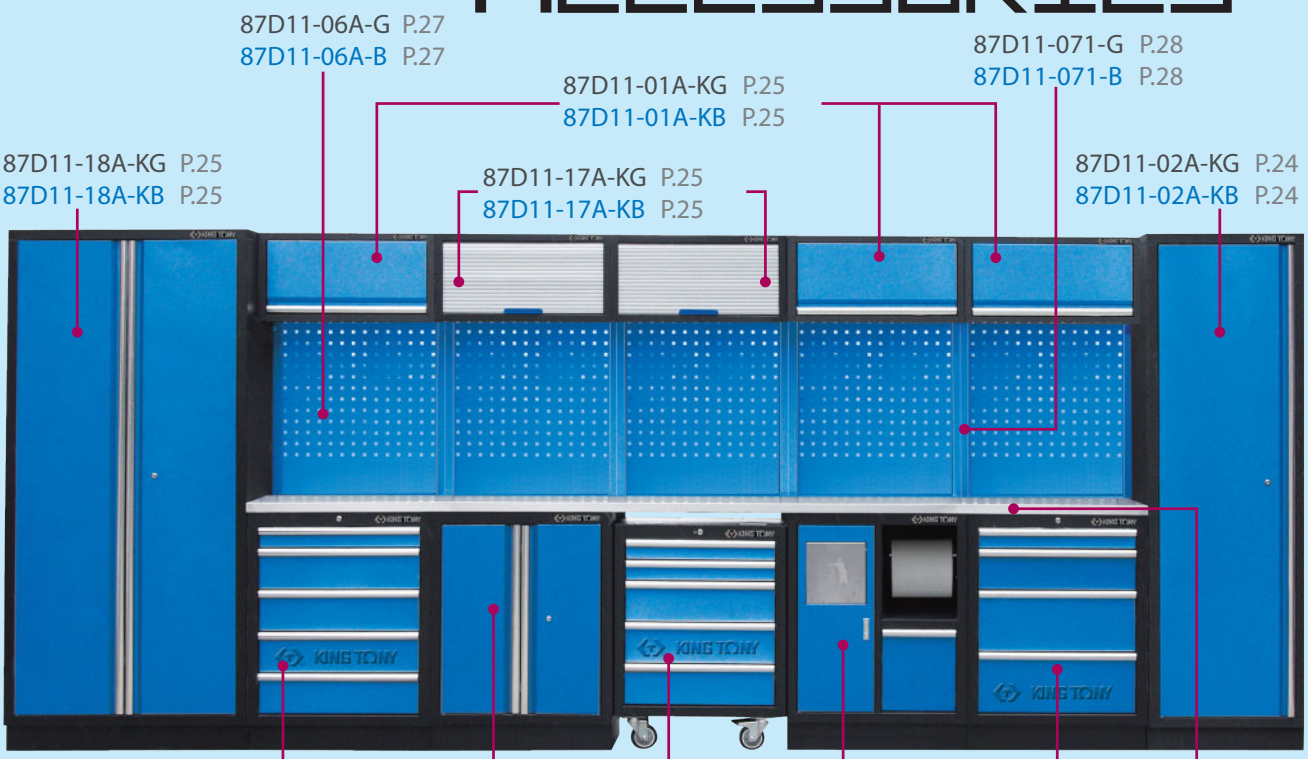

Tall Cabinet

87D11-02A-KG

KT NO.	Overall (mm)	kg	CUFT
87D11-02A-KG 87D11-02A-KB	600 x 460 x 2000	53	9.28

87D11-02A-KB



87D11-02A-KG



87D11-02A-KB

Tall Cabinet

87D11-18A-KG

87D11-18A-KB



87D11-18A-KG



87D11-18A-KB

KT NO.	Overall (mm)	KG	CUFT
87D11-18A-KG 87D11-18A-KB	915 x 460 x 2000	78	12.72



Wall Cabinet

87D11-01A-KG

87D11-17A-KG



87D11-01A-KG



87D11-17A-KG

Rolling Shutter

87D11-01A-KB

87D11-17A-KB



87D11-01A-KB



87D11-17A-KB

KT NO.	Overall (mm)	KG	CUFT
87D11-01A-KG	680 x 280 x 350	10.0	3.73
87D11-01A-KB			
87D11-17A-KG		8.4	
87D11-17A-KB			



Opened Door Cabinet

87D11-03A-KG



87D11-03A-KG

87D11-03A-KB



87D11-03A-KB



KT NO.	Overall (mm)	Kg	CUFT
87D11-03A-KG 87D11-03A-KB	680 x 460 x 910	28.5	13.58

Drawer Cabinet

87D11-04A-KG

87D11-04A-KB



87D11-04A-KG

87D11-04A-KB

87D11-05A-KG

87D11-05A-KB



87D11-05A-KG

87D11-05A-KB

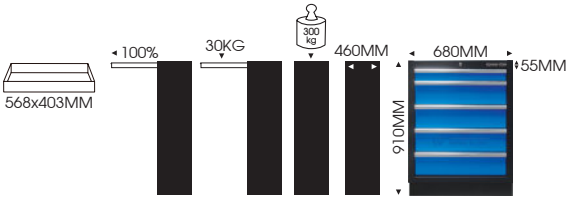



KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-04A-KG 87D11-04A-KB	4 Drawer	680 x 460 x 910	46.70	13.58
87D11-05A-KG 87D11-05A-KB	5 Drawer		49.30	

Trash Bin With Paper Holder

87D11-11A-KG

87D11-11A-KB



87D11-11A-KG 87D11-11A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-11A-KG 87D11-11A-KB	680 x 460 x 910	35.20	13.58



5 Drawers Cabinet

87D11-12A-KG

87D11-12A-KB

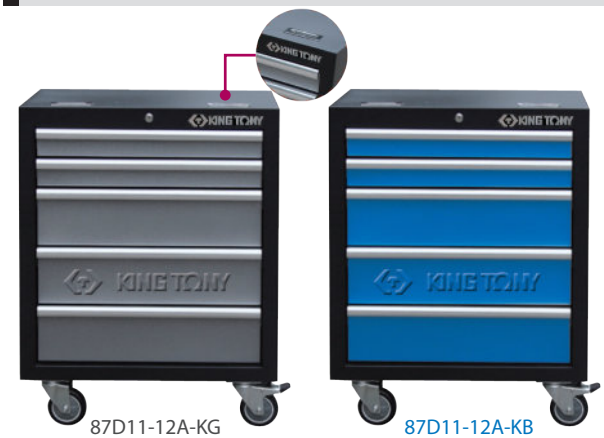

87D11-12A-KG 87D11-12A-KB

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-12A-KG 87D11-12A-KB	5 Drawer	650 x 460 x 862	46	10.41

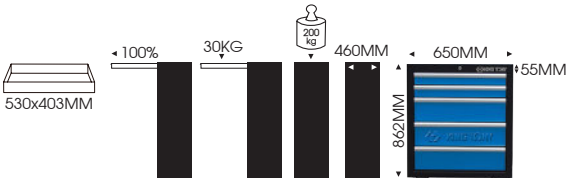

Pressed Wooden Board

87D11-08A

87D11-09A

87D11-10A

KT NO.	Overall (mm)		CUFT
87D11-08A	1360 x 465 x 38	12.5	1.61
87D11-09A	2042 x 465 x 38	19.0	2.39
87D11-10A	681 x 463 x 38	6.0	0.81



Stainless Board

87D11-08SA

87D11-09SA

87D11-10SA

KT NO.	Overall (mm)	Kg	CUFT
87D11-08SA	1360 x 465 x 38	21.0	1.61
87D11-09SA	2042 x 465 x 38	31.80	2.39
87D11-10SA	681 x 463 x 38	10.50	0.81



Back Panel

87D11-06A-G

87D11-06A-B

KT NO.	Overall (mm)	Kg	CUFT
87D11-06A-G 87D11-06A-B	615 x 25 x 1052	5.3	1.13

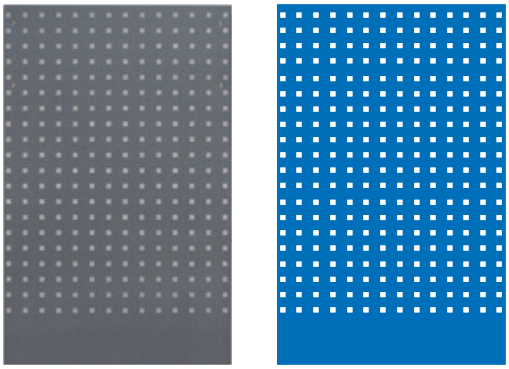

87D11-06A-G 87D11-06A-B

Pillar

87D11-071A-G

KT NO.	Overall (mm)	Kg	CUFT
87D11-071A-G 87D11-071A-B	33 x 30 x 1420	1.5	0.13

87D11-071A-B

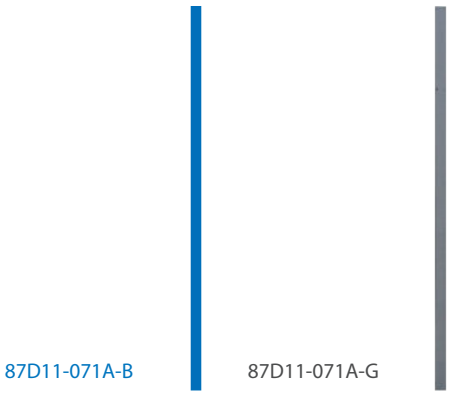

Optional accessories

87D11X06SA-KG

87D11X06A-KG

87D11X06SA-KB

87D11X06A-KB

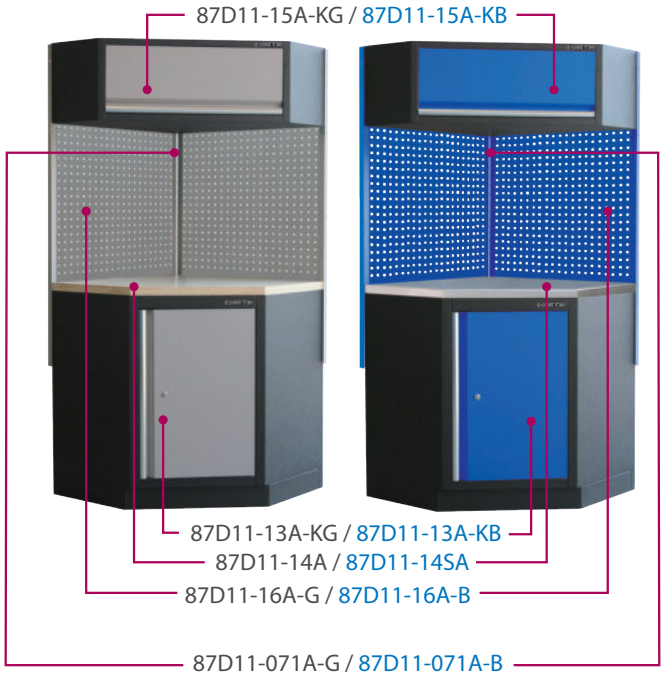

Corner Bottom Cabinet

87D11-13A-KG

87D11-13A-KB





KT NO.	Overall (mm)	Kg	CUFT
87D11-13A-KG 87D11-13A-KB	865 x 865 x 910	42	7.06



Corner Wall Cabinet

87D11-15A-KG

87D11-15A-KB





KT NO.	Overall (mm)	Kg	CUFT
87D11-15A-KG 87D11-15A-KB	865 x 865 x 350	21	12.70



Stainless Steel Board

87D11-14SA



KT NO.	Overall (mm)	Kg	CUFT
87D11-14SA	865 x 865 x 38	19	1.94

Pressed Wooden Board

87D11-14A



KT NO.	Overall (mm)	Kg	CUFT
87D11-14A	865 x 865 x 38	13	1.94

Corner Back Panel

87D11-16A-G

87D11-16A-B

KT NO.	Overall (mm)	Kg	CUFT
87D11-16A-G 87D11-16A-B	800 x 25 x 1052	6.95	1.45

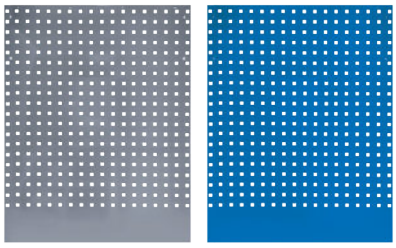

Adjusting Feet

KT NO.		Contents	g
87D11-05A-10		▪ Pack by 4 PC.	700

Hook

KT NO.		Contents	g
87E02-051A		▪ 1" Single hook ▪ Pack by 10 PC.	20
87E02-053A		▪ 3" extra long single hook ▪ Pack by 10 PC.	30
87E02-061A		▪ 1" Double hook ▪ Pack by 10 PC.	50
87E02-063A		▪ 3" extra long double hook ▪ Pack by 10 PC.	68

Customized Color Choice Chart

Color	Item Number
Red	8743X-XB
Red+Black	8743X-XB-RK
Blue	8743X-XB-B
Blue+Black	8743X-XB-BK
Black	8743X-XB-K
Gray	8743X-XB-G
Orange+Black	8743X-XB-OK



Red



Red+Black



Blue



Blue+Black



Orange+Black



Black



Gray

(Other colors are optional, produce with minimum quantity)

Tool Trolley



• 100% open ball bearing slide for drawer



• Add strength and safety



• Central locking system + 10mm top mat



• One piece steel body





• Embossed & hammed edge drawer increase strength



• Industrial TPR floor brake casters

Accessory

87432-15

- Plastic top mat
- Size : 920(W) x 490(D) x 50(H)mm



84087637BKT

- Plastic mat
- Size : 665(W) x 455(H) x 19(D) mm



87432-31

- Side handle bar
- Size : (Ø)38.5 x 457(L) mm



87432-32

- Can holder



87432-52

- Paper holder
- Size : 45(H) x 290(L) x 65(D) mm



87432-17

- Flat side panel
- Size : 456 x 370mm



87432-23



87432-24



KT NO.	Frame(mm) Width x Depth x Height	Material	Divider Size mm
87432-23	574 x 358 x 40	Steel	Long: 560x40(2PC.) Short: 368x40(2PC.)
87432-24	-	Plastic	Long: 570x40(3PC.) Short: 375x40(3PC.)

87432-33

- Magnetic tool holder
- Size : 458 x 52 x 17mm



87432-34

- Bottle side holder



87432-41

CAUTION

Can't install side tray(87432-32) at the same time

- Work panel
- Size : 656(W) x 500(H) x 30(D) mm

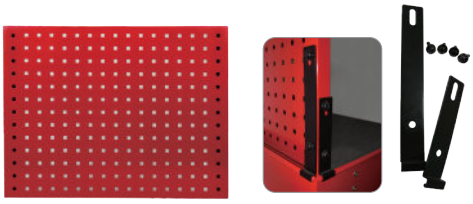

Tool Trolley



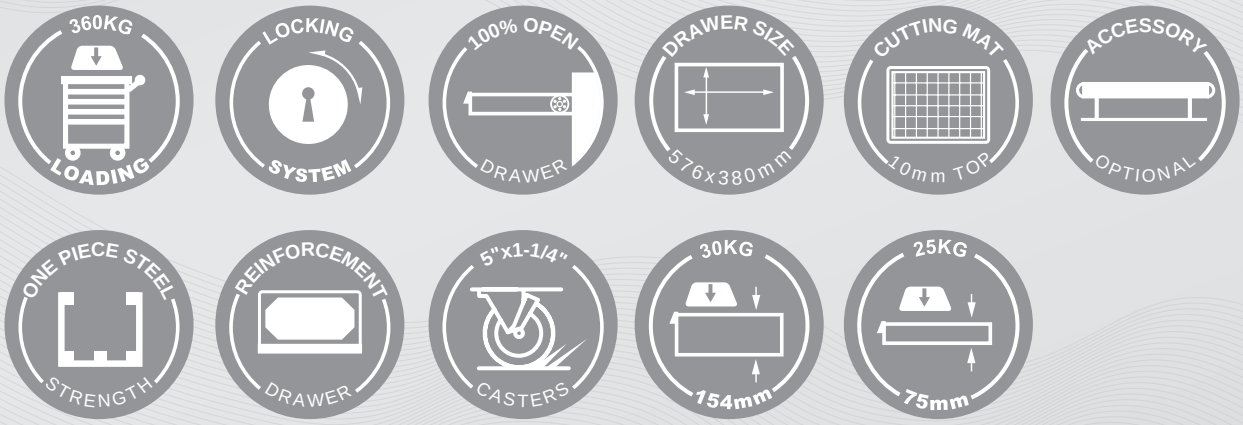

Tool Trolley Set



P.60-64
P.87-92

EVA Foam



P.67-85

Plastic Tray



P.104-127



▪ Selective colors:





• One piece steel body



• Embossed & hammed edge drawer increase strength



• Central locking system + 10mm top mat



• Add strength and safety



• Industrial TPR floor brake casters



87438-3B



87432-5B



87434-7B



87437-8B



87437-10B

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87438-3B	3 Drawer	576 x 380 x 75	5"x1-1/4"	360 Kg	48.5	12.24
	2 Door	550 x 380 x 420				
87432-5B	4 Drawer	576 x 380 x 75			56	
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7B	5 Drawer	576 x 380 x 75			64	
	2 Drawer	576 x 380 x 154				
87437-8B	7 Drawer	576 x 380 x 75			66	
	1 Drawer	576 x 380 x 154				
87437-10B	6 Drawer	576 x 380 x 48.5			69	
	3 Drawer	576 x 380 x 75				
	1 Drawer	576 x 380 x 154				

Evolution Roller

- Enlarge storage for long straight object or tools
- All corners placement for large object or tools, increase storage arrangement to 850mm length tools
- Folded edges for magnetic holder or tools, 80mm width
- Multi-function concave shape for safety placement of tools
- Hanging solutions with various additional accessories

KT NO.	Contents	15.0	1 / 1
 87430A-K	Multipole space bar x 2		
	Pull handle bar x1		
	Tool bin & oil can holder x 2		
	Single hook x4		



Tool Trolley

- Specifically collocate with workbench

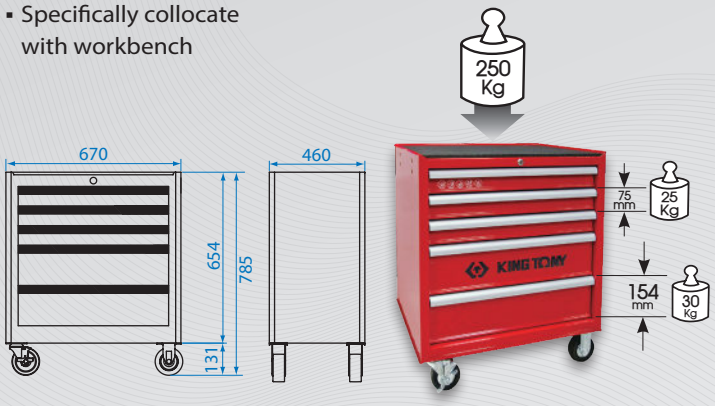

87431-5BE

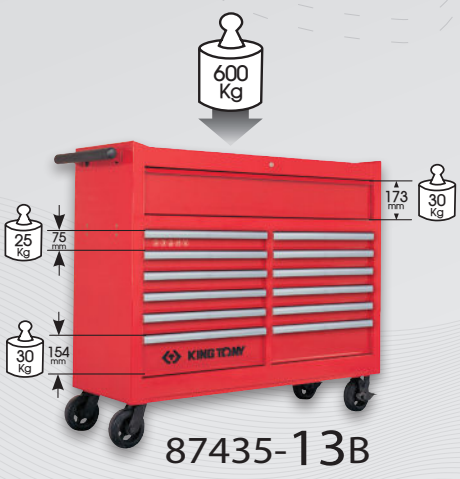

87435-13B

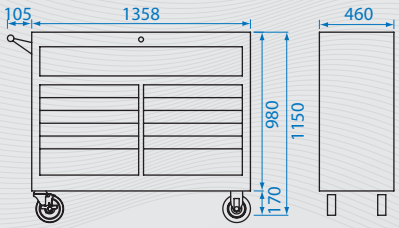

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87431-5BE	3 Drawer	576 x 380 x 75	4" x 1-1/4"	250 Kg	50	10.03
	2 Drawer	576 x 380 x 154				
87435-13B	10 Drawer	576 x 380 x 75	6" x 2"	600 Kg	166	31.54
	2 Drawer	576 x 380 x 154				
	1 Drawer	1215 x 390 x 173				

Trolley Side Cabinet

- Drawer chest for trolley







87430A5-1BP new

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87430A5-1BP	Overall	382 x 460 x 795	29.78	8.5



87430A5-7B

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87430A5-7B	Overall	382 x 460 x 795	41	8.5
	5 Drawer	288 x 380 x 75		
	2 Drawer	288 x 380 x 154		

Risk-Free Tool Trolley

(Other colors are optional, produce with minimum quantity)



Selective colors:



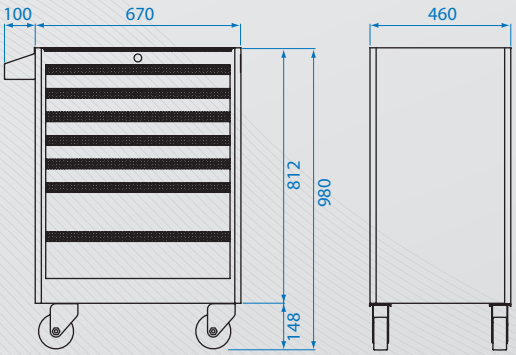





87432-5G



87434-7G

Only open one drawer to prevent tilting risk !

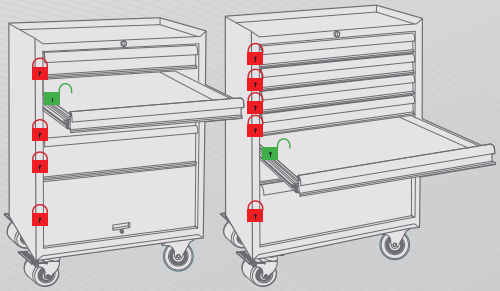

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	kg	CUFT
87432-5G	4 Drawer	576 x 380 x 75	5" x 2"	680 Kg	56	12.24
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7G	5 Drawer	576 x 380 x 75			64	
	2 Drawer	576 x 380 x 154				

Risk-Free Tool Trolley

INDUSTRIAL



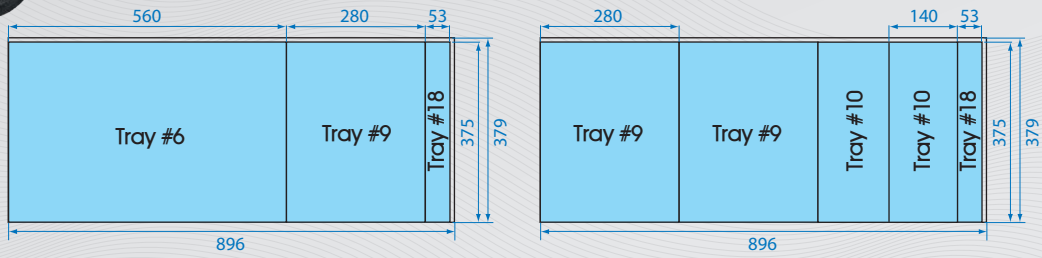

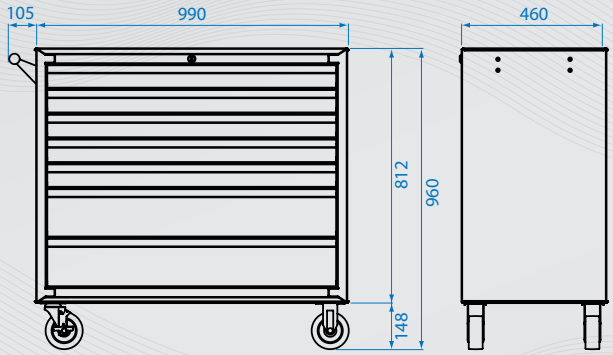



Only open one drawer to prevent tilting risk !

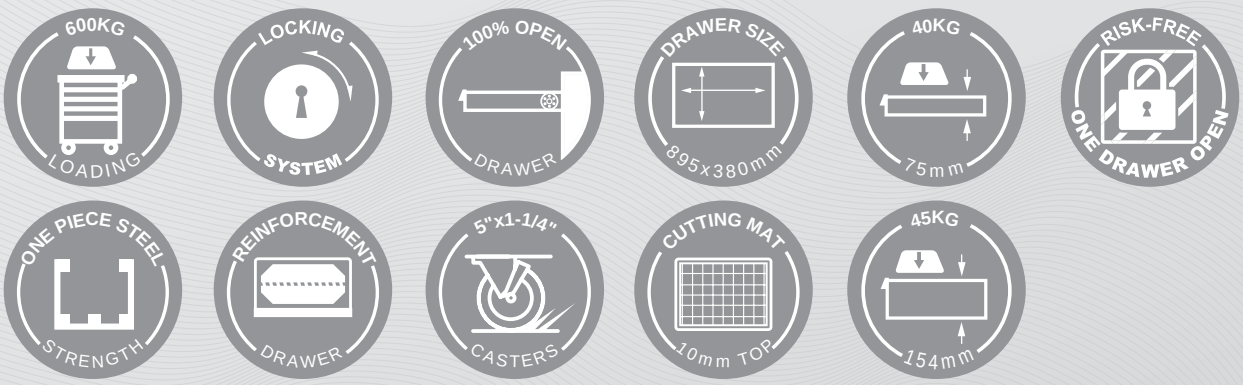

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87462-7G-KB	Overall	990 x 460 x 812	5" x 1-1/4"	600 Kg	83	21.17
	Overall+5" Casters	990 x 460 x 960				
	5 Drawer	895 x 380 x 75				
	2 Drawer	895 x 380 x 154				

Classic Bumper Type Tool Trolley



- Multi-functional stainless working top
- One drawer open only, prevents unstable center of gravity
- 100% pull out ball bearing drawer with auto-return system
- TPR corner protection bumpers
- More space for hanging
- 5" x 2" Heavy duty casters (2 fixed and 2 swivel with stop function)

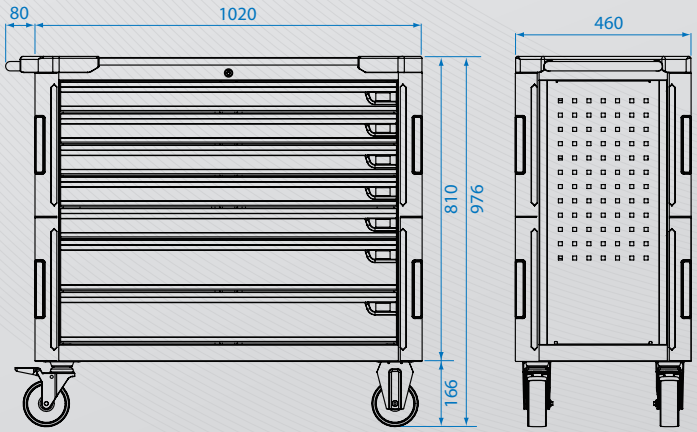



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G33-7B-KB	Overall	1020 x 460 x 810	5" x 2"	500 Kg	80.0	22.60
	Overall+4 Casters	1020 x 460 x 976				
	5 Drawers	850 x 390 x 80				
	2 Drawers	850 x 390 x 135				

Classic Bumper Type Tool Trolley



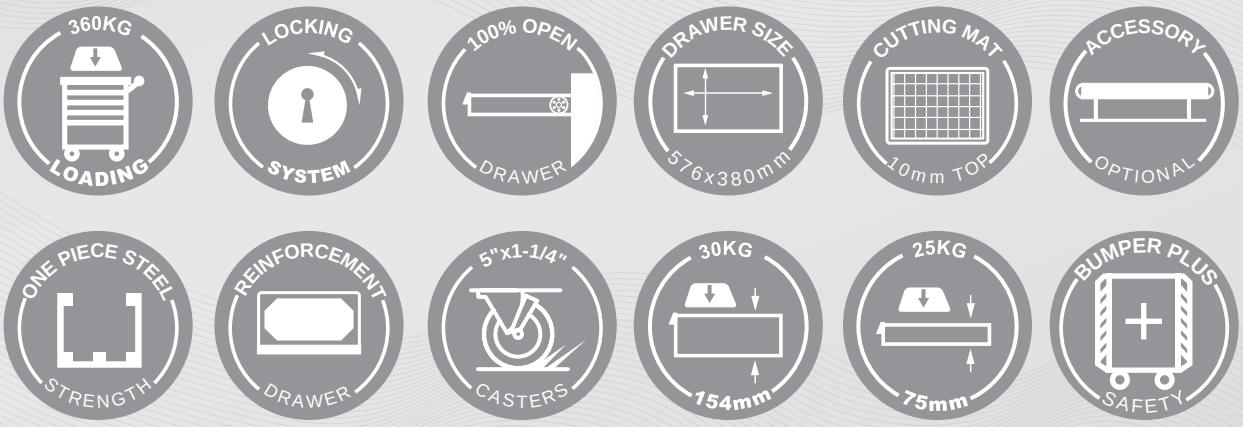

Tool Trolley Set



P.60-64
P.87-92

EVA Foam



P.67-85

Plastic Tray



P.104-127



(Other colors are optional, produce with minimum quantity)

Selective colors:





• Multipole space bar to hold other tools



• Embossed & hammed edge drawer increase strength



• With bottle tray and side tray



• Industrial TPR floor brake casters



• Ball bearing drawer



• Black anodized aluminum strip



• Soft bumpers side advioding damage vehicle



87632-5B



87634-7B

- Soft bumpers each side avoids scratch or damage vehicle
- More space for bottles & hanging
- Easily move two side handle bar & industrial TPR casters
- 100% pull out ball bearing drawer
- One piece steel for heavy load structure
- Central locking system + 10mm top mat

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87632-5B	4 Drawer	576 x 380 x 75	5" x 1-1/4"	360 Kg	59.00	15.64
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87634-7B	5 Drawer	576 x 380 x 75			66.14	
	2 Drawer	576 x 380 x 154				

Risk-Free Bumper Type Tool Trolley



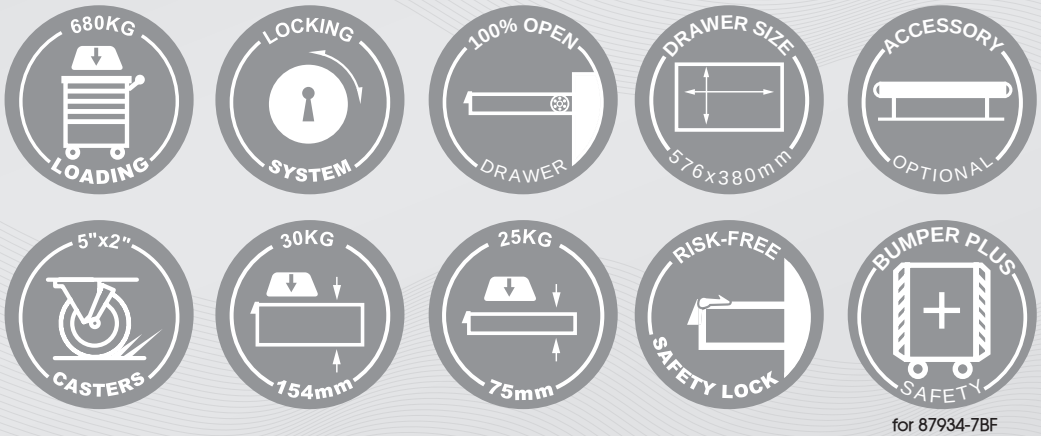

for 87934-7BF

Tool Trolley Set



P.60-64
P.87-92

EVA Foam



P.67-85

Plastic Tray



P.104-127



(Other colors are optional, produce with minimum quantity)

Selective colors:





• Soft bumpers side avoids damage vehicle



• Black anodized aluminum strip



• Industrial TPR floor brake casters

- Smooth to slip with 2 steps safety lock casters
- 5" x 2" TPR high-perfomance wheels on roller bearings, w/brake
- Patent crane hook lock drawer prevent tilting risk
- More space for bottles & hanging
- 100% pull out ball bearing drawer
- Double-wall construction for dust free storage
- Central locking system + 10mm top mat

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Contents		Casters	Static load	Kg	CUFT
87934-7BF	7 Drawer	5-576 x 380 x 74 2-576 x 380 x 153	87934-31	Pull handle bar x 1	5" x 2"	680 Kg	75.00	12.70
			87934-32	Tool bin & oil can holder x 1				
			87502-051	Single hook x 4				

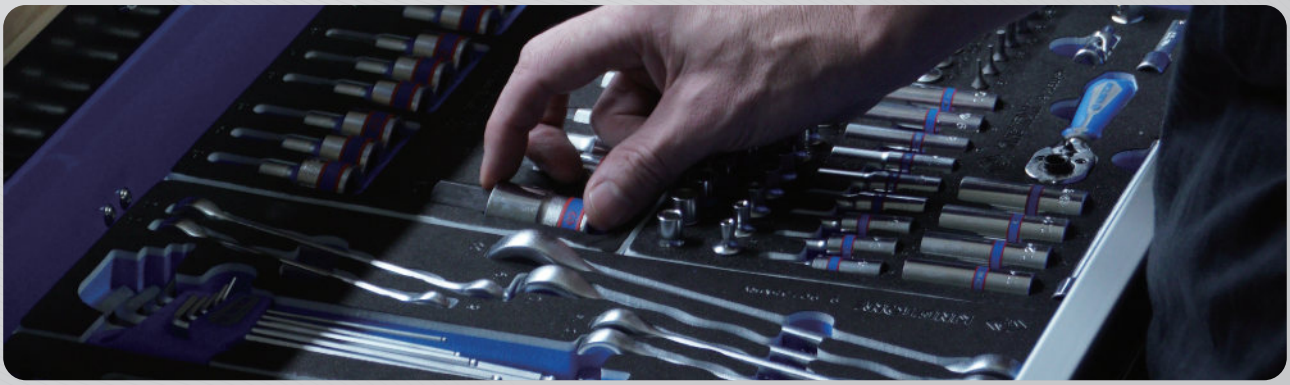


KING TONY
KING TONY
KING TONY
KING TONY

7+2 Tool Trolley

- Magnetic drawer closures
- Extra side compartment
- Multi-functional working top
- Side locking system







• Side compartment



• Industrial TPR floor brakes casters



• Multi-functional working top

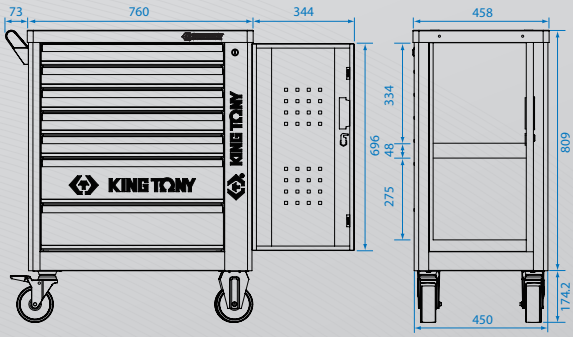

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G35-7B-KB	Overall	760 x 458 x 809	5" x 2"	400 Kg	55	13.19
	Overall+4 Casters	760 x 458 x 983.2				
	5 Drawers 2 Drawers	570 x 380 x 70 570 x 380 x 140				

Heavy Duty Tool Trolley & Chest

- 4 drawers top chest + 7 drawers tool trolley
- ABS corner protection bumpers avoids damaging vehicle
- 100% pull out ball bearing drawer with auto-return system
- Heavy duty ball bearing sides, 35kgs capacity for each drawer
- Top chest lid with hydraulic bars
- With side tray and garbage bin
- Internally welded joints for durability



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G001DQ-BK	Overall	843 x 467 x 1365	5" x 2"	630 Kg	124.00	27.25
	Overall +4 Casters	843 x 467 x 1543				

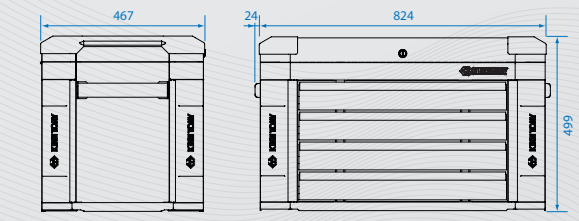





KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87G11-4B-BK	Overall	824 x 467 x 499	41.5	9.72
	4 Drawers	575 x 410 x 70		



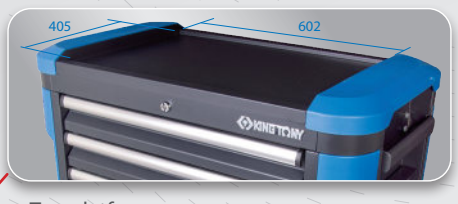

• Top platform





• Side handle bar



• Garbage bin

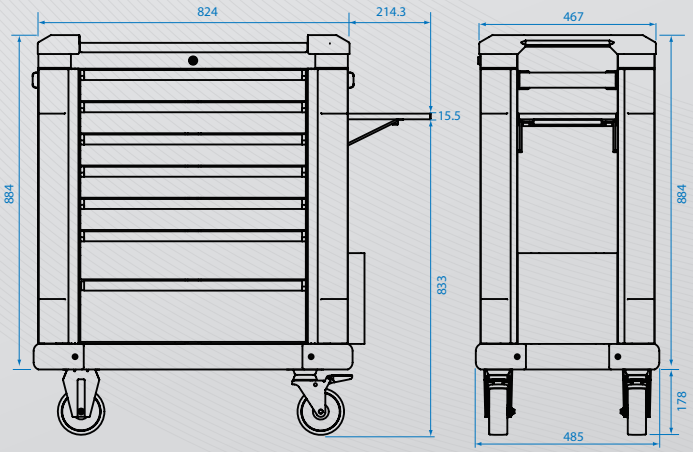



• Industrial TPR floor brakes casters



• Flat side panel

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G31-7B-BK	Overall	824 x 485 x 884	5" x 2"	500 Kg	75.00	16.85
	Overall + 4 Casters	824 x 485 x 1062				
	5 Drawers	575 x 410 x 70				
	1 Drawers	575 x 410 x 110				
	1 Drawers	575 x 410 x 140				

Tool Trolley



87441-1B

- 1 drawer trolley
- Two 3.5" deep trays are positioned for convenience



87441-3B

- 3 drawer trolley
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

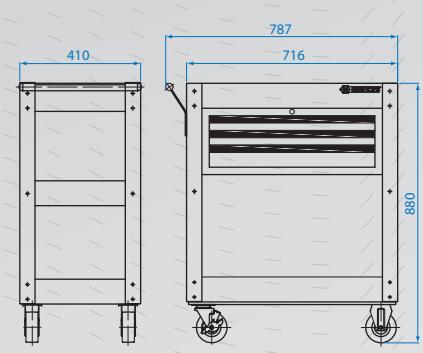

87G41-B

- With multi-functional working top
- 4"x 1" Heavy duty casters (2 Fixed and 2 swivel with stop function)

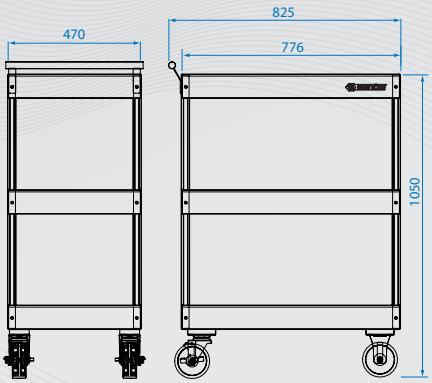



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87441-1B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	23.2	2.7
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
87441-3B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	33.0	4.95
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
	2 Drawer	569 x 275 x 50				
87G41-B	Overall	776 x 470 x 900	4" x 1"	150 Kg	23.0	3.67
	Overall + 4 Casters	776 x 470 x 1050				

Tool Trolley

- 3 drawer trolley
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners



- Multiple space bar to hold other tools

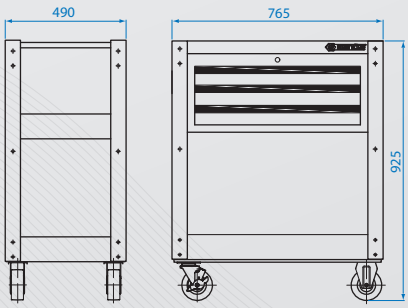



87446-3B-KR



87446-3B-KB

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87446-3B-KR	overall	765 x 490 x 760	5"x1-1/4"	600 Kg	38	13
	overall + 5"x1-1/4" Casters	765 x 490 x 925				
87446-3B-KB	3 Drawer	576 x 380 x 75				

Workbench

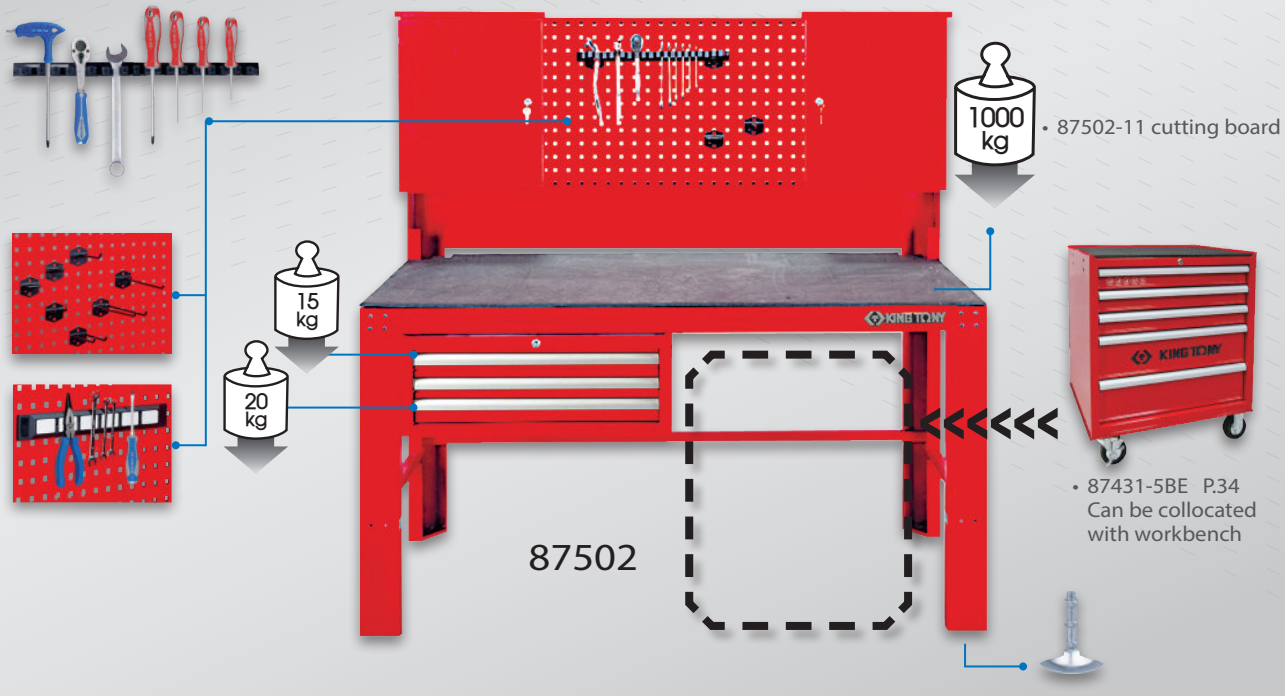

Accessory

KT NO.	Contents	
87502-01		Tool holder 500mmL
87502-02		Magnetic tool holder for workbench backpanel Size : 458 x 52 x 17mm
87502-050		U Shape hook
87502-051		1" Shape hook
87502-054		4" Shape hook
87502-058		8" Shape hook
87502-061		1" Double hook
87502-064		4" Double hook
87502-068		8" Double hook
87502-11		▪ Cutting board ▪ Oil-resistant, acid-resistant, moisture-resistant and anti-static ▪ 10mm PP foaming board
87502-12		▪ 4 PC. Adjusting device ▪ Includes adjustable bolt & adjustable pad

87502P02

▪ Drawer chest for workbench



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P02	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

87502P03

▪ 2 PC. wall cabinets





KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P03	Overall	400 x 200 x 500	14.00	4.5

Workbench

- Workbench excludes cutting board & tool holder

KT NO.			Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502		▪ 3 drawer chest-ball bearing slide ▪ 2 wall cabinets	Overall	1525 x 700 x 1520	86.00	13.4
			3 Drawer chest	660 x 307 x 251		
			2 Drawer	569 x 275 x 50		
			1 Drawer	569 x 275 x 75		
			Wall cabinet	400 x 200 x 500		
87502P01		▪ Workbench with back panel	Overall	1525 x 700 x 1520	59.00	6.5
87502P011		▪ Workbench	Overall	1525 x 700 x 800	48.00	6.5
87502P012		▪ Back panel	Overall	1525 x 20 x 700	13.50	2.7

87512

KT NO.			Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87512		▪ 3 drawer chest ball bearing slide ▪ 1 wall cabinet	Overall	1565 x 766 x 1403	130.10	21.19
			3 Drawer chest	668 x 313 x 270		
			2 Drawer	568 x 262 x 50		
			1 Drawer	568 x 262 x 75		
			Wall cabinet	1565 x 203 x 603		

Wall Mounted Type Tool Cabinet

87201

- With 20 PC. hooks
  - 5 PC. U shape hook (87502-050)
  - 10 PC. 1" single hook (87502-051)
  - 5 PC. 1" double hook (87502-061)
- Heavy duty design for storage heavy duty tool
- Powder coating finishing
- Full opened door with 2 aluminum alloy handles
- 4 holes on the back of cabinet to be fixed on the wall
- Double wall door panel design, peg hole at inside wall of door





Steel thickness: (body)1.0 mm


87502-050


87502-051


87502-061

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87201	Overall	820 x 250 x 900	24.00	8

Tool Chest





87411-6B



87411-9B



87419-5B
(Extra deep)



87417-10B
(Extra deep)

- Powder coating
- Ball bearing slide
- Central locking system
- Hemmed edge design to improve strength and safety
- Drawer quick release and detent design

Selective colors:



(Produce with minimum quantity)



• Ball bearing slides



• Steel ball



• Lockable



• Plastic drawer divider for cabinet



• Bottom rubber mats to avoid slipping

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87411-6B	Overall	660 x 307 x 374	25.40	3.97
	Top	646 x 290 x 60		
	3 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87411-9B	Overall	660 x 307 x 427	30.20	4.3
	Top	646 x 290 x 60		
	6 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87419-5B	Overall	660 x 455 x 483	40.00	8.58
	Top	646 x 420 x 70		
	2 Drawer	576 x 410 x 48.5		
	3 Drawer	576 x 410 x 75		
87417-10B	Overall	660 x 455 x 483	51.20	8.58
	Top	646 x 420 x 70		
	6 Drawer	169 x 410 x 48.5		
	1 Drawer	169 x 410 x 154		
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		



87421-3B



87422-3B (Extra deep)

- 3 drawer chest
- Intermediate type
- Heavy gauge steel
- Drawer slides type-ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- 10mm Top mat
- Powder coating finish
- 4 pins on the middle chest corners to tie in with top chest for extra security
- Overall size (mm) - 660(W) x 307(D) x 251(H) for 87421-3B
  Overall size (mm) - 660(W) x 455(D) x 254(H) for 87422-3B

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87421-3B	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87422-3B	Overall	660 x 455 x 254	24.8	5
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		

Selective colors:



-RK -B -BK -K -G -OK

(Produce with minimum quantity)





• Ball bearing slides



• Steel ball



- Heavy gauge steel plus flange reinforced design
- Close cover synchronously lock all of the drawers
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 287(H)

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87401-2	2 Drawer	504 x 195 x 79	8.80	2.05
87401-3	3 Drawer	504 x 195 x 52	10.20	
87401-3H	3 Drawer	504 x 195 x 52	11.20	



87401-2



87401-3



87401-3H

Only 87401-3H:



• Internal lock system



• Ball bearing slides



• Steel ball

Tool Box

87402

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87402	5 compartments	470 x 220 x 260	5.60	1.22
87408		530 x 220 x 260	6.70	1.3

87408





87A05

87A05-KB

87A051

87A051-KB

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength



87A05

KT NO.	Spec.	Dimension(mm) W x D x H	Kg	CUFT
87A05	5 compartments	470 x 220 x 260	5.10	1.41
87A05-KB				
87A051		530 x 220 x 260	6.80	1.48
87A051-KB				





87A05-KB

87A08

- Material : PP + Metal
- Shock-resistant reinforced polypropylene shell with metal cover
- Impact resistant and sturdy bumper at corners
- 30kgs load on top and stackable design
- V groove on top for sawing or placement
- Easy to use with grip handle for carry
- Portable tote tray take tools or small parts
- Lockable allow use padlock for security
- Metal double clasp

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87A08	2 compartments	470 x 210 x 207	2.0	0.91





87404

87407

- Meterial : PP
- Multi-function box, extra space for tools and parts
- Lightweight
- Durable design for tool storage





87404





87407

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87404	2 compartments	560 x 278 x 270	2.40	1.75
87407		445 x 240 x 206	1.74	0.79

Parts Box

87137

- Parts box
- Material : PP

KT NO.	Dimension(mm) Width x Depth x Height	g
87137	180 x 39 x 96	109





• PP plastic storage box for spare parts

Fabric Tool Bag

87711C

- Waterproof 600D Oxford
- Lightweight stainless bar & comfortable EVA handle
- Velcro cover for easy access & quickly take out tools
- Adjustable ambi-bag with soft padded shoulder strap
- 39 inner pockets for multiple-tools storage
- 50% less weight than metal box

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87711C	550 x 285 x 370	3.00	1 / 1







87722B

- Waterproof, reinforced rubber base protects tools
- 600D Oxford
- Internal and external storage pockets
- Zip fastening and rubber comfort grip handles
- Removable padded shoulder strap for comfortable carry

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87722B	390 x 210 x 320	1.80	1 / 5





87721B

- Heavy duty 600D Oxford
- Wide opening at top with zipper for easy access and security
- Removable shoulder strap
- Removable compartment for greater organization
- External and internal side pockets

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87721B	360 x 200 x 250	0.95	1 / 1







Modular Stacking Box

Modular Stacking Box

According to the demand of tools in different working environments, we've designed toolboxes to cope with different working situations. It is more convenient for the out-ofhome technician to carry the tools, also reducing the time for the technician to go back and forth between the vehicle and the construction site.
This saves the technician's time and energy, improving the technician's work efficiency and mobility



- For better clarity you can attach labels to either the front or the sides of the case to optimize your workflow









- I-Locking the 90° twist system is also extremely practical since you can open it just using one hand



- Fixing boxes in pallet truck



- With four swivel casters of which two are braked by an integrated brake











•The sturdy and ergonomic handles on the lid and in the front can be easily carried according to your requirement

• The double-layer tool pouch can adjust the space through the buckle to facilitate the user take the tools

L



87405-3
456 x 372 x 262 mm

M



87405-2
456 x 372 x 155 mm

S



87405-1
456 x 372 x 115 mm



87405-9
655 x 490 x 170 mm

Handy Case

Handy Case Series

The outside of handy case can afford high load capacity, and great crash-resistance. There are four different sizes with the conception of T.C.S mod. Therefore, its design is based on the user perspective , easy to carry and store, make every user enjoying their work.



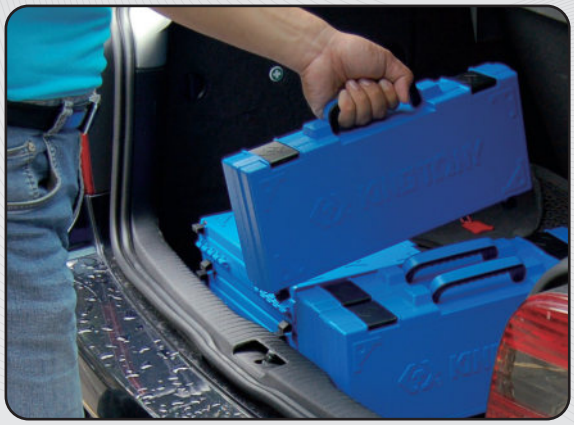





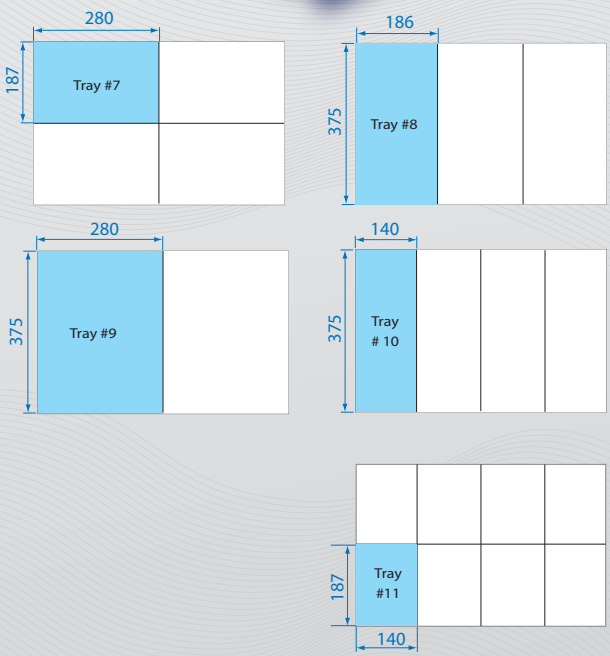

#11



820005
199 x 171 x 50mm

#7



820001
294 x 231 x 66mm

#10



820002
389 x 184 x 66mm

#8



820003
389 x 229 x 66mm

#9



820011
422 x 372 x 92mm

Handy Case

820011

- Made of shockproof PE-HD for heavy duty contents
- Ideal for tool storage & tool box system
- Easy to pile and store
- Anti-collision
- Case for Eva foam / tray





- Steel buckle provides security & strength



- Foam protection against collisions



- Hexagon overlap in 4 corners, easy to file up



- Extra space for thumb taking out

KT NO.	Size mm	EVA / Tray	g	
820011	422 x 372 x 92	#9	1417	1 / 4

82000

- Tool case made of sturdy ABS material
- Ideal for tool storage & tool box system
- Easy to pile and store
- Case for Eva foam / tray





- Plastic padding for better stable storage
- The hinge construction makes box more durable



- 180° swivel handle easy to carry



- Easy and quick to lock



- Foam protection against collisions



- Hexagon overlap in 4 corners, easy to pile up



- Extra space for thumb taking out

KT NO.	Size mm	EVA / Tray	g	
820001	294 x 231 x 66	# 7	641	1 /6
820002	389 x 184 x 66	#10	651	1 / 5
820003	389 x 229 x 66	# 8	793	1 / 4
820005	199 x 171 x 50	#11	293	1 / 8

Multi-Storage Case

827011

- Heavy duty plastic blow case with foam padded internal
- High impact polystyrene with dividers make 12 spaces
- Easy to carry tools from trolley & store bolts, nuts
- Mini case (278 x 87 x 42 mm)









Blow case size (mm) :
422 x 372 x 92 (0.51 Cuft)

KT NO.	Contents	kg	
827011	84700011B x4	2.19	1 / 4

Plastic Tray

847000

- For accessories, parts and consumables
- Easily combine the parts box sizes depending on the handy case
- Easy to carry and segment

84700011B 84700002B 84700003B



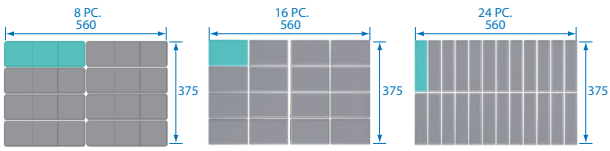

KT NO.	Size	g	
84700011B	283 x 93 x 43	150	8 / 72
84700002B	140 x 93 x 43	75	16 / 144
84700003B	187 x 47 x 43	50	24 / 216

Roller Seat

Material: PVC leather + foam cushion + finishing powder coating steel
Two Open Storage Areas



▪ Four 360° swivel Casters

87452B-B



Metal tray with rack funciton



87452C-B



Metal tray



KT NO.	Dimension(mm) Width x Depth x Height	kg	1 / 1	CUFT
87452B-B	350 x 260 x 240	6.4	1 / 1	0.49
87452C-B		6.3	1 / 1	



Tools Control & Security Storage System

How to complete your tool trolley set and tool chest set



Three-colors fabrication



waterproof



Laser marking



Missing tools detected

Drawer (646x290 mm)



Drawer (172x275 mm)



Drawer (572x275 mm)



Drawer (579x380 mm)



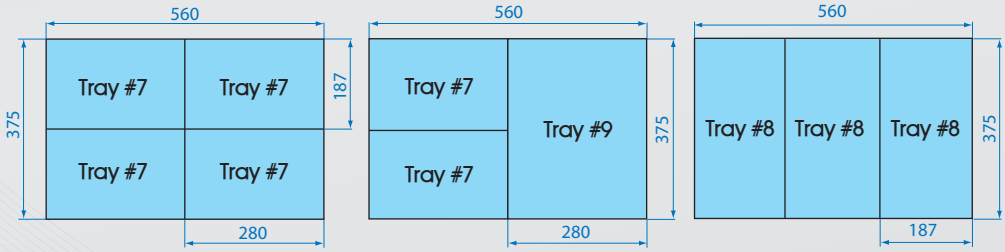

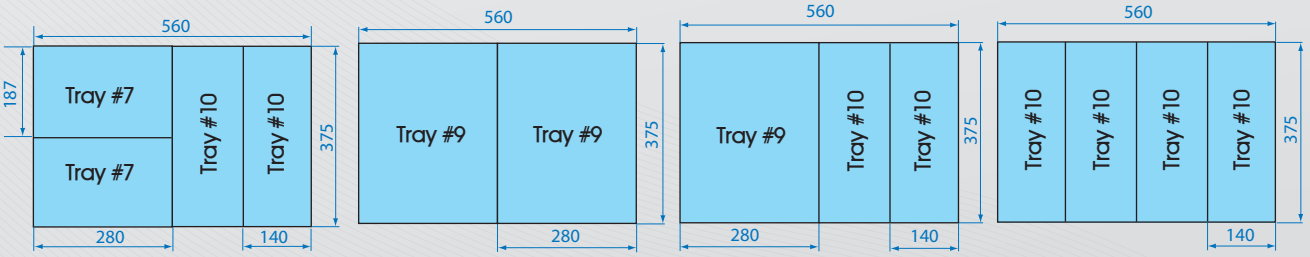

Drawer (896 x 379 mm)

- for 87462-7G-KB

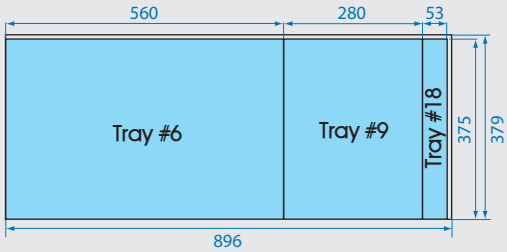

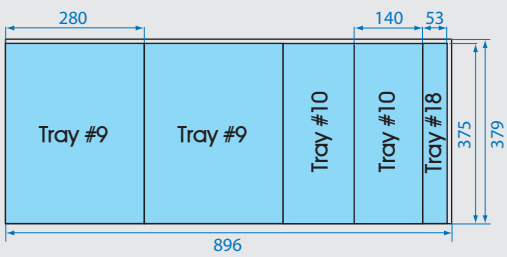

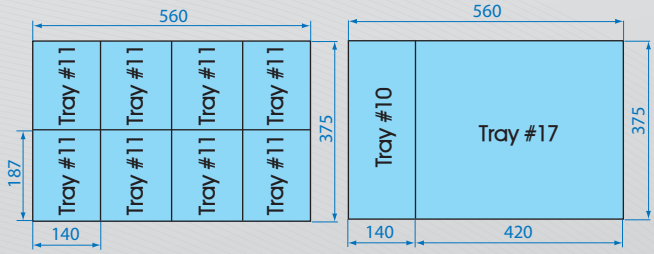

- **Security:**
  Separate spaces for each tools to prevent them being left in dangerous areas
- **Benefit:**
  Tools are quickly located and immediately returned after use to avoid loss
  3 colors EVA foam offers convenient identification of use with sustained sizes and mark
- **Efficiency:**
  A quick glance helps for missing tools
  Durable material prevents being dirty for easy maintenance

Tool Trolley Contents

235 PC.



Contents No. 934-235MRVD

24.15 CUFT 2.62

- Special tool set for Automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car



9-4537MRV #9 P.77

9-2565MRV #7 P.74
9-4129PRV #7 P.74



9-4147PRV #10 P.83
9-90135MRV #10 P.83
9-1220MRV #9 P.78

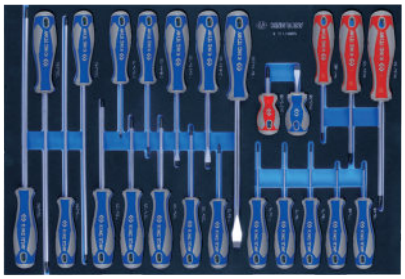

9-31124MRV #6 P.73



9-90119MRV #9 P.79
9-40104GPV #10 P.83
9-40113GPV #10 P.83



9-44214GPV #10 P.83
9-90118PRV #10 P.84

Tool Trolley Set

235 PC.

7 | 88.15 CUFT 14.86



934-235MRV (87434-7B P.33)



934-235MRV-G (87434-7B-G P.33)



934-235MRV-B (87434-7B-B P.33)

7 | 90.29 CUFT 18.26



9634-235MRV (87634-7B P.39)



9634-235MRV-G (87634-7B-G P.39)



9634-235MRV-B (87634-7B-B P.39)

7 | 99.15 CUFT 15.32



9934F-235MRV (87934-7BF P.41)



9934F-235MRV-G (87934-7BF-G P.41)



9934F-235MRV-B (87934-7BF-B P.41)

Tool Trolley Contents

286 PC.



Contents No. 934-010MRVD

28.1 CUFT 2.51

- Special tool set for automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car



9-3544MRV #9 P.76



9-4537MRV #9 P.77



9-4147PRV #10 P.83

9-4401MPV #10 P.83



9-2565MRV #7 P.74
9-4129PRV #7 P.74



9-90119MRV #9 P.79



9-1220MRV #9 P.78

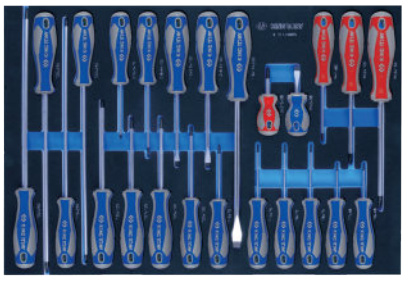

9-31124MRV #6 P.73



9-40104GPV #10 P.83
9-40113GPV #10 P.83
9-90135MRV #10 P.83
9-90118PRV #10 P.84

Tool Trolley Set

286 PC.

7 drawers, 92.10 kg, CUFT 15.03	 934-010MRV (87434-7B P.33)	 934-010MRV-G (87434-7B-G P.33)	 934-010MRV-B (87434-7B-B P.33)
7 drawers, 94.24 kg, CUFT 18.43	 9634-010MRV (87634-7B P.39)	 9634-010MRV-G (87634-7B-G P.39)	 9634-010MRV-B (87634-7B-B P.39)
7 drawers, 103.1 kg, CUFT 18.46	 9934F-010MRV (87934-7BF P.41)	 9934F-010MRV-G (87934-7BF-G P.41)	 9934F-010MRV-B (87934-7BF-B P.41)

Tool Trolley Contents

325 PC.



Contents No. 934-011MRVD

33.14 CUFT 3.75



9-3544MRV #9 P.76 | 9-4537MRV #9 P.77



9-2565MRV #7 P.74
9-4143FRV #7 P.75 | 9-1112MRV #9 P.79

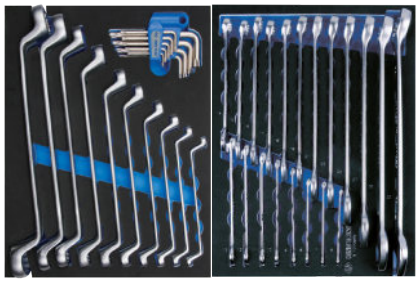

9-90119MRV #9 P.79 | 9-1220MRV #9 P.78

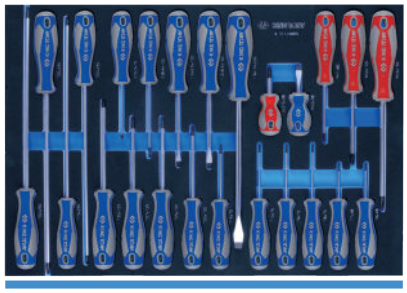

9-31124MRV #6 P.73



9-40104GPV #10 P.83 | 9-40113GPV #10 P.83 | 9-90135MRV #10 P.83 | 9-90118PRV #10 P.84



9-90413TQV #6 P.73



7962-04 P.456



9DC23 P.571



2121-18 P.579



7963-04 P.456



14210212 P.360
14226512 P.360



9-44214GPV #10 P.83 | 9-22108MRV #9 P.80

Tool Trolley Set

325 PC.

7 | 97.14 CUFT 15.99



934-011MRV (87434-7B P.33)



934-011MRV-G (87434-7B-G P.33)



934-011MRV-B (87434-7B-B P.33)

7 | 99.28 CUFT 19.39



9634-011MRV (87634-7B P.39)



9634-011MRV-G (87634-7B-G P.39)



9634-011MRV-B (87634-7B-B P.39)

7 | 108.14 CUFT 16.45



9934F-011MRV (87934-7BF P.41)



9934F-011MRV-G (87934-7BF-G P.41)



9934F-011MRV-B (87934-7BF-B P.41)

Tool Trolley Contents

327 PC.



Contents No. 934-019MRVD

56.68 CUFT 4.6

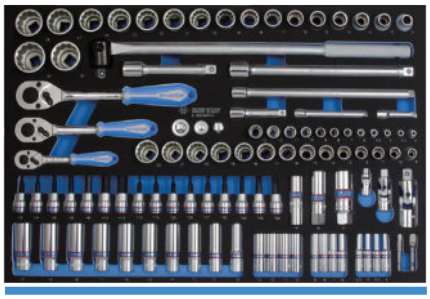

9-9003MRV01 #6 P.70

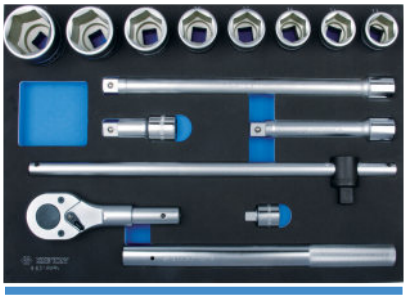

9-6314MRV #6 P.70



9-99430MFV #6 P.70



9-30208MRV #9 P.80

9-1220MRV #9 P.78

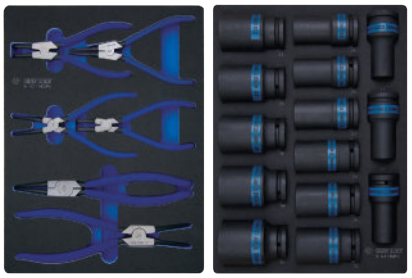

9-42116GPV #9 P.79

9-6414MPV #9 P.78



9-40104GPV #10 P.83

9-40113GPV #10 P.83

9-4147PRV #10 P.83

9-90118PRV #10 P.84



9-10112MRV #7 P.75

9-4143FRV #7 P.75

9-1044CQV #10 P.84

9-21-20-07MRV #10 P.84

Tool Trolley Set

327 PC.

7 120.68 CUFT 16.84



934-019MRV (87434-7B P.33)



934-019MRV-G (87434-7B-G P.33)



934-019MRV-B (87434-7B-B P.33)

7 122.82 CUFT 20.24



9634-019MRV (87634-7B P.39)



9634-019MRV-G (87634-7B-G P.39)



9634-019MRV-B (87634-7B-B P.39)

7 131.68 CUFT 17.30



9934F-019MRV (87934-7BF P.41)



9934F-019MRV-G (87934-7BF-G P.41)



9934F-019MRV-B (87934-7BF-B P.41)

Tool Trolley Contents

525 PC.



Contents No. 935-525CRVD

68.08 CUFT 6.51



9-9003MRV01 #6 P.70



9-6314MRV #6 P.70



9-9040SRV #9 P.77

9-4129PRV #7 P.74

9-3612MR #7 P.121



9-4147PRV #10 P.83

9-4401MPV #10 P.83

9-4435MP #9 P.123



9-1112MRV #9 P.79

9-1220MRV #9 P.78



9-90119MRV #9 P.79

9-91190CRV #9 P.80



9-91124MRV #6 P.73



9-90217GRV #6 P.72

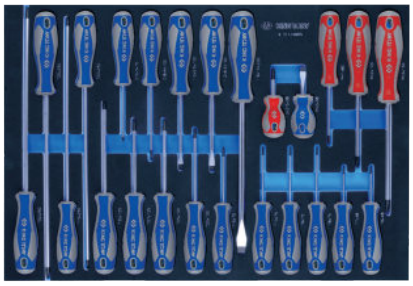

9-31124MRV #6 P.73



9-22108MRV #9 P.80

9-4143FRV #7 P.75

9-30904AY #7 P.121



9-90413TQV #6 P.73



74010 P.468



74020 P.468



74060 P.468



7861-16 P.448



7811-12 P.448



7851-16 P.449



7911-12 P.469



21-20-101 P.459



6532-14 P.354



79094-08C P.460

Tool Trolley Set

525 PC.



234.08

CUFT 38.05

935-525CRV

(87435-13B P.34)

Tool Chest Set

187 PC.

911-004CRV

47.38 CUFT 6.51





9-9077CRV #1 P.67



9-42102GPV #2 P.68 | 9-40122GPV #2 P.68 | 9-40112GPV #2 P.68



9-91131MRV #3 P.69



9-91126SRV #3 P.69



9-90145CRV #3 P.69



79093-05C P.460



7811-16 P.448



87411-6B P.50

Tool Chest Set

219 PC.

911-000CRV

48.27 CUFT 6.10



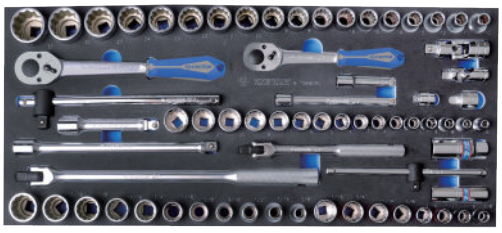

9-7069CRV #1 P.67



9-42114GPV #2 P.68 | 9-40102GPV #2 P.68 | 9-2548CRV #2 P.68



9-90129CRV #3 P.69



9-90128SR #3 P.105



9-90138CR #3 P.106



87411-6B P.50

Tool Chest Set

306 PC.

919-001CRV

Kg 66.01 CUFT 11.05



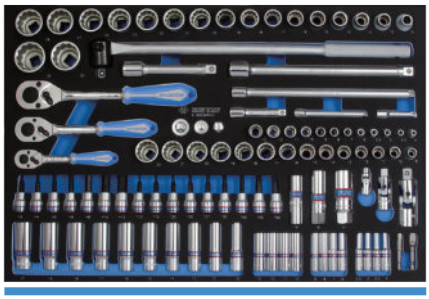

9-9003MRV01 #6 P.70



9-9040SRV #9 P.77



9-1220MRV #9 P.78



9-90217GRV #6 P.72





9-31110MRV #9 P.81 | 9-91190CRV #9 P.80



9-91124MRV #6 P.73



79094-08C
P.460



7911-12
P.469



87419-5B P.50



Tool Set Content



9-7069CRV

Tray category #1 (642 x 286mm)

70 PC.

Contents	7.5 kg	1 / 2
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16	
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1	
463516RC	463521RC	3792
4791R	3779-08G	4779-10GR
3452-08F	4452-15FR	3812
3571-08	4572-10	4813
3221-03 3221-06	4251-05R 4251-10R	7911-12




7911-12

9-9077CRV

Tray category #1 (642 x 286mm)

77 PC.

Contents	7.95 kg	1 / 2
2330M	4, 5, 6, 7, 8, 9, 10	
2330S	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8	
3330M	10, 11, 12, 13, 14, 15, 17, 19	
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	
463021RC	2792	3792	4791R
2779-55G	3779-08G	3814
4779-10GR	2221-04	3221-06
4251-10R	3452-08F	4452-15FR
4572-12		



Tool Set Content





9-2548CRV Tray category #2 (263 x 163mm)

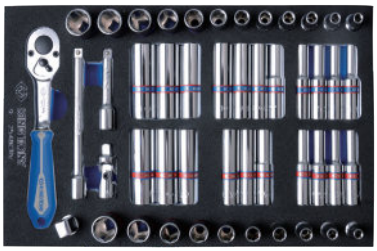

48 PC.

Contents — 1.28 kg — 1 / 10

2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2

2792 — 2813 — 2779-55G

2221-02
2221-04

9-40102GPV Tray category #2 (263 x 163mm)



2 PC.

Contents — 1.00 kg — 1 / 10

6011-10R — 6511-10

9-40112GPV Tray category #2 (263 x 163mm)



2 PC.

Contents — 0.69 kg — 1 / 10

6231-08 — 6311-10

9-40122GPV Tray category #2 (263 x 163mm)



2 PC.

Contents — 0.95 kg — 1 / 10

6111-08 — 6011-10R

9-42102GPV Tray category #2 (263 x 163mm)

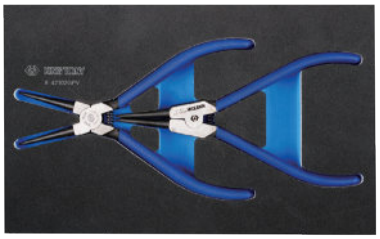

2 PC.

Contents — 0.32 kg — 1 / 10

68HS-07 — 68SS-07

9-42114GPV Tray category #2 (263 x 163mm)

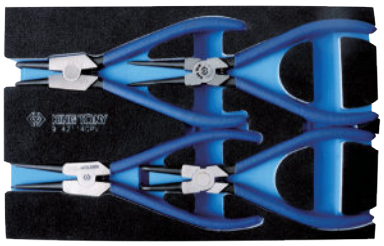

4 PC.

Contents — 0.60 kg — 1 / 10

68HS-07 — 68SS-07

68HB-07 — 68SB-07

Tool Set Content





9-91126SRV

Tray category #3 (554 x 260mm)

Contents		3.28 kg / 1 / 3
5060		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1
5930		5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8
1130SR		3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
3611R		6, 12



26 PC.

9-91131MRV

Tray category #3 (554 x 260mm)

Contents		2.98 kg / 1 / 4
1930		8x10, 10x12, 11x13, 14x17
1060		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
1125MR		H1.5, H2.5, H2, H3, H4, H5, H6, H8, H10



31 PC.

9-90145CRV

Tray category #3 (554 x 260mm)

Contents		4.04 kg / 1 / 3
1060		27, 30, 32
5060		1-1/16, 1-1/8, 1-1/4
1481		PH1x75, PH2x100, PH3x150
1482		5.5x75, 6.5x100, 8x150
1025S		3.0, 4.0, 5.0, 6.0
1025P		PH1, PH2 x 2, PH3
1025Z		PZ1, PZ2 x 2, PZ3
1025T		T10, T15, T20, T25, T27, T30, T40
1025H		H3, H4, H5, H6
1025U		T10H, T15H, T20H, T25H, T27H, T30H, T40H
7702-25	753-63	2141



45 PC.

9-90129CRV

Tray category #3 (554 x 260mm)

Contents		2.5 kg / 1 / 4
1421		PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150
1422		3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175
1130SR		3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
1120MR		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
6111-07	6231-07	
6311-06		

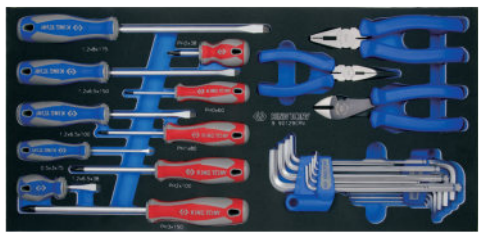

29 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-6314MRV

Tray category #6 (560 x 375mm)

Contents			kg 9.96	1 / 2
○	6335M	33, 34, 35, 36, 38, 41, 46, 50		
	6572-20		6779-20F	
	6251-04 6251-08 6251-16		6814	



14 PC.

9-9003MRV01

Tray category #6 (560 x 375mm)

Contents			kg 7.30	1 / 3
○	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
✱	3023	T10,T15,T20,T25,T27,T30,T40,T45,T50		
●	3025	H3,H4,H5,H6,H8,H10,H12		
○	3235M	10,12,13,14,15,16,17,18,19,21		
○	3330M	8,10,11,12,13,14,15,16,17,18,19,20,21,22		
○	4330MR	10,12,13,14,15,16,17,18,19,20,21,22,23,24,27,28,30,32		
	7702-50		7703-50	
	2792		3792	4791R
	363516		363521	36A014

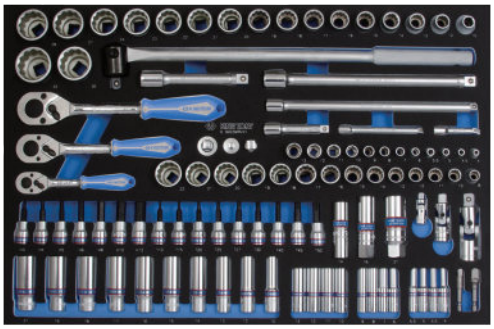

103 PC.

Contents

2813	3812	4813	
2221-02 2221-04	3221-03 3221-10	4251-05R 4251-10R	
2771-55G	3771-08G		
4771-10GR	4462-18F		

9-99430MFV



9-99430MFV

30 PC.

Contents			kg 12.38	1 / 2
○	8435M	27, 30, 32, 33, 36		
✪	6575M	E24, E26, E28, E30, E32		
✪	3375M	E4, E5, E6, E7, E8, E11		
✪	4375M	E10, E12, E14, E16, E18, E20, E22		
●	4025	H14, H17, H19		
	8866P		7823-20	
	320560		9DC22	

9-99430MFV01

Tray category #6 (560 x 375mm)



9-99430MFV01

31 PC.

Contents			kg 12.38	1 / 2
○	8435M	27, 30, 32, 33, 36		
✪	6575M	E24, E26, E28, E30, E32		
✪	3375M	E4, E5, E6, E7, E8, E11		
✪	4375M	E10, E12, E14, E16, E18, E20, E22		
●	4025	H14, H17, H19		
	4866P		8866P	7823-20
	320560		9DC22	

Tool Set Content





Drawer (579 x 380 mm)

9-44803AMPV

9-44803AMPV01

Tray category #6 (560 x 375mm)



9-44803AMPV



9-44803AMPV01

41 PC.

KT NO.		Contents		kg 9.50 / 1 / 2
9-44803AMPV	33481-095	4945M	17, 19, 21	79900-10
		4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	34423-1A
9-44803AMPV01	33411-050	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	4797P; 4260-03P 4260-05P; SY-211M x2; 33411-71

9-44805AMPV

Tray category #6 (560 x 375mm)

Contents		kg 9.76 / 1 / 2
4945M	17, 19, 21	
4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	
4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	
33481-095	37435-075	33411-71
34423-1A	SY-211M x2	
4797P	4260-03P 4260-05P	



41 PC.

9-94437MRV

Tray category #6 (560 x 375mm)

Contents		kg 4.61 / 1 / 2
1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	
3731M	8, 10, 11, 12, 13, 14, 15	
4435M	17, 19, 21	
1836P	PH2, PH3	
1836S	9, 11	
1880P	PH2, PH3	
1880S	8, 10	
4112	414810S	



37 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-90217GRV

Tray category #6 (560 x 375mm)

Contents				3.89	1 / 6
764	3,4,5,6				
76105-06		76717-05			
7811-16		6011-10R			
6111-08		6231-07		6311-08	
6314-05		68HB-07		68HS-07	
68SB-07		68SS-07		6511-10C	



17 PC.

9-91122MRV

Tray category #6 (560 x 375mm)

Contents		3.18	1 / 5
1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24		
115HM	H6, H7, H8, H9, H10, H11, H12, H13		



22 PC.

9-22124MRV50

Tray category #6 (560 x 375mm)

Contents			2.18	1 / 5
115HM	H7, H8, H10, H11, H12, H13			
ST20109MR		ST20419PR		

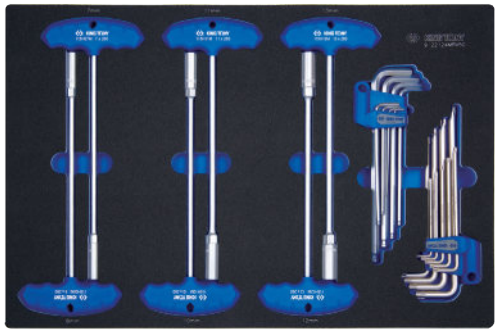

24 PC.

9-31920MRV

Tray category #6 (560 x 375mm)

Contents			2.01	1 / 2
1421	PH0 x 60, PH2 x 38, PH2 x 300			
1422	3 x 75, 6.5 x 38, 6.5 x 300			
1427	T8H x 75, T10H x 75, T15Hx 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125,			
1461	PH2 x 100, PH3 x 150			
1462	6.5 x 100, 8 x 150			
43280212		48280180		
2121-18				



20 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-31124MRV

Tray category #6 (560 x 375mm)

Contents		2.41	1 / 5
1421	PH2x38, PH1x80, PH2x100, PH3x150		
1422	3x75, 4x100, 5.5x100, 6.5x100, 10x200, 6.5x38		
1423	T6x48, T7x48, T8x75, T9x75, T10x75, T15x75, T15x250, T20x100, T20x250, T25x100, T25x250, T27x100, T30x125, T30x250		

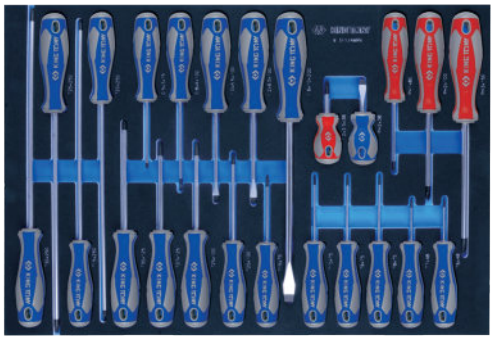

24 PC.

9-91124MRV

Tray category #6 (560 x 375mm)

Contents			4.12	1 / 5
3731	10, 12, 13, 14, 17, 18, 19			
1421	PH2 x 300			
1422	5 x 300			
74030		6615-11		
3611-10R 3611-12R		9TK118		
79063-12		11409SQ05		




11409SQ05

24 PC.

9-90413TQV

Tray category #6 (560 x 375mm)

Contents		2.49	1 / 5
115HM	8, 10, 13		
9CZ101		115345R	
48280180		43280212	
43240115Y		75102-08G	
75202-08G		75302-08G	
75402-08G		75502-08G	



13 PC.

9-91217MRV

Tray category #6 (560 x 375mm)

Contents		6.11	1 / 2
1421	PH1 x 80, PH2 x 100		
1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
1423	T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125		
48280180		9CF220	
7823-10 7823-20		7821-30	



17 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-2331SRV

Tray category #7 (280 x 187mm)

Contents — 0.97 kg — 1 / 10

2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16
2771-55G	2571-45 2142
2221-02 2221-04 2221-06	2792 2178DF



31 PC.

9-2534MRV

Tray category #7 (280 x 187mm)

Contents — 1.11 kg — 1 / 10

2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 , 12 , 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2771-55G	2571-45
2792	2178DF 2142
2221-02, 2221-04, 2221-06	



34 PC.

9-2565MRV

Tray category #7 (280 x 187mm)

Contents — 1.38 kg — 1 / 10

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2375M	E4, E5, E6, E7, E8
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40
2015X	H3, H4, H5, H6, H8
2018X	PZ1, PZ2
2011X	PH1, PH2
2012X	3.5, 5.5, 8
1025T	T6, T7
1025M	M4, M5, M6, M8, M10



65 PC.

Contents

2792 2813 276A-04G

2221-02, 2221-04, 2221-06

9-4138PRV

Tray category #7 (280 x 187mm)

Contents — 1.85 kg — 1 / 10

4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17



18 PC.

9-4129PRV

Tray category #7 (280 x 187mm)

Contents — 2.07 kg — 1 / 10

4025	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19
4026	M5, M6, M8, M10, M12, M14
402B	M16, M18



19 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-7128PRV

Tray category #7 (280 x 187mm)

Contents			kg 1.30	1 / 10
	3023	T15, T20, T25, T27, T30, T40, T45, T50		
	3025	H3, H4, H5, H6, H7, H8 H10, H12		
	3375	E8, E10, E12, E14, E16, E18		
	4375	E10, E12, E14, E16, E18, E20		



28 PC.

9-4429MPV

Tray category #7 (280 x 187mm)

Contents			kg 2.75	1 / 4
	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36		



19 PC.

9-10112MRV

Tray category #7 (280 x 187mm)

Contents			kg 1.13	1 / 10
	3731	10, 11, 12, 13, 14, 15, 16, 17, 19		
373202R	373203R	373204R		

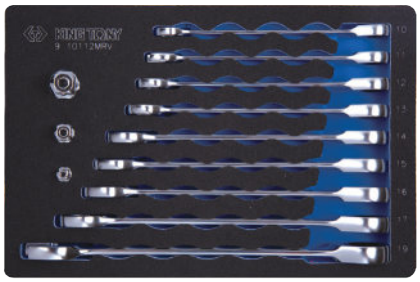

12 PC.

9-4143FRV

Tray category #7 (280 x 187mm)

Contents			kg 1.63	1 / 8
	1636H	H5, H6, H7, H8, H10, H12		
	1636M	M6, M8, M10, M12		
	1636T	T30, T40, T45, T50, T55, T60		
	1832H	H3, H4, H5, H6, H7, H8, H10, H12		
	1832T	T15, T20, T25, T27, T30, T40, T45, T50		
	1836P	PH2, PH3		
	1836S	9 x 1.6, 11 x 2		
	1880P	PH2, PH3		

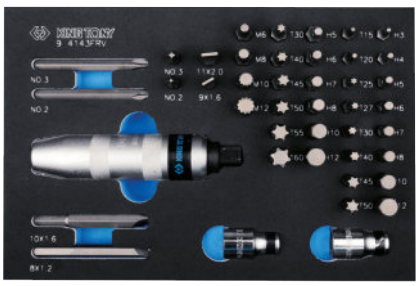

43 PC.

Contents

	1880S	8 x 1.2, 10 x 1.6	
	414810M, 414810S		4112

9-30904AYV

Tray category #7 (280 x 187mm)

Contents			kg 0.45	1 / 10
	43250115Y		43270115Y	
	43260115Y		43290115Y	



4 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-2550MRV

Tray category #8 (375 x 187mm)

50 PC.



Contents			kg 1.37	1 / 15
○		2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
✪		2375M	E4, E5, E6, E7, E8	
⊕		2031	PH1, PH2, PH3, PH4	
⊖		2032	4, 5.5, 6.5, 8, 10	
✱		2033	T8, T9, T10, T15, T20, T25, T27, T30, T40	
⬢		2035	H3, H4, H5, H6, H7, H8, H10	

Contents

	2771-55G		2178DF
	2792		2571-45
	2293-04 2293-06		2221-02





Drawer (579 x 380 mm)

9-3544MRV

Tray category #9 (375 x 280mm)

44 PC.



Contents			kg 3.19	1 / 5
○		3335M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
✪		3375M	E7, E8, E10, E11, E12	
○		3230M	8, 10, 11, 12, 13, 14, 16, 17, 19	
○		3750M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	


3812
3814


3223-14


3779-08G

3221-03
3221-06
3221-10

9-4221MRV

Tray category #9 (375 x 280mm)

21 PC.



Contents			kg 3.97	1 / 5
○		4230	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36	

9-4526MRV05

Tray category #9 (375 x 280mm)

24 PC.



Contents			kg 5.05	1 / 4
○		4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32	


4779-10FR


4572-12

4452-15FR


4791R

4251-05R
4251-10R

Tool Set Content





Drawer (579 x 380 mm)

9-4527MRV02

Tray category #9 (375 x 280mm)

Contents			kg 4.72	1 / 5
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 29, 30, 32			
4771-10GR		4791R		
4572-12		4251-05R 4251-10R		
4452-15FR		4581-10		



27 PC.

9-4537MRV

Tray category #9 (375 x 280mm)

Contents			kg 4.39	1 / 5
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32			
4375M	E10, E12, E14, E16, E18, E20, E22, E24			
4779-10GR		4293-02		
4251-05R 4251-10R		463516RC 463521RC		
4791R		463014RC		



37 PC.

9-9040SRV

Tray category #9 (375 x 280mm)

Contents		kg 3.02	1 / 5
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		
3330S	3/8, 7/16, 1/2, 9/16, 5/8		
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4,		
5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 15/16, 1		

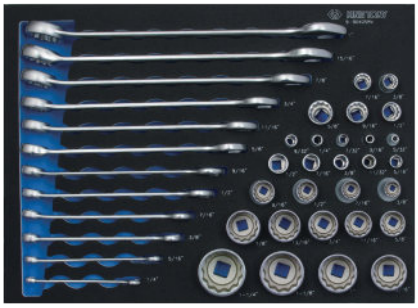

40 PC.

9-7560MRV01

Tray category #9 (375 x 280mm)

Contents			kg 6.24	1 / 2
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
4335MR	10, 11, 13, 14, 15, 16,17, 18, 19, 20, 21, 22, 24, 27, 30, 32			
1025S	3, 4.5, 5, 6.5, 8			
1025P	PH0, PH1, PH2, PH3			
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H			
1025Z	PZ1, PZ2, PZ3			
276A-04G		4771-10GR		
4452-15FR		4572-12	2745	
213312DF		2792	4791R	
2223-02 2223-04		4251-05R 4251-10R	2813	



60 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-4419MPV

Tray category #9 (375 x 280mm)

Contents		5.6	1 / 2
4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36		



19 PC.

9-6414MPV

Tray category #9 (375 x 280mm)

Contents		10.08	1 / 2
6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41		



14 PC.

9-1220MRV

Tray category #9 (375 x 280mm)

Contents		3.49	1 / 4
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		



20 PC.

9-12D20MRV

Tray category #9 (375 x 280mm)

Contents		3.45	1 / 4
1062	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		



20 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-12A1MRV

Tray category #9 (375 x 280mm)

Contents		1.75	1 / 10
1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24		



11 PC.

9-1112MRV

Tray category #9 (375 x 280mm)

Contents		2.34	1 / 4
1900	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 25x28, 30x32		



12 PC.

9-90119MRV

Tray category #9 (375 x 280mm)

Contents		3.04	1 / 4
1970	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32		
1143	T10, T15, T20, T25, T27,T30, T40, T45, T50		



19 PC.

9-42116GPV

Tray category #9 (375 x 280mm)

Contents		1.54	1 / 5





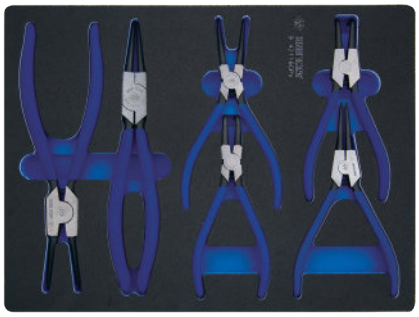

6 PC.

Tool Set Content

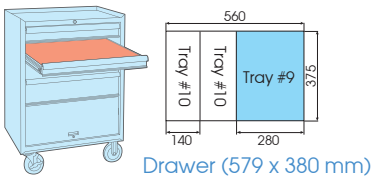

Drawer (579 x 380 mm)

9-91190CRV

Tray category #9 (375 x 280mm)

Contents		2.22	1 / 10
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025R	RB2		
7702-25	753-63		
10D0	10,12,13,14,17,18,19		
1130MR	H2.5, H3, H4, H5, H6, H8, H10		



90 PC.

Contents

1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	
1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
3611-06R 3611-08R	77328-26	
276A-04G		

9-22108MRV

Tray category #9 (375 x 280mm)

Contents		0.89	1 / 5
1160MR	H2, H2.5, H3, H4, H5, H6, H8, H10		

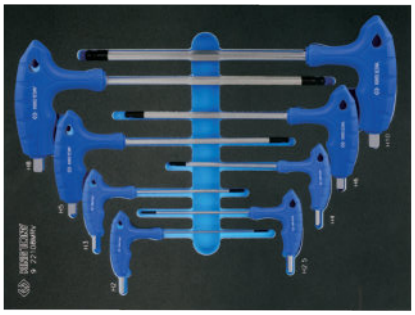

8 PC.

9-22308TRV

Tray category #9 (375 x 280mm)

Contents		0.71	1 / 10
1163TR	T10, T15, T20, T25, T30, T40, T45, T50		

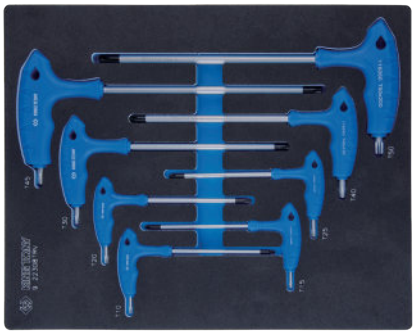

8 PC.

9-30208MRV

Tray category #9 (375 x 280mm)

Contents		1.41	1 / 5
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8 x 150, 8 x 175		



8 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-31110MRV

Tray category #9 (375 x 280mm)

Contents		2.46	1 / 5
⊕	1421	PH1 x 80, PH2 x100, PH3 x 150, PH2 x 38	
⊖	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175	

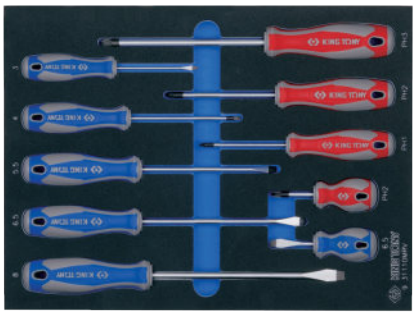

10 PC.





Drawer (579 x 380 mm)

9-2544SRV

9-2044SRV

Tray category #10 (375 x 140mm)



9-2544SRV



9-2044SRV

44 PC.

KT NO.		Contents	0.92	1 / 6
9-2544SRV	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	○ 2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
9-2044SRV	○ 2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	⊖ 1025S	3, 4.5, 5, 6.5, 8
			⊕ 1025P	PH0, PH1, PH2, PH3
			⬢ 5025H	H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32

2752-06G
2178DF
2792
2223-02
2223-04
2142

9-2548MRV

9-2048MRV

Tray category #10 (375 x 140mm)



9-2548MRV



9-2048MRV

48 PC.

KT NO.		Contents	1.09	1 / 6
9-2548MRV	○ 2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	○ 2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
9-2048MRV	○ 2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	⊖ 1025S	3, 4.5, 5, 6.5, 8
			⊕ 1025P	PH0, PH1, PH2, PH3
			⬢ 1025H	H3, H4, H5, H6, H7, H8, H10

2752-06G
2178DF
2792
2223-02
2223-04
2142

Tool Set Content





Drawer (579 x 380 mm)

9-2553MRV

Tray category #10 (375 x 140mm)

Contents		0.98	1 / 6
2335M		4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
1025H		H3, H4, H5, H6, H7, H8, H10	
1025S		3, 4.5, 5, 6.5, 8	
1025P		PH0, PH1, PH2, PH3	
1025U		T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025Z		PZ1, PZ2, PZ3	
1025T		T10, T15, T20, T25, T27, T30, T40	



53 PC.

Contents



9-2553MRV01

Tray category #10 (375 x 140mm)

Contents		0.97	1 / 6
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
1025H		H3, H4, H5, H6, H7,H8, H10	
1025T		T10, T15, T20, T25, T27, T30, T40	
1025U		T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025P		PH1, PH2, PH3	
1025Z		PZ1, PZ2, PZ3	
1025S		3, 4.5, 5, 6.5, 8	

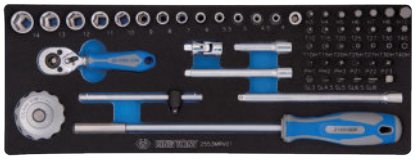

55 PC.

Contents



9-3523MRV10

Tray category #10 (375 x 140mm)

Contents		1.73	1 / 6
3335M		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24	
3771-08G		3792	
3571-08		3452-08F	
3293-03 3293-06			



23 PC.

9-3523MRV11

9-3023MRV11

Tray category #10 (375 x 140mm)

KT NO.	Contents		1.09	1 / 6
9-3523MRV11	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3771-08G 3293-03 3293-06 3453-08 3571-08 3792	
9-3023MRV11	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		



9-3523MRV11



9-3023MRV11

23 PC.

Tool Set Content

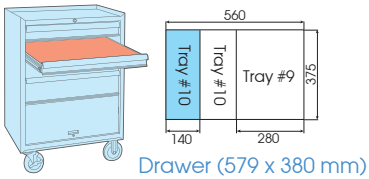

Drawer (579 x 380 mm)

9-4147PRV

Tray category #10 (375 x 140mm)

Contents			1.81 kg	1 / 5
		40D0	H6, H8, H10	
		4066	M8, M9, M10, M12, M14	
		4023	T20, T25, T27, T30, T40 T45, T50, T55, T60	



17 PC.

9-4401MPV

Tray category #10 (375 x 140mm)

Contents			2.23 kg	1 / 6
		4945M	17, 19, 21	
		4535M	17, 19, 32, 34, 36	
		4415M	17, 19, 21	



11 PC.

9-90135MRV

Tray category #10 (375 x 140mm)

Contents			1.81 kg	1 / 6
		1930	8x10, 10x12, 11x13, 12x14, 17x19, 19x22	
		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	



15 PC.

9-90135SRV

Tray category #10 (375 x 140mm)

Contents			1.28 kg	1 / 6
		5930	5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8	
		1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	



15 PC.

9-40104GPV

Tray category #10 (375 x 140mm)

Contents			1.08 kg	1 / 8
	6311-08		6111-06	
	6231-07		6319-11C	



4 PC.

9-40113GPV

Tray category #10 (375 x 140mm)

Contents			1.12 kg	1 / 8
	6011-10R		6516-10C	6314-05



3 PC.

9-44214GPV

Tray category #10 (375 x 140mm)

Contents			1.08 kg	1 / 8
67HS-07	67HB-07	68SS-07	68SB-07	

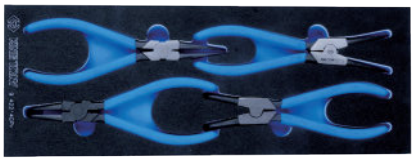

4 PC.

Tool Set Content

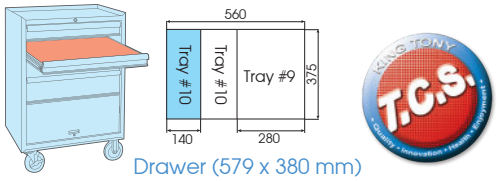

Drawer (579 x 380 mm)

9-30216MRV

Tray category #10 (375 x 140mm)

Contents			0.71	1 / 6
	1461	PH2 x 100, PH3 X 150		
	1462	5.5 X 100, 6.5 X 150		
	1411	PH2 x 38		
	1412	6.5 x 38		

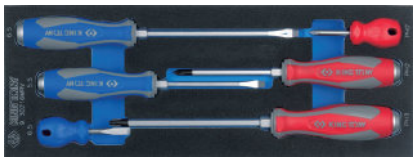

6 PC.

9-1044CQV

Tray category #10 (375 x 140mm)

Contents			1.75	1 / 6
	1636H	H4, H5, H6, H7, H8, H10, H12		
	1680H	H4, H5, H6, H7, H8, H10, H12		
	1636M	M5, M6, M8, M10, M12		
	1680M	M5, M6, M8, M10, M12		
	1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60		

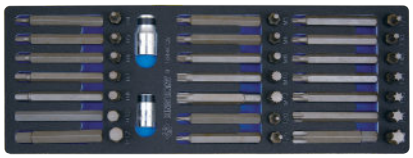

44 PC.

Contents

1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60		
314810M		414810M	

9-90118PRV

Tray category #10 (375 x 140mm)

Contents			1.28	1 / 6
76104-05		7821-30		
76217-06 76220-07		76403-06 76404-06 76405-65 76406-07		



8 PC.

9-90305TQV



9-90305TQV

5 PC.

9-90305TQV01

Tray category #10 (375 x 140mm)



9-90305TQV01

9 PC.

KT NO.		Contents			0.91	1 / 6
9-90305TQV	9BM120	7971-07		77141-08		
9-90305TQV01	11205SQ	77335-25		79093-05C		

9-21-20-07MRV

Tray category #10 (375 x 140mm)

Contents			0.91	1 / 6	Each Q'ty
4 x 8 mm		4 x 10 mm			20
4 x 8 mm		4 x 10 mm			
4.8 x 8 mm		4.8 x 10 mm			
21-20-101					1



121 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-2516MRV03

Tray category #11 (187 x 140mm)

Contents	0.47	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	
2221-06	2792	



17 PC.

9-2524MRV

Tray category #11 (187 x 140mm)

Contents	0.63	1 / 12
2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	2142
2221-02 2221-04 2221-06	2792	2178DF



21 PC.

9-2528MRV

Tray category #11 (187 x 140mm)

Contents	0.48	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14	
1025H	H3, H4, H5, H6	
1025S	4, 5	
1025T	T10, T15, T20, T30	
1025P	PH1, PH2	
276A-04G	2792	
2221-06	2142	



29 PC.





Drawer (579 x 380 mm)

9-91113SRV

Tray category #17 (375 x 420mm)

Contents	3.65	1 / 5
5970	1/4 x 5/16, 3/8 x 7/16 1/2 x 9/16, 5/8 x 11/16 3/4 x 7/8, 15/16 x1 1-1/16 x 1-1/8, 1-1/8 x 1-1/4 1-3/16 x 1-5/16	
3812	2813	3814 4813

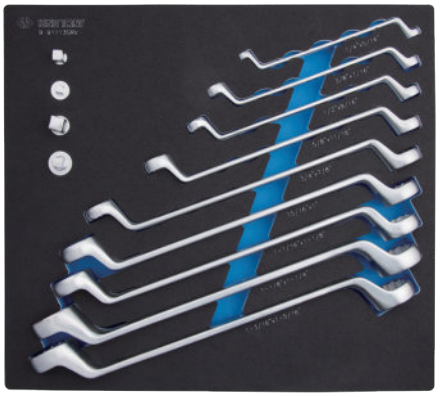

13 PC.

Fill Your Drawer

How to complete your tool trolley set and tool chest set

The drawer of tool chest includes one top drawer and different size

CAUTION

- Do not move the box / trolley unit unless you have closed the cover and locked the drawers
- Never open more than one loaded drawer at the same time
- Watch for sharp edges, we suggest to put on gloves before you lift the unit

Drawer (646x290 mm)



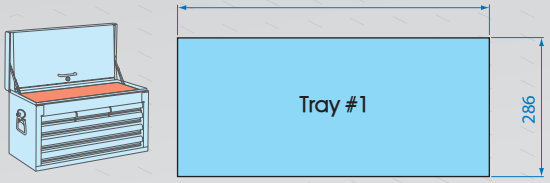

Drawer (172x275 mm)



Drawer (572x275 mm)







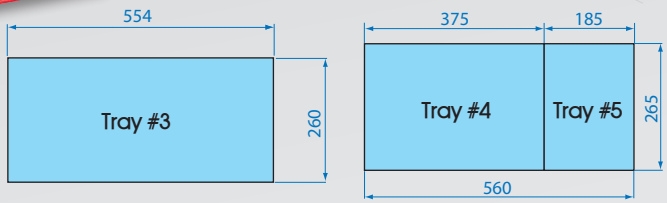



Drawer (579x380 mm)





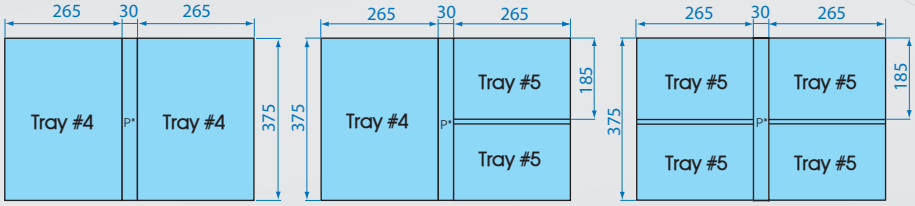

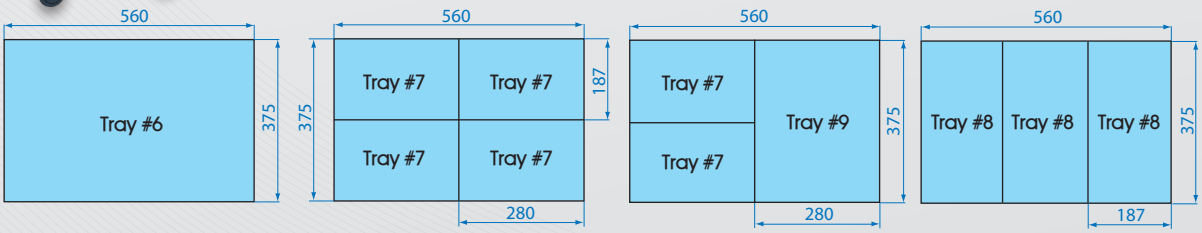

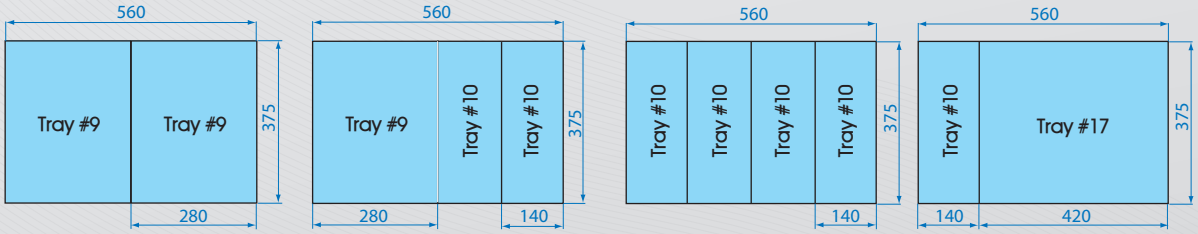

Drawer (504 x 195 mm)



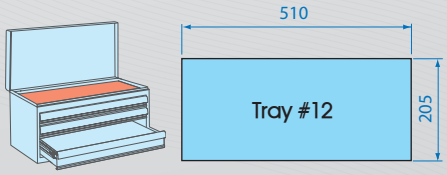

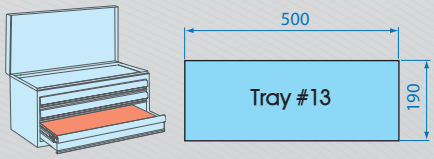

87402 Drawer (470 x 220 mm) #14
87408 Drawer (530 x 220 mm) #15



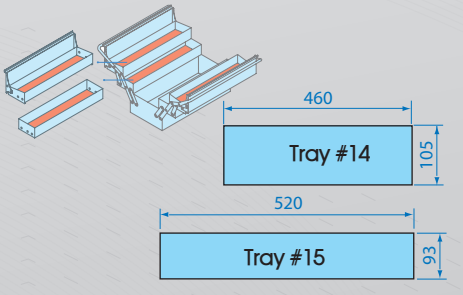

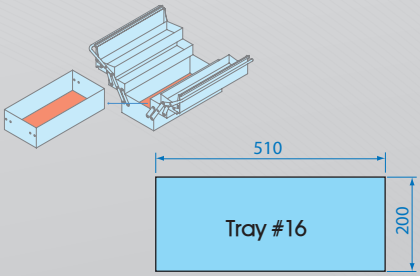

Tool Trolley Contents

101 PC.



Contents No. 932-009MRD

19.80 CUFT 2.41



9-4333MR #4 P.108
9-4120PR #5 P.117
9-4119PR #5 P.117
84700612B P*

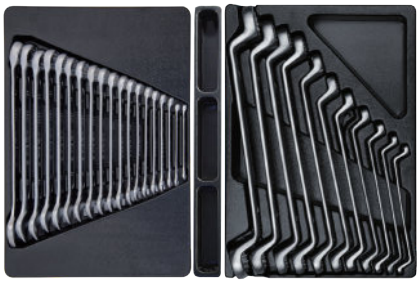

9-1219MR01 #4 P.110
9-1711MR #4 P.112
84700612B P*



9-90106SR #4 P.115
9-40103GP #5 P.118
84700612B P*



1110MR P.310



34423-1A P.289

Tool Trolley Set

101 PC.

5 drawers, 75.8 kg, CUFT 14.65	 932-009MR (87432-5B P.33)	 932-009MR-G (87432-5B-G P.33)	 932-009MR-B (87432-5B-B P.33)
5 drawers, 78.8 kg, CUFT 18.05	 9632-009MR (87632-5B P.39)	 9632-009MR-G (87632-5B-G P.39)	 9632-009MR-B (87632-5B-B P.39)
7 drawers, 85.94 kg, CUFT 18.05	 9634-009MR (87634-7B P.39)	 9634-009MR-G (87634-7B-G P.39)	 9634-009MR-B (87634-7B-B P.39)
7 drawers, 94.8 kg, CUFT 15.11	 9934F-009MR (87934-7BF P.41)	 9934F-009MR-G (87934-7BF-G P.41)	 9934F-009MR-B (87934-7BF-B P.41)

Tool Trolley Contents

144 PC.



Contents No. 932-010MRD

17.50 CUFT 1.86



9-4328MR #4 P.108 | 9-5575MR #4 P.109
84700612B P*

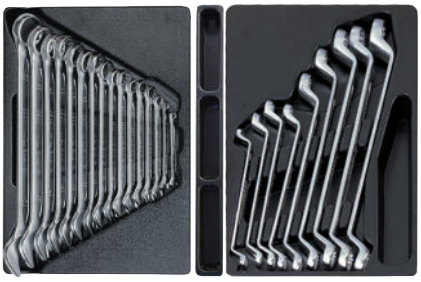

9-1216MR01 #4 P.110 | 9-1709MR #4 P.111
84700612B P*



9-90106SR #4 P.115 | 9-31106MR #5 P.118
9-40103GP #5 P.118
84700612B P*



34423-1A P.289

Tool Trolley Set

144 PC.

5 — 73.5 CUFT 14.1	 932-010MR (87432-5B P.33)	 932-010MR-G (87432-5B-G P.33)	 932-010MR-B (87432-5B-B P.33)
5 — 76.5 CUFT 17.5	 9632-010MR (87632-5B P.39)	 9632-010MR-G (87632-5B-G P.39)	 9632-010MR-B (87632-5B-B P.39)
7 — 83.64 CUFT 17.5	 9634-010MR (87634-7B P.39)	 9634-010MR-G (87634-7B-G P.39)	 9634-010MR-B (87634-7B-B P.39)
7 — 92.5 CUFT 14.56	 9934F-010MR (87934-7BF P.41)	 9934F-010MR-G (87934-7BF-G P.41)	 9934F-010MR-B (87934-7BF-B P.41)

Tool Trolley Contents

170 PC.



Contents No. 941-101MRD

24.80 CUFT 2.54





9-4026MR02 #1 P.104



9-3023MR01 #4 P.108

9-2526MR #5 P.117



9-22308PR #4 P.115

9-31106MR #5 P.118



9-4120PR #5 P.117

9-4119PR #5 P.117

9-1303MR #5 P.117





9-1711MR #4 P.112

9-1216MR #4 P.110

84700612B P*



9-90103RR #4 P.115

9-20110MR #5 P.118

9-40103GP #5 P.118

84700612B P*



9-4128FR #5 P.118



1010PR P.451

Tool Trolley Set

170 PC.

5

106.2
CUFT 18.31



941-101MR
(87411-6B P.50
87432-5B P.33)

5

109.2
CUFT 22.15



9641-101MR
(87411-6B P.50
87632-5B P.33)

7

125.2
CUFT 19.21



9644-101MR
(87411-6B P.50
87634-7B P.33)

Tool Trolley Contents

173 PC.



Contents No. 932-000MRD

24.70 CUFT 2.10



9-4333MR #4 P.108 | 9-7540MR #4 P.109
84700612B P*



9-1216MR01 #4 P.110 | 9-1711MR #4 P.112
84700612B P*



9-90131MR #4 P.110 | 9-31110MR #4 P.116
84700612B P*



9-22108MR #4 P.115 | 9-22308PR #4 P.115
84700612B P*



9-90103PP #4 P.115 | 9-40207GP #4 P.114
84700612B P*



1006PR #4 P.451

Tool Trolley Set

173 PC.

5 — 80.70 CUFT 14.34	 932-000MR (87432-5B P.33)	 932-000MR-G (87432-5B-G P.33)	 932-000MR-B (87432-5B-B P.33)
5 — 83.7 CUFT 17.74	 9632-000MR (87632-5B P.39)	 9632-000MR-G (87632-5B-G P.39)	 9632-000MR-B (87632-5B-B P.39)
7 — 99.7 CUFT 14.8	 9934F-000MR (87934-7BF P.41)	 9934F-000MR-G (87934-7BF-G P.41)	 9934F-000MR-B (87934-7BF-B P.41)

Tool Trolley Contents

179 PC.



Contents No. 932-008MRD

20.52 CUFT 2.41



9-4522MR #4 P.107 | 9-3523MR #4 P.108

84700612B P*



9-1219MR01 #4 P.110 | 9-90315MR #4 P.112

84700612B P*



9-91120MR #4 P.113 | 9-31909PR #4 P.116

84700612B P*



9-90103PP01 #4 P.115 | 9-40207GP #4 P.114

84700612B P*



9-4120PR #5 P.117
9-4119PR #5 P.117 | 9-31106MR #5 P.118
9-2526MR #5 P.117

84700612B P*



1010PR #4 P.451



9DC23 P.571

Tool Trolley Set

179 PC.

5 · 76.52 · CUFT 14.65	 932-008MR (87432-5B P.33)	 932-008MR-G (87432-5B-G P.33)	 932-008MR-B (87432-5B-B P.33)
5 · 79.52 · CUFT 18.05	 9632-008MR (87632-5B P.39)	 9632-008MR-G (87632-5B-G P.39)	 9632-008MR-B (87632-5B-B P.39)
7 · 86.66 · CUFT 18.05	 9634-008MR (87634-7B P.39)	 9634-008MR-G (87634-7B-G P.39)	 9634-008MR-B (87634-7B-B P.39)
7 · 95.52 · CUFT 15.11	 9934F-008MR (87934-7BF P.41)	 9934F-008MR-G (87934-7BF-G P.41)	 9934F-008MR-B (87934-7BF-B P.41)

Tool Trolley Contents

197 PC.



Contents No. 934-001MRD

28.70 CUFT 3.70



9-90408TQ #6 P.119



9-4516MR #4 P.107 | 9-5575MR #4 P.109

84700612B P*



9-1711MR #4 P.112 | 9-1218MR #4 P.110

84700612B P*



9-22108MR #4 P.115 | 9-31909PR #4 P.116

84700612B P*



9-90310MR #4 P.116 | 9-90106SR #4 P.115

84700612B P*



9-90205GN01 #4 P.114 | 9-4128FR #5 P.118 | 9-40103GP #5 P.118

84700612B P*



7962-04 P.456



9DC23 P.571



42114GP P.344



2121-18 P.579



7963-04 P.456



14210212 P.360
14226512 P.360



1108MR P.310

Tool Trolley Set

197 PC.

7 | 92.7 CUFT 15.94



934-001MR (87434-7B P.33)



934-001MR-G (87434-7B-G P.33)



934-001MR-B (87434-7B-B P.33)

7 | 94.84 CUFT 15.94



9634-001MR (87634-7B P.39)



9634-001MR-G (87634-7B-G P.39)



9634-001MR-B (87634-7B-B P.39)

7 | 103.7 CUFT 16.4



9934F-001MR (87934-7BF P.41)



9934F-001MR-G (87934-7BF-G P.41)



9934F-001MR-B (87934-7BF-B P.41)

Tool Chest Set

69 PC.

901-068MR

18.80 CUFT 2.05



9-4338MR #11 P.124 (901-069MR use)





9-90121MR #12 P.124



87401-3 P.51

901-069MR

18.40 CUFT 2.05



9-4338MR01 #11 P.124 (901-068MR use)

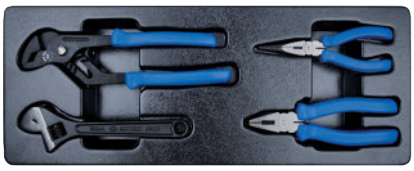

9-90104GP #12 P.124



9-31006MR #12 P.125

Tool Chest Set

74 PC.

901-073MR

19.50 CUFT 2.05





9-4338MR03 #11 P.124



9-90126MR #12 P.124



87401-3 P.51

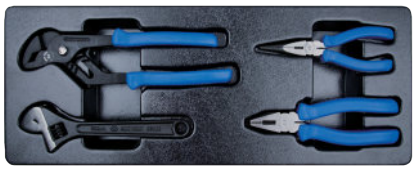

9-90104GP #12 P.124



9-31006MR #12 P.125

Tool Chest Set

219 PC.

911-000CR

50.50 CUFT 6.10



9-7069CR #1 P104 (911-000CR use)

911-000CR02

50.80 CUFT 6.10



9-7069CR01 #1 P.104 (911-000CR02 use)





9-90129CR #3 P.106



9-90138CR #3 P.106



87411-6B P.50



9-2548CR #2 P.105 (911-000CR use)

9-2548CR01 #2 P.105 (911-000CR02 use)

9-42114GP #2 P.105

9-40102GP #2 P.105



9-90128SR #3 P.105

Tool Chest Set

107 PC.

911-002CR

40.50 CUFT 5.12





4042CR #476 x 282mm P.190

20107SR P.395

20109MR P.395

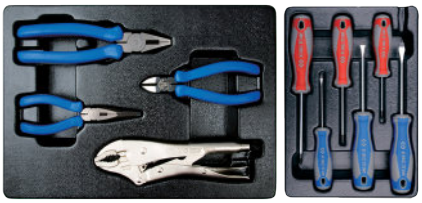

9-42144GP #4 P.114

9-31106MR #5 P.118



9-90138CR #3 P106



87411-6B P.50



7811-16 P.448

Tool Chest Set

235 PC.

911-003CR

46.16 CUFT 6.10

911-003CR01

46.16 CUFT 6.10

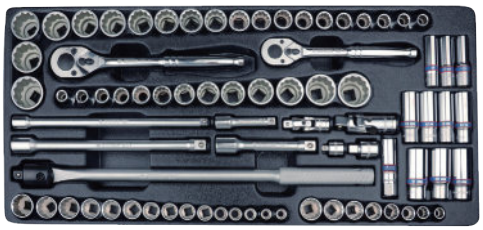

9-7078CR #1 P.104 (911-003CR use)



9-7078CR01 #1 P.104 (911-003CR01 use)





9-90220MR #3 P.106 (911-003CR use)



9-90220MR01 #3 P.106 (911-003CR01 use)



9-90154CR #3 P.107 (911-003CR use)



9-90154CR01 #3 P.107 (911-003CR01 use)



87411-6B P.50



9-90329CR #3 P.106



9-2548CR01 #2 P.105 (911-003CR use)

9-2548CR #2 P.105 (911-003CR01 use)

9-42114GP #2 P.105

9-40102GP #2 P.105



Tool Box Contents

62 PC.



Contents No. 902-062MRD

8.80 CUFT 1.22



9-4116FR #14 P.126



9-30206MR #14 P.126



9-1217MR #14 P.126



9-4319MR #14 P.125



9-90120MR #14 P.126



9-40203GP #14 P.126

Tool Box Set

62 PC.

14.4 CUFT 1.22



902-062MR (87402 P.52)

13.9 CUFT 1.22



9A05-062MR (87A05 P.52)



9A05-062MR-KB (87A05-KB P.52)

Tool Box Contents

63 PC.



Contents No. 902-164MRD

10.20 CUFT 1.22



9-4116FR #14 P.126



9-4219MR #14 P.125

	1060 P.306	8, 10, 12, 13, 14, 17, 19, 21, 22, 24
	1120MR P.395	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	1421 P.360	PH1 x 80, PH2 x 38, PH3 x 150
	1422 P.360	5.5 x 100, 6.5 x 38, 8 x 175



6111-07 P.337



6311-06 P.338



6511-10 P.340



3611-08R P.326

76104-05 P.449

76217-06 P.450
76223-08 P.450

76403-05 P.450
76404-06 P.450
76405-65 P.450
76406-07 P.450



7811-16 P.448

Tool Box Set

63 PC.

15.8 CUFT 1.22



902-164MR (87402 P.52)

15.3 CUFT 1.22



9A05-164MR (87A05 P.52)



9A05-164MR-KB (87A05-KB P.52)

Tool Box Contents

65 PC.



Contents No. 902-065MRD

9.10 CUFT 1.22



9-4116FR #14 P.126



9-4319MR #14 P.125



9-90115MR #14 P.126



9-1716MR #14 P.126

1421 P.360 PH1 x 80, PH2 x 38, PH3 x 150

1422 P.360 5.5 x 100, 6.5 x 38, 8 x 175


6111-07 P.337


6311-06 P.338


6511-10 P.340


3611-08P P.326

76104-05 P.449

76217-06 P.450
76223-08 P.450

76403-05 P.450
76404-06 P.450
76405-65 P.450
76406-07 P.450


7811-16 P.448

Tool Box Set

65 PC.

14.7 CUFT 1.22



902-065MR (87402 P.52)

14.2 CUFT 1.22



9A05-065MR (87A05 P.52)



9A05-065MR-KB (87A05-KB P.52)

Tool Box Contents

68 PC.



Contents No. 902-068MRD

10.30 CUFT 1.22



9-4116FR #14 P.126



9-4319MR01 #14 P.125

1060 P.306 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24

1120MR P.395 H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

1421 P.360 PH1 x 80, PH2 x 38, PH3 x 150

1422 P.360 5.5 x 100, 6.5 x 38, 8 x 175


6111-07 P.337


6311-06 P.338


6511-10 P.340


3611-12P P.326

76104-05 P.449


7911-12 P.469

76217-06 P.450
76223-08 P.450

76403-05 P.450
76404-06 P.450
76405-65 P.450
76406-07 P.450


7821-30 P.448

Tool Box Set

68 PC.

15.9 CUFT 1.22



902-068MR (87402 P.52)

15.4 CUFT 1.22



9A05-068MR (87A05 P.52)



9A05-068MR-KB (87A05-KB P.52)

Tool Box Contents

81 PC.



Contents No. 902-084MRD01

13.60 CUFT 1.22



9-4116FR03 #14 P.126



9-4219MR07 #14 P.125



1215MR P.307

- 4230M P.168 — 16, 17, 18, 19, 20, 21, 22, 24, 25, 26
- 1421 P.360 — PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.360 — 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.337
- 6311-06 P.338
- 6463-08C P.339
- 6516-10C P.339

- 6031-07R P.344
- 3611-08R P.326
- 3611-12R P.326
- 20218MR P.393
- 7851-16 P.449
- 7811-16 P.448
- 76104-05 P.449
- 76105-06 P.449
- 76213-04 P.450
- 76215-05 P.450
- 76220-07 P.450
- 76306-05 P.449
- 76403-05 P.450
- 76404-06 P.450

Tool Box Set

81 PC.

19.24 CUFT 1.22



902-084MR01 (87402 P.52)

18.74 CUFT 1.22



9A05-084MR01 (87A05 P.52)



9A05-084MR01-KB (87A05-KB P.52)

Tool Box Contents

84 PC.



Contents No. 902-084SRD

15.90 CUFT 1.22



9-4116FR03 #14 P.126



9-4219SR08 #14 P.125



1216SR P.307

- 4230S P.168 — 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4
- 1421 P.360 — PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.360 — 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.337
- 6311-06 P.338
- 6463-08C P.339
- 6516-10C P.339
- 20107SR P.395
- 6031-07R P.344

- 3611-08R P.326
- 3611-12R P.326
- 7811-16 P.448
- 7851-16 P.449
- 76104-05 P.449
- 76105-06 P.449
- 76213-04 P.450
- 76215-05 P.450
- 76220-07 P.450
- 76306-05 P.449
- 76403-05 P.450
- 76404-06 P.450

Tool Box Set

84 PC.

21.55 CUFT 1.22



902-084SR (87402 P.52)

21.0 CUFT 1.22



9A05-084SR (87A05 P.52)



9A05-084SR-KB (87A05-KB P.52)

Tool Box Contents

88 PC.



Contents No. 902-089MRD01

13.90 CUFT 1.22



9-4116FR #14 P.126



9-4319MR01 #14 P.125



1812MR P.325

1060 P.306	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
1900 P.310	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17x19, 22 x 24
1120MR P.395	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.396	T10H, T15H, T20H, T25H, T27H, T30H, T40H

1421 P.360	PH2 x 38, PH3 x 150	
1422 P.360	3 x 75, 5 x 100	
6111-07 P.337		3611-08R P.326
6311-06 P.338		7911-12 P.469
6516-10C P.339		7821-80 P.448

Tool Box Set

88 PC.

19.5 CUFT 1.22



902-089MR01 (87402 P.52)

19.0 CUFT 1.22



9A05-089MR01 (87A05 P.52)



9A05-089MR01-KB (87A05-KB P.52)

Tool Box Contents

103 PC.



Contents No. 902-103MRD

19.20 CUFT 1.22



9-4116FR #14 P.126



9-4319MR01 #14 P.125



1812MR P.325

1060 P.306	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32
1120MR P.395	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.396	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1421 P.360	PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150
1422 P360	3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175

6111-07 P.337	7911-12 P.469
6311-06 P.338	7821-80 P.448
6516-10C P.339	76220-07 P.450 76226-12 P.450
6231-08 P.337	76402-45 P.450
6431-10 P.339	76403-05 P.450 76404-06 P.450
6011-10R P.344	76405-65 P.450
3611-12R P.326	76406-07 P.450 76408-08 P.450
79093-03C P.460	76412-09 P.450 76414-10 P.450

Tool Box Set

103 PC.

24.8 CUFT 1.22



902-103MR (87402 P.52)

24.3 CUFT 1.22



9A05-103MR (87A05 P.52)



9A05-103MR-KB (87A05-KB P.52)

Tool Box Contents

109 PC.



Contents No. 902-109MRD — 19.40 CUFT 1.22



9-4116FR #14 P.126



9-4319MR01 #14 P.125



1812MR P.325



1306MR P.316



1060 P.306 — 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32



1120MR P.395 — H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10



1147R P.396 — T10H, T15H, T20H, T25H, T27H, T30H, T40H



1421 P.360 — PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150



1422 P.360 — 3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175



6111-07 P.337



6311-06 P.338



6516-10C P.339



6231-08 P.337



6431-10 P.339



6011-10R P.344



3611-12R P.326



79093-05C P.460



7911-12 P.469



7811-16 P.448

76220-07 P.450
76226-12 P.450

76402-45 P.450
76403-05 P.450
76404-06 P.450
76405-65 P.450
76406-07 P.450
76408-08 P.450
76412-09 P.450
76414-10 P.450

Tool Box Set

109 PC.



24.99 CUFT 1.22



902-109MR (87402 P.52)

24.5 CUFT 1.22



9A05-109MR (87A05 P.52)



9A05-109MR-KB (87A05-KB P.52)

Tool Box Contents

132 PC.



Contents No. 902-132CRD — 24.50 CUFT 1.51



9-4116FR #14 P.126



9-4319MR01 #14 P.125



1812MR P.325



1226MR P.307



1005GQ P.470



30617MR P.412



20208MR01
20208SR01
P.394



11205SQ P.465



1421 P.360 — PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150



1422 P.360 — 3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175



6111-07 P.337



6311-06 P.338



6516-10C P.339

6231-07 P.337

6721-10 P.443

6711-06 P.339

3611-08P P.326
3611-12P P.326

20419PR P.399

7911-12 P.469

7811-12 P.448

76104-05 P.449

76220-07 P.450

6011-10R P.344

2121-18 P.579

7971-07 P.434

79093-03C P.460

Tool Box Set

132 PC.

30.1 CUFT 2.73

902-132CR (87402 P.52)

29.1 CUFT 2.92

9A05-132CR (87A05 P.52)

9A05-132CR-KB (87A05-KB P.52)

Tool Box Contents

77 PC.



Contents No. 908-077CRD

19.80 CUFT 0.99



9-4029CR #15 P.127



9-90111MR #15 P.127



9-4156PR #15 P.127



9-30206MR #14 P.126



9-1215MR03 #16 P.127



9-6010MR #16 P.127

Tool Box Set

77 PC.

26.52
CUFT 2.29



908-077CR
(87408 P.52)



Tool Box Contents

25 PC.



Contents No. 41026MRD

3.96 CUFT 0.78

- 4330MR P.167 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463021RC P.171
- 4791R P.179
- 4452-15FR P.178
- 4768-10F P.175
- 4572-12 P.179
- 4251-05R P.178
- 4251-10R P.178

Tool Box Set

25 PC.

5.7
CUFT 0.78



41026MR
(87407 P.52)

Tool Box Contents

25 PC.



Contents No. 41526MRD

3.96 CUFT 0.78

- 4335MR P.167 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463521RC P.171
- 4791R P.179
- 4452-15FR P.178
- 4768-10F P.175
- 4572-12 P.179
- 4251-05R P.178
- 4251-10R P.178

Tool Box Set

25 PC.

5.7
CUFT 0.78



41526MR
(87407 P.52)

Tool Box Contents

17 PC.



Contents No. 41517MRVD — 2.26 CUFT 0.91

4335MR P.167	10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	4251-05R P.178	
4771-10GR P.175		3611-08R P.326	
4791R P.179		6111-06 P.337	

Tool Box Set

17 PC.

4.26 CUFT 0.91



41517MRV
(87A08 P.52)

Tool Box Contents

42 PC.



Contents No. 41542MRVD — 4.65 CUFT 0.91

4335MR P.167	10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	4251-05R P.178	
1421 P.360	PH0 x 60, PH1 x 80, PH2 x 100	3611-08R P.326	
1422 P.360	3 x 75, 5.5 x 100, 6.5 x 150	6111-06 P.337	
1130MR P.395	H2.5, H3, H4, H5, H6, H8, H10	4771-10GR P.175	
1062 P.304	8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 22, 24	4791R P.179	

Tool Box Set

42 PC.

6.65 CUFT 0.91



41542MRV
(87A08 P.52)

Tool Set Content



9-4526MR

9-4026MR02 Tray category #1 (642 x 286mm)

24 PC.


9-4526MR


9-4026MR02

KT NO.		Contents						
						4.6	1 / 5	
9-4526MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC	4768-10F	4572-12	4251-05R 4251-10R		
9-4026MR02	4330MR		463021RC	4768-10P	4452-15FR			

9-7069CR

9-7069CR01 Tray category #1 (642 x 286mm)

70 PC.


9-7069CR


9-7069CR01


7911-12

KT NO.		Contents						
						8.8	1 / 2	
9-7069CR	3779-08G 4779-10GR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	463521RC	463516RC	3571-08		
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16	3452-08F	4452-15FR	4251-05R 4251-10R		
9-7069CR01	3769-08P 4768-10P	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4572-10	3221-03 3221-06	7911-12		
		4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1	3792	4791R	3812	4813	

9-7078CR

9-7078CR01 Tray category #1 (642 x 286mm)

78 PC.


9-7078CR


9-7078CR01

KT NO.		Contents						
						8.67	1 / 2	
9-7078CR	3769-08P 4768-10P	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	3235M	10, 12, 13, 14, 15, 16, 17, 18, 19, 22	363516		
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	4462-18F	3221-03 3221-10	4251-05R 4251-10R		
9-7078CR01	3779-08G 4779-10GR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 28, 30, 32	3792	4791R	3812	4813	
		4330SR	3/8, 7/16,1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4					

Tool Set Content



9-2548CR

9-2548CR01 Tray category #2 (263 x 163mm)


9-2548CR


9-2548CR01

48 PC.

KT NO.		Contents	
9-2548CR	2779-55G	2235M: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 2792 2813 2221-02 2221-04	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2335S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
9-2548CR01	2769-55P		

1.28 | 1 / 10

9-40102GP



2 PC.

Contents — 1.0 | 1 / 10


6011-10R


6511-10

9-42114GP Tray category #2 (263 x 163mm)

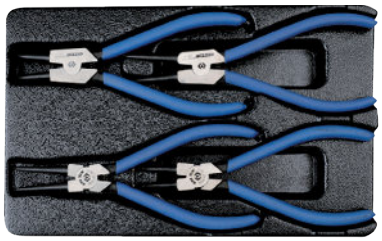

4 PC.

Contents — 0.6 | 1 / 10


68HS-07


68SS-07


68HB-07


68SB-07



9-90128SR

Tray category #3 (554 x 260mm)

Contents — 4.8 | 1 / 4

5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 1
5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8
76105-06	7811-16
76215-05 76217-06 76220-07 76224-10	76404-06 76406-07 76408-08



28 PC.

Tool Set Content


Drawer (572x275)



9-90138CR

Tray category #3 (554 x 260mm)

Contents		4.8	1 / 4
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21		
1900	8 x 9, 10 x 11, 12 x 13, 14 x 15, 18 x 19		
1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19		
1930	10 x 11, 12 x 14, 14 x 17		
5900	1/4 x 5/16, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 11/16 x 3/4, 13/16 x 7/8		
3611P	8, 12		



38 PC.

9-90329CR

Tray category #3 (554 x 260mm)

Contents		3.37	1 / 4
1060	6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21		
5060	7/16, 1/2, 9/16, 5/8, 11/16, 3/4		
10D0	10, 12, 13, 14, 17, 18, 19		
3611R	6, 8		



29 PC.

9-90129CR

Tray category #3 (554 x 260mm)

Contents		2.5	1 / 4
1421	PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150		
1422	3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175		
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8		
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
6111-07	6231-07		
6311-06			



29 PC.

9-90220MR



9-90220MR

9-90220MR01

Tray category #3 (554 x 260mm)



9-90220MR01

20 PC.

KT NO.			Contents		2.51	1 / 4
9-90220MR	14280204	14240206	3025	H3, H4, H5, H6, H8, H10, H12	1421	PH1x80, PH2x100
			3023	T30, T40	1422	4x100, 5.5x125, 6.5x150, 8x175
9-90220MR01	14232004	14232504	6111-08	6231-08	6311-08	

Tool Set Content


Drawer (572x275)



9-90154CR

KT NO.	PC.	Contents	2.86	1 / 4
9-90154CR	54	1032CQ01	1130MR	H2.5, H3, H4, H5, H6, H8, H10
			1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
9-90154CR01	53	1032CQ	7811-16	
			74030	
			76717-05	
			761	Ø 4 x 120
			764	Ø 3 x 125 Ø 4 x 150 Ø 5 x 165

9-90154CR01 Tray category #3 (554 x 260mm)







Drawer (572x275)





Drawer (579x380)



9-4516MR

Tray category #4 (375 x 265mm)

Contents	3.12	1 / 10
4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 23, 24	
4791R	4768-10F	4452-15FR
4251-05R 4251-10R		



16 PC.

9-4522MR

Tray category #4 (375 x 265mm)

Contents	2.96	1 / 10
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	
463521RC	463516RC	4791R
4768-10F	4251-03R, 4251-05R, 4251-10R	



22 PC.



Drawer (572x275)



Drawer (579x380)

Tool Set Content

9-3523MR

9-3023MR01 Tray category #4 (375 x 265mm)

22 PC.


9-3523MR


9-3023MR01

| KT NO. | Contents | | |



Drawer (572x275)

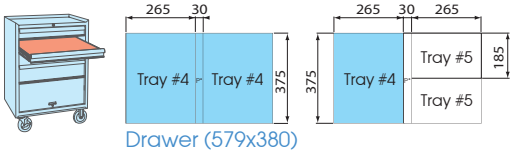

Drawer (579x380)

Tool Set Content

9-5575MR

Tray category #4 (375 x 265mm)

Contents		4.15	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
2335S	1/4, 3/8, 1/2		
3235M	8, 10, 12, 14, 17		
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22		
2375M	E4, E5, E6, E7, E8		
3375M	E10, E12, E14, E16, E18		
2037	T10H, T15H, T20H, T25H, T27H, T30H		
2033	T20, T25, T30, T40		
3027	T40H, T45H, T50H		

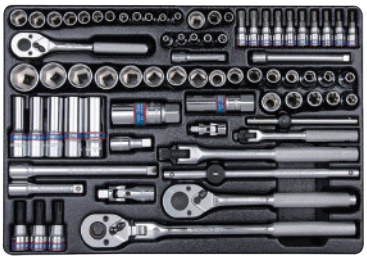

75 PC.

Contents

366516 366521 3221-16
2769-55F 3769-08F 3781-11F
2221-02 2221-04 3221-03 3221-06 2571-45
2452-05F 3452-08F 3571-08
2792 3792

9-7537MR

Tray category #4 (375 x 265mm)

Contents		2.28	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
4023	T20, T25, T27, T30, T40, T45, T50, T55, T60		
4025	H3, H4, H5, H6, H7, H8, H10, H12, H14		
2779-55G	2571-45	2792	
2452-05F	2221-02 2221-04	2141	



37 PC.

9-7540MR

Tray category #4 (375 x 265mm)

Contents		3.50	1 / 5
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
2375M	E4, E5, E6, E7, E8		
4375M	E10, E12, E14, E16, E18, E20		
4435M	10, 11, 12, 13, 14, 17, 19, 21, 22, 24		
2792	2755-55G	2571-45	
2221-02 2221-04	2177DF	2452-05F	



40 PC.

9-93523MR

Tray category #4 (375 x 265mm)

Contents		2.63	1 / 6
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22		
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
3792	3769-08F	3452-08F	3571-08	3221-03 3221-06



31 PC.



Drawer (572x275)

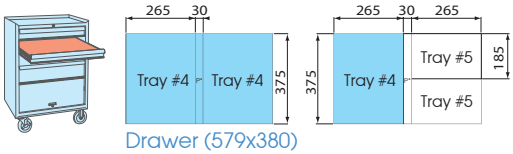

Drawer (579x380)

Tool Set Content

9-90131MR

Tray category #4 (375 x 265mm)

Contents		3.1	1 / 10
4033		T20, T25, T27, T30, T40, T45, T50, T55, T60	
4035		H4, H5, H6, H7, H8, H10, H12, H14, H17	
1120MR		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	
1930		10 x 11, 12 x 14, 14 x 17	
3204 (Ø 60 ~ 140)			



31 PC.

9-1205MR

Tray category #4 (375 x 265mm)

Contents		2.70	1 / 6
1060		27, 28, 29, 30, 32	



5 PC.

9-1216MR / 9-1216MR01 / 9-1216MR03

Tray category #4 (375 x 265mm)

KT NO.	Contents	3.20	1 / 6
9-1216MR	1060	6, 8, 10, 12, 13, 14, 16, 17, 19, 21, 22, 24, 26, 27, 29, 32	
9-1216MR01		6, 8, 10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	
9-1216MR03		8, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	

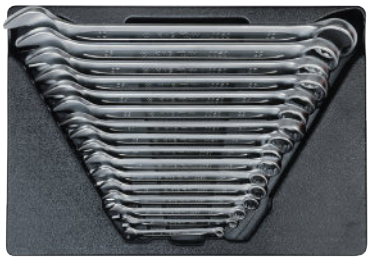

16 PC.

9-1219MR01

Tray category #4 (375 x 265mm)

Contents		2.25	1 / 6
1060		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	

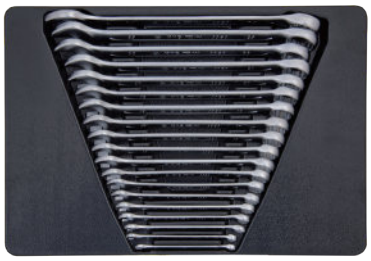

19 PC.

9-1218MR

Tray category #4 (375 x 265mm)

Contents		2.12	1 / 6
1060		6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	
1930		8 x 10, 9 x 11	



18 PC.



Drawer (572x275)

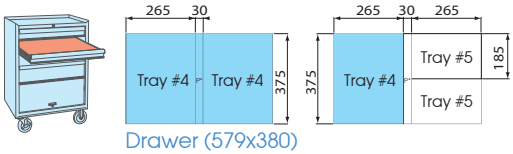

Drawer (579x380)

Tool Set Content

9-1282MR

Tray category #4 (375 x 265mm)

Contents		1.05	1 / 10
	10D0	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

9-1272MR

Tray category #4 (375 x 265mm)

Contents		1.45	1 / 5
	1067	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	



12 PC.

9-1608MR

Tray category #4 (375 x 265mm)

Contents		1.5	1 / 6
	1960	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	



8 PC.

9-1609MR

Tray category #4 (375 x 265mm)

Contents		1.93	1 / 6
	1960	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	



9 PC.

9-1709MR

Tray category #4 (375 x 265mm)

Contents		2.18	1 / 6
	1970	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	



9 PC.



Drawer (572x275)

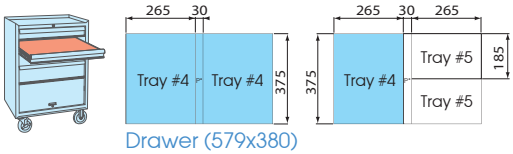

Drawer (579x380)

Tool Set Content

9-1711MR

Tray category #4 (375 x 265mm)

Contents		2.80	1 / 6
	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 30 x 32	



11 PC.

9-90315MR

Tray category #4 (375 x 265mm)

Contents		2.6	1 / 6
	1900	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24	
	1970	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24	
	79093-05C		



15 PC.

9-1812MR

KT NO.	Contents		3.69	1 / 6
9-1812MR	○	1080	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	
9-1912MR	○	1081		

9-1912MR

Tray category #4 (375 x 265mm)

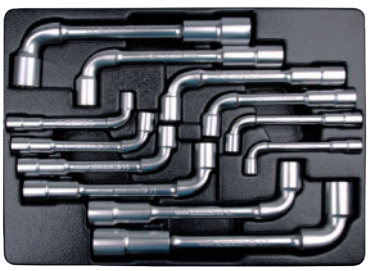

12 PC.

9-1838MR

Tray category #4 (375 x 265mm)

Contents		2.57	1 / 6
○	1084	8, 10, 11, 12, 13, 15, 17, 19	

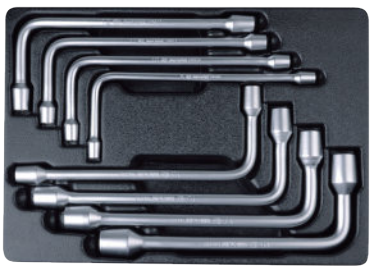

8 PC.



Drawer (572x275)

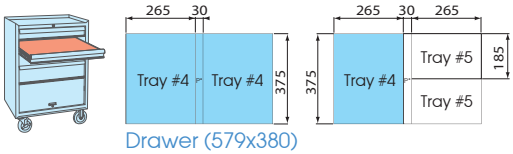

Drawer (579x380)

Tool Set Content

9-1C08MR

Tray category #4 (375 x 265mm)

Contents		0.91	1 / 10
19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22		



8 PC.

9-10115MR

KT NO.	Contents		1.9	1 / 10
9-10115MR	3731M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	373202R	
9-102A15MR	373AM		373203R	
			373204R	

9-102A15MR

Tray category #4 (375 x 265mm)



15 PC.

9-12120MR

Tray category #4 (375 x 265mm)

Contents		1.27	1 / 6
3731M	8, 10, 12, 13, 14, 15, 17, 19		
373204R		373203R	



10 PC.

9-90109MN

Tray category #4 (375 x 265mm)

Contents		2.28	1 / 6
1970	8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19		
6011-10N		3611-12R	



8 PC.

9-91120MR

Tray category #4 (375 x 265mm)

Contents		2.40	1 / 6
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
1930	8 x 10, 10 x 12, 11 x 13, 14 x 17		
3731M	8, 10, 12, 13, 14		
6011-10N		3611-12R	



20 PC.



Drawer (572x275)

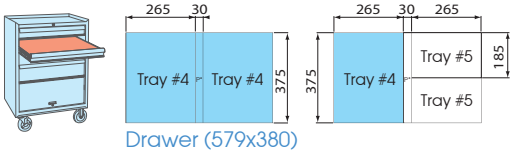

Drawer (579x380)

Tool Set Content

9-40207GP

9-40207GP01 Tray category #4 (375 x 265mm)

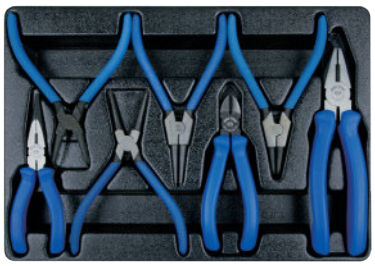
9-40207GP

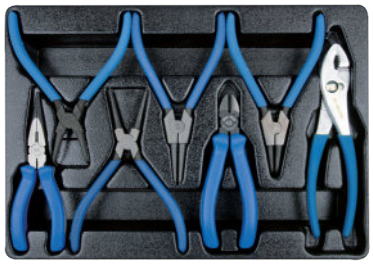
9-40207GP01

7 PC.

KT NO.	Contents	kg	
9-40207GP	6111-08, 6211-06, 6311-06, 68HS-07, 68HB-07, 68SS-07, 68SB-07	1.5	1 / 10
9-40207GP01	6463-08C, 6211-06, 6311-06, 67HS-07, 67HB-07, 67SS-07, 67SB-07		1 / 6

9-40604GP

Tray category #4 (375 x 265mm)

Contents — 1.98 kg — 1 / 6

6116-07A, 6216-06A, 6318-08A, 6516-10A

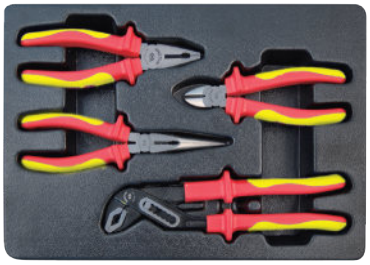

4 PC.

9-42144GP

Tray category #4 (375 x 265mm)

Contents — 1.63 kg — 1 / 8

6011-10N, 6111-08, 6211-06, 6311-06

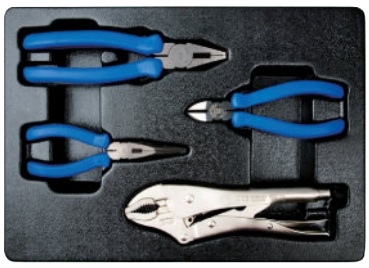

4 PC.

9-90205GN

9-90205GN01 Tray category #4 (375 x 265mm)


9-90205GN


9-90205GN01

5 PC.

Contents — 1.98 kg — 1 / 6

9-90205GN	6313-06	6011-10N	6111-07	6463-08C	74410	
9-90205GN01	6311-06					



Drawer (572x275)

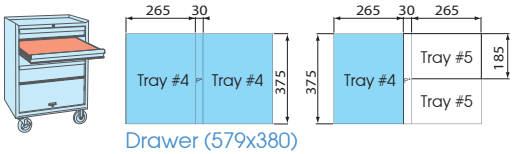

Drawer (579x380)

Tool Set Content

9-90103PP | 9-90103PP01 | 9-90103PP02

Tray category #4 (375 x 265mm)

3 PC.


9-90103PP


9-90103PP01


9-90103PP02

KT NO.	Contents			kg	
9-90103PP 9-90103PP01 9-90103PP02	3611-12P	6511-10	7821-30 7811-16 7821-80	2.30 2.51	1 / 5 1 / 10

9-90103RR

Tray category #4 (375 x 265mm)

Contents — kg 2.3 — 1 / 5

3611-12R | 6511-10 | 7821-30



3 PC.

9-90106SR

Tray category #4 (375 x 265mm)

Contents — kg 2.05 — 1 / 4

76404-06
76405-65
76406-07 | 76105-06 | 7822-30 | 7842-35



6 PC.

9-22108MR

Tray category #4 (375 x 265mm)

Contents — kg 1.10 — 1 / 10

1160MR H2, H2.5, H3, H4, H5, H6, H8, H10



8 PC.

9-22308TR

Tray category #4 (375 x 265mm)

Contents — kg 1.10 — 1 / 10

1163TR T10, T15, T20, T25, T30, T40, T45, T50



8 PC.



Drawer (572x275)

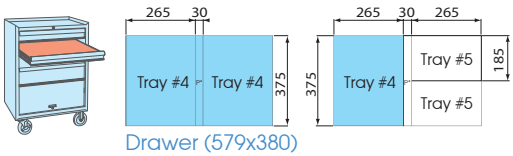

Drawer (579x380)

Tool Set Content

9-30110CR

Tray category #4 (375 x 265mm)

Contents		1.4	1 / 6
	1450	6, 7, 8, 9, 10, 11, 12, 13	
	5450	1/4, 5/16	



10 PC.

9-31110MR

Tray category #4 (375 x 265mm)

Contents		1.0	1 / 10
	1421	PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150	
	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175	



10 PC.

9-31909PR

Tray category #4 (375 x 265mm)

Contents		0.65	1 / 6
	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	

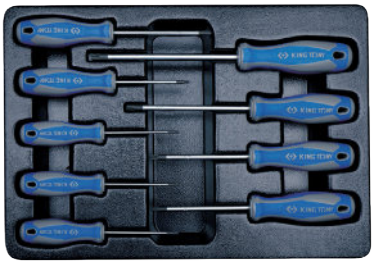

9 PC.

9-90310MR

Tray category #4 (375 x 265mm)

Contents		1.08	1 / 6
	1411	PH1 x 100, PH2 x 100, PH3 x 150	
	1412	5.5 x 100, 6.5 x 100, 8.0 x 150	
	76220-07	9CJ2120	14324003	24110214

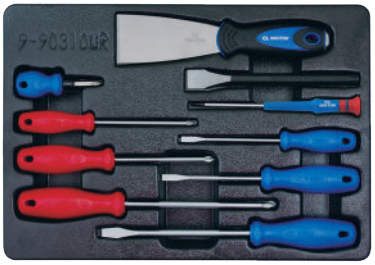

10 PC.

9-34128FR

Tray category #4 (375 x 265mm)

Contents		1.98	1 / 6
	1836P	PH2, PH3	
	1836S	9, 11	
	1880P	PH2, PH3	
	1880S	8, 10	
	1930	8 x 10, 11 x13, 12 x 14	
	4112	414810S	3204



14 PC.





Drawer (579x270)







Drawer (579x380)



Tool Set Content

9-2526MR

Tray category #5 (265 x 185mm)

Contents			0.90	1 / 10
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
	2779-55G	2813		
	2221-02 2221-04	2792		



26 PC.

9-4119PR

Tray category #5 (265 x 185mm)

Contents			1.10	1 / 10
	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60		



9 PC.

9-4120PR

Tray category #5 (265 x 185mm)

Contents			1.30	1 / 10
	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17		



9 PC.

9-91026PR

Tray category #5 (265 x 185mm)

Contents			1.30	1 / 10
	1143R	T10, T15, T20, T25, T27, T30, T40, T45, T50		
	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
	4023	T30, T40, T45, T50, T55		
	4375M	E10, E12, E14, E16, E18		



26 PC.

9-1303MR

Tray category #5 (265 x 185mm)

Contents			0.50	1 / 10
	1930	10 x 11, 12 x 14, 14 x 17		



3 PC.

9-1905MR

Tray category #5 (265 x 185mm)

Contents			0.82	1 / 10
	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22		



5 PC.



Drawer (579x270)

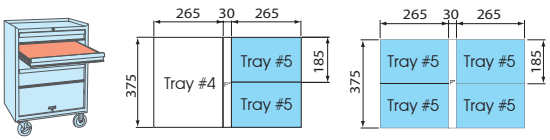

Drawer (579x380)

Tool Set Content

9-10112MR

KT NO.	Contents		1.22	1 / 10
9-10112MR	3731M	10, 11, 12, 13, 14, 15, 16, 17, 19	373202R	
9-102A12MR	373AM		373203R	
			373204R	

9-102A12MR Tray category #5 (265 x 185mm)



12 PC.

9-40103GP

Tray category #5 (265 x 185mm)

Contents		0.83	1 / 10
6111-07	6211-06		
6311-06			



3 PC.

9-31106MR

Tray category #5 (265 x 185mm)

Contents		0.60	1 / 10
1421	PH0 x 60, PH1 x 80, PH2 x 100		
1422	3 x 75, 5.5 x 100, 6.5 x 150		



6 PC.

9-4128FR

Tray category #5 (265 x 185mm)

Contents			1.70	1 / 10
1836P	PH2, PH3			
1836S	9, 11			
1880P	PH2, PH3			
1880S	8, 10			
4112	414810S			



10 PC.

9-20110MR

Tray category #5 (265 x 185mm)

Contents		1.10	1 / 10
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
	3204 (Ø 60 ~ 140)		



10 PC.



Tool Set Content

9-7576MR

Tray category #6 (560 x 375mm)

Contents — kg 7.69 / 1 / 3

3335M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 24	
3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24	
4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
4235M	10, 12, 13, 14, 17, 19, 21, 22, 24	
9TD403	12, 13, 14, 17, 19	
321510M 321512M	366516 366521	3792
3452-08F	3769-08P	4311-16F
4768-10P	4452-18FR	4573-10



76 PC.

Contents

4251-03R 4251-05R 4251-10R	3221-03 3221-06 3221-10

9-94435MP

Tray category #6 (560 x 375mm)

Contents — kg 6.49 / 1 / 3

4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32	
4535M	10, 12, 13, 14, 17, 19, 21, 24	
4415M	17, 19, 21, 22	
4797P	68SS-07	68HS-07
6011-10R	6211-06	6311-08
6463-08C	74030	



35 PC.

9-31919MR

Tray category #6 (560 x 375mm)

Contents — kg 2.67 / 1 / 5

1411	PH0 x 75, PH2 x 38
1412	3 x 75, 6.5 x 38
1421	PH2 x 300
1422	6.5 x 300
1481	PH2 x 100, PH3 x 150
1482	6.5 x 100, 8 x150
1427	T8H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125
43280212	2121-18



19 PC.

9-90408TQ

Tray category #6 (560 x 375mm)

Contents — kg 2.06 / 1 / 5

75102-08G	75202-08G
75302-08G	75402-08G
75502-08G	79063-12
79093-05C	7911-12



8 PC.

Tool Set Content



Drawer (579x380)

9-4057MR

Tray category #7 (280 x 187mm)

Contents — 2.99 — 1 / 4

○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36



27 PC.

9-4557MR

Tray category #7 (280 x 187mm)

Contents — 2.99 — 1 / 4

○	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36

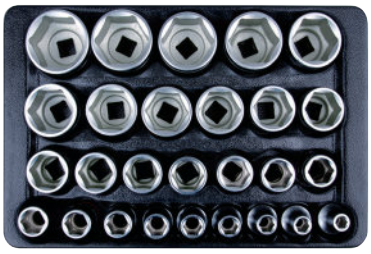

27 PC.

9-4138PR

Tray category #7 (280 x 187mm)

Contents — 1.9 — 1 / 10

✪	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
●	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17



18 PC.

9-7128PR

Tray category #7 (280 x 187mm)

Contents — 1.20 — 1 / 10

●	3025	H3, H4, H5, H6, H7, H8, H10, H12
✪	3023	T15, T20, T25, T27, T30, T40, T45, T50
○	3375M	E8, E10, E12, E14, E16, E18
○	4375M	E10, E12, E14, E16, E18, E20



28 PC.

9-4427MP

Tray category #7 (280 x 187mm)

Contents — 4.09 — 1 / 4

○	4535M	8, 9, 10, 11, 12, 13, 14, 15,16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36



27 PC.

9-4827MP

Tray category #7 (280 x 187mm)

Contents — 4.09 — 1 / 4

○	4530M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36



27 PC.

Tool Set Content



Drawer (579x380)

9-12C7MR

Tray category #7 (280 x 187mm)

Contents	0.78	1 / 10
1061	8, 10, 11, 13, 14, 17, 19	



7 PC.

9-3612MR

Tray category #7 (280 x 187mm)

Contents	1.27	1 / 10
3351MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

9-30904AY

Tray category #7 (280 x 187mm)

- Use for scribing, aligning, installing and removing O rings, seals and washers stainless

Contents	0.43	1 / 10
43250115Y	43270115Y	
43260115Y	43290115Y	



4 PC.

Tool Set Content



Drawer (579x380)

9-30909AY

Tray category #8 (375 x 187mm)

Contents	0.69	1 / 12
43250115Y	43350175Y	
43260115Y	43360175Y	
43270115Y	43370175Y	
43290115Y	43390175Y	
43240115Y		



9 PC.

Tool Set Content



Drawer (579x380)

9-12110MR

Tray category #8 (375 x 187mm)

Contents		1.89	1 / 12
3731M	8, 10, 12, 13, 14, 17, 19, 21, 22, 24		



10 PC.

9-90114MR

Tray category #8 (375 x 187mm)

Contents		1.75	1 / 12
1930	8 x 10, 10 x 11, 12 x 14, 14 x 17, 17 x 19		
1060	8, 10, 12, 14, 17, 19, 21, 22, 24		



14 PC.

9-40618GP

Tray category #8 (375 x 187mm)

Contents		1.89	1 / 12
1471	PH1 x 100, PH2 x 100		
1472	4 x 100, 5.5 x 125		
6CB02	100~500V		

6318-08A 6116-07A 6216-06A



8 PC.

9-1011GP

Tray category #8 (375 x 187mm)

Contents		1.15	1 / 12
761G	ø6x185mm		
763G	ø4x185mm, ø5x185mm ø6x185mm, ø8x185mm		
764G	ø2x140mm, ø3x150mm, ø4x180mm, ø5x200mm, ø6x210mm, ø8x220mm		



11 PC.

9-91016MR

Tray category #8 (375 x 187mm)

Contents		1.15	1 / 12
3730M	8, 10, 12, 13, 14, 17, 19		
1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50		



16 PC.



Drawer (579x380)

Tool Set Content

9-4335MR

KT NO.	Contents	5.01 kg / 1 / 2
9-4335MR	4235M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36
9-4235MR	4230M	

9-4235MR

Tray category #9 (375 x 280mm)



25 PC.

9-4435MP

Tray category #9 (375 x 280mm)

Contents	7.3 kg / 1 / 2
4435M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36



25 PC.

9-6414MP

9-6414SP

Tray category #9 (375 x 280mm)



9-6414MP



9-6414SP

14 PC.

KT NO.	Contents	10.9 kg / 1 / 2
9-6414MP	6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41
9-6414SP	6435S	3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8

9-12A1MR

Tray category #9 (375 x 280mm)

Contents	1.91 kg / 1 / 4
1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24



11 PC.



Drawer (504 x 195 mm)

Tool Chest Set Content

9-4338MR | 9-4338MR01 | 9-4338MR03

Tray category #12 (510 x 205mm)

▪ For Top drawer of 87401-2 / 87401-3 / 87401-3H P.51

38 PC.


9-4338MR


9-4338MR01 / 9-4338MR03

KT NO.	Contents				
					5.96 kg / 1 / 5
9-4338MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4768-10F	4021 PH2, PH3	4251-05R, 4251-10R
9-4338MR01			4755-10G	4022 8, 10	4572-12
				4023 T25, T27, T30, T40	4791R
9-4338MR03		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	4755-10G	4025 H4, H5, H6, H8, H10, H12	463521RC

▪ for 87401-2 / 87401-3 / 87401-3H P.51



Drawer (504 x 195 mm)

Tool Chest Set Content

9-90121MR

Tray category #13 (500 x 190mm)

21 PC.

Contents			2.1 kg / 1 / 5
	1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24	
	1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	



9-90126MR

Tray category #13 (500 x 190mm)

26 PC.

Contents			2.38 kg / 1 / 5
	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	



9-90104GP

Tray category #13 (500 x 190mm)

4 PC.

Contents			1.36 kg / 1 / 5
	3611-08P		6511-10
	6111-07		6311-06



▪ for 87401-2 / 87401-3 / 87401-3H P.51

Tool Chest Set Content

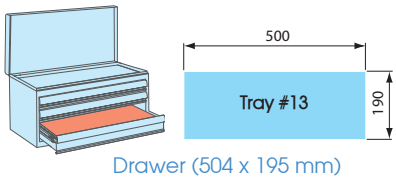

Drawer (504 x 195 mm)

9-31006MR

Tray category #13 (500 x 190mm)

Contents		0.74	1 / 5
1421	PH1 x 80, PH2 x 38, PH3 x 150		
1422	6.5 x 38, 5.5 x 100, 8 x 175		

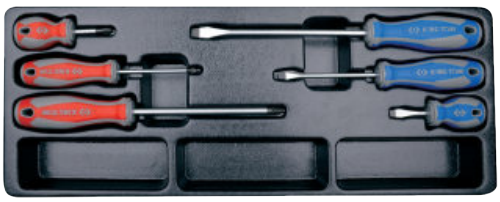

6 PC.

9-90113MA

Tray category #13 (500 x 190mm)

Contents		2.98	1 / 5
4023	T45		
4025	H8, H12		
402B	M16		
3204	401408M	9AE42	
112005MR 112006MR	9AE2-6606 9AE2-7608	9AE2-7614 9AE2-9315	



13 PC.

▪ For 87402 / 87A05 P.52

Tool Box Set Content



Drawer (470 x 220 mm)

9-4219MR

9-4219MR07

9-4219SR08

9-4319MR

9-4319MR01

9-4319MR02

9-4319MR05

Tray category #14 (460 x 105mm)



20 PC.

KT NO.	Contents			2.5	1 / 8
9-4219MR	4768-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32		
9-4219MR07	4762-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27		
9-4219SR08		4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4		
9-4319MR	4768-10F	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	
9-4319MR01	4755-10G				
9-4319MR02	4779-10FR				
9-4319MR05	4768-10F		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32		

▪ For 87402 / 87A05 P.52

Tool Box Set Content



9-4116FR

9-4116FR03 Tray category #14 (460 x 105mm)



6 PC.

KT NO. | Contents | 2.2 | 1 / 8

KT NO.	Contents		
9-4116FR	463521RC	4251-05R 4251-10R	4572-12
9-4116FR03	463021RC	4452-18FR	4223-02R

9-1606MR

9-1606MR01 Tray category #14 (460 x 105mm)



6 PC.

KT NO. | Contents | 1.1 | 1 / 8

KT NO.	Contents	
9-1606MR	1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26
9-1606MR01		8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 22 x 24

9-1217MR Tray category #14 (460 x 105mm)



7 PC.

Contents | 1.5 | 1 / 8

1060	17, 18, 19, 20, 21, 22, 24

9-1716MR Tray category #14 (460 x 105mm)



6 PC.

Contents | 1.1 | 1 / 8

1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19

9-90115MR Tray category #14 (460 x 105mm)



15 PC.

Contents | 1.2 | 1 / 8

1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-40203GP Tray category #14 (460 x 105mm)



3 PC.

Contents | 0.8 | 1 / 8

6111-07	6211-06	
6311-06		

9-90120MR Tray category #14 (460 x 105mm)



20 PC.

Contents | 1.5 | 1 / 8

1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-30106MR Tray category #14 (460 x 105mm)



6 PC.

Contents | 0.8 | 1 / 8

1421	PH1 x 80, PH2 x 100, PH3 x 150
1422	5.5 x 100, 6.5 x 150, 8 x 175

9-90125MR Tray category #14 (460 x 105mm)



15 PC.

Contents | 1.2 | 1 / 8

1900	8 x 10 , 10 x 12 , 12 x 14 , 14 x 17 , 17 x 19 , 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-30206MR Tray category #14 (460 x 105mm)



6 PC.

Contents | 1.18 | 1 / 8

1461	PH1 x 75, PH2 x 100, PH3 x 150
1462	5.5 x 100, 6.5 x 150, 8 x 175

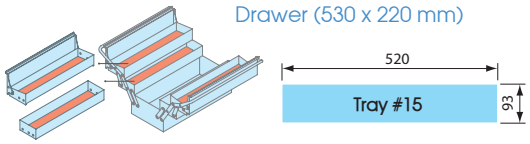

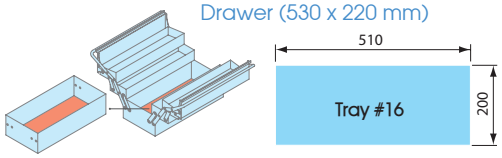

▪ For 87408 only P.52

Tool Box Set Content

9-4029CR Tray category #15 (520 x 93mm)

29 PC.



Contents		2.67 kg	1 / 5
4025	H5, H6, H8, H10, H12, H14		
4330MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24, 26, 27, 28, 30, 32		
4330SR	7/16, 9/16, 7/8		
463521RC			

9-4156PR Tray category #15 (520 x 93mm)

6 PC.



Contents		1.99 kg	1 / 5
4779-10GR	4572-12		
4251-03R 4251-05R 4251-10R	4791R		

9-90111MR Tray category #15 (520 x 93mm)

11 PC.



Contents		1.25 kg	1 / 5
1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
3611-10P	6511-10C		

9-6010MR Tray category #16 (510 x 200mm)

9-6010MR01

10 PC.



KT NO.	Contents			kg	
9-6010MR	6330M	33, 36, 38, 41, 46, 50	6779-20F 6251-08 6251-16	9.70	1 / 2
9-6010MR01		30, 32, 36, 41, 46, 50	6572-20	9.50	

9-1215MR03 Tray category #16 (510 x 200mm)

15 PC.



Contents		3.12 kg	1 / 2
1060	8, 10, 11, 12, 13, 14, 17, 18, 19, 21, 22, 24, 27, 30, 32		

HAND SOCKETS & ACCESSORIES




KING TONY
KINGTONY

Socket Made


1 Hot forge


2 Lathing


3 Marking


4 Heat treatment


5 Sand blast


6 Grinding


7 Plating


8 Rubber stripe assembly

Precision forging Technology



Other brand (not good)



King Tony brand (good)

In forging process, metal moved while it is still in the solid state. King Tony specialized in forging technology to create better metal configuration. Non-straight grain flow and non-sharp corners can extend lifetime and durability of socket. Torque is transmitted for powerful tightening under safety.

Conventional heat treatment and microstructural



Other brand:
Over of Troostite (Zn,Mn) element will bring weak point. (not good)



King Tony brand:
Well spread (Fe) element will bring better strength. (good)

Heat treatment involves the use of heating or chilling experience and time control. King Tony controls heat treatment system to ensure the right hardness without the brittleness. From microstructural picture you can see elements are well- distributed.

Professional production & quality control





KING TONY hand socket reach 30% higher than DIN international standard.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our hand socket, ratchet, extension bar, and power handle is 30% higher than international DIN standards. Impact socket reach 50% higher torque than DIN standards.

Finest material for tools

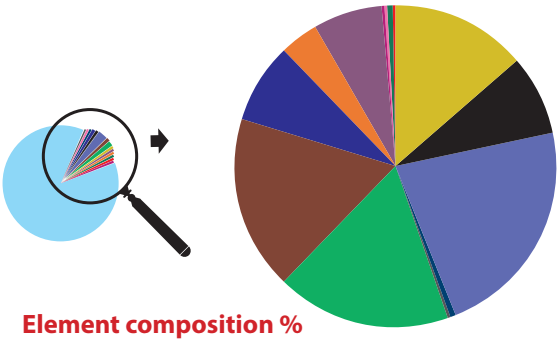

Element composition %

• Fe	97.1025%	• Mo	0.2325%	• P	0.0125%
• Mn	0.6485%	• Si	0.2301%	• S	0.0104%
• Ni	0.5089%	• Cu	0.1970%	• Co	0.0092%
• Cr	0.5058%	• V	0.1130%	• W	0.0088%
• C	0.4000%	• Al	0.0196%	• B	0.0012%

Tools are made to extend hand work. King Tony selects different material depends on its difference of nature for tightening, power impacting, cutting, rotating, and locking. Choose qualified material to meet required lifetime for professional use and consumption.

Extremely hard-wearing performance

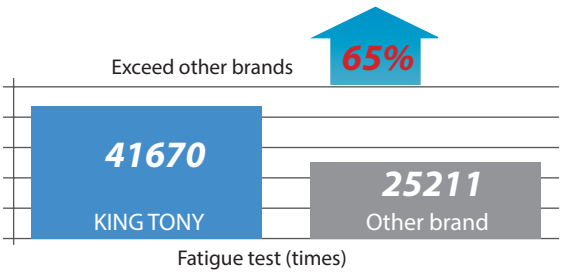

Fatigue test (times)

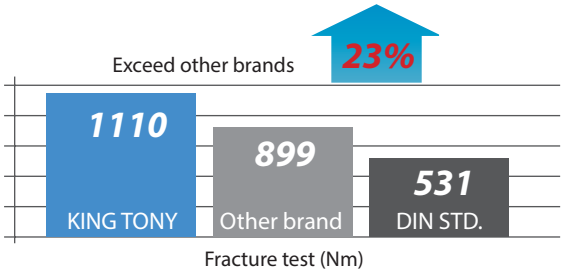

Fracture test (Nm)
1/2DR. 19mm hand socket (433519MR)

King Tony offers reliable tools for professional users, strictly controls its quality to ensure achievement of required performance. From "fracture & fatigue test", you will know the difference we have when compare to others.

Standard Socket

KT No. & D1

2330M 2330S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233004M	4	6.8	11.8	4	24	9	20 / 600
233045M	4.5	7.4	11.8	5	24	9	20 / 600
233005M	5	8.0	11.8	6	24	9	20 / 600
233055M	5.5	8.7	11.8	6	24	11	20 / 600
233006M	6	9.2	11.8	7	24	11	20 / 600
233007M	7	10.3	11.8	7	24	10	20 / 600
233008M	8	11.4	11.8	8	24	12	20 / 600
233009M	9	12.8	12.0	8	24	12	20 / 600
233010M	10	14.3	13.0	9	24	13	12 / 360
233011M	11	15.8	14.2	9	24	18	12 / 360
233012M	12	16.8	15.5	9	24	21	12 / 360
233013M	13	17.8	16.5	9	24	23	12 / 360
233014M	14	19.6	18.5	9	24	31	10 / 360

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233005S	5/32	6.8	11.8	4	24	9	20 / 600
233006S	3/16	7.9	11.8	6	24	9	20 / 600
233007S	7/32	8.7	11.8	6	24	10	20 / 600
233008S	1/4	9.5	11.8	7	24	10	20 / 600
233009S	9/32	10.3	11.8	7	24	10	20 / 600
233010S	5/16	11.4	11.8	8	24	10	20 / 600
233011S	11/32	13.7	12.2	8	24	12	20 / 600
233012S	3/8	14.2	13.0	8	24	14	12 / 360
233014S	7/16	15.8	14.2	9	24	18	12 / 360
233015S	15/32	16.8	15.5	9	24	21	12 / 360
233016S	1/2	17.6	16.5	9	24	24	12 / 360

2335M 2335S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233532M	3.2	5.7	11.8	3.5	24	9	20 / 600
233504M	4	6.8	11.8	4	24	9	20 / 600
233545M	4.5	7.4	11.8	5	24	10	20 / 600
233505M	5	8.0	11.8	6	24	10	20 / 600
233555M	5.5	8.7	11.8	6	24	10	20 / 600
233506M	6	9.2	11.8	7	24	10	20 / 600
233507M	7	10.3	11.8	7	24	11	20 / 600
233508M	8	11.4	11.8	8	24	11	20 / 600
233509M	9	12.8	12.0	8	24	13	20 / 600
233510M	10	14.3	13.0	9	24	14	12 / 360
233511M	11	15.8	14.2	9	24	19	12 / 360
233512M	12	16.8	15.5	9	24	22	12 / 360
233513M	13	17.8	16.5	9	24	25	12 / 360
233514M	14	19.6	18.5	9	24	32	10 / 300
233515M	15	20.9	19.3	12	24	39	10 / 300

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233505S	5/32	6.8	11.8	4	24	9	20 / 600
233506S	3/16	7.9	11.8	6	24	11	20 / 600
233507S	7/32	8.7	11.8	6	24	11	20 / 600
233508S	1/4	9.5	11.8	7	24	11	20 / 600
233509S	9/32	10.3	11.8	7	24	11	20 / 600
233510S	5/16	11.4	11.8	8	24	11	20 / 600
233511S	11/32	13.7	12.2	8	24	12	20 / 600
233512S	3/8	14.2	13.0	8	24	14	12 / 360
233514S	7/16	15.8	14.2	9	24	19	12 / 360
233515S	15/32	16.8	15.5	9	24	22	12 / 360
233516S	1/2	17.6	16.5	9	24	24	12 / 360
233518S	9/16	19.6	18.5	9	24	31	10 / 300

Deep Socket

2235M 1/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
223504M	4	6.9	11.6	6	49.5	18	20 / 320
223545M	4.5	7.5	11.6	6	49.5	20	20 / 320
223505M	5	8.0	11.6	7	49.5	21	20 / 320
223555M	5.5	8.8	11.6	7	49.5	21	20 / 320
223506M	6	9.5	11.6	8	49.5	22	20 / 320
223507M	7	10.5	11.6	12	49.5	23	20 / 320
223508M	8	11.8	11.8	15	50	24	20 / 320
223509M	9	13.0	13.0	15	50	30	15 / 240
223510M	10	14.5	14.5	15	50	38	15 / 240
223511M	11	15.8	15.8	21	50	43	15 / 240
223512M	12	16.8	16.8	21	50	48	15 / 240
223513M	13	17.8	17.8	21	50	52	15 / 240
223514M	14	19.8	19.8	21	50	69	15 / 240
223515M	15	20.9	20.9	25	50	71	12 / 240

2235S 1/4"

- Inch-ANSI/ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
223505S	5/32	6.8	11.8	6	50	19	20 / 320
223506S	3/16	7.9	11.8	7	50	20	20 / 320
223507S	7/32	8.7	11.8	9	50	21	20 / 320
223508S	1/4	9.5	11.8	9	50	23	20 / 320
223509S	9/32	10.3	11.8	15	50	24	20 / 320
223510S	5/16	11.8	11.8	15	50	25	20 / 320
223511S	11/32	13.0	13.0	15	50	32	15 / 240
223512S	3/8	14.5	14.5	15	50	41	15 / 240
223514S	7/16	15.8	15.8	21	50	47	15 / 240
223516S	1/2	17.6	17.6	21	50	54	15 / 300
223518S	9/16	19.6	19.6	21	50	71	15 / 270

Deep Socket

2230M — 1/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
223004M	4	6.8	11.8	6	50	20	20 / 320
223045M	4.5	7.4	11.8	7	50	20	20 / 320
223005M	5	8.0	11.8	7	50	20	20 / 320
223055M	5.5	8.7	11.8	9	50	20	20 / 320
223006M	6	9.2	11.8	9	50	21	20 / 320
223007M	7	10.3	11.8	15	50	22	20 / 320
223008M	8	11.8	11.8	15	50	25	20 / 320
223009M	9	13.0	13.0	15	50	28	15 / 240
223010M	10	14.5	14.5	15	50	36	15 / 240
223011M	11	15.8	15.8	21	50	41	15 / 240
223012M	12	16.8	16.8	21	50	47	15 / 240
223013M	13	17.8	17.8	21	50	49	15 / 240
223014M	14	19.8	19.8	21	50	66	15 / 240

Double Square Socket

2310M — 2310S — 1/4"

- Metric-DIN 3120
- Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
231008M	8	13.8	13.0	9	24	16	12 / 360
231010M	10	16.8	15.4	9	24	22	12 / 360
KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
231010S	5/16	13.8	13.0	9	24	15	12 / 360
231012S	3/8	16.8	15.4	9	24	24	12 / 360

Star Socket

2375M — 1/4"

- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
237504M	E4	6.0	11.8	3.6	24	9	20 / 600
237505M	E5	7.0	11.8	4.0	24	10	20 / 600
237506M	E6	8.0	11.8	6.0	24	10	20 / 600
237507M	E7	8.5	11.8	7.0	24	11	20 / 600
237508M	E8	9.8	11.8	8.0	24	11	20 / 600
237510M	E10	11.8	11.8	9.0	24	13	20 / 600

Star Socket

2275M — 1/4"

- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
227504M	E4	6.0	11.8	3.6	50	21	20 / 320
227505M	E5	7.0	11.8	4.0	50	22	20 / 320
227506M	E6	8.0	11.8	6.0	50	24	20 / 320
227507M	E7	8.5	11.8	7.0	50	24	20 / 320
227508M	E8	9.8	11.8	8.0	50	26	20 / 320

Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

2011X — 1/4"

- Phillips head
- DIN ISO 8764-1





KT NO.	No.	L mm		
201101X	PH1	25	9	20 / 600
201102X	PH2	25	9	20 / 600
201103X	PH3	25	10	20 / 600
201104X	PH4	25	12	20 / 600

2012X — 1/4"

- Slotted head
- DIN ISO 2380-1





KT NO.	Tip width mm	Tip thickness mm	L mm		
201235X	3.5	0.6	25	8	20 / 600
201255X	5.5	1.0	25	9	20 / 600
201208X	8	1.2	25	10	20 / 600

2015X — 1/4"

- Hexagon head
- DIN ISO 2380-1





KT NO.	mm	L mm		
201503MX	H3	25	8	20 / 600
201504MX	H4	25	9	20 / 600
201505MX	H5	25	10	20 / 600
201506MX	H6	25	10	20 / 600
201508MX	H8	25	13	20 / 600
201510MX	H10	25	15	20 / 600
201506SX	3/16	25	9	20 / 600
201507SX	7/32	25	10	20 / 600
201508SX	1/4	25	10	20 / 600
201510SX	5/16	25	13	20 / 600

Bit Socket

KT No. & D1

2013X — 1/4"

- For torx internal screw



KT NO.	Size	L mm	g	
201308X	T8	25	8	20 / 600
201309X	T9	25	8	20 / 600
201310X	T10	25	8	20 / 600
201315X	T15	25	8	20 / 600
201320X	T20	25	9	20 / 600
201325X	T25	25	9	20 / 600
201327X	T27	25	9	20 / 600
201330X	T30	25	10	20 / 600
201340X	T40	25	11	20 / 600

2018X — 1/4"

- Pozidriv head
- DIN ISO 8764-1



KT NO.	No.	L mm	g	
201801X	PZ1	25	9	20 / 600
201802X	PZ2	25	9	20 / 600
201803X	PZ3	25	10	20 / 600
201804X	PZ4	25	11	20 / 600

2031 — 1/4"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	L mm	g	
203101	PH1	37	15	20 / 600
203102	PH2	37	15	20 / 600
203103	PH3	37	15	20 / 600
203104	PH4	37	16	20 / 600

2032 — 1/4"

- Slotted head
- DIN ISO 8764-1



KT NO.	Tip width mm	Tip thickness mm	L mm	g	
203235	3.5	0.5	37	15	20 / 600
203204	4	0.8	37	14	20 / 600
203255	5.5	1.0	37	15	20 / 600
203265	6.5	1.2	37	15	20 / 600
203207	7	1.2	37	15	20 / 600
203208	8	1.2	37	16	20 / 600
203210	10	1.6	37	20	20 / 600

2035 — 1/4"

- Hexagon head
- DIN 7422 / 3120



KT NO.	mm	L mm	g	
203503	H3	37	15	20 / 600
203504	H4	37	15	20 / 600
203505	H5	37	15	20 / 600
203506	H6	37	16	20 / 600
203507	H7	37	18	20 / 600
203508	H8	37	19	20 / 600
203510	H10	37	23	20 / 600

2033 — 1/4"

- For torx internal screw
- DIN 3120



KT NO.	Size	L mm	g	
203308	T8	37	14	20 / 600
203309	T9	37	14	20 / 600
203310	T10	37	14	20 / 600
203315	T15	37	14	20 / 600
203320	T20	37	15	20 / 600
203325	T25	37	15	20 / 600
203327	T27	37	15	20 / 600
203330	T30	37	16	20 / 600
203340	T40	37	16	20 / 600

2037 — 1/4"

- For tamper resistant torx screw
- DIN 3120



KT NO.	Size	L mm	g	
203708	T8H	37	14	20 / 600
203709	T9H	37	14	20 / 600
203710	T10H	37	14	20 / 600
203715	T15H	37	14	20 / 600
203720	T20H	37	15	20 / 600
203725	T25H	37	15	20 / 600
203727	T27H	37	15	20 / 600
203730	T30H	37	15	20 / 600
203740	T40H	37	16	20 / 600

90 Teeth Dustproof Ratchet PAT.



- Material
  - chrome vanadium alloy steel handle
  - chrome molybdenum steel (gear) driver
- Finishing
  - polished, chrome plated
  - black driver by phosphate sunk



1 New slimline I-Beam shank offers superior strength with less effort

2773-55GS

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122
- IP51

KT NO.	Square DR.	Overall length inch	Overall length mm	g	pcs/box
2773-55GS	1/4"	5-1/2	140	110	1 / 100
2773DK			renewal kits		

2 Dustproof - Double Sealing gasket



2773DK



3 Screwless design - Easy to repair

Mini Bit Ratchet PAT.

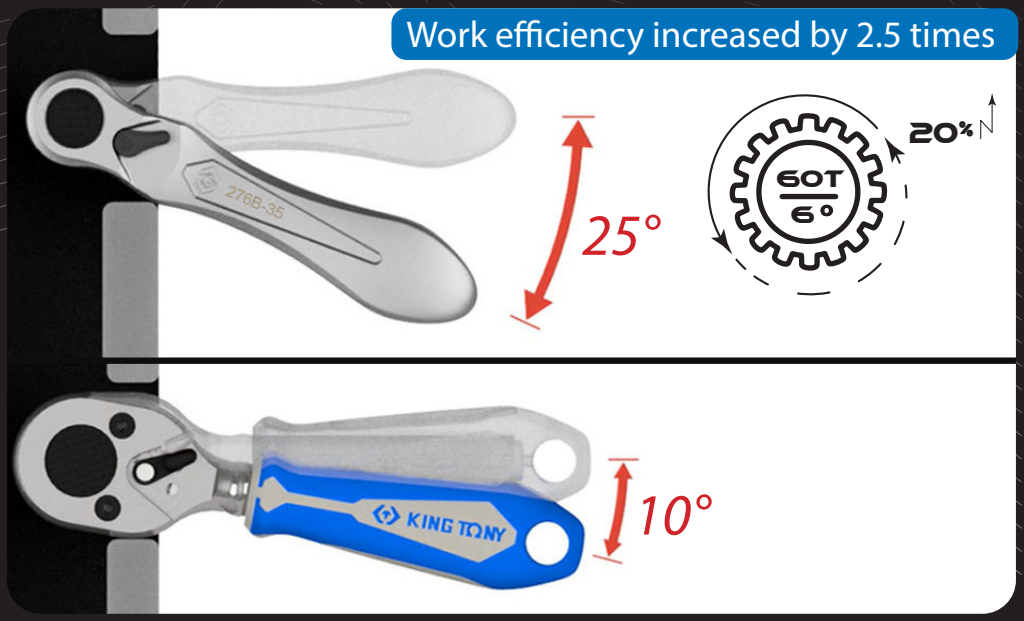

276B-0225

- Reversible ratchet
- 6° gear action degree (60 teeth)
- Quick release design, convenient for users to quickly replace bit
- BIT-holder 12-PT design for quick bit replacement
- Reduced head size and shape of waist can be used quickly and conveniently in narrow spaces





- Quick release Design

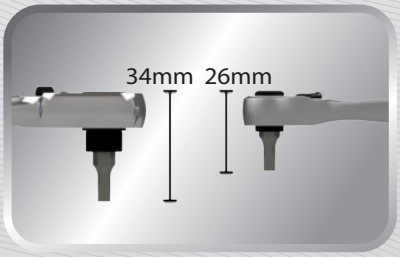

- Operating space 30% thinner

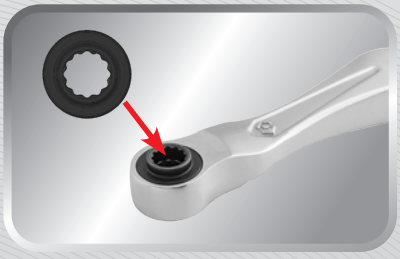

- D-head 12 PT design for quick bit replacement

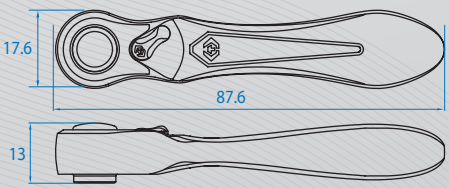

Contents	80	1 / 36
7702-25		
276B-35		

Ratchet

2725

FINE GEAR 1/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2725-55F	5-1/2	140	156	5 / 90
2725-55G	5-1/2	140	168	5 / 90
2725DK	renewal kits		-	-



2725DK



2725-55G



2725-55F

2755

FINE GEAR 1/4"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2755-55G	5-1/2	144	113	5 / 90
2755DK	renewal kits		-	-



2755DK





2752

QUICK RELEASE FINE GEAR 1/4"

- Quick release flexible and reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners





KT NO.	Overall length inch	Overall length mm	g	pcs / box
2752-06G	6	150	128	6 / 108
2752DK	renewal kits		-	-



2752DK





2752-45G

QUICK RELEASE FINE GEAR 1/4"

- Swivel head ratchet
- Quick release flexible and reversible ratchet
- 5° gear action degree(72 teeth)
- Application: T-handle ratchet / screwdriver ratchet

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2752-45G	4-1/2	114	128	6 / 108









Ratchet

KT No. & D1

2761

QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs / box
2761-55F	5-1/2	140	164	6 / 108
2761-55P	5-1/2	140	156	6 / 108
2761DK	renewal kits		-	-



2761DK



2761-55F



2761-55P

2769

1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs / box
2769-55F	5-1/2	140	167	6 / 108
2769-55P	5-1/2	140	159	6 / 108
2769DK	renewal kits		-	-



2769DK



2769-55F



2769-55P

2771

QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs / box
2771-55F	5-1/8	130	142	6 / 108
2771-55G	5-1/8	134	110	6 / 108
2771DK	renewal kits		-	-



2771DK



2771-55F



2771-55G

2774

1/4"

- Universal joint reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs / box
2774-55F	5-1/8	130	146	6 / 108
2774-55G	5-1/8	134	114	6 / 108
2774DK	renewal kits		-	-







2774DK



2774-55F



2774-55G

2779

1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs / box
2779-55F	5-1/8	130	145	6 / 108
2779-55G	5-1/8	134	113	6 / 108
2779DK	renewal kits		-	-



2779DK



2779-55F



2779-55G

Ratchet

KT No. & D1

2781

QUICK RELEASE 1/4"

- Quick release flexible and reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2781-06P	6	150	156	6 / 108
2781DK	renewal kits		-	-



2781DK



2789

1/4"

- Flexible and reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2789-06F	6	150	140	6 / 108
2789DK	renewal kits		-	-



2789DK



2760

MINI RATCHET 1/4"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2760-04	4	100	95	8 / 128
2760DK01	renewal kits		-	-



2760DK01



276A

FINE GEAR MINI RATCHET 1/4"

- Mini bit holder ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action

KT NO.	A mm	D mm	L mm	H mm	g	pcs / box
276A-04G	23	26	111	20	101	6 / 108
276ADK			renewal kits			



276ADK



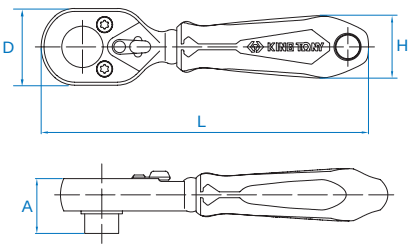



276A-04G (top, side, back)

Mini Ratchet Set

2515MR 1/4"

- Mini ratchet set
- 5° gear action degree (72 teeth)
- Two teeth pawl action

15 PC.



Contents		0.26	6 / 36
	2335M	5, 5.5, 6, 7, 8	
	1025P	PH1, PH2	
	1025T	T10, T15, T20	
	1025H	H3, H4, H5, H6	
	276A-04G		

2501MR 1/4"

- 5° gear action degree (72 teeth)
- Two teeth pawl action

21 PC.



Contents		0.36	4 / 48
	2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13	
	1025P	PH1, PH2, PH3	
	1025T	T10, T20, T30	
	1025H	H4, H6	
	1025S	5.5x1.0, 6.5x1.2	
	276A-04G		

Accessory

2745 1/4"

- Palm ratchet bit holder
- Non-toothed palm ratchet is designed for any angle of degree
- 3 position of forward / lock / reverse
- Suitable for narrow space where a standard wrench cannot attain
- Anodized aluminum alloy body & chrome vanadium alloy steel bit holder

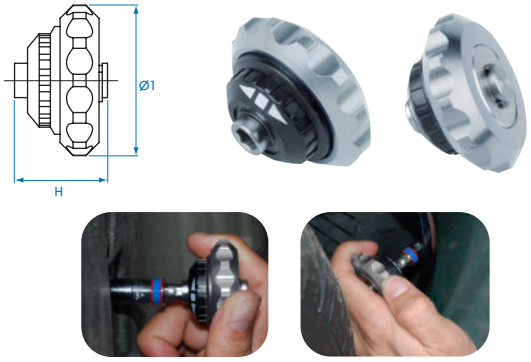

KT NO.	Ø1 mm	H		
2745	46	26.5	103	12 / 144

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated



KT No. & D1

2221 1/4"

- Extension bar
- DIN 3122



KT NO.	Overall length inch	Overall length mm		
2221-02	2	55	27	30 / 480
2221-03	3	75	36	20 / 400
2221-04	4	100	44	15 / 240
2221-06	6	150	67	15 / 240
2221-10	10	254	107	15 / 240
2221-12	12	305	130	15 / 240

CAUTION

In order to get normal life of bit socket, Always use within limited torque to bit.

2223 1/4"

- Offset extension bar
- Max. torque:35 Nm
- DIN 3123



KT NO.	Overall length inch	Overall length mm		
2223-02	2	55	24	30 / 480
2223-04	4	100	44	15 / 240

Accessory

2293 1/4"

- Multi-function extension bar and offset extension bar
- Hex key is applicable to the hex shank
- Max. torque : 35 N·m
- DIN 3123





KT NO.	Overall length inch	mm	g	pcs / box
2293-02	2	55	24	30 / 480
2293-03	3	75	34	20 / 400
2293-04	4	100	44	15 / 240
2293-06	6	150	65	15 / 300


KT No. & D1

2311 1/4"

- Flexible extension bar



KT NO.	Overall length inch	mm	g	pcs / box
2311-06	6	150	65	12 / 240
2311-12	12	300	89	12 / 120
2311-18	18	450	112	20 / 200


KT No. & D1

2312 1/4"

- Flexible extension bar



KT NO.	Overall length inch	mm	g	pcs / box
2312-06	6	150	59	12 / 240

2792 1/4"

- Universal joint
- DIN 3123



KT NO.	Overall length inch	mm	g	pcs / box
2792	1 - 1/2	36	22	24 / 384

2813 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3123



3/8" drive (M) ← 1/4" drive (F)

KT NO.	Spec.	g	pcs / box
2813	1/4" F x 3/8"M	20	12 / 360

213312DF 1/4"

- Magnetic screwdriver handle
- DIN 3126



KT NO.	Overall length inch	mm	g	pcs / box
213312DF	12	300	132	2 / 40

2177DF 1/4"

- Spinner handle
- DIN 3122



KT NO.	Overall length inch	mm	g	pcs / box
2177DF	12-1/4	310	126	6 / 60

2178DF 1/4" / 2179DF 1/4"

- Spinner handle
- DIN 3122


2178DF (PP + TPR)


2179DF (PP)

KT NO.	Overall length inch	mm	g	pcs / box
2178DF	6	150	76	6 / 120
2179DF	6	150	90	12 / 192

2178TG 1/4"

- Spinner handle
- DIN 3122



KT NO.	■	mm	mm	g	pcs / box
2178TG	1/4	115	154	94	6 / 96


KT No. & D1

2452 1/4"

- Flexible handle
- Action degree -180°
- DIN 3122




2452DK

KT NO.	Overall length inch	mm	g	pcs / box
2452-05F	5	130	86	15 / 270
2452DK	renewal kits			

Accessory

KT No. & D1

2453 1/4"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122





2452DK

KT NO.	Overall length inch	mm	g	
2453-05F	5	130	71	15 / 270
2452DK	renewal kits			

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

2571 1/4"

- Sliding T-handle
- DIN 3122



KT NO.	Overall length inch	mm	g	
2571-45	4-1/2	115	44	12 / 192

KT No. & D1

2141

- Bit holder
- DIN 3122





2141





2142

2142 1/4"

KT NO.	Size inch	Overall length mm	g	
2141	1/4	25	14.0	20 / 320
2142	1/4	25	15	20 / 320

Socket Rail Set

2509MR 1/4"

- Socket rail 150mmL



9 PC.

Contents	kg		
2335M	4, 5, 6, 7, 8, 9, 10, 11, 13	0.17	40
8720609			

Socket Rail Set

2509SR 1/4"

- Socket rail 150mmL



9 PC.

Contents	kg	
2335S	5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	0.17 / 40
8720609		

2513MR 1/4"

- Socket rail 240 mmL



13 PC.

Contents	kg	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	0.23 / 6 / 60
8721114		

2513MRD1 1/4"

- Socket rail 508 mmL



13 PC.

Contents	kg	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	0.34 / 50
8720813D1		

2311MR 1/4"

- Socket rail 240 mmL



13 PC.

Contents	kg	
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13,14	0.46 / 6 / 60
8721114		

2127PR 1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm



7 PC.

Contents	kg	
2035	H3, H4, H5, H6, H7, H8, H10	0.15 / 50
8720507		

Socket Rail Set

2109PR 1/4"

- Socket rail 150mmL
- For torx head screw
- H : 37mm

9 PC.



Contents			0.12	50
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40			
8720609				

2107PR 1/4"

- Socket rail 130mmL
- For tamper resistant torx head screw
- H : 37mm

7 PC.



Contents		0.12	50
2037	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
8720507			

2119PR 1/4"

- Socket rail 150mmL
- For tamper resistant torx head screw
- H : 37mm

9 PC.



Contents		0.12	50
2037	T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H		
8720609			

872 1/4"

- Rail length from 160 mm to 560 mm



KT NO.	L (mm)
870406	160
870208	200
870422	560
8720	-

8720813D1 1/4"

Socket rail carrier with retaining clip
26" roller cabinet



KT NO.	Square drive	Clip	L (mm)
8720813D1	1/4"	13	508

Extension Bar Set

2104PR 1/4"



4 PC.

Contents		0.17	1 / 80
2221	2", 3", 4", 6"		

Socket Set

2313MR 1/4"



13 PC.

Contents		0.42	20
2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2766-55G	2221-04		

2510SR 1/4"

Metal case size (mm) :
223 x 65 x 32 (0.016 cuft)

10 PC.



Contents		0.62	1 / 30
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		

2511MR 1/4"

Metal case size (mm) :
223 x 65 x 32 (0.016 cuft)

11 PC.



Contents		0.67	1 / 30
2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		

Socket Set

2516MR

2516SR 1/4"

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)

16 PC.


2516MR


2516SR

KT NO.		Contents				1.10	1 / 18
2516MR	○ 2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13	2779-55G	2571-45	2179DF		
2516SR	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2221-04	2792			

2518MR

2518SR

2518MR01 1/4"

Metal case size (mm) :
198 x 105 x 32 (0.023cuft)

18 PC.


2518MR/2518MR01


2518SR

KT NO.		Contents			0.96	1 / 20
2518MR	○ 2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	○ 2310M 8, 10	2452-05F	2571-45	
2518SR	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	○ 2310S 5/16, 3/8	2725-55F	2792	
2518MR01	○ 2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		2221-02 2221-04		

2019MR

2019SR

2519MR

2519SR 1/4"

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

18 PC.


2019MR/2519MR


2019SR/2519SR

KT NO.		Contents				0.92	1 / 20
2019MR	○ 2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	○ 2310M 8, 10	2769-55P	2452-05F		
2519MR	○ 2335M			2221-02 2221-04	2571-45		
2019SR	○ 2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	○ 2310S 5/16, 3/8	2792			
2519SR	○ 2335S						

Socket Set

2021MR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

KT NO.	Contents		0.87 kg / 1 / 20
2021MR	○ 2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2779-55G, 2221-02, 2221-04, 2452-05F, 2571-45, 2792, 2141
2521MR	○ 2335M		

2521MR 1/4"



19 PC.

2525MRE 1/4"

Blow case size (mm) :
203 x 93 x 43(0.028cuft)

Contents		0.54 kg / 1 / 20
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
⊕	1025P	PH2 x2
◉	1025H	H5, H6
✱	1025T	T10, T15, T20, T25, T30, T40
2771-55G	2221-04	2142



25 PC.

2027MRE 1/4"

Blow case size (mm) :
203 x 93 x 43(0.028cuft)



2527MRE 1/4"



27 PC.

KT NO.			Contents	0.60 kg / 1 / 20
2027MRE	○ 2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 12, 13, 14	⊕ 1025P PH1, PH2	2221-04, 276A-04G, 2142, 2792
2527MRE	○ 2335M		◉ 1025H H3, H4, H5	
			✱ 1025T T10, T15, T20, T25, T30, T40	

Socket Set

2526MR

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



2526MR

2526SR 1/4"



2526SR

26 PC.

KT NO.		Contents	1.30	1 / 18
2526MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13	2779-55G	2221-02 2221-04
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
2526SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2792	2813
	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		

2031MR

Metal case size (mm) :
280 x 130 x 41 (0.053 cuft)

KT NO.	Contents		1.60	1 / 15
2031MR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12, 13	2033 T8, T9, T10, T15, T20, T25, T27, T30 2035 H3, H4, H5, H6, H8, H10 2779-55G 2221-03 2221-06 2179DF 2571-45 2792	
2531MR	2335M			

2531MR 1/4"



31 PC.

2030CR

2530CR 1/4"

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



30 PC.

KT NO.	Contents		1.30	1 / 18
2030CR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	2310M 8, 10 2310S 5/16, 3/8 2769-55F 2792 2571-45 2452-05F 2221-02 2221-04	
	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		
2530CR	2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12		
	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		

2539MR 1/4"

Metal case size (mm) :
280 x 130 x 41 (0.053 cuft)



39 PC.

Contents			1.61	1 / 15
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13			
2375M	E4, E5, E6, E7, E8			
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40			
2035	H3, H4, H5, H6, H7, H8, H10			
2779-55G	2179DF			
2571-45	2221-02 2221-04	2792		

Socket Set

2540MR 1/4"

Metal case size (mm):
316 x 104 x 40 (0.047 cuft)



39 PC.

Contents		1.52	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
1025S	4, 5.5, 7		
1025P	PH0, PH1, PH2, PH3		
1025H	H3, H4, H5, H6, H7, H8		
1025T	T10, T15, T20, T25, T30, T40		
2779-55G	213312DF	2792 2141	
2571-45	2452-05F	2221-02 2221-06	

2575MR 1/4"

Metal case size (mm):
244 x 118 x 37 (0.038 cuft)



45 PC.

Contents		1.24	1 / 18
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
1025S	4, 6.5, 7, 8		
1025P	PH1, PH2, PH3		
1025H	H2.5, H3, H4, H5, H6, H7, H8, H10		
1025U	T8H, T9H, T10H, T15H, T20H, T25H, T27H,T30H, T40H		
1025Z	PZ1, PZ2, PZ3		
2755-55G	2223-02	2792	
2311-06	2179DF	2142	

2551MR

Metal case size (mm):
244 x 118 x 37 (0.038 cuft)



2551MR

2551MR01 1/4"



2551MR01

51 PC.

KT NO.		Contents				1.30	1 / 18
2551MR	2755-55G	2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	2813	2142 2792
		1025S	3, 4, 5, 6	1025Z	PZ1, PZ2 x2, PZ3	7702-25	753-63
2551MR01	2761-55F	1025P	PH1, PH2 x2, PH3	1025T	T10, T15, T20, T25, T27, T30, T40	2223-02 2223-04	2178DF
		1025H	H3, H4, H5, H6				

2516MRV03

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199 x 161 x 56 (0.063 Cuft)

Contents		0.75	1/16
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2771-55G	2571-45		
2221-06	2792		



17 PC.

2524MRV

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199 x 161 x 56 (0.063 Cuft)

Contents		0.9	1/16
2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2771-55G	2571-45	2142	
2221-02 2221-04 2221-06	2178DF	2792	



21 PC.

Socket Set

2528MRV

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199x 161 x 56 (0.063 Cuft)

29 PC.



Contents		0.76	1 / 16
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14		
1025H	H3, H4, H5, H6		
1025S	4, 5		
1025T	T10, T15, T20, T30		
1025P	PH1, PH2		
276A-04G	2792	2221-06	2142

2331SRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm) :
289 x 230 x 66 (0.154Cuft)

31 PC.



Contents		1.63	1 / 6
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16		
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16		
2771-55G	2571-45	2142	
2221-02 2221-04 2221-06	2792	2178DF	

2534MRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm) :
289 x 230 x 66 (0.154Cuft)

34 PC.

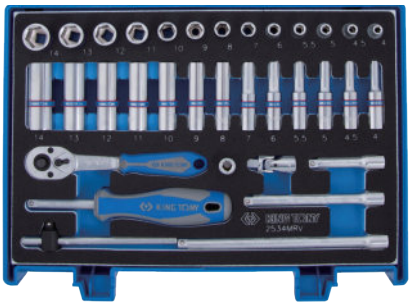

Contents		1.76	1 / 6
2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 ,12 , 13, 14		
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2771-55G	2571-45	2142	
2221-02 2221-04 2221-06	2178DF	2792	

2044SRV

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

2544SRV

Tray category #10 (375 x 140mm) 1/4"

44 PC.



2044SRV



2544SRV

KT NO.			Contents	1.62	1 / 10
2044SRV	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		2142 2792
2544SRV	2335S		1025S: 3, 4.5, 5, 6.5, 8		2223-02 2223-04
			1025P: PH0, PH1, PH2, PH3		2752-06G
			5025H: H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32		2178DF

Socket Set

2048MRV

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)



2048MRV

2548MRV Tray category #10 (375 x 140mm) 1/4"



2548MRV

48 PC.

KT NO.			Contents	
2048MRV	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2235M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 1025H: H3, H4, H5, H6, H7, H8, H10	2142 2792 2223-02 2223-04 2178DF 2752-06G
2548MRV	2335M			

1.79 | 1 / 10

2550MRV

Tray category #8 (375 x 187mm) 1/4"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)



50 PC.

Contents — 2.2 | 1 / 6

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2375M	E4, E5, E6, E7, E8		
2031	PH1, PH2, PH3, PH4		
2032	4, 5.5, 6.5, 8, 10		
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40		
2035	H3, H4, H5, H6, H7, H8, H10		
2771-55G		2178DF	
2571-45		2792	
2293-04 2293-06		2221-02	

2553MRV

Tray category #10 (375 x 140mm) 1/4"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)



53 PC.

Contents — 1.67 | 1 / 10

2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
1025H	H3, H4, H5, H6, H7, H8, H10
1025S	3, 4.5, 5, 6.5, 8
1025P	PH0, PH1, PH2, PH3
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025Z	PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
7702-25	2792, 2813

Contents

276A-04G	213312DF
2223-02 2223-04	2745

Socket Set

2553MRV01

Tray category #10 (375 x 140mm) 1/4"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

Contents		1.87	1/10
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
1025H	H3, H4, H5, H6, H7,H8, H10		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025P	PH1, PH2, PH3		
1025Z	PZ1, PZ2, PZ3		
1025S	3, 4.5, 5, 6.5, 8		
7702-25	276A-04G		



55 PC.

Contents

2571-45 213312DF

2221-02
2221-04
2221-06
2745 2792 2142

2565MRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm):
289 x 230 x 66 (0.154 cuft)

Contents		2.67	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2375M	E4, E5, E6, E7, E8		
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40		
2015X	3, 4, 5, 6, 8		
2018X	PZ1, PZ2		
2011X	PH1, PH2		
2012X	3.5, 5.5, 8		
1025T	T6, T7		
1025M	M4, M5, M6, M8, M10		



65 PC.

Contents

2792 2813 276A-04G 2221-02
2221-04
2221-06



Standard Socket

3330M | 3330S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
333006M	6	9.9	17.8	7.0	27	25	12 / 360
333007M	7	10.8	17.8	7.0	27	24	12 / 360
333008M	8	12.0	17.8	7.0	27	25	12 / 360
333009M	9	13.2	17.8	7.0	27	25	12 / 360
333010M	10	14.5	17.8	9.0	27	26	12 / 360
333011M	11	15.8	17.8	9.0	27	27	12 / 360
333012M	12	16.8	17.8	9.0	27	26	12 / 360
333013M	13	17.8	16.8	9.0	27	25	12 / 360
333014M	14	19.7	18.0	11.0	29	33	10 / 300
333015M	15	20.8	18.0	11.0	29	35	10 / 300
333016M	16	21.8	20.0	11.0	29	45	10 / 300
333017M	17	23.8	20.0	11.0	29	48	10 / 200
333018M	18	24.7	21.0	13.0	29	50	10 / 200
333019M	19	25.8	21.0	13.0	29	51	10 / 200
333020M	20	27.1	25.0	13.0	32	83	10 / 160
333021M	21	27.8	25.0	13.0	32	80	10 / 160
333022M	22	29.7	26.0	15.0	32	86	10 / 160
333023M	23	29.7	26.0	15.0	32	80	10 / 160
333024M	24	31.8	26.0	17.0	32	89	8 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
333008S	1/4	10.0	17.8	7.0	27	24	12 / 360
333010S	5/16	12.0	17.8	7.0	27	24	12 / 360
333011S	11/32	13.2	17.8	7.0	27	25	12 / 360
333012S	3/8	14.0	17.8	9.0	27	26	12 / 360
333014S	7/16	15.8	17.8	9.0	27	26	12 / 360
333015S	15/32	16.8	17.8	9.0	27	27	12 / 360
333016S	1/2	17.8	16.8	9.0	27	26	12 / 360
333018S	9/16	19.7	18.0	11.0	29	33	10 / 300
333019S	19/32	20.8	18.0	11.0	29	35	10 / 300
333020S	5/8	21.8	20.0	11.0	29	42	10 / 300
333022S	11/16	23.8	20.0	11.0	29	46	10 / 200
333024S	3/4	25.8	21.0	13.0	29	50	10 / 200
333026S	13/16	27.8	25.0	13.0	32	80	10 / 160
333028S	7/8	29.7	26.0	15.0	32	83	10 / 160
333030S	15/16	31.8	26.0	17.0	34	83	8 / 160
333032S	1	33.8	26.0	17.0	34	96	8 / 160

3335M | 3335S 3/8"

- Metric-DIN 3124, ISO 2725-1
  Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
333506M	6	9.9	17.8	7.0	27	25	12 / 360
333507M	7	10.8	17.8	7.0	27	24	12 / 360
333508M	8	12.0	17.8	7.0	27	26	12 / 360
333509M	9	13.2	17.8	7.0	27	25	12 / 360
333510M	10	14.5	17.8	9.0	27	28	12 / 360
333511M	11	15.8	17.8	9.0	27	27	12 / 360
333512M	12	16.8	17.8	9.0	27	28	12 / 360
333513M	13	17.8	16.8	9.0	27	26	12 / 360
333514M	14	19.7	18.0	11.0	29	35	10 / 300
333515M	15	20.8	18.0	11.0	29	39	10 / 300
333516M	16	21.8	20.0	11.0	29	43	10 / 300
333517M	17	23.8	20.0	11.0	29	50	10 / 200
333518M	18	24.7	21.0	13.0	29	51	10 / 200
333519M	19	25.8	21.0	13.0	29	53	10 / 200
333520M	20	27.1	25.0	13.0	32	87	10 / 160
333521M	21	27.8	25.0	13.0	32	82	10 / 160
333522M	22	29.7	26.0	15.0	32	89	10 / 160
333523M	23	29.7	26.0	15.0	32	84	10 / 160
333524M	24	31.8	26.0	17.0	32	94	8 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
333508S	1/4	10.0	17.8	7.0	27	24	12 / 360
333510S	5/16	12.0	17.8	7.0	27	25	12 / 360
333511S	11/32	13.2	17.8	7.0	27	24	12 / 360
333512S	3/8	14.0	17.8	9.0	27	25	12 / 360
333514S	7/16	15.8	17.8	9.0	27	25	12 / 360
333515S	15/32	16.8	17.8	9.0	27	27	12 / 360
333516S	1/2	17.8	16.8	9.0	27	26	12 / 360
333518S	9/16	19.7	18.0	11.0	29	32	10 / 300
333519S	19/32	20.8	18.0	11.0	29	35	10 / 300
333520S	5/8	21.8	20.0	11.0	29	43	10 / 300
333522S	11/16	23.8	20.0	11.0	29	48	10 / 200
333524S	3/4	25.7	21.0	13.0	29	51	10 / 200
333526S	13/16	27.8	25.0	13.0	32	83	10 / 160
333528S	7/8	29.6	26.0	15.0	32	89	10 / 160
333530S	15/16	31.8	26.0	17.0	34	86	8 / 160
333532S	1	33.8	26.0	17.0	34	101	8 / 160

Thin Wall Deep Socket

3215M 3/8"

- Specifically for heat plug, glow plug







Thin walled design (D1)

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
321510M	10	13.0	17.8	12.0	65	49	20 / 240
321512M	12	15.0	17.8	15.0	65	49	20 / 240

Deep Socket

KT No. & D1

3230M

3230S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323007M	7	10.8	17.8	10.0	63	55	20 / 320
323008M	8	12.0	17.8	12.0	63	49	18 / 288
323009M	9	13.2	17.8	12.0	63	57	18 / 288
323010M	10	14.5	17.8	12.0	63	57	15 / 240
323011M	11	15.8	17.8	15.0	63	57	15 / 240
323012M	12	16.8	17.8	15.0	63	58	15 / 240
323013M	13	17.8	16.8	15.0	63	57	15 / 240
323014M	14	19.7	18.0	16.0	63	73	12 / 192
323015M	15	20.8	18.0	18.0	63	73	10 / 160
323016M	16	21.8	20.0	18.0	63	87	8 / 128
323017M	17	23.8	20.0	18.0	63	101	8 / 128
323018M	18	24.7	21.0	20.0	63	107	6 / 96
323019M	19	25.8	21.0	20.0	63	113	6 / 96
323021M	21	27.8	25.0	20.0	63	122	6 / 96
323022M	22	29.7	26.0	20.0	63	150	6 / 96
323024M	24	31.8	26.0	25.0	63	158	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
323008S	1/4	10.0	16.8	10.0	63	48	20 / 320
323010S	5/16	12.0	17.8	12.0	63	48	18 / 288
323012S	3/8	14.0	17.8	12.0	63	53	15 / 240
323014S	7/16	15.8	17.8	15.0	63	54	15 / 240
323016S	1/2	17.8	16.8	15.0	63	58	15 / 240
323018S	9/16	19.7	18.0	16.0	63	74	12 / 192
323020S	5/8	21.8	20.0	18.0	63	88	8 / 128
323022S	11/16	23.8	20.0	18.0	63	98	8 / 128
323024S	3/4	25.8	21.0	20.0	63	111	6 / 96
323026S	13/16	27.8	25.0	20.0	63	125	6 / 96
323028S	7/8	29.7	26.0	21.0	63	158	6 / 96
323030S	15/16	31.8	26.0	22.0	63	170	5 / 80
323032S	1	33.8	26.0	22.0	63	195	5 / 80

3235M

3235S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
323506M	6	9.9	17.8	10.0	63	51	20 / 320
323507M	7	10.8	17.8	10.0	63	52	20 / 320
323508M	8	12.0	17.8	12.0	63	49	18 / 288
323509M	9	13.2	17.8	12.0	63	53	18 / 288
323510M	10	14.5	17.8	12.0	63	58	15 / 240
323511M	11	15.8	17.8	15.0	63	60	15 / 240
323512M	12	16.8	17.8	15.0	63	68	15 / 240
323513M	13	17.8	16.8	15.0	63	64	15 / 240
323514M	14	19.7	18.0	16.0	63	77	12 / 192
323515M	15	20.8	18.0	18.0	63	75	10 / 160
323516M	16	21.8	19.0	18.0	63	86	8 / 128
323517M	17	23.8	20.0	18.0	63	102	8 / 128
323518M	18	24.7	21.0	20.0	63	112	6 / 96
323519M	19	25.8	21.0	20.0	63	111	6 / 96
323521M	21	27.8	25.0	20.0	63	142	6 / 96
323522M	22	29.7	26.0	20.0	63	167	6 / 96
323524M	24	31.8	26.0	25.0	63	171	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
323508S	1/4	10.0	16.8	10.0	63	47	20 /320
323510S	5/16	12.0	17.8	12.0	63	56	18 / 288
323512S	3/8	14.0	17.8	12.0	63	56	15 / 240
323514S	7/16	15.8	17.8	15.0	63	59	15 / 240
323516S	1/2	17.8	16.8	15.0	63	41	15 / 240
323518S	9/16	19.7	18.0	16.0	63	76	12 / 192
323520S	5/8	21.8	20.0	18.0	63	90	8 / 128
323522S	11/16	23.8	20.0	18.0	63	97	8 / 128
323524S	3/4	25.8	21.0	20.0	63	108	6 / 96
323526S	13/16	27.8	25.0	20.0	63	146	6 / 96
323528S	7/8	29.7	26.0	21	63	166	6 / 96
323530S	15/16	31.8	26.0	22	63	182	5 / 80
323532S	1	33.8	26.0	22	63	206	5 / 80

Star Socket

3375M 3/8"

- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
337504M	E4	6.0	16.8	3.6	28	21	12 / 360
337505M	E5	7.0	16.8	4.0	28	21	12 / 360
337506M	E6	8.0	16.8	5.0	28	22	12 / 360
337507M	E7	8.9	16.8	6.0	28	22	12 / 360
337508M	E8	10.0	16.8	6.5	28	23	12 / 360
337510M	E10	12.0	16.8	7.0	28	24	12 / 360
337511M	E11	12.8	16.8	8.0	28	24	12 / 360
337512M	E12	14.3	16.8	9.0	28	26	12 / 360
337514M	E14	15.9	17.8	9.5	28	31	12 / 360
337516M	E16	18.0	19.8	10.5	28	42	10 / 300
337518M	E18	20.0	21.8	11.0	28	55	10 / 300

3275M 3/8"

- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
327504M	E4	6.0	16.8	3.6	63	45	12 / 240
327505M	E5	7.0	16.8	4.0	63	47	12 / 240
327506M	E6	8.0	16.8	5.0	63	48	12 / 240
327507M	E7	8.9	16.8	6.0	63	49	12 / 240
327508M	E8	10.0	16.8	6.5	63	52	12 / 240
327510M	E10	12.0	16.8	7.0	63	57	12 / 240
327511M	E11	12.8	16.8	8.0	63	59	12 / 240
327512M	E12	14.3	16.8	9.0	63	65	12 / 240
327514M	E14	15.9	16.8	9.5	63	67	12 / 240
327516M	E16	17.8	17.8	10.5	63	77	12 / 240
327518M	E18	19.8	19.8	11.0	63	100	10 / 160

KING TONY Spark Plug Sockets								
Square drive	Type	Size / KT NO. inch	mm	Rubber I	Magnet	Rubber II	Metal clip	Spring
3/8"	6PT		14	36B014				
			14	36B514				
		5/8"	16	363516	366516		367516	
			18				367518	
		13/16"	20.8	363521	366521		367521	
	12PT		14			36C014		36A014
			14			36D014		
		5/8"	16	363016				
			18	36B018			367018	
		13/16"	20.8	363021	366021		367021	
1/2"	6PT		14	463514RC			467514C	
		5/8"	16	463516RC	466516C		467516	
		13/16"	20.8	463521RC	466521C		467521	
	12PT		14	463014RC			467014C	
		5/8"	16	463016RC	466016		467016	
		13/16"	20.8	463021RC	466021		467021	

Metal Clip Universal Joint Spark Plug Socket

3650 — 3/8"

- Inside sleeve - Metal clip for a firm hold and assembly of the spark plugs
- Universal joint- for working in restricted access and obstructive areas
- 12-point socket enables application on 14mm spark plugs of 6-point and 12-point
- Application: For 14 mm spark plugs e.g. BMW and MERCEDES-BENZ
- DIN 3120


365016A


365014B / 365016B

KT NO.	inch	mm	D mm	L mm		
365014B	-	14.0	18.5	155	169	6 / 120
365016A	5/8	16.0	21.0	101	130	6 / 180
365016B	5/8	16.0	21.0	162	185	6 / 120



36A0

36B5

36B0

36C0

36D0 — 3/8"

- Inside sleeve - rubber and spring
- DIN 3120
- 36C014 & 36D014 are suitable for BMW, Mini, RENAULT Clio / Twingo / Kangoo type, PEUGEOT 206 1.4 16V, CITROEN C5 HPI


Spring


36A014




Rubber


36B014


36C014


36B018


36D014


Rubber


36B514



Spark Plug Socket

KT No. & D1

3630 | 3660 | 3635 | 3665

3670 | 3675 | 3/8"

- 6 / 12 points
- Size combined- 16.0mm (5/8") - 20.8mm (13/16")
- Inside sleeve - rubber / magnet
- DIN 3120



KT NO.	Type	Size inch	Size mm	D mm	L mm		
363016	12 points Rubber	5/8	16.0	21	70	85	10 / 200
363021	12 points Rubber	13/16	20.8	27.7	70	149	12 / 120
366021	12 points Magnet	13/16	20.8	27.7	70	149	12 / 120
363516	6 points Rubber	5/8	16.0	21	70	88	10 / 200
366516	6 points Magnet	5/8	16.0	21	70	89	10 / 200
363521	6 points Rubber	13/16	20.8	27.7	70	153	12 / 120
366521	6 points Magnet	13/16	20.8	27.7	70	155	12 / 120
367018	12 points Metal clip	-	18.0	23.8	63	84	12 / 120
367021	12 points Metal clip	13/16	20.8	27.7	70	167	12 / 120
367516	6 points Metal clip	5/8	16.0	21.0	70	86	10 / 200
367518	6 points Metal clip	-	18.0	23.8	63	91	12 / 120
367521	6 points Metal clip	13/16	20.8	27.7	70	169	12 / 120


363016


363021


366021


363516


366516


363521


366521






367516


367018



Glow Plug Socket & Set

3785M — 3/8"

- The socket has a Sprung-loaded clip with ball bearing end to stop the glow plug from falling out
- Suitable for the removal of glow plugs in most diesel engines



KT NO.	mm	D1 mm	D2 mm	L mm		
378508M	8	13.5	17.8	120	131	10 / 100
378509M	9	13.5	17.8	127	120	10 / 100
378510M	10	13.5	17.8	128	123	10 / 100
378512M	12	17.8	17.8	136	147	10 / 100
378514M	14	17.8	17.8	142	139	10 / 100
378516M	16	19.8	17.8	157	154	10 / 100

3716MR — 3/8"

Blow case size (mm):
260 x 160 x 64 (0.094 cuft)

6 PC.





Contents		kg 1.23	1 / 10
3785M	8, 9, 10, 12, 14, 16		

Flexible Ring Socket Wrench & Set

3350M — 3/8"

- Flexible head folds up to 200°
- Combined with F-handle, handle, T-handle speed-handle
- Suitable for all hydraulic, fuel, oil brake, A/C, auto tool and air line work
- DIN 3120

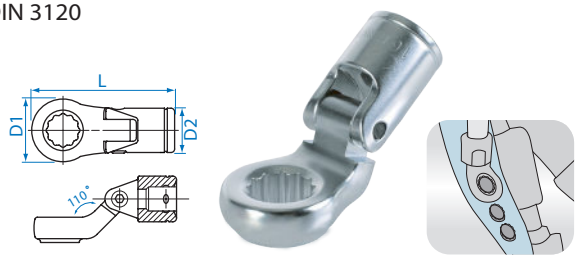

KT NO.	mm	D1 mm	D2 mm	L mm	g	
335008M	8	15.0	18.8	45.0	44	12 / 360
335009M	9	18.0	18.8	49.0	48	12 / 360
335010M	10	18.0	18.8	49.0	49	12 / 360
335011M	11	22.0	18.8	53.0	58	12 / 360
335012M	12	22.0	18.8	53.0	58	12 / 360
335013M	13	26.0	18.8	60.0	80	12 / 240
335014M	14	26.0	18.8	60.0	82	12 / 240
335015M	15	27.0	18.8	60.0	80	12 / 240
335016M	16	32.0	24.7	73.5	159	6 / 96
335017M	17	33.0	24.7	73.5	159	6 / 96
335018M	18	33.0	24.7	73.5	156	6 / 96
335019M	19	32.0	24.7	73.5	161	6 / 96

Flexible Crowfoot Socket Wrench & Set

3351M — 3/8"

- Flexible head folds up to 200°
- Combined with F-handle, handle, T-handle speed-handle
- Suitable for all hydraulic, fuel, oil brake, A/C, auto tool and air line work
- DIN 3120

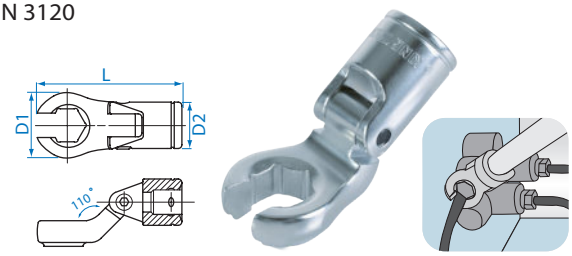

KT NO.	mm	D1 mm	D2 mm	L mm	g	
335108M	8	15.0	18.8	45.0	45	12 / 360
335109M	9	18.0	18.8	49.0	48	12 / 360
335110M	10	18.0	18.8	49.0	49	12 / 360
335111M	11	22.0	18.8	53.0	57	12 / 360
335112M	12	22.0	18.8	53.0	57	12 / 360
335113M	13	26.0	18.8	60.0	77	12 / 240
335114M	14	26.0	18.8	60.0	76	12 / 240
335115M	15	27.0	18.8	60.0	76	12 / 240
335116M	16	32.0	24.7	73.5	153	6 / 96
335117M	17	33.0	24.7	73.5	152	6 / 96
335118M	18	33.0	24.7	73.5	150	6 / 96
335119M	19	33.3	24.7	73.5	153	6 / 96

3609MR10 — 3/8"

- Socket rail 290mmL



9 PC.

Contents	kg 0.99	20
3350M	8, 10, 12, 13, 14, 16, 17, 18, 19	
8731109		

3619MR10 — 3/8"

- Socket rail 290mmL



9 PC.

Contents	kg 0.89	20
3351M	8, 10, 12, 13, 14, 16, 17, 18, 19	
8731109		

3612MR — 3/8"

Metal case size (mm):
296 x 130 x 41 (0.056 cuft)

Contents	kg 1.89	1 / 10
3351M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

Universal Socket & Set

KT No. & D1

3750M

- Chrome vanadium alloy steel
- DIN 3120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
375010M	10	14.5	19	4.6	49.5	56	15 / 240
375011M	11	15.8	19	5.4	50.5	57	15 / 240
375012M	12	17.0	19	6.1	51.0	57	15 / 240
375013M	13	18.3	19	6.7	52.0	56	15 / 240
375014M	14	20.0	19	8.3	52.0	60	12 / 192
375015M	15	22.0	19	8.3	54.5	66	10 / 160
375016M	16	22.0	19	9.5	54.5	63	10 / 160
375017M	17	24.0	19	9.5	55.5	71	8 / 128
375018M	18	26.0	19	10	55.5	75	6 / 96
375019M	19	26.0	19	11	57.5	72	6 / 96

3750S 3/8"

- Chrome vanadium alloy steel





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
375012S	3/8	14.0	19	4.6	49.0	56	15 / 240
375014S	7/16	15.8	19	5.4	50.5	58	15 / 240
375016S	1/2	18.3	19	6.7	52.0	59	15 / 240
375018S	9/16	20.0	19	8.3	52.0	60	12 / 192
375020S	5/8	22.0	19	9.5	54.5	65	10 / 160
375022S	11/16	24.0	19	9.5	55.5	65	8 / 128
375024S	3/4	26.0	19	11.0	57.5	74	6 / 96

3709MR10 3/8"

- Socket rail 240mmL



9 PC.

Contents	kg 0.6	14
3750M	10, 11, 12, 13, 14, 16, 17, 18, 19	
8730907		

3707SR10 3/8"

- Socket rail 240mmL



7 PC.

Contents	kg 0.48	14
3750S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	
8730907		

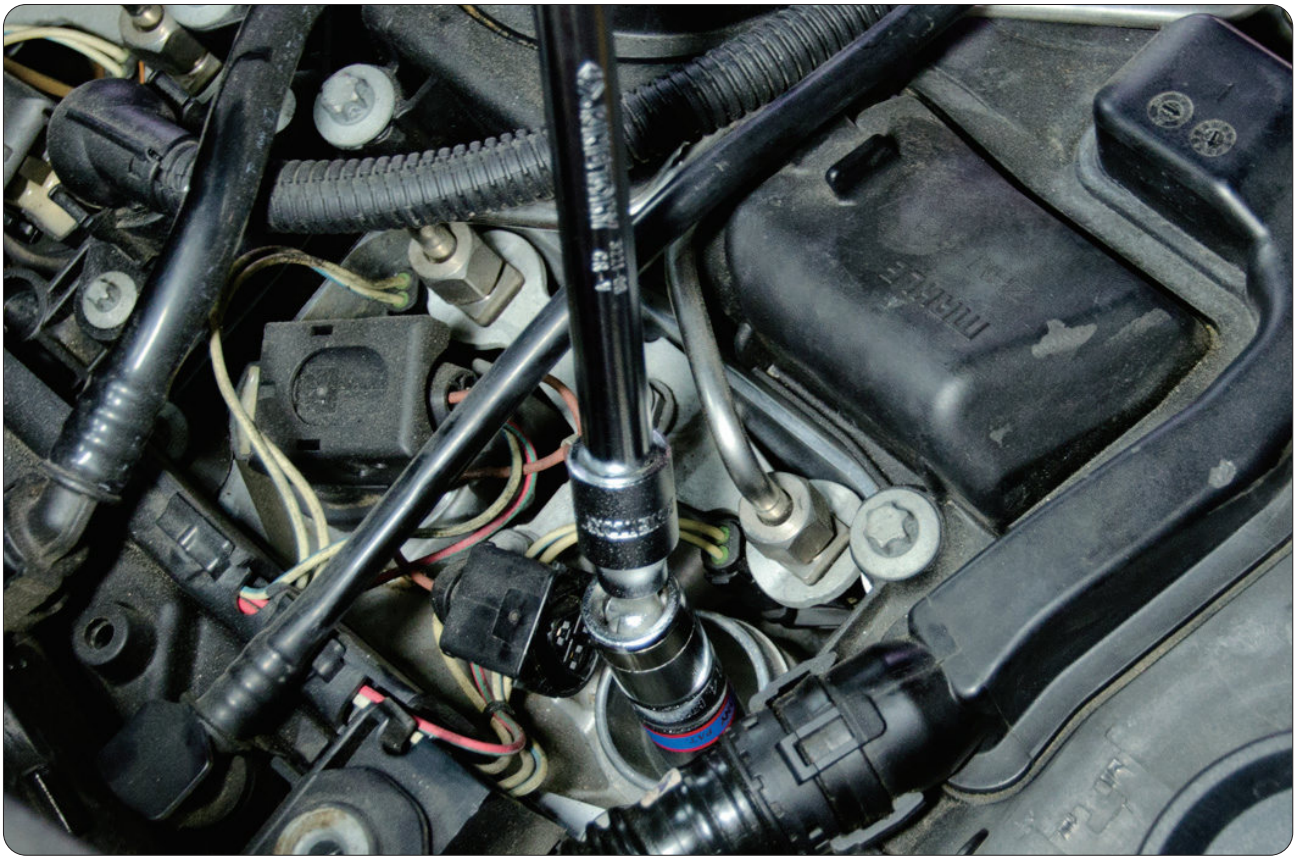

Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

3021 — 3/8"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	Overall length mm		
302102	PH2	50	34	20 / 400
302103	PH3	50	34	20 / 400
302104	PH4	50	34	20 / 400

3022 — 3/8"

- Slotted head
- DIN ISO 8764-1



KT NO.	Tip width mm	Tip thickness mm	Overall length mm		
302205	5	1.0	50	34	20 / 400
302208	8	1.2	50	38	20 / 400
302210	10	1.6	50	46	20 / 400

3025 — 3/8"

- Hexagon head
- DIN 7422 / 3120



KT NO.	mm	Overall length mm		
302503	H3	50	30	20 / 400
302504	H4	50	34	20 / 400
302505	H5	50	35	20 / 400
302506	H6	50	35	20 / 400
302507	H7	50	39	20 / 400
302508	H8	50	41	20 / 400
302509	H9	50	44	20 / 400
302510	H10	50	50	20 / 400
302512	H12	50	53	20 / 400

3023 — 3/8"

- For torx internal screw
- DIN 3120



KT NO.	mm	Overall length mm		
302308	T8	50	30	20 / 400
302309	T9	50	30	20 / 400
302310	T10	50	34	20 / 400
302315	T15	50	34	20 / 400
302320	T20	50	33	20 / 400
302325	T25	50	34	20 / 400
302327	T27	50	34	20 / 400
302330	T30	50	35	20 / 400
302340	T40	50	36	20 / 400
302345	T45	50	39	20 / 400
302350	T50	50	40	20 / 400

3027 — 3/8"

- For tamper resistant torx screw
- DIN 3120



KT NO.	mm	Overall length mm		
302708	T8H	50	33	20 / 400
302709	T9H	50	33	20 / 400
302710	T10H	50	33	20 / 400
302715	T15H	50	34	20 / 400
302720	T20H	50	33	20 / 400
302725	T25H	50	34	20 / 400
302727	T27H	50	34	20 / 400
302730	T30H	50	35	20 / 400
302740	T40H	50	35	20 / 400
302745	T45H	50	39	20 / 400
302750	T50H	50	39	20 / 400

3039 — 3/8"

- Ribe bit socket
- Use for VW, Audi, Fiat cylinder head bolt
- DIN 3120



KT NO.	size	Overall length mm		
303906	M6	90	70	8 / 160
303907	M7	90	71	8 / 160
303908	M8	90	71	8 / 160
303909	M9	90	88	8 / 160
303910	M10	90	90	8 / 160

302D — 3/8"

- For torx plus tamper screw
- IPR20 for the operation of the screwed connection of the plug-in pump on MERCEDES-BENZ Atego and Actros MAZDA 3 1.4 and 1.6
- IPR25 for the screwed connections at the control unit and the air flow sensor on VW
- DIN 3120



KT NO.	mm	Overall length mm		
302D08	IPR8	50	33	20 / 400
302D09	IPR9	50	33	20 / 400
302D10	IPR10	50	33	20 / 400
302D15	IPR15	50	33	20 / 400
302D20	IPR20	50	34	20 / 400
302D25	IPR25	50	34	20 / 400
302D27	IPR27	50	34	20 / 400
302D30	IPR30	50	35	20 / 400
302D40	IPR40	50	36	20 / 400
302D45	IPR45	50	38	20 / 400
302D50	IPR50	50	40	20 / 400
302D55	IPR55	50	48	20 / 400
302D60	IPR60	50	53	15 / 300

Ratchet

KT No. & D1

3725

FINE GEAR 3/8"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122



3725-08F



3725-08G

KT NO.	Overall length inch	Overall length mm	g	
3725-08F	8	203	369	2 / 40
3725-08G	8	207	384	2 / 32
3725DK	renewal kits		-	-



3725DK

3755

FINE GEAR 3/8"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122





KT NO.	Overall length inch	Overall length mm	g	
3755-08G	8	200	190	2 / 40
3755DK	renewal kits		-	-



3755DK

3752

QUICK RELEASE FINE GEAR 3/8"

- Quick release flexible and reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners









KT NO.	Overall length inch	Overall length mm	g	
3752-09G	9	235	374	2 / 32
3752DK	renewal kits		-	-



3752DK

3760

MINI RATCHET FINE GEAR 3/8"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	
3760-45	4-3/8	110	116	6 / 108
3760DK01	renewal kits		-	-



3760DK01

Ratchet

3761

QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3761-08F	8	200	401	2 / 40
3761-08P	8	200	376	2 / 40
34362-2DK	renewal kits		-	-



34362-2DK



3761-08F



3761-08P

3769

3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3769-08F	8	200	405	2 / 40
3769-08P	8	200	380	2 / 40
3769DK	renewal kits		-	-



3769DK



3769-08F



3769-08P

3771

QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3771-08G	8	200	268	2 / 40
3771DK	renewal kits		-	-



3771DK



3774

3/8"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation

KT NO.	Overall length inch	mm	g	
3774-08G	8	200	275	2 / 40
3774DK	renewal kits		-	-







3774DK



3779

3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3779-08F	8	200	366	2 / 40
3779-08G	8	200	273	2 / 40
3779DK	renewal kits		-	-



3779DK



3779-08F



3779-08G

Ratchet

KT No. & D1

3781

QUICK RELEASE 3/8"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



3781-11F



3781-11P



3781DK

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3781-11F	11	280	467	2 / 40
3781-11P	11	280	445	2 / 40
3781DK	renewal kits		-	-

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

Accessory

3221

3/8"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3221-16	1-3/4	44	47	12 / 360
3221-03	3	75	77	12 / 240
3221-06	6	150	146	6 / 120
3221-10	10	250	238	6 / 96
3221-18	18	450	324	1 / 50
3221-24	24	600	424	1 / 50

3223

3/8"

- Offset extension bar
- Max. torque : 150 N·m
- DIN 3123

CAUTION

The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3223-14	1-1/2	38	40	14 / 224
3223-02	2	50	52	12 / 360
3223-03	3	75	75	12 / 240
3223-06	6	150	144	6 / 120
3223-10	10	250	237	6 / 96

3293

3/8"

- Multi-function of extension bar and offset extension bar
- Max. torque : 150 N·m



1.offset extension bar or 2.extension bar



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3293-03	3	75	75	12 / 240
3293-06	6	150	143	6 / 120
3293-10	10	250	228	6 / 96

3311

3/8"

- Flexible extension bar
- DIN 3120



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3311-06	6	150	144	5 / 100
3311-12	12	300	168	12 / 108

3452

3/8"

- Flexible handle
- Action degree -180°
- DIN 3122



3452DK



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3452-08F	8	205	291	4 / 80
3452-10F	10	250	310	4 / 64
3452DK	renewal kits		-	-

3453

3/8"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122





3453DK

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3453-08F	8	200	221	4 / 80
3453DK	renewal kits			

3571

3/8"

- Sliding T-handle
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3571-08	8	200	178	4 / 80

Accessory

KT No. & D1

3792 3/8"

- Universal joint
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
3792	2	50	67	15 / 300

3794 3/8"

- Universal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	
3794	1-4/5	46	106	15 / 300

3812 3814 3/8"

- Adapter
- Convert to 1/4" drive or 1/2" drive
- 3812→Max. torque : 62 N·m
- DIN 3123, ISO 3316



3812 / 3814

KT NO.	Spec.	g	
3812	3/8"Fx1/4"M	30	12 / 192
3814	3/8"Fx1/2"M	46	12 / 360

3148 3/8"

- Bit holder
- DIN 3120 / 3126



KT NO.	Size	Overall length mm	g	
314808S	1/4"	30	35	12 / 360
314810S	5/16"	30	35	12 / 360
314810M	10 mm	30	35	12 / 360

Socket Rail Set

3013MR 3013SR

3513MR 3/8"

- Socket rail 290mmL



13 PC.

3013MR / 3513MR

3013SR

KT NO.	Contents		kg 0.52	35
3013MR	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19		
3013SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16	8731213	
3513MR	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19		

3508MR10 3/8"

- Socket rail 210mmL



8 PC.

Contents		kg 0.65	24
3235M	10, 11, 12, 13, 14, 16, 17, 19		
8730808			

3106PR 3/8"

- Socket rail 150mmL



6 PC.

Contents		kg 0.28	40
3375M	E8, E10, E12, E14, E16, E18		
8730606			

3116PR 3/8"

- Socket rail 150mmL



6 PC.

Contents		kg 0.39	50
3275M	E4, E5, E8, E10, E12, E14		
8730606			

3129PR 3/8"

- Socket rail 210mmL



9 PC.

Contents		kg 0.27	40
3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16		
8730809			

Socket Rail Set

Packing



3109PR8 / 3119PR8 / 3149PR8 / 3131PR8

3121PR 3/8"

- Socket rail 290mmL

11 PC.



Contents 0.32 kg 35

3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
8731213	

3108PR8 3/8"

- Socket rail 210mmL
- For hex head screw
- H : 50mm

8 PC.



Contents 0.34 kg 50

3025	H3, H4, H5, H6, H7, H8 H10, H12
8730808	

3109PR8 3/8"

- Socket rail 210mmL
- For torx head screw
- H : 50mm

9 PC.



Contents 0.36 kg 50

3023	T10, T15, T20, T25, T27, T30, T40, T45, T50
8730809	

3119PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

9 PC.



Contents 0.36 kg 50

3027	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
8730809	

3131PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

11 PC.



Contents 0.4 kg 48

3027	T8H, T9H, T10H, T15H,T20H, T25H, T27H, T30H, T40H, T45H, T50H
8730811	

3146PR 3/8"

- Socket rail 150mmL
- For torx plus tamper resistant head screw
- H : 50mm

6 PC.



Contents 0.36 kg 50

302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30
8730606	

3149PR8 3/8"

- Socket rail 210mmL
- For torx plus tamper resistant head screw
- H : 50mm

9 PC.



Contents 0.36 kg 50

302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40, IPR45, IPR50
8730809	

3105PR 3/8"

- 3/8" + 1/2" drive ribe bit socket set
- Socket rail 150mmL
- For ribe head screw
- H : 100mm

5 PC.



Contents 0.75 kg 30

3039	M7, M8
4049	M10, M12, M13
8740606	

Socket Rail

873 3/8"

- Rail length from 160 mm to 560 mm





KT NO.	L (mm)
870406	160
870311	280
870422	560
8730	-

8730811D1 3/8"

- Socket rail carrier with retaining clip
- 26" roller cabinet





KT NO.	Square drive	Clip	L (mm)
8730811D1	3/8"	11	508

Extension Bar Set

3113PR 3/8"



3 PC.

Contents | 0.5 kg | 35

	3221	3", 6", 10"

3103PR 3/8"



3 PC.

Contents | 0.4 kg | 35

	3223	3", 6", 10"

Socket Set

3213MR 3/8"

Contents | 0.79 kg | 25

○	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19
	3755-08G	3221-06



13 PC.

3508MR 3/8"

Metal case size (mm):
203 x 79 x 41 (0.023 cuft)



Contents | 1.0 kg | 1 / 20

○	3235M	10, 11, 12, 13, 14, 16, 17, 19

3508SR 3/8"

Metal case size (mm):
203 x 79 x 41 (0.023 cuft)



8 PC.

Contents | 1.0 kg | 1 / 20

○	3235S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16

3020MR
3020SR
3020MR02
3020SR02
3520MR
3520MR02 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)



3020MR / 3520MR



3020SR

20 PC.

KT NO.	Contents					
3020MR	○ 3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 22	○ 363021	3769-08F	3221-03 3221-06	2.5	1 / 6
3020MR02				3779-08F		2.8
3020SR	○ 3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 11/16, 3/4, 13/16, 7/8		3769-08F	3452-08F	2.5
3020SR02				3779-08F	3571-08	2.8
3520MR	○ 3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 23	○ 363521	3769-08F	3792	2.5
3520MR02				3779-08F		2.8

Socket Set

3023MR

3523MR 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

KT NO. Contents — 2.8 kg — 1 / 6

KT NO.	Contents			
3023MR	○ 3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	3769-08F	3452-08F, 3571-08, 3221-03, 3221-06, 3792
3523MR	○ 3335M			



22 PC.

3024MR

3024SR

3524MR 3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)

KT NO. Contents — 2.2 kg — 1 / 10

KT NO.	Contents			
3024MR	○ 3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	⊕ 3021	PH2,PH3
3524MR	○ 3335M		⊖ 3022	5,8
			⬢ 3025	H3, H4, H5, H6, H7, H8, H10
3024SR	○ 3330S	1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	3779-08G, 3221-06, 3792	



3024MR/3524MR



3024SR

24 PC.

3027MR

3027SR

3527MR 3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)

KT NO. Contents — 2.6 kg — 1 / 10

KT NO.	Contents			
3027MR	○ 3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	○ 3235M 8, 10, 11, 12, 13, 14, 16, 17, 19	3779-08G, 3221-03, 3812, 3792
3527MR	○ 3335M			
3027SR	○ 3330S	1/4, 5/16, 11/32, 3/8, 7/16,15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16		
	○ 3235S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16		



3027MR/3527MR



3027SR

26 PC.

3034MR

3534MR 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

KT NO. Contents — 3.1 kg — 1 / 6

KT NO.	Contents			
3034MR	○ 3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	✪ 3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16, E18
3534MR	○ 3335M		✱ 3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45
			3779-08G, 3571-08, 3792	3452-10F, 3221-03, 3221-06



36 PC.

Socket Set

3036CR — 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

Contents			3.27 kg	1 / 6
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22			
3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8			
3769-08F	3452-08F	3571-08	3221-03 3221-06	3792



36 PC.

3537MR — 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

Contents			3.17 kg	1 / 6
3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45			
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19			
3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16, E18			
3779-08G	3452-10F	3571-08	3221-03 3221-06	3792



39 PC.

3523MRV10 — Tray category #10 (375 x 140mm) 3/8"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

Contents			2.43 kg	1 / 10
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24			
3771-08G	3792			
3571-08	3452-08F			
3293-03 3293-06				



23 PC.

3023MRV11 / 3523MRV11 — Tray category #10 (375 x 140mm) 3/8"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

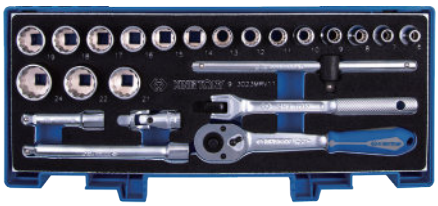

3023MRV11

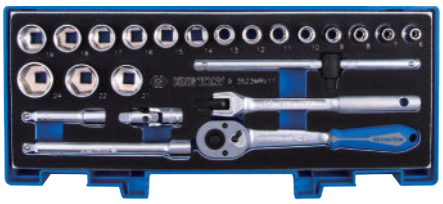

3523MRV11

23 PC.

KT NO.	Contents		2.40 kg	1 / 10
3023MRV11	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18,19, 21, 22, 24	3771-08G 3571-08	3453-08F 3293-03 3293-06 3792
3523MRV11	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		

Socket Set

3032SRV

Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

Contents			3.28 kg	1 / 6
3230S	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8			
3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16			
3771-08G		3453-08F		
3293-03 3293-06		3792		

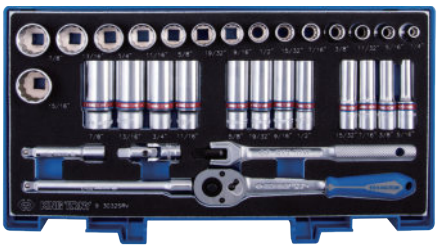

32 PC.

3033MRV

3533MRV

Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

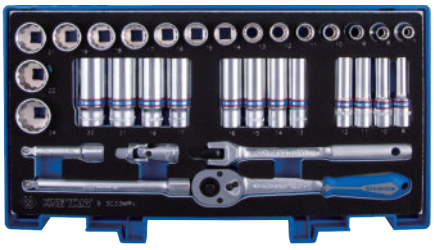

3033MRV

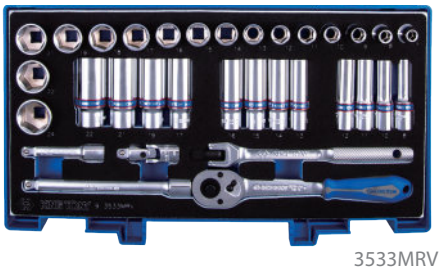

3533MRV

33 PC.

KT NO.	Contents				3.40 kg	1 / 6
3033MRV	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3771-08G	3792		
	3230M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22	3453-08F	3293-03 3293-06		
3533MRV	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24				
	3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22				

3545MRV

Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

Contents			2.47 kg	1 / 6
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24			
3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18			
3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45, T50			
3771-08G		3453-08F		
3571-08		3792	3293-03 3293-06	

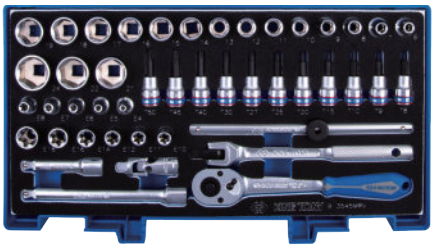

45 PC.

Socket Set

3054MR — 3/8"

Blow case size (mm) :
340 x 263 x 80 (0.25cuft)

Contents		3.85 kg	1 / 3
3330M		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22	
3235M		8, 10, 12, 13, 14	
1025T		T10, T15, T20, T25, T30, T40, T45 T50	
3630		16, 21	
1145MR		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	
14A1		PH2 x 100	
14A2		5.5 x 100	
1060		8, 10, 12, 13, 14, 17, 19	
3771-08G	3792	3221-03 3221-06	
314808S	6111-06		



54 PC.

3568MR — 3/8"

Metal shelf size (mm) :
415 x 336 x 320 (1.58 cuft)



268 PC.

Contents		Each Q'ty
3335M	8, 9, 10, 11, 12, 13	10
	14, 15, 16, 17, 18, 19	8
	21, 22, 23, 24	6
3235M	7, 8, 9, 10, 11, 12, 13	10
	14, 15, 16, 17, 18, 19	8
	21, 22, 24	6

KT NO.	Spec.	kg	Cuft
3568MR-A	87102	6.35	0.67
3568MR-D	268 PC. socket content	16.50	0.38



▪ Metric-DIN 3124, ISO 2725-1 / Inch-ANSI / ASME B107.1

Standard Socket

KT No. & D1

4330MR 4330SR 1/2"





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433008MR	8	13.2	23.3	7.0	38	53	10 / 200
433009MR	9	14.0	23.3	7.0	38	52	10 / 200
433010MR	10	15.0	23.3	8.0	38	51	10 / 200
433011MR	11	16.4	23.3	8.0	38	54	10 / 200
433012MR	12	17.8	23.3	9.0	38	54	10 / 200
433013MR	13	19.0	23.3	10.0	38	58	10 / 200
433014MR	14	20.4	23.3	11.0	38	60	10 / 200
433015MR	15	21.6	23.3	11.0	38	61	10 / 200
433016MR	16	22.5	23.3	11.0	38	61	10 / 200
433017MR	17	24.0	23.2	12.0	38	62	10 / 200
433018MR	18	25.2	23.2	13.0	38	69	10 / 200
433019MR	19	27.0	23.2	13.0	38	72	10 / 160
433020MR	20	27.9	23.2	13.0	38	74	10 / 160
433021MR	21	28.9	23.2	14.0	38	78	10 / 160
433022MR	22	30.2	24.0	15.0	40	90	10 / 160
433023MR	23	31.2	25.0	15.0	40	92	8 / 160
433024MR	24	32.1	26.0	17.0	42	101	8 / 160
433025MR	25	33.4	27.0	17.0	42	107	8 / 160
433026MR	26	35.0	28.0	17.0	42	125	6 / 120
433027MR	27	36.6	28.0	19.0	42	130	6 / 120
433028MR	28	37.8	30.0	20.0	42	142	6 / 120
433029MR	29	39.0	30.0	21.0	44	161	6 / 120
433030MR	30	40.0	29.5	21.0	44	156	6 / 120
433032MR	32	42.5	30.0	23.0	44	163	6 / 120
433033MR	33	43.0	30.0	24.0	46	173	6 / 96
433034MR	34	45.0	30.0	24.0	46	207	6 / 96
433036MR	36	47.0	33.0	24.0	46	236	6 / 96

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433010SR	5/16	13.2	21.8	7.0	38	41	10 / 200
433012SR	3/8	15.0	21.8	7.0	38	44	10 / 200
433013SR	13/32	15.0	23.3	7.0	38	51	10 / 200
433014SR	7/16	16.4	23.3	8.0	38	53	10 / 200
433015SR	15/32	18.0	23.3	8.0	38	55	10 / 200
433016SR	1/2	19.0	23.3	10.0	38	57	10 / 200
433018SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433019SR	19/32	21.6	23.3	11.0	38	60	10 / 200
433020SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433022SR	11/16	24.0	23.2	12.0	38	60	10 / 200
433024SR	3/4	27.0	23.2	13.0	38	73	10 / 160
433025SR	25/32	28.0	23.2	13.0	38	75	10 / 160
433026SR	13/16	28.6	23.2	13.0	38	79	10 / 160
433028SR	7/8	30.2	24.0	15.0	40	87	10 / 160
433030SR	15/16	32.6	26.0	17.0	42	105	8 / 160
433032SR	1	34.8	26.8	17.0	42	119	8 / 160
433034SR	1-1/16	36.6	28.0	19.0	42	133	6 / 120
433036SR	1-1/8	39.0	30.0	21.0	44	158	6 / 120
433038SR	1-3/16	40.0	29.5	21.0	44	156	6 / 120
433040SR	1-1/4	42.5	30.0	23.0	44	173	6 / 120
433044SR	1-3/8	46.0	33.0	24.0	46	243	6 / 96

4335MR 4335SR 1/2"





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433506MR	6	12.0	23.3	7.0	38	51	10 / 200
433507MR	7	12.6	23.3	7.0	38	51	10 / 200
433508MR	8	13.2	23.3	7.0	38	52	10 / 200
433509MR	9	14.0	23.3	7.0	38	51	10 / 200
433510MR	10	15.0	23.3	8.0	38	51	10 / 200
433511MR	11	16.4	23.3	8.0	38	54	10 / 200
433512MR	12	17.8	23.3	9.0	38	56	10 / 200
433513MR	13	19.0	23.3	10.0	38	58	10 / 200
433514MR	14	20.4	23.3	11.0	38	61	10 / 200
433515MR	15	21.6	23.3	11.0	38	62	10 / 200
433516MR	16	22.5	23.3	11.0	38	63	10 / 200
433517MR	17	24.0	23.2	13.5	38	63	10 / 200
433518MR	18	25.2	23.2	13.5	38	66	10 / 200
433519MR	19	27.0	23.2	17.0	38	74	10 / 160
433520MR	20	27.9	23.2	17.0	38	76	10 / 160
433521MR	21	28.9	23.2	17.0	38	79	10 / 160
433522MR	22	30.2	24.0	17.0	38	90	10 / 160
433523MR	23	31.2	25.0	17.0	38	99	8 / 160
433524MR	24	32.1	26.0	17.0	38	108	8 / 160
433525MR	25	33.4	27.0	18.0	40	118	8 / 160
433526MR	26	35.0	28.0	21.0	42	130	6 / 120
433527MR	27	36.6	28.0	21.0	42	141	6 / 120
433528MR	28	37.8	30.0	20.0	42	154	6 / 120
433529MR	29	39.0	30.0	20.0	44	165	6 / 120
433530MR	30	40.0	29.5	22.0	44	164	6 / 120
433532MR	32	42.5	30.0	22.0	44	180	6 / 120
433533MR	33	43.0	30.0	24.0	46	185	6 / 96
433534MR	34	45.0	30.0	24.0	46	206	6 / 96
433536MR	36	47.0	33.0	24.0	46	251	6 / 96
433538MR	38	49.0	34.0	25.0	50	268	6 / 60
433539MR	39	50.0	34.0	25.0	50	291	6 / 60
433541MR	41	53.0	36.0	27.0	53	336	6 / 36
433546MR	46	59.0	40.0	30.0	58	453	4 / 32

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433510SR	5/16	13.2	21.8	7.0	38	44	10 / 200
433512SR	3/8	15.0	21.8	7.0	38	45	10 / 200
433514SR	7/16	16.4	23.3	8.0	38	54	10 / 200
433515SR	15/32	18.0	23.3	8.0	38	56	10 / 200
433516SR	1/2	19.0	23.3	10.0	38	58	10 / 200
433518SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433519SR	19/32	21.6	23.3	11.0	38	61	10 / 200
433520SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433522SR	11/16	24.0	23.2	12.0	38	62	10 / 200
433524SR	3/4	27.0	23.2	13.0	38	75	10 / 160
433525SR	25/32	28.0	23.2	13.0	38	77	10 / 160
433526SR	13/16	28.6	23.2	13.0	38	80	10 / 160
433528SR	7/8	30.2	24.0	15.0	40	92	10 / 160
433530SR	15/16	32.6	26.0	17.0	42	113	8 / 160
433532SR	1	34.8	26.8	17.0	42	124	8 / 160
433534SR	1-1/16	36.6	28.0	19.0	42	138	6 / 120
433536SR	1-1/8	39.0	30.0	21.0	44	166	6 / 120
433538SR	1-3/16	40.0	29.5	21.0	44	168	6 / 120
433540SR	1-1/4	42.5	30.0	23.0	44	176	6 / 120

Socket Set

4072MR | 4072SR | 4572MR | 4572SR 1/2"

Metal shelf size (mm) :
415x 336 x 320 (1.58 cuft)



4072MR / 4572MR

KT NO.	PC.		Contents	Each Q'ty
4072MR	172	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24, 25	7
4572MR	172	4335MR	26. 27, 28, 29, 30,	6
			32	5
4072SR	136	4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16	8
			3/4, 25/32, 13/16, 7/8, 15/16	7
4572SR	136	4335SR	1, 1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	kg	Cuft
4072MR 4572MR -A	87103	6.37	0.67
4072MR 4572MR -D	172 PC. socket content	17.73	0.38
4072SR 4572SR -A	87103	6.37	0.67
4072SR 4572SR -D	136 PC. socket content	13.00	0.28

Deep Socket

4230M | 4230S ○ 1/2"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1





KT NO.	○ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
423008M	8	13.2	22.0	16	77	79	6 / 120
423009M	9	14.0	22.0	16	77	79	6 / 120
423010M	10	15.2	23.7	24	77	99	6 / 120
423011M	11	16.3	23.7	24	77	104	6 / 120
423012M	12	17.7	23.7	24	77	110	6 / 120
423013M	13	18.7	23.7	24	77	114	6 / 120
423014M	14	20.2	23.7	35	77	121	6 / 120
423015M	15	21.3	23.7	35	77	120	6 / 120
423016M	16	22.6	23.7	35	77	128	6 / 96
423017M	17	23.7	23.2	35	77	122	6 / 96
423018M	18	25.5	23.2	35	77	141	6 / 96
423019M	19	25.7	23.2	35	77	126	6 / 96
423020M	20	27.7	24.0	35	77	150	6 / 96
423021M	21	27.7	25.0	35	77	148	6 / 96
423022M	22	29.8	26.0	35	77	175	6 / 96
423023M	23	31.8	27.5	35	77	210	5 / 60
423024M	24	31.8	28.5	35	77	204	5 / 60
423025M	25	33.8	29.5	35	77	239	5 / 60
423026M	26	35.8	30.5	35	77	220	5 / 60
423027M	27	35.8	31.5	34	77	253	5 / 60
423028M	28	37.8	32.5	34	77	308	5 / 50
423029M	29	37.8	33.5	34	77	273	5 / 50
423030M	30	39.8	34.5	34	77	276	5 / 50
423032M	32	41.8	36.0	34	77	309	5 / 50
423033M	33	43.8	38.5	35	77	356	5 / 50
423034M	34	44.8	38.5	35	77	422	5 / 50
423036M	36	46.8	40.5	36	77	462	2 / 40

KT NO.	○ inch	D1 mm	D2 mm	ℓ mm	L mm	g	
423010S	5/16	13.2	22.0	9	77	92	6 / 120
423012S	3/8	14.7	22.0	10	77	82	6 / 120
423014S	7/16	16.3	23.7	12	77	98	6 / 120
423016S	1/2	18.7	23.7	14	77	114	6 / 120
423018S	9/16	20.2	23.7	15	77	119	6 / 120
423020S	5/8	22.6	23.7	17	77	129	6 / 96
423022S	11/16	23.7	23.2	35	77	124	6 / 96
423024S	3/4	25.7	23.2	35	77	128	6 / 96
423026S	13/16	27.7	25.0	37	77	151	6 / 96
423028S	7/8	29.8	26.0	37	77	170	6 / 96
423030S	15/16	31.8	28.5	37	77	208	5 / 60
423032S	1	33.8	29.5	37	77	233	5 / 60
423034S	1-1/16	36.6	31.5	28	77	247	5 / 60
423036S	1-1/8	37.8	32.5	28	77	254	5 / 50
423038S	1-3/16	39.8	34.5	34	77	285	5 / 50
423040S	1-1/4	41.8	36.0	34	77	305	5 / 50

Deep Socket

KT No. & D1

4235M 4235S 1/2"

- Metric-DIN 3124, ISO 2725-1
- ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
423508M	8	13.2	22.0	16	77	90	6 / 120
423509M	9	14.0	22.0	16	77	81	6 / 120
423510M	10	15.2	23.7	24	77	102	6 / 120
423511M	11	16.3	23.7	24	77	103	6 / 120
423512M	12	17.7	23.7	24	77	113	6 / 120
423513M	13	18.7	23.7	24	77	119	6 / 120
423514M	14	20.2	23.7	35	77	121	6 / 120
423515M	15	21.3	23.7	35	77	126	6 / 120
423516M	16	22.6	23.7	35	77	130	6 / 96
423517M	17	23.7	23.2	35	77	127	6 / 96
423518M	18	25.5	23.2	35	77	149	6 / 96
423519M	19	25.7	23.2	35	77	133	6 / 96
423520M	20	27.7	24.0	35	77	158	6 / 96
423521M	21	27.7	25.0	35	77	155	6 / 96
423522M	22	29.8	26.0	35	77	185	6 / 96
423523M	23	31.8	27.5	35	77	218	5 / 60
423524M	24	31.8	28.5	35	77	211	5 / 60
423525M	25	33.8	29.5	35	77	251	5 / 60
423526M	26	35.8	30.5	35	77	236	5 / 60
423527M	27	35.8	31.5	34	77	295	5 / 60
423528M	28	37.8	32.5	34	77	281	5 / 50
423529M	29	37.8	33.5	34	77	292	5 / 50
423530M	30	39.8	34.5	34	77	301	5 / 50
423532M	32	41.8	36.0	34	77	330	5 / 50
423533M	33	43.8	38.5	35	77	373	5 / 50
423534M	34	44.8	38.5	35	77	450	5 / 50
423536M	36	46.8	40.5	36	77	478	2 / 40
423538M	38	49.0	40.5	38	77	504	2 / 40
423541M	41	53.0	40.5	40	77	521	2 / 24

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
423510S	5/16	13.2	22.0	16	77	90	6 / 120
423512S	3/8	14.7	22.0	16	77	84	6 / 120
423514S	7/16	16.3	23.7	24	77	104	6 / 120
423516S	1/2	18.7	23.7	24	77	116	6 / 120
423518S	9/16	20.2	23.7	35	77	123	6 / 120
423520S	5/8	22.6	23.7	35	77	130	6 / 96
423522S	11/16	23.7	23.2	35	77	124	6 / 96
423524S	3/4	25.7	23.2	35	77	131	6 / 96
423526S	13/16	27.7	25.0	35	77	157	6 / 96
423528S	7/8	29.8	26.0	35	77	181	6 / 96
423530S	15/16	31.8	28.5	35	77	218	5 / 60
423532S	1	33.8	29.5	35	77	223	5 / 60
423534S	1-1/16	36.6	31.5	34	77	266	5 / 60
423536S	1-1/8	37.8	32.5	34	77	262	5 / 50
423538S	1-3/16	39.8	34.5	34	77	296	5 / 50
423540S	1-1/4	41.8	36.0	34	77	327	5 / 50
423542S	1-5/16	44.0	38.5	35	77	430	5 / 50
423544S	1-3/8	46.0	38.5	35	77	452	2 / 40
423546S	1-7/16	47.5	40.5	36	77	485	2 / 40
423548S	1-1/2	49.0	40.5	38	77	507	2 / 40

4245M EXTENDED LENGTH 1/2"

- DIN 3120





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
424508M	8	13.2	22.0	9.0	90	104	6 / 120
424509M	9	14.0	22.0	10.0	90	106	6 / 120
424510M	10	15.2	23.7	11.0	90	130	6 / 120
424512M	12	17.7	23.7	13.0	90	152	6 / 120
424513M	13	18.7	23.7	14.0	90	151	6 / 120
424514M	14	20.2	23.7	15.0	90	159	6 / 120

4255M EXTENDED LENGTH 1/2"

- DIN 3120





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
425508M	8	13.2	22.0	9	120	127	6 / 96
425509M	9	14.0	22.0	10	120	134	6 / 96
425510M	10	15.2	23.7	11	120	160	6 / 96
425512M	12	17.7	23.7	13	120	195	6 / 96
425513M	13	18.7	23.7	14	120	201	6 / 96
425514M	14	20.2	23.7	15	120	202	6 / 96

Square Socket

4014M 1/2"

- DIN 3120





KT NO.	mm	inch	D mm	ℓ mm	L mm		
401408M	RB8.0		23.5	13.5	35	54	10 / 200
401409M	RB9.5	3/8	23.5	13.5	35	58	10 / 200
401410M	RB10.0		23.5	13.5	35	57	10 / 200
401411M	RB10.5		23.5	13.5	35	58	10 / 200
401412M	RB12.0		23.5	13.5	35	62	10 / 200
401413M	RB12.7	1/2	23.5	13.5	35	64	10 / 200
401414M	RB13.5		23.5	13.5	35	67	10 / 200
401419M	RB19.0		25.0	15.5	40	108	10 / 160

Deep Socket Set

4066MR | 4066SR | 4566MR 1/2"

Metal shelf size (mm) :
415x 336 x 320 (1.58 cuft)



4066MR / 4566MR

KT NO.	PC.		Contents	Each Q'ty
4066MR	165	4230M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24	7
4566MR	165	4235M	26, 27, 28, 29, 30	6
			32	5
4066SR	114	4230S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16	8
			3/4, 13/16, 7/8, 15/16, 1	7
			1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	kg	Cuft
4066MR 4566MR -A	87103	5.87	0.62
4066MR 4566MR -D	165 PC. socket content	30.70	0.63
4066SR -A	87103	5.87	0.62
4066SR -D	114 PC. socket content	21.0	0.47

Star Socket

4375M 1/2"

- For torx external screw
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
437508M	E08	11.4	23.8	7.0	37	52	10 / 200
437510M	E10	13.2	23.8	7.5	37	55	10 / 200
437511M	E11	14.0	23.8	8.0	37	57	10 / 200
437512M	E12	15.0	23.8	9.0	37	58	10 / 200
437514M	E14	16.4	23.8	10.0	37	59	10 / 200
437516M	E16	18.8	23.8	11.0	37	63	10 / 200
437518M	E18	20.5	23.8	12.5	39	68	10 / 200
437520M	E20	22.8	23.8	14.0	39	72	10 / 200
437522M	E22	24.6	23.8	16.0	39	78	10 / 200
437524M	E24	26.5	23.8	16.0	39	85	10 / 160

4275M 1/2"

- Long type
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
427508M	E08	11.4	23.8	7.0	77	106	6 / 120
427510M	E10	13.2	23.8	7.5	77	112	6 / 120
427512M	E12	15.0	23.8	9.0	77	121	6 / 120
427514M	E14	16.4	23.8	10.0	77	127	6 / 120
427516M	E16	18.8	23.8	11.0	77	143	6 / 120
427518M	E18	20.5	23.8	12.5	77	148	6 / 120
427520M	E20	22.8	23.8	14.0	77	161	6 / 120
427522M	E22	24.6	23.8	16.0	77	178	6 / 96
427524M	E24	26.5	23.8	16.0	77	197	6 / 96

Spark Plug Socket

KT No. & D1

4630RC | 4660 | 4635RC | 4665C

4670 | 4675 | 1/2"

- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120
- 14mm use for Toyota Yaris, Vios



KT NO.	Type	Size inch	Size mm	D mm	L mm		
463014RC	12 points Rubber	-	14.0	19.05	70	70	12 / 240
463016RC	12 points Rubber	5/8	16.0	20.75	70	72	10 / 200
466016	12 points Magnet	5/8	16.0	20.75	70	74	10 / 200
463514RC	6 points Rubber	-	14.0	19.05	70	70	12 / 240
463516RC	6 points Rubber	5/8	16.0	20.75	70	76	10 / 200
466516C	6 points Magnet	5/8	16.0	20.75	70	77	10 / 200
463021RC	12 points Rubber	13/16	20.8	27.7	70	142	12 / 120
466021	12 points Magnet	13/16	20.8	27.7	70	139	12 / 120
463521RC	6 points Rubber	13/16	20.8	27.7	70	148	12 / 120
466521C	6 points Magnet	13/16	20.8	27.7	70	150	12 / 120
467014C	12 points Metal clip	-	14.0	19.05	70	70	12 / 240
467016	12 points Metal clip	5/8	16.0	20.75	70	73	10 / 200
467021	12 points Metal clip	13/16	20.8	27.7	70	121	12 / 120
467514C	6 points Metal clip	-	14.0	19.05	70	70	12 / 240
467516	6 points Metal clip	5/8	16.0	20.75	70	74	10 / 200
467521	6 points Metal clip	13/16	20.8	27.7	70	162	12 / 120


463014RC - Thin walled design


463514RC - Thin walled design


463016RC - Thin walled design


466016 - Thin walled design


463516RC - Thin walled design


466516C - Thin walled design


463021RC


466021


463521RC


466521C






467514C


467014C





Bit Socket

CAUTION
In order to get normal life of bit socket, always use within limited torque to bit.

4021 — 1/2"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	Overall length mm		
402102	PH2	60	67	10 / 180
402103	PH3	60	77	10 / 180
402104	PH4	60	68	10 / 180

4022 — 1/2"

- Slotted head
- DIN ISO 5264 / 3120



KT NO.	Tip width mm	Tip thickness mm	Overall length mm		
402208	8	1.2	60	68	10 / 180
402210	10	1.6	60	75	10 / 180
402212	12	2.0	60	89	10 / 180
402214	14	2.5	60	104	10 / 180
402216	16	2.5	60	104	10 / 180

4025

4035

40D5 — 1/2"

- Hexagon head
- DIN 7422



KT NO.	mm / Inch	Overall length mm		
402503	H3	60	65	10 / 180
402504	H4	60	65	10 / 180
402505	H5	60	66	10 / 180
402506	H6	60	68	10 / 180
402507	H7	60	67	10 / 180
402508	H8	60	70	10 / 180
402509	H9	60	78	10 / 180
402510	H10	60	80	10 / 180
402511	H11	60	95	10 / 180
402512	H12	60	94	10 / 180
402514	H14	60	114	10 / 180
402517	H17	66	166	10 / 100
402519	H19	66	225	10 / 120
403504	H4	80	74	6 / 120
403505	H5	80	75	6 / 120
403506	H6	80	77	6 / 120
403507	H7	80	77	6 / 120
403508	H8	80	80	6 / 120
403509	H9	80	91	6 / 120
403510	H10	80	93	6 / 120
403511	H11	80	111	6 / 120
403512	H12	80	113	6 / 120
403514	H14	80	140	6 / 120
403517	H17	80	193	6 / 120
403519	H19	80	259	6 / 96
40D506	H6	140	101	6 / 120
40D508	H8	140	102	6 / 120
40D510	H10	140	131	6 / 120
402506S	3/16	60	66	10 / 180
402507S	7/32	60	68	10 / 180
402508S	1/4	60	69	10 / 180
402509S	9/32	60	71	10 / 180
402510S	5/16	60	76	10 / 180
402512S	3/8	60	79	10 / 180
402514S	7/16	60	92	10 / 180
402516S	1/2	60	110	10 / 180
402518S	9/16	66	156	10 / 120
402520S	5/8	66	162	10 / 120
402524S	3/4	66	226	10 / 120

40D0 — 1/2"

- Hexagon with ball point head



KT NO.	mm	Overall length mm		
40D006	H6	140	101	6 / 120
40D008	H8	140	103	6 / 120
40D010	H10	140	132	6 / 120

4026

4036 — 1/2"

4046

4066

- Spline head
- DIN 3120



KT NO.	Size	Overall length mm		
402605	M5	60	69	10 / 180
402606	M6	60	67	10 / 180
402608	M8	60	70	10 / 180
402610	M10	60	78	10 / 180
402612	M12	60	91	10 / 180
402614	M14	60	108	10 / 180
402616	M16	60	144	10 / 120
402618	M18	60	195	10 / 120
403605	M5	80	75	6 / 120
403606	M6	80	76	6 / 120
403608	M8	80	76	6 / 120
403610	M10	80	91	6 / 120
403612	M12	80	110	6 / 120
403614	M14	80	135	6 / 120
404605	M5	100	83	6 / 120
404607	M7	100	84	6 / 120
404608	M8	100	85	6 / 120
404610	M10	100	105	6 / 120
404612	M12	100	128	6 / 120
404614	M14	100	161	6 / 120
406608	M8	140	102	6 / 120
406609	M9	140	131	6 / 120
406610	M10	140	130	6 / 120
406612	M12	140	168	6 / 120
406614	M14	140	212	6 / 120
406616	M16	140	301	6 / 72

Bit Socket

KT No. & D1

404108 1/2"

- Spline head
- DIN 3120
- Use for Toyota Tercel cylinder head bolt



KT NO.	Size	Overall length mm	g	
404108	M8.9	100	123	6 / 120

402A 1/2"

- Pentagon head
- For using on most vehicles fitting brake system



KT NO.	Size	Overall length mm	g	
402A10	10	60	89	10 / 180

402B 1/2"

- Spline head
- Tamper resistant type
- For gearbox and sump plugs of Audi A4/A6/A3, Golf IV/LT of VW



KT NO.	Size	Overall length mm	g	
402B16	M16	66	151	10 / 120
402B18	M18	66	204	10 / 120

4049 1/2"

- Use for VW, Audi, Fiat cylinder head bolt



KT NO.	Size	Overall length mm	g	
404904	M4	100	81	6 / 120
404905	M5	100	83	6 / 120
404906	M6	100	83	6 / 120
404907	M7	100	83	6 / 120
404908	M8	100	84	6 / 120
404909	M9	100	102	6 / 120
404910	M10	100	103	6 / 120
404925	M10.5	100	102	6 / 120
404912	M12	100	127	6 / 120
404913	M13	100	156	6 / 120
404914	M14	100	159	6 / 120
404916	M16	100	215	6 / 120

4027 4037 1/2"

- For tamper resistant torx screw
- DIN 3120



4027



4037

KT NO.	Size	Overall length mm	g	
402720	T20H	60	65	10 / 180
402725	T25H	60	66	10 / 180
402727	T27H	60	66	10 / 180
402730	T30H	60	66	10 / 180
402740	T40H	60	67	10 / 180
402745	T45H	60	70	10 / 180
402750	T50H	60	68	10 / 180
402755	T55H	60	77	10 / 180
402760	T60H	60	105	10 / 180
403720	T20H	80	74	6 / 120
403725	T25H	80	73	6 / 120
403727	T27H	80	74	6 / 120
403730	T30H	80	77	6 / 120
403740	T40H	80	76	6 / 120
403745	T45H	80	77	6 / 120
403750	T50H	80	79	6 / 120
403755	T55H	80	90	6 / 120
403760	T60H	80	131	6 / 120

4023 4033 1/2"

- For torx internal screw
- DIN 3120



4023



4033

KT NO.	Size	Overall length mm	g	
402320	T20	60	68	10 / 180
402325	T25	60	66	10 / 180
402327	T27	60	68	10 / 180
402330	T30	60	65	10 / 180
402340	T40	60	67	10 / 180
402345	T45	60	69	10 / 180
402350	T50	60	69	10 / 180
402355	T55	60	78	10 / 180
402360	T60	60	106	10 / 180
402370	T70	60	110	10 / 180
403320	T20	80	76	6 / 120
403325	T25	80	74	6 / 120
403327	T27	80	75	6 / 120
403330	T30	80	75	6 / 120
403340	T40	80	78	6 / 120
403345	T45	80	76	6 / 120
403350	T50	80	79	6 / 120
403355	T55	80	92	6 / 120
403360	T60	80	132	6 / 120
403370	T70	80	136	6 / 120



Ratchet & Set

KT No. & D1

4725

FINE GEAR 1/2"

- Reversible ratchet
- 8° gear action degree(45 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs/box
4725-10FR	10	250	590	1 / 40
4725-10GR	10	250	631	1 / 20
4725-12FR	12	300	652	2 / 40
4725-12GR	12	300	693	1 / 20
4725-12BR	12	300	637	2 / 40
4725DKR01	renewal kits		-	-



4725DKR01

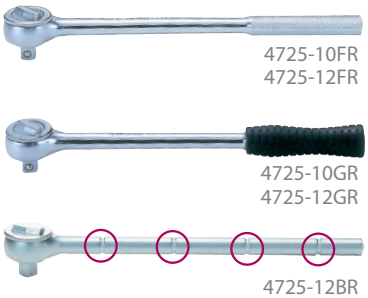

4725-10FR
4725-12FR
4725-10GR
4725-12GR
4725-12BR

4755

FINE GEAR 1/2"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs/box
4755-10G	10	262	540	1 / 20
4755DK	renewal kits		-	-



4755DK

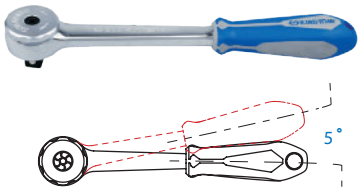

4756

QUICK RELEASE FINE GEAR 1/2"

- Quick release reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	pcs/box
4756-10G	10	262	539	1 / 20
4756DK	renewal kits		-	-



4756DK

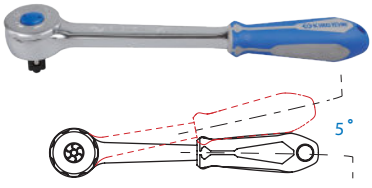

Ratchet

4752

QUICK RELEASE FINE GEAR 1/2"

- Quick release flexible and reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners



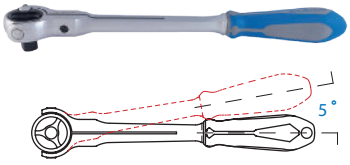

KT NO.	Overall length inch	mm	g	
4752-12G	12	312	639	1 / 20
4752DK	renewal kits		-	-



4752DK

4760

MINI RATCHET FINE GEAR 1/2"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122



4760-05

KT NO.	Overall length inch	mm	g	
4760-05	4-3/4	120	209	5 / 90
4760-05G	5-1/2	137	201	4 / 72
4760DK01	renewal kits		-	-



4760DK01



4760-05G

4762

QUICK RELEASE 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4762-10G / 4762-15G



4762-10F



4762-10P

KT NO.	Overall length inch	mm	g	
4762-10G	10	250	536	5 / 30
4762-10F	10	250	580	6 / 36
4762-10P	10	250	552	6 / 36
4762-15G	15	375	693	5 / 20
4762DK	renewal kits		-	-



4762DK

4768

1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4768-10G / 4768-15G



4768-10F / 4768-15F



4768-10P

KT NO.	Overall length inch	mm	g	
4768-10G	10	250	542	5 / 30
4768-10F	10	250	589	6 / 36
4768-10P	10	250	557	6 / 36
4768-15G	15	375	723	5 / 20
4768-15F	15	375	760	6 / 24
4768DK	renewal kits		-	-



4768DK

4771

QUICK RELEASE 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122





4771-10BR



4771-10FR



4771-10GR

KT NO.	Overall length inch	mm	g	
4771-10BR	10	250	551	2 / 40
4771-10FR	10	250	620	2 / 40
4771-10GR	10	262	540	1 / 20
4771DK	renewal kits		-	-



4771DK

Ratchet

KT No. & D1

4774 — 1/2"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation







4774-10F



4774-10G

KT NO.	Overall length inch	Overall length mm	g	pcs / box
4774-10F	10	250	619	2 / 40
4774-10G	10	262	553	1 / 20
4774DK	renewal kits		-	-



4774DK

4779 — 1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4779-10BR



4779-10FR



4779-10GR

KT NO.	Overall length inch	Overall length mm	g	pcs / box
4779-10BR	10	250	559	2 / 40
4779-10FR	10	250	626	2 / 40
4779-10GR	10	262	551	1 / 20
4779DK01	renewal kits		-	-



4779DK01

4781 — QUICK RELEASE 1/2"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4781-12F	12	300	783	1 / 20
4781DK	renewal kits		-	-



4781DK

4772 — QUICK RELEASE 1/2"

- Design spec. similar to DIN 3122, ISO 3315
- Made from special-purpose drop-forged and hardened aluminium
- Finishing
  - anodic treatment
  - black driver by phosphate sunk
- The mechanism as in all 4771/9 ratchets is made from high-quality steel





4772DK01



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4772-10F	10	250	350	1 / 25
4772DK01	renewal kits		-	-

90 Teeth Dustproof Ratchet PAT.



- Material
  - chrome vanadium alloy steel handle
  - chrome molybdenum steel (gear) driver
- Finishing
  - polished, chrome plated
  - black driver by phosphate sunk

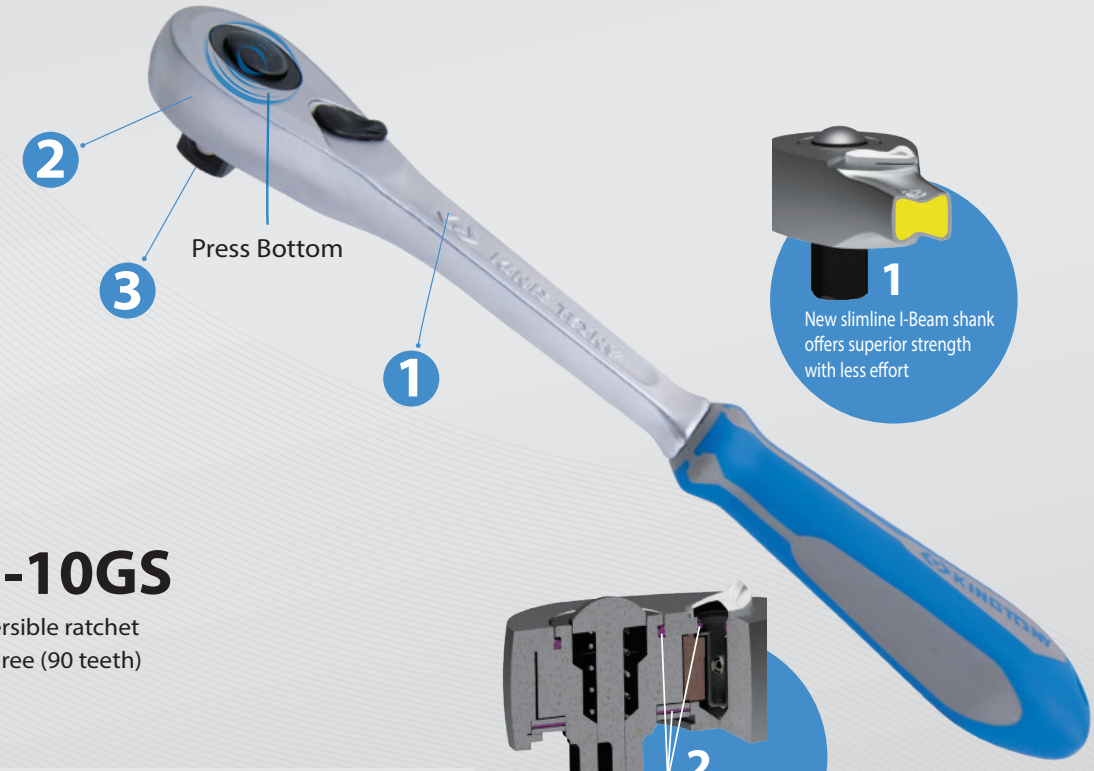

1 New slimline I-Beam shank offers superior strength with less effort

4773-10GS

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122
- IP51

KT NO.	Square DR.	Overall length inch	Overall length mm	g	pcs / box
4773-10GS	1/2"	10	262	500	1 / 25
4773DK				renewal kits	

2 Dustproof - Double Sealing gasket

4773-10GS (IP51)



4773DK



3 Screwless design - Easy to repair

Accessory

CAUTION

The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

4121 1/2"

- Adjustable handle
- Push-Lock design



KT NO.	Overall length inch	Overall length mm	g	/
4121-11GR	11-1/2	295	535	1 / 20

4251 1/2"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	/
4251-02R	2	55	105	12 / 216
4251-03R	3	75	143	6 / 120
4251-04R	4	100	182	4 / 80
4251-05R	5	125	197	4 / 80
4251-06R	6	150	231	4 / 64
4251-08R	8	200	294	4 / 80
4251-10R	10	250	364	4 / 64

4104PR 1/2"

- Extension bar



4 PC.

Contents kg 0.84 / 1 / 25

4251 3" 5" 6" 10"

4221 1/2"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	/
4221-18	18	450	548	1 / 20
4221-24	24	600	685	1 / 20
4221-30	30	750	860	1 / 20
4221-36	36	900	1055	1 / 20

4223 1/2"

- Offset extension bar
- Max. torque : 320 N·m
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	/
4223-02R	2	55	98	12 / 216
4223-05R	5	125	194	4 / 80
4223-10R	10	250	358	4 / 64

4293 1/2"

- Multi-function of extension bar and offset extension bar
- Max. torque : 320 N·m
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	/
4293-02	2	55	97	12 / 216
4293-05	5	125	191	4 / 80
4293-10	10	250	356	4 / 64

4311 1/2"

- Speed brace
- DIN 3122



4311-16F



4311-16G

KT NO.	Overall length inch	Overall length mm	g	/
4311-16F	16-1/4	412	610	5 / 40
4311-16G	16-1/4	412	499	5 / 40

4452 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122



4452DK



KT NO.	Overall length inch	Overall length mm	g	/
4452-15FR	15	375	718	2 / 24
4452-18FR	18	450	810	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-

KT NO.	Overall length inch	Overall length mm	g	
4452-24FR	24	600	1138	20
4452DK1	renewal kits(for 24F)		62	-

4453 1/2"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offer 15% lightweight
- DIN 3122



4452DK



4453-15F



4453-18F

KT NO.	Overall length inch	Overall length mm	g	/
4453-15F	15	375	630	2 / 24
4453-18F	18	450	708	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-

Accessory

KT No. & D1

4462 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122



4462DK



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4462-18F	18	463	1046	1 / 20
4462-24F	24	613	1350	1 / 20
4462DK	renewal kits		-	-

4572 1/2"

- Sliding T-handle
- DIN 3122



4572DK



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4572-10	10	250	371	2 / 40
4572-12	12	300	426	2 / 40
4572DK	renewal kits		-	-

4573 1/2"

- Sliding T-handle
- DIN 3120



4573DK



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4573-10R	10	250	470	2 / 40
4573DK	renewal kits		-	-

4581 1/2"

- 90° L-handle
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4581-10	10	250	450	1 / 40

4583 1/2"

- 105° L-handle
- DIN 3120

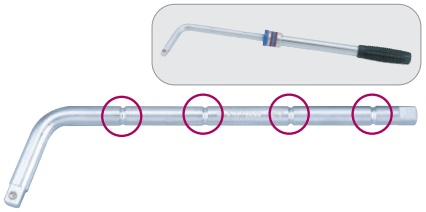

KT NO.	Overall length inch	Overall length mm	g	pcs / box
4583-12R	12-1/2	315	550	1 / 40

4584 1/2"

- 90° L-handle
- DIN 3120



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4584-12R	12	300	547	40

4791R 1/2"

- Univesal joint
- DIN 3120, ISO 3316





KT NO.	Overall length inch	Overall length mm	g	pcs / box
4791R	3	77.5	159	5 / 100

4794 1/2"

- Univesal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	pcs / box
4794	2-3/8	60	105	5 / 180

4813 4816 1/2"

- Adapter
- Convert to 3/8" drive or 3/4" drive
- 4813 →Max. torque : 202 N·m
- DIN 3123, ISO 3316



4813
3/8" drive(M)



4816
3/4" drive(M)

← 1/2" drive(F)

KT NO.	Spec.	g	pcs / box
4813	1/2"Fx3/8"M	56	10 / 200
4816	1/2"Fx3/4"M	111	10 / 200

4148 1/2"

- Bit holder



KT NO.	Size	Overall length mm	g	pcs / box
414808S	1/4"	38	50	10 / 200
414810S	5/16"	38	55	10 / 200
414810M	10 mm	38	56	10 / 200

Accessory

KT No. & D1

4844R

1/2"

- 1/2 " drive (1/2 " F x 1/2 " M)
- Finish : Chrome Alloy Steel, chrome plated
- Reversible
- 5° gear action degree (72 teeth)
- Apply to 1/2" accessory (Ex : 4453-15F)
- Apply to 1/2“ torque wrench (Ex : 3446E series)

PAT.







Outer diameter 37 x Height 62 mm

KT NO.	Overall length inch	mm		
4844R	2-7/16	62	250	1 / 64

Magnetic Insert

91000M

- Magnetic insert for sockets
- Powerful retention force
- Reusable
- 11 PC. set, for metric sockets

11 PC.





8 10 11 12 13 14 15 16 17 18 19

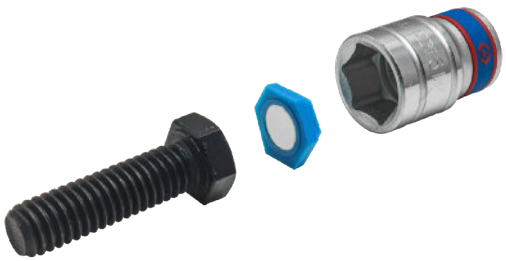

KT NO.	Size (mm)		
91000M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	42	12 / 144



Socket Rail Set

4010MR / 4010SR / 4510MR / 4510SR 1/2"

- Socket rail 230mmL

8 PC.



4010MR/4510MR



4010SR/4510SR

KT NO.	Contents			0.64	40
4010MR	4330MR	10, 12, 13, 14, 17, 19, 21, 22	8740908		
4510MR	4335MR				
4010SR	4330SR	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8			
4510SR	4335SR				

4208MR10 / 4308MR10 1/2"

- Socket rail 240mmL

8 PC.



KT NO.	Contents			1.22	14
4208MR10	4230MR	12, 13, 14 17, 19, 21 22, 23	8741108		
4308MR10	4235MR				

4106PR 1/2"

- Socket rail 230mmL

6 PC.



Contents 0.51 40

4375M	E10, E12, E14, E16, E18, E20	
8740906		

4148PR10 1/2"

- Socket rail 240mmL

8 PC.



Contents 1.24 14

4275M	E10, E12, E14, E16, E18, E20, E22, E24	
8741108		

4118MR 1/2"

- Socket rail 230mmL

8 PC.



Contents 0.57 40

4014M	RB8, RB9.5, RB10, RB10.5, RB12, RB12.7, RB13.5, RB19	
8740908		

4311MR 1/2"

- Socket rail 230mmL

11 PC.



Contents 0.92 12

4335MR	10, 11, 13, 14, 15, 17, 18, 19	
4725-10GR		4572-10
4251-05R		8740908

Bit Socket Rail Set

4110PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

9 PC.



Contents 0.77 14

4025	H3, H4, H5, H6, H7, H8, H10, H12, H14	
8741009		

4110SR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

9 PC.



Contents 1.22 14

4025S	3/16, 7/32, 1/4, 9/32, 5/16, 3/8, 1/2, 9/16, 5/8	
8741009		

Bit Socket Rail Set

4120PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 80mm

9 PC.



Contents — 1.0 kg — 14

4035	H4, H5, H6, H7, H8, H10, H12, H14, H17
8741009	

4108PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

8 PC.



Contents — 0.96 kg — 14

4025	H6, H7, H8, H10, H12, H14, H17, H19
8741009	

4126PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 60mm

4 PC.



Contents — 0.38 kg — 50

4026	M6, M8, M10, M12
8740504	

4105PR 1/2"

- Socket rail 150mmL
- For spline head screw
- H : 60 & 66 mm

5 PC.



Contents — 0.57 kg — 50

4026	M8, M10, M12, M14
402B	M16
8740605	

4136PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 80mm

4 PC.



Contents — 0.46 kg — 30

4036	M6, M8, M10, M12
8740504	

4109PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 60mm

9 PC.



Contents — 0.74 kg — 14

4023	T20, T25, T27, T30, T40, T45, T50, T55, T60
8741009	

4119PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 80mm

9 PC.



Contents — 0.84 kg — 14

4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
8741009	

4116PR 1/2"

- Socket rail 180mmL
- For ribe head screw
- H : 100mm

6 PC.



Contents — 0.38 kg — 20

4049	M9, M10, M12, M13, M14, M16
8740706	

Socket Rail

874 1/2"

- Rail length from 160 mm to 560 mm



KT NO.	L (mm)
870406	160
870410	260
870422	560
8740	-

8740809D1 1/2"

- Socket rail carrier with retaining clip
- 26" roller cabinet





KT NO.	Square drive	Clip	L (mm)
8740809D1	1/2"	9	508

Socket & Wrench Set

4313MR01 1/2"



13 PC.

Contents	1.55 kg	10
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	
4771-10GR	4251-06R	

4213MR 1/2"



11 PC.

Contents	1.39 kg	16
4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22	
4766-10G	4251-06R	



Socket Set

4208MR 4208SR
4308MR 1/2"

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)



8 PC.

4208MR / 4308MR



4208SR

KT NO.	Contents	1.75 kg	1 / 12
4208MR	4230M	12, 13, 14, 17, 19, 21, 22, 23	
4308MR	4235M		
4208SR	4230S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16	

4215MR 4315MR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.107 cuft)



15 PC.

KT NO.	Contents	3.80 kg	1 / 6
4215MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	
4315MR	4235M		

4216MR 4316MR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.107 cuft)



16 PC.

KT NO.	Contents	3.68 kg	1 / 6
4216MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	
4316MR	4235M		

Bit Socket Set

4109PR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

9 PC.



4109PR

4119PR 1/2"



4119PR

KT NO.	Contents			
4109PR	4023	T20, T25, T27, T30, T40, T45, T50, T55, T60	1.04	1 / 20
4119PR	4033		1.13	1 / 20

4110PR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

9 PC.



4110PR

4120PR 1/2"



4120PR

KT NO.	Contents			
4110PR	4025	H3, H4, H5, H6, H7, H8, H10, H12, H14	1.03	1 / 20
4120PR	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17	1.38	1 / 20

4117PR 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)

7 PC.



Contents		1.22	1 / 8
4026	M6, M8, M10, M12, M14		
402B	M16, M18		

4128PR 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)

8 PC.



Contents		1.24	1 / 8
4026	M5, M6, M8, M10		
402B	M16		
4036	M8, M10, M12		

Socket Set

4501MR 1/2"

Metal case size (mm) :
392 x 90 x 50 (0.062 cuft)

15 PC.



Contents		3.28	1 / 6
4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 22, 24, 27		
4779-10FR	4251-05R		
4452-15FR			

4511MR

4511SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4511MR



4511SR

KT NO.	Contents			5.5	1 / 4
4511MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC, 4725-12GR, 4572-10, 4251-05R, 4251-10R, 4223-02R		
4511SR	4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4			

Socket Set

4012MR 4012SR 4512MR 4512SR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.106 cuft)



4012MR / 4512MR



4012SR / 4512SR

14 PC.

KT NO.		Contents		
			3.50	1 / 6
4012MR	○ 4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22, 24	○ 463021RC	4768-10F
4512MR	○ 4335MR		○ 463521RC	4572-12
4012SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	○ 463021RC	4251-05R
4512SR	○ 4335SR		○ 463521RC	

4016SR 4516MR 4516SR 1/2"

Metal case size (mm) :
370 x 150 x 54 (0.105 cuft)



4516MR



4016SR / 4516SR

16 PC.

KT NO.		Contents		
			3.68	1 / 6
4016SR	○ 4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-1/16	○ 463021RC	4791R, 4779-10FR
4516MR	○ 4335MR	10, 11, 12, 13, 14, 17, 19, 21, 23, 24, 27	○ 463521RC	4251-05R
4516SR	○ 4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 5/8, 3/4, 13/16, 15/16, 1, 1-1/16	○ 463521RC	4452-15FR

4220MR

Metal case size (mm) :
445 x 135 x 50 (0.106 cuft)

KT NO.	Contents		3.83	1 / 6
4220MR	○ 4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27	4755-10G	
4320MR	○ 4335MR		4251-05R 4251-10R	4791R

4320MR 1/2"



20 PC.

Socket Set

4031MR | 4031SR | 4531MR | 4531SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4031MR / 4531MR



4031SR / 4531SR

23 PC.

KT NO.		Contents	5.3 kg / 1 / 4
4031MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4779-10GR; 4251-05R 4251-10R
4531MR	○ 4335MR		
4031SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	4452-15FR; 4791R
4531SR	○ 4335SR		

4024MR | 4024SR | 4524MR | 4524SR
4033MR | 4033SR | 4533MR | 4533SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4024SR / 4524SR



4024MR / 4524MR



4033SR / 4533SR



4033MR / 4533MR

24 PC.

KT NO.		Contents		5.7 kg / 1 / 4	
4033SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4779-10BR	4121-11GR
4533SR	○ 4335SR		○ 463521RC		
4033MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC		4223-02R
4533MR	○ 4335MR		○ 463521RC		
4024SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	○ 463021RC	4725-12BR	4573-10
4524SR	○ 4335SR		○ 463521RC		
4024MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC		4583-12R
4524MR	○ 4335MR		○ 463521RC		

Socket Set

4224MR / 4324MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4224MR / 4324MR

KT NO.		Contents						Kg 5.3	1 / 4
4224MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4779-10GR	4452-18FR	4572-12	4251-05R 4251-10R	4791R		
4324MR	○ 4335MR								

4028MR / 4028SR / 4528MR / 4528SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4028MR / 4528MR



4028SR / 4528SR

KT NO.		Contents				Kg 5.3	1 / 4
4028MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10GR	4791R		
4528MR	○ 4335MR		○ 463521RC		4251-05R 4251-10R		
4028SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	○ 463021RC	4779-10GR	4572-10		
4528SR	○ 4335SR		○ 463521RC				

4032MR / 4032SR / 4532MR / 4532SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4032MR / 4532MR



4032SR / 4532SR

KT NO.		Contents				Kg 5.3	1 / 4
4032MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10FR	4251-05R 4251-10R		
4532MR	○ 4335MR		○ 463521RC				
4032SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4452-15FR	4791R		
4532SR	○ 4335SR		○ 463521RC				

Socket Set

4325MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

Contents — 5.3 kg | 1 / 4

○ 4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
4779-10GR	4251-05R, 4251-10R, 4791R
4311-16G	4572-10



24 PC.

4026MR | 4026SR | 4526MR | 4526SR
4026MR03 | 4026SR03 | 4526MR03 | 4526SR03
4026MR04 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4026MR / 4526MR



4026SR / 4526SR



4026SR03 / 4526SR03



4026MR03 / 4526MR03



4026MR04

24 PC.

KT NO.	Contents				5.95 kg | 1 / 4
4026MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4768-10F	
4526MR	○ 4335MR		○ 463521RC		
4026MR03	○ 4330MR	8, 10, 11, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10GR	4452-15FR
4526MR03	○ 4335MR				4572-12
4026MR04	○ 4330MR			4755-10G	4251-05R, 4251-10R
4026SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4768-10F	
4526SR	○ 4335SR		○ 463521RC		
4026SR03	○ 4330SR		4791R	4779-10GR	
4526SR03	○ 4330MR				

Socket Set

4033MR03

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

4533MR03 1/2"

24 PC.



4033MR03 / 4533MR03

KT NO.		Contents				4.43	1 / 4
4033MR03	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10BR	4223-02R		
4533MR03	○ 4335MR		4121-11GR	4573-10	4583-12R		

4030CR

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

4030CR01 1/2"

30 PC.



4030CR



4030CR01

KT NO.			Contents				
4030CR	○ 4330MR	10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 30, 32	4768-10P	4452-15FR	4791R	4.90	1 / 4
4030CR01	○ 4330SR	7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	4779-10GR	4251-05R	4813	4.92	

4034MR

4034MR06

4534MR

4534MR06 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)

33 PC.



4034MR / 4534MR



4034MR06 / 4534MR06

KT NO.			Contents				
4034MR	○ 4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	○ 463021RC	○ 463516RC	4251-03R 4251-05R 4251-10R	7.6	1 / 2
4534MR	○ 4335MR		○ 463521RC	4779-10FR	4572-12		
4034MR06	○ 4330MR		○ 463014RC	4779-10GR	4452-18FR	7.9	
4534MR06	○ 4335MR		○ 463016RC		4791R		

Socket Set

4535MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 Cuft)

Contents		4.46	1 / 4
4335MR	10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24, 27, 30, 32		
1836H	H5, H6, H7, H8, H10, H12		
1836T	T25, T27, T30, T40, T45, T50		
1836P	PH2, PH3		
463516RC	463514RC		
4251-05R 4251-10R	4771-10GR	4794	414810S



35 PC.

4042CR 4042CR02 4542CR 4542CR02 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)



4042CR / 4542CR



4042CR02 / 4542CR02

42 PC.

KT NO.	Contents					8.5	1 / 2
4042CR	4330MR	4330SR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 5/16, 3/8, 7/16, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	463021RC	4768-10F	4452-18FR	
4542CR	4335MR	4335SR		463521RC		4251-05R 4251-10R	
4042CR02	4330MR	4330SR		4779-10GR			
4542CR02	4335MR	4335SR		4791R		4572-12	

4044CR 4544CR 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)

KT NO.	Contents		8.5	1 / 2
4044CR	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	4779-10BR	
	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4	4573-10 4121-11GR	
4544CR	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	4583-12R 4791R	
	4335SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4	4223-02R	



43 PC.

Socket Set

4523MRV01

Tray category #8 (375 x 187mm) 1/2"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)

Contents		3.88 kg	1 / 6
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		
4771-10GR		4791R	
4572-10		4251-05R 4251-10R	



23 PC.

4526MR15

1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

Contents		5.05 kg	1 / 4
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32		
4779-10FR		4572-12	
4452-15FR	4791R	4251-05R 4251-10R	



24 PC.

4047MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

KT NO.	Contents		6.62 kg	1 / 2
4047MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
			1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H
			1411	PH2x100, PH2x150
			1412	6.5x100, 6.5x150
			4251-05R 4251-10R	4452-15FR
			4572-12	4791R
			4768-10F	463521RC
			6111-07	6311-06
4547MR	4335MR			

4547MR

1/2"



47 PC.

Socket Set

4306MRN 1/2"

Contents — 2.28 — 1 / 8

4335MR	17, 19	
4121-11GR		4251-03R
4584-12R		4725-12BR



6 PC.

Impact Driver Set

CAUTION Please wear proper safety gear while working.

4108FR

Metal case size (mm) :
190 x 60 x 48 (0.019 cuft)




4108FR

4111FR


4111FR

4112FR 1/2"


4112FR

KT NO.	PC.	Contents					
4108FR	8	1836S 9, 11	1836P PH2, PH3	1880P PH2, PH3	4112	1.04	1 / 24
4111FR	6	1880S 8, 10	1880P PH2, PH3			1.00	
4112FR	6	1836S 9, 11	1836P PH2, PH3		414810S	1.00	

4505MR

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)



10 PC.

4505SR 1/2"



10 PC.

KT NO.	Contents	
4505MR	4335MR	8, 10 12, 14
4505SR	4335SR	5/16, 3/8 1/2, 9/16

1.6 — 1 / 12

1836S 9, 11 — 1836P PH2, PH3 — 4112 — 414810S

Standard Socket

6330M 3/4"

- Metric-DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
633017M	17	26.0	32.7	14	51	144	8 / 96
633019M	19	30.0	32.7	14	51	164	8 / 96
633021M	21	32.0	32.7	16	51	169	8 / 96
633022M	22	33.0	35.7	16	51	204	8 / 96
633023M	23	34.0	35.7	16	51	210	8 / 96
633024M	24	35.0	35.7	17	51	209	8 / 96
633026M	26	35.7	35.0	17	52	196	8 / 96
633027M	27	38.0	36.0	19	52	219	8 / 96
633028M	28	39.0	36.0	19	52	220	8 / 96
633029M	29	40.0	38.0	19	52	245	8 / 96
633030M	30	42.0	38.0	21	54	274	6 / 48
633032M	32	44.0	38.0	23	56	297	6 / 48
633033M	33	46.0	39.0	23	56	330	6 / 48
633034M	34	47.0	42.0	24	57	377	6 / 48
633035M	35	48.0	42.0	25	58	393	6 / 36
633036M	36	50.0	42.0	25	58	420	6 / 36
633038M	38	52.0	45.0	27	60	468	6 / 36
633041M	41	56.0	45.0	29	64	549	4 / 32
633042M	42	57.0	45.0	29	64	541	4 / 32
633046M	46	62.0	48.0	33	68	673	4 / 32
633048M	48	64.0	48.0	34	70	689	2 / 24
633050M	50	68.0	48.0	34	72	840	2 / 24
633054M	54	72.0	50.0	35	75	943	1 / 20
633055M	55	74.0	50.0	37	76	989	1 / 20
633058M	58	77.0	50.0	37	78	1044	1 / 20
633060M	60	80.0	50.0	40	78	1072	1 / 20
633063M	63	83.0	55.0	40	81	1201	1 / 12
633065M	65	85.0	58.0	43	83	1311	1 / 12
633070M	70	92.0	58.0	46	88	1634	1 / 12

6330S 3/4"

- Inch-ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
633022S	11/16	26	35.7	14	50.8	144	8 / 96
633024S	3/4	30	35.7	14	50.8	164	8 / 96
633026S	13/16	32	35.7	16	50.8	169	8 / 96
633028S	7/8	33	35.7	16	51.0	206	8 / 96
633030S	15/16	35	35.7	17	51.0	213	8 / 96
633032S	1	35	35.7	17	52.0	208	8 / 96
633034S	1-1/16	38	36.0	19	52.0	219	8 / 96
633036S	1-1/8	40	38.0	19	52.0	244	8 / 96
633038S	1-3/16	42	38.0	21	54.0	273	6 / 48
633040S	1-1/4	44	38.0	23	56.0	299	6 / 48
633042S	1-5/16	46	39.0	23	56.0	331	6 / 48
633044S	1-3/8	48	42.0	25	58.0	393	6 / 36
633046S	1-7/16	50	42.0	25	58.0	412	6 / 36
633048S	1-1/2	52	45.0	27	60.0	477	6 / 36
633050S	1-9/16	54	45.0	28	62.0	493	4 / 32
633052S	1-5/8	56	45.0	29	64.0	564	4 / 32
633054S	1-11/16	58	45.0	29	65.0	562	4 / 32
633056S	1-3/4	60	48.0	31	66.0	636	4 / 32
633058S	1-13/16	62	48.0	34	68.0	669	4 / 32
633060S	1-7/8	64	48.0	34	70.0	712	2 / 24
633062S	1-15/16	66	48.0	34	70.0	768	2 / 24
633064S	2	68	48.0	34	72.0	826	2 / 24
633066S	2-1/16	70	50.0	35	74.0	893	1 / 20
633068S	2-1/8	72	50.0	35	75.0	944	1 / 20
633070S	2-3/16	74	50.0	37	76.0	957	1 / 20
633072S	2-1/4	76	50.0	37	76.0	962	1 / 20
633074S	2-5/16	78	50.0	37	78.0	1084	1 / 20
633076S	2-3/8	80	50.0	40	78.0	1093	1 / 20
633078S	2-7/16	82	55.0	40	81.0	1160	1 / 12
633080S	2-1/2	84	55.0	40	81.0	1238	1 / 12
633082S	2-9/16	85	58.0	43	83.0	1355	1 / 12
633084S	2-5/8	86	58.0	43	83.0	1277	1 / 12
633086S	2-11/16	90	58.0	43	85.0	1514	1 / 12
633088S	2-3/4	92	58.0	46	88.0	1642	1 / 12



Standard Socket

6335M — 3/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
633517M	17	26.0	32.7	14	51	147	8 / 96
633518M	18	28.0	32.7	14	51	155	8 / 96
633519M	19	30.0	32.7	14	51	168	8 / 96
633520M	20	31.0	32.7	16	51	169	8 / 96
633521M	21	32.0	32.7	16	51	173	8 / 96
633522M	22	33.0	35.7	16	51	208	8 / 96
633523M	23	34.0	35.7	16	51	211	8 / 96
633524M	24	35.0	35.7	17	51	216	8 / 96
633525M	25	35.0	35.7	17	52	211	8 / 96
633526M	26	35.7	35.0	17	52	199	8 / 96
633527M	27	38.0	36.0	19	52	226	8 / 96
633528M	28	39.0	36.0	19	52	230	8 / 96
633529M	29	40.0	38.0	19	52	252	8 / 96
633530M	30	42.0	38.0	21	54	287	6 / 48
633531M	31	43.0	38.0	23	55	295	6 / 48
633532M	32	44.0	38.0	23	56	308	6 / 48
633533M	33	46.0	39.0	23	56	345	6 / 48
633534M	34	47.0	42.0	24	57	392	6 / 48
633535M	35	48.0	42.0	25	58	403	6 / 36
633536M	36	50.0	42.0	25	58	438	6 / 36
633537M	37	51.0	45.0	25	59	471	6 / 36
633538M	38	52.0	45.0	27	60	491	6 / 36
633539M	39	53.0	45.0	28	61	499	4 / 32
633540M	40	54.0	45.0	28	62	512	4 / 32
633541M	41	56.0	45.0	29	64	571	4 / 32
633542M	42	57.0	45.0	29	64	573	4 / 32
633543M	43	58.0	45.0	29	65	591	4 / 32
633544M	44	60.0	48.0	31	66	689	4 / 32
633545M	45	61.0	48.0	33	67	687	4 / 32
633546M	46	62.0	48.0	33	68	708	4 / 32
633547M	47	63.0	48.0	33	69	729	4 / 32
633548M	48	64.0	48.0	34	70	708	2 / 24
633549M	49	66.0	48.0	34	70	808	2 / 24
633550M	50	68.0	48.0	34	72	891	2 / 24
633551M	51	69.0	50.0	35	73	911	1 / 20
633552M	52	69.0	50.0	35	73	873	1 / 20
633553M	53	70.0	50.0	35	74	904	1 / 20
633554M	54	72.0	50.0	35	75	968	1 / 20
633555M	55	74.0	50.0	37	76	1025	1 / 20
633556M	56	75.0	50.0	37	76	1052	1 / 20
633557M	57	76.0	50.0	37	76	1017	1 / 20
633558M	58	77.0	50.0	37	78	1067	1 / 20
633559M	59	78.0	50.0	37	78	1127	1 / 20
633560M	60	80.0	50.0	40	78	1145	1 / 20
633562M	62	82.0	55.0	40	81	1258	1 / 12
633563M	63	83.0	55.0	40	81	1304	1 / 12
633564M	64	84.0	55.0	40	81	1300	1 / 12
633565M	65	85.0	58.0	43	83	1422	1 / 12
633570M	70	92.0	58.0	46	88	1800	1 / 12

Deep Socket

KT No. & D1

6230M — 3/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
623030M	30	42.0	38.0	31	90	584	1 / 24
623032M	32	44.0	38.0	34	90	568	1 / 24
623033M	33	46.0	39.0	34	90	542	1 / 24
623036M	36	50.0	42.0	37	90	608	1 / 24
623039M	39	53.0	45.0	41	90	666	1 / 24
623041M	41	56.0	45.0	41	90	701	1 / 24
623046M	46	62.0	48.0	46	95	889	1 / 10
623050M	50	68.0	48.0	50	95	1022	1 / 10

6235M — 3/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
623517M	17	26.0	32.7	20	90	275	2 / 48
623518M	18	28.0	32.7	20	90	345	2 / 48
623519M	19	30.0	32.7	20	90	325	2 / 48
623520M	20	31.0	32.7	22	90	373	2 / 48
623521M	21	32.0	32.7	22	90	335	2 / 48
623522M	22	33.0	35.7	22	90	391	2 / 48
623523M	23	34.0	35.7	24	90	390	2 / 48
623524M	24	35.0	35.7	24	90	406	2 / 48
623525M	25	35.0	35.7	25	90	399	2 / 48
623526M	26	35.7	35.0	25	90	353	1 / 24
623527M	27	38.0	36.0	28	90	389	1 / 24
623528M	28	39.0	36.0	28	90	397	1 / 24
623529M	29	40.0	38.0	28	90	428	1 / 24
623530M	30	42.0	38.0	31	90	469	1 / 24
623531M	31	43.0	38.0	34	90	472	1 / 24
623532M	32	44.0	38.0	34	90	490	1 / 24
623533M	33	46.0	39.0	34	90	549	1 / 24
623534M	34	47.0	42.0	34	90	591	1 / 24
623535M	35	48.0	42.0	37	90	583	1 / 24
623536M	36	50.0	42.0	37	90	632	1 / 24
623537M	37	51.0	45.0	37	90	687	1 / 24
623538M	38	52.0	45.0	41	90	673	1 / 24
623539M	39	53.0	45.0	41	90	689	1 / 24
623540M	40	54.0	45.0	41	90	713	1 / 24
623541M	41	56.0	45.0	41	90	753	1 / 24
623542M	42	57.0	45.0	46	95	794	1 / 24
623543M	43	58.0	45.0	46	95	816	1 / 10
623544M	44	60.0	48.0	46	95	920	1 / 10
623545M	45	61.0	48.0	46	95	932	1 / 10
623546M	46	62.0	48.0	46	95	940	1 / 10
623547M	47	63.0	48.0	46	95	961	1 / 10
623548M	48	64.0	48.0	50	95	948	1 / 10
623549M	49	66.0	48.0	50	95	1015	1 / 10
623550M	50	68.0	48.0	50	95	1064	1 / 10
623551M	51	69.0	50.0	50	95	1114	1 / 10
623552M	52	69.0	50.0	50	95	1109	1 / 10
623553M	53	70.0	50.0	50	95	1119	1 / 10
623554M	54	72.0	50.0	50	95	1170	1 / 10
623555M	55	74.0	50.0	50	95	1236	1 / 10
623556M	56	75.0	50.0	50	95	1272	1 / 10
623557M	57	76.0	50.0	52	100	1392	1 / 10
623558M	58	78.0	50.0	52	100	1446	1 / 10
623559M	59	78.0	50.0	52	100	1410	1 / 10
623560M	60	80.0	50.0	53	100	1471	1 / 10
623563M	63	83.0	55.0	53	100	1511	1 / 6
623565M	65	85.0	58.0	55	100	1613	1 / 6
623570M	70	92.0	58.0	55	100	1766	1 / 6

Bit Socket

6023 3/4"

- For torx internal screw
- DIN 3120
- E.g. on commercial vehicles and agricultural machinery
- Screw of the steering tie lever on commercial vehicles MAN
  602380 : for M series
  6023A0 : for F series



602360 6023A0

KT NO.	Size	L mm	g	
602360	T60	80	246	2/48
602370	T70	80	253	2/48
602380	T80	80	326	2/48
602390	T90	80	332	2/48
6023A0	T100	80	339	2/48

6025 3/4"

- HEXAGON head
- DIN 7422



602514 602519

KT NO.	mm	L mm	g	
602514	H14	80	257	2 / 48
602517	H17	80	268	2 / 48
602519	H19	80	278	2 / 48
602522	H22	80	361	2 / 48

Ratchet

6724 3/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122



6724DK



KT NO.	Overall length inch	mm	g	
6724-20F	20	500	2223	1 / 6
6724DK	renewal kits		-	-

6778 3/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



6778DK



KT NO.	Overall length inch	mm	g	
6778-20FS	20	500	2612	1 / 6
6778DK	renewal kits		-	-

Ratchet & Accessory

6779 3/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



6779DK



KT NO.	Overall length inch	mm	g	
6779-20F	20	500	2449	1 / 6
6779DK	renewal kits		-	-

6251 3/4"

KT No. & D1



- Extension bar
- DIN 3123



KT NO.	Overall length inch	mm	g	
6251-04	4	100	418	4 / 40
6251-08	8	200	734	2 / 20
6251-16	16	400	1375	1 / 10

6452 3/4"

- Flexible handle
- Action degree -180°
- DIN 3122



6452DK



KT NO.	Overall length inch	mm	g	
6452-18F	18	450	1768	1 / 10
6452-30F	30	750	2581	1 / 8
6452DK	renewal kits		-	-

6482 3/4"

- 180° swivel ratchet head
- 3 position ratchet control : forward / reverse / lock
- Telescopic handle : 620 mm-970 mm
- 15° gear action (24 teeth)
- DIN 3122

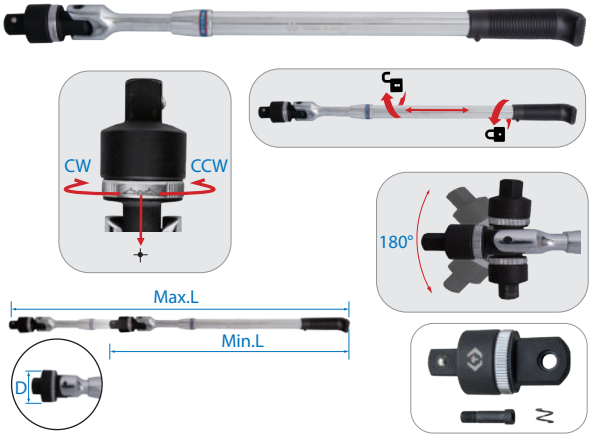

6482DK

KT NO.	D mm	Min.L inch	mm	Max.L inch	mm	kg	
6482-24G	46	24	620	36	970	3	1 / 6
6482DK	renewal kits						

Accessory

6572 3/4"

- Sliding T-handle
- DIN 3122



6572DK

KT NO.	Overall length inch	Overall length mm	g	
6572-20	20	500	1542	1 / 10
6572DK	renewal kits		-	-

6581 3/4"

- 90° L-handle



KT NO.	Overall length inch	Overall length mm	g	
6581-12	12	300	1307	10
6581-18	18	450	1939	12

6585 3/4"

- Double driver L-handle 90°



KT NO.	Overall length inch	Overall length mm	g	
6585-19	19	478	2010	12

6791 3/4"

- Universal joint
- DIN 3123, ISO 3316



KT No. & D1

KT NO.	Overall length inch	Overall length mm	g	
6791	4-1/4	108	571	2 / 20

6814 6818 3/4"

- Adapter
- Convert to 1/2" drive or 1" drive
- 6814→Max. torque : 512 N·m
- DIN 3123, ISO 3316

KT No. & D1



6814 / 6818

KT NO.	Spec.	g	
6814	3/4"F x 1/2"M	120	8 / 96
6818	3/4"F x 1"M	296	6 / 60

Socket Rail

8760807D1 3/4"

- Socket rail carrier with retaining clip
- 26" roller cabinet





KT NO.	Square drive	Clip	L (mm)
8760807D1	3/4"	7	508
8760			

Socket Set

6014MR

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



6014MR

6314MR 3/4"



6314MR

14 PC.

KT NO. Contents kg 13.8 1

6014MR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50
6314MR	6335M	



6016MR

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



6316MR

6316MR

6016SR 3/4"



6016MR/6016SR

16 PC.

KT NO. Contents kg 14.0 1

6016MR	6330M	21, 22, 23, 24, 27, 30, 32, 36, 38, 41, 46, 50
6316MR	6335M	
6016SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4, 1-3/8, 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2



Socket Set

6023MR / 6323MR / 6023SR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



6323MR



6023MR/6023SR

23 PC.

KT NO.		Contents	
			17.1 / 1
6023MR	6330M	21, 22, 23, 24, 26, 27, 28, 29, 30, 32, 34, 35, 36, 38, 41, 46, 50	6779-20F; 6251-04 6251-08 6251-16
6323MR	6335M		
6023SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16, 1-5/8, 1-3/4 1-13/16, 1-7/8, 2	6572-20; 6791

6224CR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



24 PC.

KT NO.		Contents	
			17.9 / 1
6224CR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F; 6251-08 6251-16; 6572-20
	6330S	1, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8, 1-3/4, 2	

6226CR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



26 PC.

KT NO.		Contents	
			17.2 / 1
6226CR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6251-04 6251-08; 6572-20; 6452-18F
	6330S	7/8, 15/16, 1, 1-1/8, 1-3/16, 1-5/16, 1-3/8, 1-7/16, 1-5/8, 1-3/4, 1-7/8, 2	

6014MR12

Blow case size(mm) :
422 x 372 x 92 (0.51 cuft)



Contents			10.8 / 1 / 2
6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50		
6251-04 6251-08		6779-20F	
6572-20			

6314MR12 3/4"

Blow case size(mm) :
422 x 372 x 92 (0.51 cuft)



14 PC.

Contents			10.8 / 1 / 2
6335M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50		
6251-04 6251-08		6779-20F	
6572-20			

Socket Set

8330M 1"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
833036M	36	52	48	26	65	514	1 / 24
833038M	38	54	48	26	65	536	1 / 24
833041M	41	58	50	29	70	659	1 / 24
833046M	46	65	54	32	75	961	1 / 24
833050M	50	70	54	34	75	985	1 / 20
833054M	54	74	57	38	80	1164	1 / 20
833055M	55	76	57	42	83	1256	1 / 12
833058M	58	79	57	42	83	1263	1 / 12
833060M	60	82	58	46	87	1488	1 / 12
833063M	63	86	58	46	87	1548	1 / 12
833065M	65	88	65	49	90	1817	1 / 12
833067M	67	91	70	49	91	1932	1 / 12
833070M	70	94	70	50	93	2064	1 / 8
833071M	71	95	70	50	93	2026	1 / 8
833075M	75	100	70	50	95	2168	1 / 8
833077M	77	103	80	52	100	2732	1 / 8
833080M	80	107	80	52	100	3009	1 / 8

8330S 1"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
833046S	1-7/16	52	48	26	65	506	1 / 24
833048S	1-1/2	54	48	26	65	537	1 / 24
833054S	1-11/16	60	54	29	70	741	1 / 24
833060S	1-7/8	67	54	34	75	912	1 / 10
833064S	2	71	54	34	75	989	1 / 10
833072S	2-1/4	78	57	42	83	1267	1 / 12
833076S	2-3/8	82	58	46	87	1452	1 / 12
833084S	2-5/8	90	65	49	90	1825	1 / 12
833094S	2-15/16	100	70	52	95	2076	1 / 8
8330A0S	3-1/8	107	80	52	100	2975	1 / 8

Ratchet

8779 1"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



8779DK



KT NO.	Overall legth inch	mm	g	
8779-32F	32	800	4400	5
8779DK	renewal kits		-	-

Accessory

- Chrome vanadium handle, chrome molybdenum driver
- Chrome plated handle & black phosphate sunk driver

8251 1"

- Extension bar
- DIN3123



KT NO.	Overall length inch	mm	g	
8251-08	8	200	1364	1 / 16
8251-16	16	400	2555	1 / 10

8572 1"

- Sliding T-handle
- DIN 3122



8572DK



KT NO.	Overall length inch	mm	g	
8572-25	25	630	4200	6
8572DK	renewal kits		-	-

8581 1"

- L-handle
- DIN 3122



KT NO.	Overall length inch	mm	g	
8581-26	26	660	5182	4

8816 1"

- Adapter
- Convert to 3/4" drive
- Max. torque : 1412 N·m
- DIN 3123, ISO 3316

3/4" drive(M)



← 1" drive(F)

KT NO.	Spec.	g	
8816	1"F x 3/4"M	309	6 / 48

Socket Set

8015MR

Metal case size (mm) :
660 x 205 x 108 (0.52 cuft)

8015SR 1"



14 PC.

KT NO.		Contents	34.1	1
8015MR	8330M	36, 41, 46, 50, 55, 60, 65, 70, 75, 80	8779-32F	8251-08 8251-16
8015SR	8330S	1-7/16, 1-1/2, 1-11/16, 1-7/8, 2, 2-1/4, 2-3/8, 2-5/8, 2-15/16, 3-1/8		8572-25

Socket Rail Set

7112PR

- Socket rail 260mmL
  - Rail with 5 PC. 3/8" & 6 PC. 1/2" drive clip

12 PC.

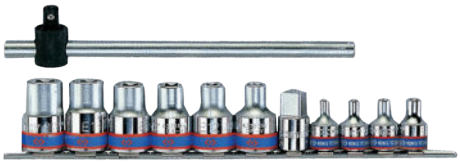

Contents	0.76	24
3375M	E4, E5, E6, E8	
4375M	E10, E12, E14, E16, E18, E20	
3571-08	8771011	3814

7113PR 3/8"+1/2"

- Socket rail 260mmL
  - Rail with 6 PC. 3/8" drive & 6 PC. 1/2" drive clip

12 PC.



Contents	0.6	32
3375M	E4, E5, E6, E7, E8, E11	
4375M	E10, E12, E14, E16, E18, E20	
8771012		

Socket Set

7120PR

Metal case size (mm) :
296 x 130 x 41 (0.056 cuft)

7120PR01 3/8"+1/2"



20 PC.

KT NO.	Contents	1.79	1 / 10
7120PR	4023 T30, T40, T45, T50, T55	3375M E6, E7, E8, E10 4375M E12, E14, E16, E18, E20 3023 T10, T15, T20, T25, T27 4813	
7120PR01	4027 T30H, T40H, T45H, T50H, T55H		

Socket Set

5022MR / 5522MR / 5022SR 1/4"+3/8"

Metal case size (mm) :
285 x 135 x 45 (0.059 cuft)



5022MR / 5522MR



5022SR

21 PC.

1.60 / 1 / 10

KT NO.		Contents			
5022MR	3330M	10, 11, 12, 13, 14, 17, 19	2335M	363021	3769-08F, 3221-03, 3221-06
5522MR	3335M		4, 5, 5.5, 6, 7, 8, 9	363521	363516, 3812, 2179DF
5022SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32	363021		
	3330S	3/8, 7/16, 15/32, 1/2, 9/16, 11/16, 3/4			

5039CR 1/4"+3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)



39 PC.

2.60 / 1 / 10

Contents	
2335M	4.5, 5, 6, 7, 8, 9, 10, 11, 12
2335S	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
3330M	9, 10, 11, 12, 13, 14, 16, 17, 19
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4

3769-08F, 3221-03, 2179DF, 363021, 3812

7558MR 1/4"+1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



58 PC.

3.8 / 1 / 4

Contents	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
1025S	4, 6, 8
1025P	PH1, PH2, PH3
1025H	H3, H4, H5, H6, H7, H8
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025Z	PZ1, PZ2, PZ3

2779-55G, 4779-10GR, 2792, 4791R, 2141, 2221-02, 2221-04, 4251-05R, 2179DF

Socket Set

9063MR
9563MR
9063MR01
9563MR01 1/4"+3/8"+1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)



9063MR/9563MR



9063MR01/9563MR01

62 PC.

KT NO.			Contents		
					7.4 / 1 / 2
9063MR	4330MR 3330M	4330MR / 4335MR 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 3330M / 3335M 8, 9, 10, 11, 12, 13, 14, 15, 17, 19	363021	4768-10F 3769-08F	2335M 4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12 3023 T20, T25, T27, T30, T40 3025 H4, H5, H6, H8, H10 2571-45 2221-04 3571-08 3221-06 4572-12 4251-06R 3792 4791R 3812
9563MR	4335MR 3335M		363521	3235M 12, 14, 17, 19	
9063MR01	4330MR 3330M		363021	4755-10G 3779-08G	
9563MR01	4335MR 3335M		363521	3235M 10, 13, 17, 19	

9033CR 1/4"+3/8"+1/2"

Metal case size (mm) :
450 x 370 x 56 (0.329 cuft)

Contents		12.3 / 1 / 2
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
○	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
○	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
○	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
○	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32
○	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4
◉	2015MX	H3, H4, H5, H6, H8, H10
◉	2015SX	1/8, 3/16, 7/32, 1/4, 5/16, 3/8
⊕	2011X	PH1, PH2, PH3, PH4
◉	1115-03	H1.5, H2, H2.5



135 PC.

Contents

463516RC 463021RC 2179DF 2452-05F
3769-08F 4768-10F 2571-45 4572-10
2221-02 2221-04 3221-03 3221-06 4251-05R 4251-10R 3812 3792 4791R
2561 cross bar. 4-1/2"L 3840 3/8" drive spin disc. 4840 1/2" drive spin disc.

Socket & Tool Set

7096MR

7596MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

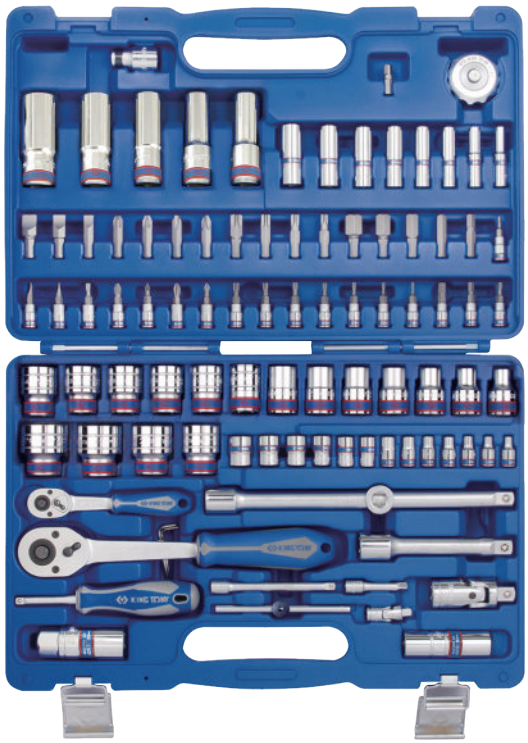

96 PC.

6.22 kg | 1 / 4

KT NO.	Contents		
7096MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2031 PH1, PH2	2771-55G
	2230M 6, 7, 8, 9, 10, 11, 12, 13	2032 4, 5.5, 6.5	2178DF
	4230M 14, 15, 17, 19, 22	2033 T8, T10, T15, T20, T25, T27, T30	4771-10GR
	4330MR 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	2035 H3, H4, H5, H6	2571-45
	4630RC 16, 21	2038 PZ1, PZ2	4222-10
		1836P PH3, PH4	2221-02 2221-04
7596MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1836S 8x1.2, 10x1.6, 12x2.0	4251-05R
	2235M 6, 7, 8, 9, 10, 11, 12, 13	1836T T40, T45, T50, T55	2792 4791R
	4235M 14, 15, 17, 19, 22	1836H H7, H8, H10, H12, H14	3824
	4335MR 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	1836Z PZ3, PZ4	414810S
	4635RC 16, 21	1115-03 1.5, 2, 2.5	7702-25
			2745

Socket & Tool Set

7011MR

7511MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

110 PC.

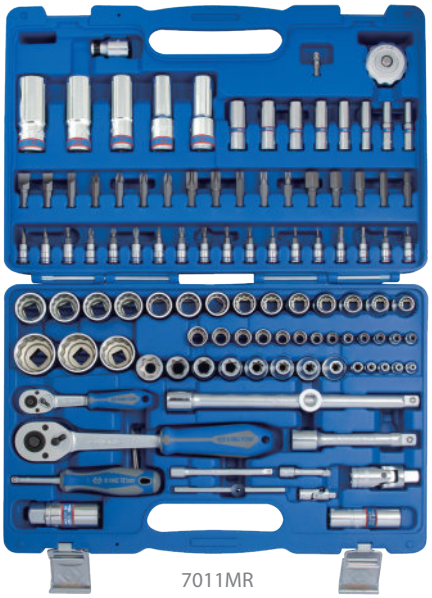
7011MR

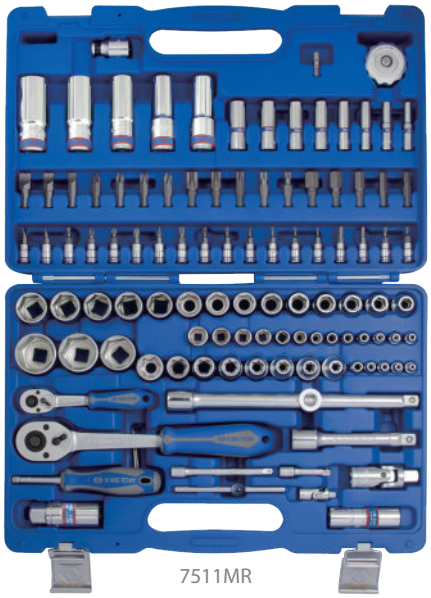
7511MR

KT NO. | Contents | 6.90 | 1 / 4

7011MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230M — 14, 15, 17, 19, 22
- 4330MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021RC

7511MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235M — 14, 15, 17, 19, 22
- 4335MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516RC
- 463521RC

Contents

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E11, E12, E14, E16, E18, E20, E24
- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55, T60
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5
- 2771-55G
- 4771-10GR
- 2178DF
- 2221-02, 2221-04
- 4222-10
- 4251-05R
- 2571-45
- 3824
- 414810S
- 2792, 4791R
- 2745
- 7702-25

Socket & Tool Set

7082MR

7582MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

83 PC.





KT NO. | Contents | 5.65 | 1 / 4

7082MR


2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14


4330MR — 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32


463016RC


463021RC


1060 — 8, 10, 11, 12, 13, 14, 17, 19


2031 — PH1, PH2


2032 — 4, 5.5, 6.5


2033 — T8, T10, T15, T20, T25, T27, T30


2035 — H3, H4, H5, H6


2038 — PZ1, PZ2


1836P — PH3, PH4


1836S — 8x1.2, 10x1.6, 12x2.0


1836H — H8, H10, H12, H14


1836T — T40, T45, T50, T55


1836Z — PZ3, PZ4


2771-55G


4771-10GR


2178DF

2221-02
2221-04

2312-06

2571-45

4251-05R

4222-10


79831


2792
4791R

7702-25


3824


414810S

7582MR


2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14


4335MR — 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32


463516RC


463521RC

Socket Set

7077MR

7577MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 Cuft)

77 PC.



KT NO.	Contents				
7077MR	2330M	4, 5, 6, 7, 8, 9, 10, 11, 12	463016RC	1115-03	1.5, 2, 2.5
	2230M	8, 10, 12, 13		1025P	PH1, PH2, PH3
	4330MR	12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463021RC	1025S	3, 4, 5, 6
				1025H	H3, H4, H5, H6
				1025T	T10, T15, T20, T25, T27, T30, T40
				1421	PH1 x 80, PH2 x 100, PH3 x 150
				1422	4 x 100, 6.5 x 100
				1060	8, 10, 12, 13, 14, 15, 17, 19
7577MR	2335M	4, 5, 6, 7, 8, 9, 10, 11, 12	463516RC		
	2235M	8, 10, 12, 13			
	4335MR	12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463521RC		

7.52 | 1 / 2

- 2771-55G
- 4771-10GR
- 6111-07
- 6516-10
- 2178DF
- 7821-50
- 2571-45
- 2221-03
- 2312-06
- 4222-10
- 4251-05R
- 2792
- 4791R
- 3824
- 2141

Socket & Tool Set

7081MR

7581MR

7581MR01 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)





7581MR01





7581MR / 7081MR

81 PC.

KT NO. Contents 7.14 1 / 2

KT NO.			Contents	
7081MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 4330MR 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4771-10GR	463016RC 463021RC	1421 PH1 x 80, PH2 x 100 1422 4 x 100, 5.5 x 125, 6.5 x 150 1025H H3, H4, H5, H6, H7, H8 1025T T20, T25, T30, T40 1120MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1147R T10H, T15H, T20H, T25H, T27H, T30H, T40H 1060 6, 7, 8, 10, 12, 13, 14, 15, 17, 19 276A-04G 6111-06 6311-06 6516-10 76104-05 76215-05 76404-06 2221-04 9DC22 79831 7821-50 4251-05R 750-60 2792 4791R
7581MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	4771-10GR	463516RC	
7581MR01	4335MR 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4755-10G	463521RC	

Socket & Tool Set

7087MR

7587MR01

7587MR

7587SR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

87 PC.



7087MR / 7587MR



7587MR01



7587SR

KT NO.	Contents		
			9.2 / 1 / 2
7087MR	2330M 5, 5.5, 6, 7, 8, 10, 11, 12, 13 2230M 7, 8, 10, 12, 13 20107MR01 4330MR 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060 8, 10, 12, 13, 14, 15, 17, 18, 19, 22	2312-06 463016RC	1636H H5, H6, H7, H8, H10, H12 1636M M6, M8, M10, M12 1636T T30, T40, T45, T50, T55, T60
7587MR	2335M 5, 5.5, 6, 7, 8, 10, 11, 12, 13 2235M 7, 8, 10, 12, 13 4335MR 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060 8, 10, 12, 13, 14, 15, 17, 18, 19, 22	2312-06	1421 PH1 x 80, PH2 x 100 1422 4 x 100, 5.5 x 100
7587MR01	463516RC 20107MR01	2221-06	463014RC 414810M 4791R 2792 4251-05R 2571-45 4453-15FR
7587SR	2335S 5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 2235S 9/32, 5/16, 3/8, 7/16, 1/2 20107SR 4335SR 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1-1/16, 1-1/8, 1-1/4 5060 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8	2312-06 463516RC	2779-55G 4779-10GR 6111-06 6231-07 6516-10 20407PR 19980016 19980410

Socket & Tool Set

7098MR

7598MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)



97 PC.

8.87 | 1 / 2

KT NO.	Contents	
7098MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	1421 PH2 x 38, PH2 x 100, PH3 x 150
	2230M 7, 8, 10, 12, 13	1422 4 x 100, 6.5 x 38
	4330MR 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	1462 6.5 x 150
	463016RC 463021RC	1025S 4, 5.5, 7, 8
		1025P PH0, PH1, PH2, PH3
7598MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	1025H H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10
	2235M 7, 8, 10, 12, 13	1025U T8H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
	4335MR 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	1025Z PZ1, PZ2, PZ3
	463516RC 463521RC	1060 6, 7, 8, 10, 12, 13, 14, 15, 16, 17, 18, 19


4771-10BR


2771-55F


2571-45


4573-10

4121-11GR


6111-06


6516-10


2178DF

4583-12R

4251-10R

2221-02
2221-04


2792


4223-02R


4791R


2141

Socket & Tool Set

7003MR

7503MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 Cuft)

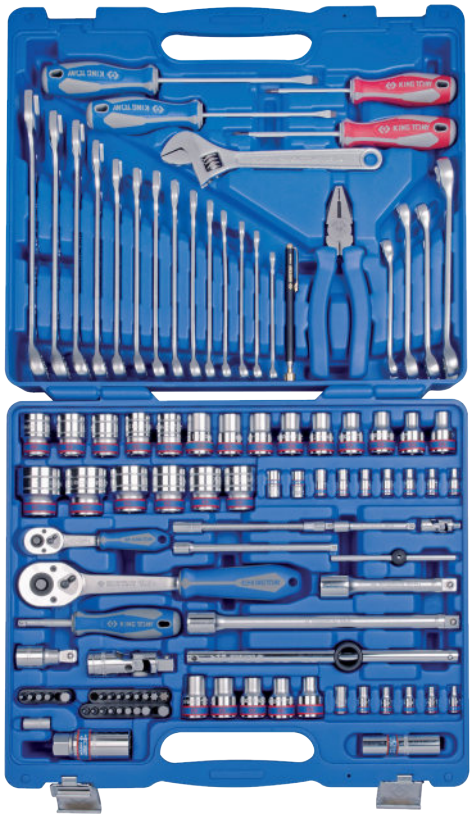

103 PC.

KT NO.	Contents			9.24	1 / 2
7003MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	2375M	E4, E5, E6, E7, E8, E10	4771-10GR
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4375M	E11, E12, E14, E16, E18	2771-55G
	463016RC		1060	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	6111-07
	463021RC		1930	8 x 10, 11 x 13, 12 x 14, 17 x 19	2178DF
7503MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	1025H	H2, H2.5, H3, H4 , H5, H6, H7, H8, H10	3611-08R
	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	1025M	M4, M5, M6, M8, M10	2221-03 2221-06
	463516RC		1025T	T15, T20, T25, T27, T30, T40, T45, T50	2571-45 4572-10
	463521RC		1421	PH1 x 80, PH2 x 100	2312-06
			1422	5.5 x 125, 6.5 x 150	4251-05R 4251-10R
					2792 4791R
					4223-02R
					2128-26
					2141

Socket & Tool Set

7010MR

7510MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

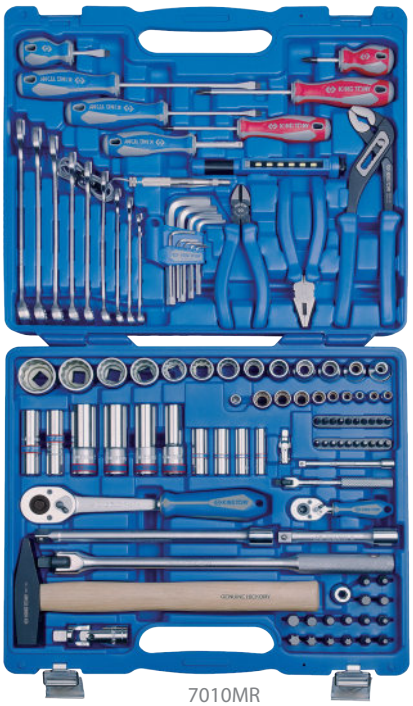

7010MR

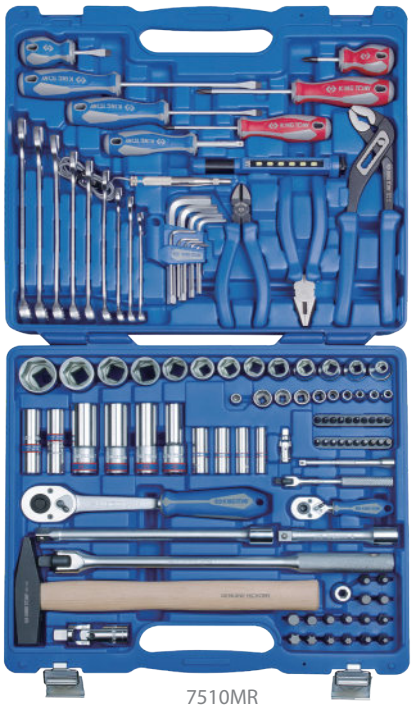

7510MR

110 PC.



KT NO.	Contents	9.2 kg / 1 / 2
7010MR	2230M 8, 10, 12, 13	1025P PH0, PH1, PH2, PH3
	2330M 5, 5.5, 6, 7, 8, 10, 12, 13, 14	1025H H2.5, H3, H4, H5, H6
	4230M 14, 17, 19, 22	1025S 3, 4, 5, 6.5
	4330MR 8, 10, 12, 13, 14, 15, 17, 18, 19, 22, 24, 27, 30	1025T T15, T20, T25, T27, T30
	463014RC 463016RC	1025Z PZ1, PZ2
7510MR	2235M 8, 10, 12, 13	1636H H5, H6, H7, H8, H10, H12
	2335M 5, 5.5, 6, 7, 8, 10, 12, 13, 14	1636M M6, M8, M10, M12
	4235M 14, 17, 19, 22	1636T T30, T40, T45, T50, T55, T60
	4335MR 8, 10, 12, 13, 14, 15, 17, 18, 19, 22, 24, 27, 30	1421 No.1 x 80, No.2 x 100, No.2 x 38
	463514RC 463516RC	1422 5.5 x 100, 6.5 x 150, 6.5 x 38

1145MR 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

1060 8, 10, 12, 13, 14, 15, 17, 18, 19

4771-10GR 276A-04G

2178DF 6111-06 6211-06

6516-10 79831

4452-15FR 2452-05F

4251-05R 4251-10R 2221-04

9DC22 7821-50

4791R 2792 414810M

2141

Socket & Tool Set

7028MR | 7528MR | 7528MR01 1/4"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 Cuft)

128 PC.

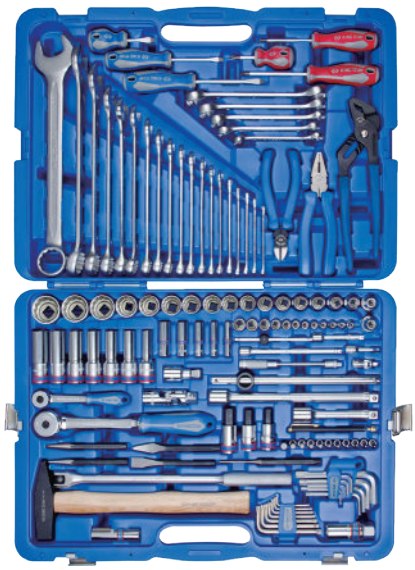

7028MR



7528MR



7528MR01

KT NO.	Contents			Kg 14.95	1 / 2
7028MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2755-55G	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17, 19, 21, 22, 24, 27, 30, 32
	2230M	7, 8, 10, 12, 13		1930	8 x 10, 9 x 11, 12 x 13, 14 x 17, 17 x 19
	4230M	10, 12, 13, 14, 15, 17, 19	4755-10G	1143	T10, T15, T20, T25, T27, T30, T40
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		1145	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	463016RC	463021RC		1421	PH1 x 80, PH2 x 38, PH2 x 100
				1422	5 x 75, 6.5 x 38, 6.5 x 100
				2033	T10, T15, T20, T25, T27
				2035	H4, H5, H6, H7, H8, H10
				4025	H12, H14, H17
				7821-50	
				6111-07	
				6211-06	
				6511-10C	
				4452-15FR	
				2571-45	
				4572-10	
				2311-06	
				2293-02 2293-06	
				2221-03 2221-06	
				4251-05R 4251-10R	
				76215-05	
				76404-06	
				76505-05	
				76104-05	
				76303-05	
				2128-26	
				4223-02R	
				2792 4791R	
7528MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2755-55G		
	2235M	7, 8, 10, 12, 13	4755-10G		
	4235M	10, 12, 13, 14, 15, 17, 19			
7528MR01	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	2771-55G		
	463516RC	463521RC	4771-10GR		

Socket & Tool Set

7053MR01

7553MR01 1/4"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

153 PC.

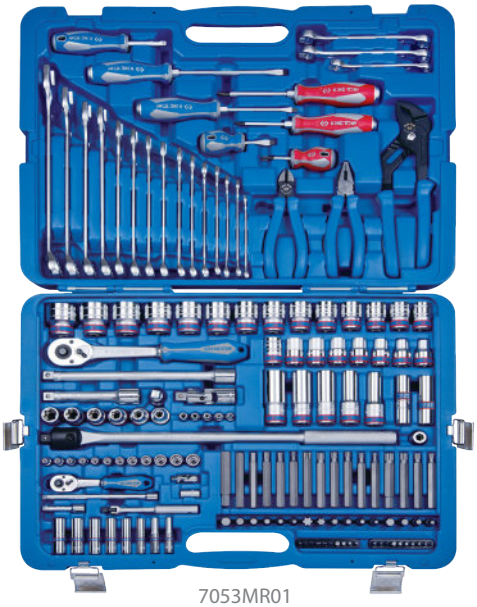

7053MR01



7553MR01

KT NO. | Contents | 14.17 | 1 / 2

7053MR01

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
- 4330MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230M — 13, 14, 17, 19, 22

7553MR01

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
- 4335MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235M — 13, 14, 17, 19, 22

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E12, E14, E16, E18, E20
- 1461 — PH1 x 75, PH2 x 100
- 1462 — 5.5 x 100, 6.5 x 150
- 1421 — PH2 x 38
- 1422 — 6.5 x 38
- 1025S — 4, 5, 6.5
- 1025P — PH0, PH1, PH2
- 1025H — H3, H4, H5, H6
- 1025Z — PZ1, PZ2, PZ3
- 1025T — T10, T15, T20, T25, T27, T30, T40
- 1636H — H5, H6, H7, H8, H10, H12
- 1636M — M6, M8, M10, M12
- 1636T — T30, T40, T45, T50, T55, T60
- 1680H — H5, H6, H7, H8, H10, H12
- 1680M — M6, M8, M10, M12
- 1680T — T25, T30, T40, T45, T50, T55
- 463014RC
- 463016RC
- 1060 — 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27
- 1930 — 8x10, 11x13, 12x14
- 4771-10GR
- 2771-55G
- 6511-10
- 6111-06
- 6211-06
- 2178DF
- 4462-18FR
- 2452-05F
- 2221-02, 2221-06
- 4251-05R, 4251-10R
- 2792, 4791R
- 4223-02R
- 2142
- 414810M

Socket & Wrench Set

9043MR

9543MR 1/4"+3/8"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

143 PC.



9043MR



9543MR



13.7 1 / 2

KT NO.		Contents
9043MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	2375M E4, E5, E6, E7, E8
	3330M 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22	4375M E10, E12, E14, E16, E20
	4330MR 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32	1025P PH0, PH1, PH2, PH3
	4630RC 16, 21	1025S 4, 5.5, 7
		1025U T10H, T15H, T20H, T25H, T27H, T30H, T40H
		1025H H2, H3, H4, H5, H6, H7, H8, H10
		1025Z PZ0, PZ1, PZ2, PZ3
9543MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	1421 PH2 x 38, PH1 x 80
	3330M 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22	1461 PH2 x 100
	4335MR 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32	1422 6.5 x 38, 5.5 x 75
	4635RC 16, 21	1462 6.5 x 150
		1060 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
		1930 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19

1145MR H1.5, H2.0, H2.5, H3.0, H4.0, H5.0, H6.0, H8.0, H10

4771-10GR

2771-55G

2178DF

6111-07

3781-11F

4452-18FR

4581-10

6011-10R

4222-10

2312-06

2221-02
2221-04
2221-06

3221-03
3221-06

4251-03R

3824

3812

2141

2792
3792
4791R

7821-30

79093-03M

79831

Socket & Wrench Set

9519MR50 1/4"+3/8"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

119 PC.

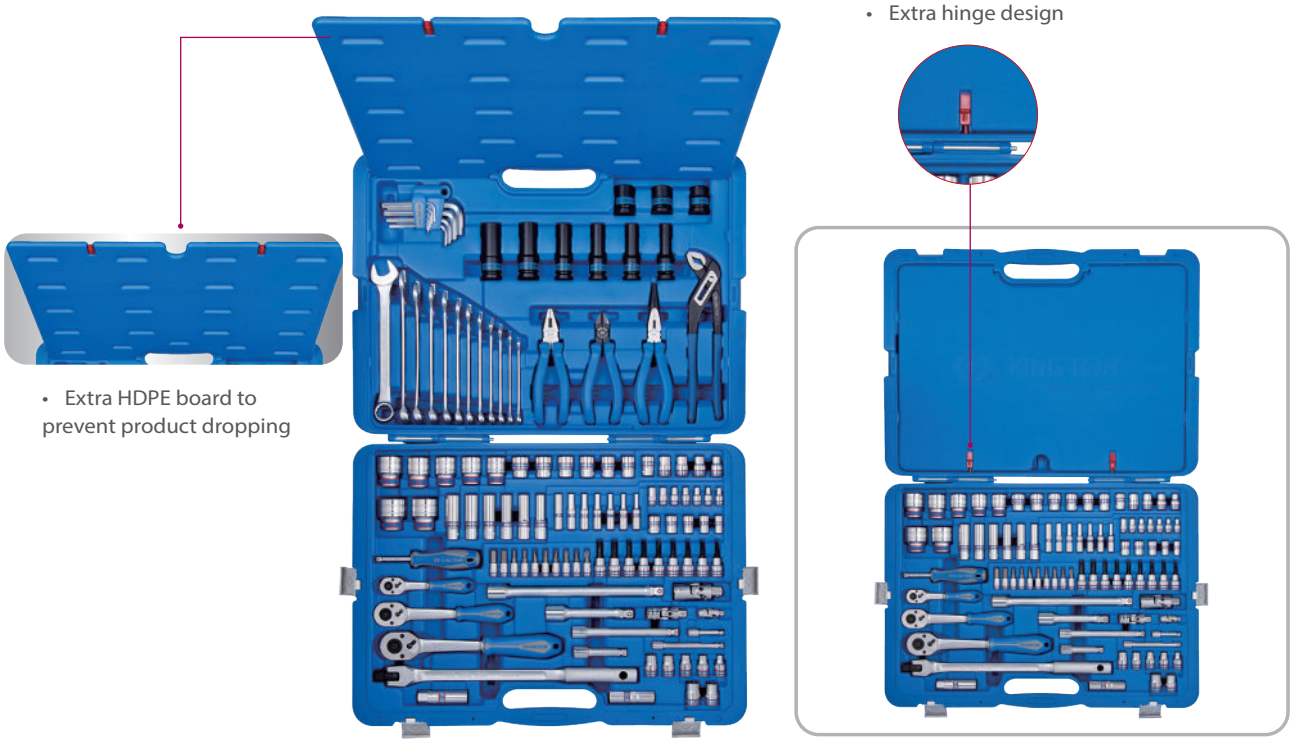

- Extra HDPE board to prevent product dropping
- Extra hinge design

Contents		
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	3335M	9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	4335MR	20, 21, 22, 24, 27, 30, 32
	2235M	4, 4.5, 5, 5.5, 6, 7, 8
	3235M	10, 11, 12, 13, 14, 15
	3375M	E8, E10, E11, E12, E14, E16, E18
	2031	PH1, PH2, PH3
	2032	5.5, 6.5
	2035	H3, H4, H6, H8, H10
	3023	T10, T15, T20, T25, T27, T30, T40, T45, T50

Contents		
	4535M	17, 19, 21
	4435M	10, 12, 13, 14, 17, 19
	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

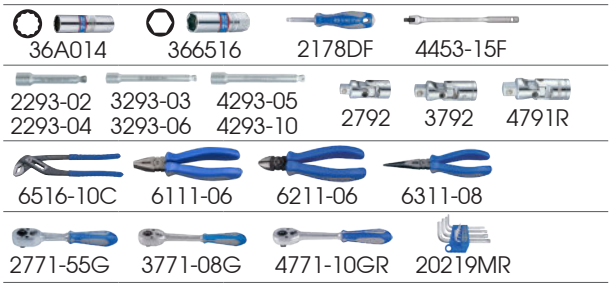

12.48 1 / 2

Tools Bag Set

92543MR

Tool bag size (mm) :
250 x 400 x 30 (0.11 cuft)



92543MR

92543MR01 1/4"



92543MR01

43 PC.

KT NO.		Contents	2.49 / 1 / 10
92543MR	79093-03C 7978-07 2141	2335M 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1421 PH0 x 60, PH1 x 100, PH2 x 38, PH2 x 150 1422 3.0 x 75, 6.5 x 38, 6.5 x 150 1025Z PZ1, PZ2, PZ3 1025T T10, T15, T20, T25, T27, T30, T40	6511-10 6111-07 2178DF 3611-08P 20317MR 8720813 2792
92543MR01	79093-03M 7971-07 2142		

Axial Lock Nut Socket

44K9M 1/2"

- Specially for SKF bearing

64K9M 3/4"

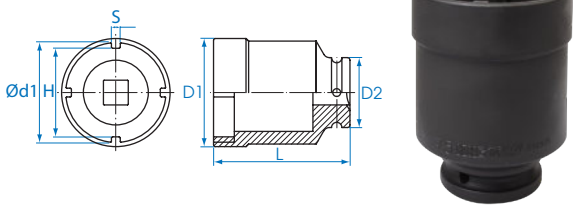



KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	/
44K928M	TMFS 3	28	1/2	24.4	3.8	36	30	30	90	382	1 / 24
44K932M	TMFS 4	32	1/2	28.4	3.8	38	30	34	90	378	1 / 24
44K938M	TMFS 5	38	1/2	34.4	4.8	46	30	40	90	559	1 / 24
64K975M	TMFS 11	75	3/4	69.4	6.8	83.5	54	77	105	1645	1 / 6

External & Internal KM Locknut Socket

44K7 1/2" | 64K7 3/4" | 44K8 1/2" | 64K8 3/4"

- Specially for SKF bearing

KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K732M	TMFS 4	32	1/2	28.3	3.7	37.3	30	28.3	60	207	1 / 24
44K738M	TMFS 5	38	1/2	34.3	4.7	44.3	30	34.3	60	259	1 / 24
44K745M	TMFS 6	45	1/2	41.3	4.7	52.3	30	41.3	60	321	1 / 24
44K752M	TMFS 7	52	1/2	48.3	4.7	59.3	30	48.3	60	350	1 / 20
44K758M	TMFS 8	58	1/2	53.5	4.7	65.5	30	53.5	60	422	1 / 20
64K765M	TMFS 9	65	3/4	60.5	5.7	73.5	42	60.5	68	601	1 / 20
64K770M	TMFS 10	70	3/4	65.5	5.7	78.5	42	65.5	68	625	1 / 12
64K775M	TMFS 11	75	3/4	69.5	6.7	82.6	42	59.5	68	664	1 / 12
64K780M	TMFS 12	80	3/4	74.5	6.7	87.7	42	74.5	68	691	1 / 12



44K7 & 64K7



KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K832M	TMFS 4	32	1/2	28.3	3.7	41.5	30	34.5	60	282	1 / 24
44K838M	TMFS 5	38	1/2	34.3	4.7	49.5	30	40.7	60	365	1 / 24
44K845M	TMFS 6	45	1/2	41.3	4.7	59.0	30	48.0	60	474	1 / 24
44K852M	TMFS 7	52	1/2	48.3	4.7	66.0	30	54.8	60	540	1 / 20
44K858M	TMFS 8	58	1/2	53.5	5.7	73.0	30	60.8	60	582	1 / 20
64K865M	TMFS 9	65	3/4	60.5	5.7	80.0	42	67.7	68	915	1 / 20
64K870M	TMFS 10	70	3/4	65.5	5.7	86.0	42	72.7	68	1022	1 / 12
64K875M	TMFS 11	75	3/4	69.5	6.7	93.0	42	78.8	68	1167	1 / 12
64K880M	TMFS 12	80	3/4	74.5	6.7	98.0	42	83.5	68	1329	1 / 12



44K8 & 64K8



Application: Removal and installation of bearings, gear wheels, cone roll bearings, ball bearings etc.
Trucks, land and construction machines, municipally and forestery technology etc.

Internal KM Locknut Socket Set

7K09MP

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Use in conjunction with extensions, ratchets etc.
- Working range KM4 to KM12 (nuts of ball bearing)

	Contents		7.90 kg	1 / 3
	44K8	TMFS 4, 5, 6, 7, 8		
	64K8	TMFS 9, 10, 11, 12		



9 PC.

External KM Locknut Socket Set

7K09MP01

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Slim design
- Working range KM4 to KM12 (nuts of ball bearing)

	Contents		5.33 kg	1 / 3
	44K7	TMFS 4, 5, 6, 7, 8		
	64K7	TMFS 9, 10, 11, 12		



9 PC.

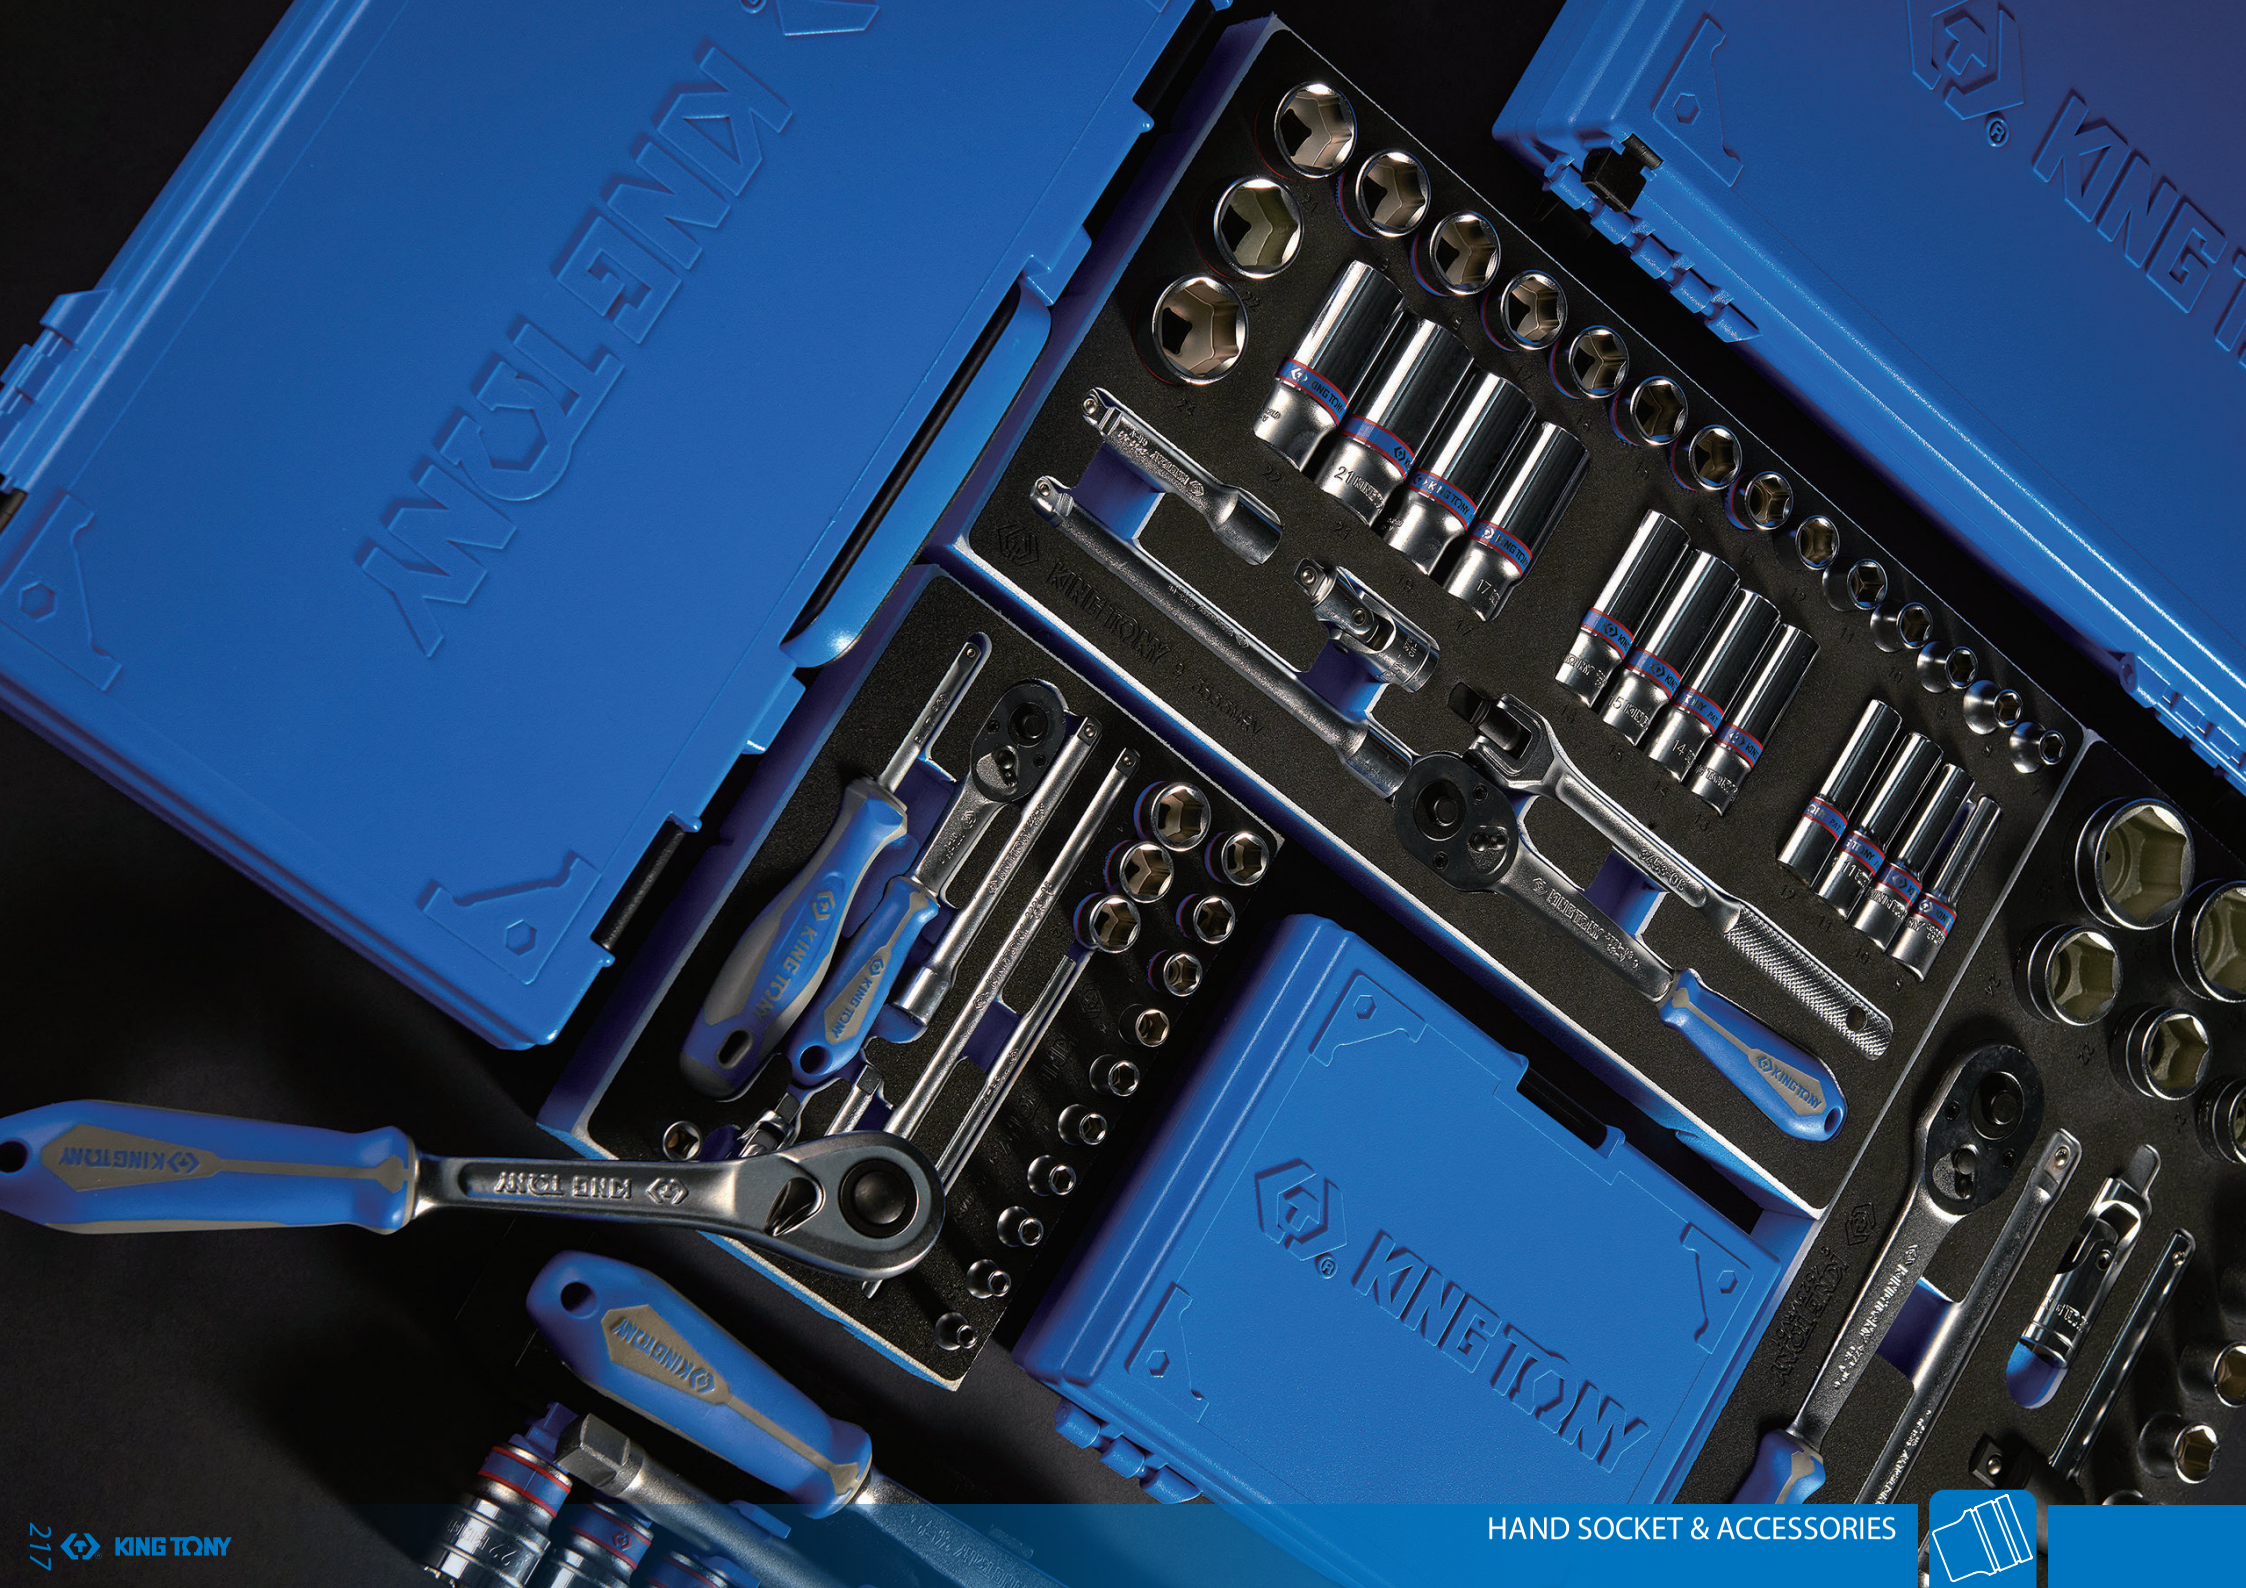
KINGTONY

IMPACT SOCKETS & ACCESSORIES

Professional production & quality control



DIN 50%

KING TONY impact socket 50% higher torque on performance.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our Impact socket reach 50% higher torque than DIN standards.


KING TONY CR-MO

Standard Impact Socket & Rail Set

2535M — 1/4"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
253504M	4	7.5	13	4	23	12	20 / 600
253545M	4.5	8.1	13	5	23	12	20 / 600
253505M	5	8.8	13	6	23	11	20 / 600
253555M	5.5	9.4	13	6	23	12	20 / 600
253506M	6	10.0	13	7	23	13	20 / 600
253507M	7	11.3	13	7	23	13	20 / 600
253510M	10	15.0	13	9	23	17	12 / 360
253513M	13	18.8	13	9	23	22	12 / 360
253514M	14	19.8	13	9	23	23	10 / 300

Standard Impact Socket

3535M — 3/8"

- DIN 3129, ISO 2725-2

3535S — 3/8"

- ANSI / ASME B107.2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
353506M	6	10.6	19	5	32	33	12 / 360
353507M	7	11.8	19	5	32	33	12 / 360
353508M	8	13.2	19	6	32	35	12 / 360
353509M	9	14.5	19	6	32	36	12 / 360
353510M	10	15.5	19	7	32	37	12 / 360
353511M	11	17.0	19	7	32	39	12 / 360
353512M	12	18.2	19	8	32	39	12 / 360
353513M	13	19.4	22	9	32	53	10 / 200
353514M	14	20.7	22	9	32	54	10 / 200
353515M	15	22.0	22	10	32	56	10 / 200
353516M	16	23.8	22	10	32	57	10 / 200
353517M	17	24.8	22	11	32	58	10 / 200
353518M	18	25.8	22	11	32	62	10 / 200
353519M	19	27.6	22	13	32	63	10 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
353508S	1/4	10.8	19	5	32	32	12 / 360
353510S	5/16	13.0	19	6	32	36	12 / 360
353512S	3/8	15.3	19	7	32	38	12 / 360
353514S	7/16	17.0	19	7	32	38	12 / 360
353516S	1/2	18.2	19	9	32	53	12 / 360
353518S	9/16	20.7	22	9	32	53	10 / 200
353520S	5/8	23.8	22	10	32	57	10 / 200
353522S	11/16	24.5	22	11	32	60	10 / 200
353524S	3/4	27.0	22	11	32	61	10 / 160

Impact Accessory

2863P — 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3121



KT NO.	Spec.	D mm	g	
2863P	1/4"F x 3/8"M	14	20	12 / 360

Deep Impact Socket

3435M — 3/8"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
343506M	6	10.6	19	10	65	50	6 / 120
343507M	7	11.8	19	10	65	55	6 / 120
343508M	8	13.2	19	12	65	68	6 / 120
343509M	9	14.5	19	12	65	65	6 / 120
343510M	10	15.5	19	12	65	82	6 / 120
343511M	11	17.0	19	13	65	75	6 / 120
343512M	12	18.2	19	14	65	89	6 / 120
343513M	13	19.4	22	14	65	111	6 / 120
343514M	14	20.7	22	14	65	109	6 / 120
343515M	15	22.0	22	16	65	112	6 / 120
343516M	16	23.8	22	16	65	126	6 / 96
343517M	17	24.8	22	17	65	143	6 / 96
343518M	18	25.8	22	18	65	133	6 / 96
343519M	19	27.6	22	20	65	171	6 / 96
343520M	20	28.3	22	20	65	154	6 / 96
343521M	21	29.5	22	22	65	161	6 / 96
343522M	22	30.8	22	22	65	178	5 / 60
343523M	23	32.0	22	24	65	177	5 / 60
343524M	24	32.5	22	24	65	176	5 / 60

Deep Impact Socket

3435S — 3/8"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
343508S	1/4	10.8	19	10	63.5	62	6 / 120
343510S	5/16	13.0	19	12	63.5	71	6 / 120
343512S	3/8	15.3	19	12	63.5	82	6 / 120
343514S	7/16	17.0	19	13	63.5	84	6 / 120
343516S	1/2	18.2	19	14	63.5	113	6 / 120
343518S	9/16	20.7	22	14	65	114	6 / 120
343520S	5/8	23.8	22	16	65	126	6 / 96
343522S	11/16	24.5	22	17	65	138	6 / 96
343524S	3/4	27.0	22	20	65	154	6 / 96
343526S	13/16	29.5	22	22	65	156	6 / 96
343528S	7/8	30.8	22	22	65	172	5 / 60

Impact Star Socket

3575M — 3/8"

- For torx external screw
- DIN 3121





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
357505M	E5	9.6	19	4.0	32	31	12 / 360
357506M	E6	10.2	19	5.0	32	31	12 / 360
357507M	E7	10.8	19	6.0	32	33	12 / 360
357508M	E8	11.5	19	6.5	32	35	12 / 360
357510M	E10	12.0	19	7.0	32	33	12 / 360
357512M	E12	14.0	19	9.0	32	34	12 / 360
357514M	E14	17.0	19	9.5	32	40	12 / 360

Impact Bit Socket

KT No. & D1



CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

3051 — 3/8"

- For phillips head screw
- DIN 3121



KT NO.	No.	L mm	g	
305101	PH1	55	33	12 / 360
305102	PH2	55	35	12 / 360
305103	PH3	55	40	12 / 360
305104	PH4	55	45	12 / 360

3052 — 3/8"

- For slotted head screw
- DIN 3121



KT NO.	Tip widh mm	L mm	g	
305255	5.5	55	32	12 / 360
305208	8	55	39	12 / 360
305210	10	55	45	12 / 360

3055M — 3/8"

- For hexagon head screw
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
305504M	H4	55	20.8	34	12 / 360
305505M	H5	55	36.0	38	12 / 360
305506M	H6	55	62.4	40	12 / 360
305507M	H7	55	97.0	43	12 / 360
305508M	H8	55	144.0	46	12 / 360
305510M	H10	55	264.0	55	12 / 360
305512M	H12	55	480.0	65	12 / 360
305514M	H14	55	650.0	77	12 / 288
305516M	H16	55	680.0	91	12 / 288
305517M	H17	55	715.0	99	12 / 288

3055S — 3/8"

- For hexagon head
- DIN 3121



KT NO.	inch	L mm	Max. torq N·m	g	
305504S	1/8	55	18.8	34	12 / 360
305545S	9/64	55	20.8	34	12 / 360
305505S	5/32	55	22.5	36	12 / 360
305506S	3/16	55	36.0	36	12 / 360
305507S	7/32	55	62.4	38	12 / 360
305508S	1/4	55	93.6	41	12 / 360
305510S	5/16	55	144.0	46	12 / 360
305512S	3/8	55	264.0	54	12 / 360
305516S	1/2	55	518.0	71	12 / 360

Impact Bit Socket

KT No. & D1

3065M — 3/8"

- For hexagon head screw
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
306504M	H4	90	20.8	39	8 / 160
306505M	H5	90	36.0	44	8 / 160
306506M	H6	90	62.4	50	8 / 160
306508M	H8	90	144.0	66	8 / 160
306510M	H10	90	264.0	86	8 / 160

3053 / 3063 — 3/8"

- For torx internal screw
- DIN 3121



3053



3063

KT NO.	Size	L mm	g	
305310	T10	55	35	12 / 360
305315	T15	55	34	12 / 360
305320	T20	55	35	12 / 360
305325	T25	55	36	12 / 360
305327	T27	55	36	12 / 360
305330	T30	55	36	12 / 360
305340	T40	55	39	12 / 360
305345	T45	55	43	12 / 360
305350	T50	55	44	12 / 360
305355	T55	55	52	12 / 288
305360	T60	55	60	12 / 288
306320	T20	90	42	8 / 160
306325	T25	90	42	8 / 160
306327	T27	90	43	8 / 160
306330	T30	90	45	8 / 160
306340	T40	90	50	8 / 160
306345	T45	90	57	8 / 160
306350	T50	90	64	8 / 160
306355	T55	90	82	8 / 160

Impact Accessory

3862P — 3/8"

- Adapter
- Convert to 1/4" drive
- 3862P → Max. torque : 62 N·m
- DIN 3121



KT NO.	Spec.	D mm	g	
3862P	3/8"F x 1/4"M	20.8	32	24 / 384

3864P — 3/8"

- Adapter
- Convert to 1/2" drive
- DIN 3121



KT NO.	Spec.	D mm	g	
3864P	3/8"F x 1/2"M	20.8	53	24 / 384

3147 — 3/8"

- Bit holder



KT NO.	Size	L mm	g	
314708S	1/4"	40	41	12 / 420
314710S	5/16"	40	43	12 / 420
314710M	10mm	40	42	12 / 420

3260P — 3/8"

- Extension bar
- DIN 3121



KT NO.	Overall length inch	Overall length mm	g	
3260-03P	3	75	98	6 / 120
3260-04P	4	100	121	8 / 160
3260-05P	5	125	147	8 / 144
3260-06P	6	150	169	5 / 100
3260-08P	8	200	217	6 / 72
3260-10P	10	250	264	6 / 54

3796P — 3/8"

- Universal joint
- DIN 3121





KT NO.	Overall length inch	Overall length mm	D mm	g	
3796P	2	50	22	87	10 / 200

90608

- Locking pin
- Chrome vanadium steel
- DIN 3129

90609 — 3/8"



KT NO.	Desp.	ø	d / ℓ	Applied to socket sizes
90608	pin	2.5	14	3535M (6~12 mm)3535S (1/4~1/2 inch) 3435M (6~12 mm) 3435S (1/4~1/2 inch) 3055M (4~12 mm) 3055S (3/16~1/2inch) 3065M (4~10 mm) 3053 (T10~T15) 3575M (E5~E14) 3053.3055.3065.3147.3862.3864
90609	pin	2.5	16	3535M (13~19 mm) 3535S (9/16~3/4inch) 3435M (13~24 mm) 3435S (9/16~7/8inch) 3260.3796

Impact Bit Socket Set

3406MP 3/8"

- For hexagon head screw
- 55mmL

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)

6 PC.



Contents	0.72	1 / 20
3055M	H4, H5, H6, H8, H10, H12	

3419PP 3/8"

- For torx internal head
- 55mmL

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)

9 PC.



Contents	0.62	1 / 20
3053	T10, T15, T20, T25, T27, T30, T40, T45, T50	



Standard Impact Socket

KT No. & D1

4530M 1/2"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453008M	8	15.0	25	7	38	65	10 / 200
453009M	9	16.3	25	7	38	68	10 / 200
453010M	10	17.6	25	8	38	68	10 / 200
453011M	11	18.8	25	8	38	69	10 / 200
453012M	12	20.0	25	9	38	73	10 / 200
453013M	13	21.2	25	10	38	71	10 / 200
453014M	14	22.5	25	10	38	78	10 / 200
453015M	15	23.8	30	11	38	111	10 / 160
453016M	16	25.0	30	11	38	118	10 / 160
453017M	17	26.2	30	12	38	116	10 / 160
453018M	18	27.5	30	13	38	115	10 / 160
453019M	19	28.8	30	13	38	114	10 / 160
453020M	20	29.5	30	13	38	117	10 / 160
453021M	21	30.0	30	14	40	121	8 / 160
453022M	22	32.4	30	14	40	129	8 / 160
453023M	23	33.2	30	15	40	130	8 / 160
453024M	24	34.4	30	15	42	147	6 / 120
453025M	25	36.0	30	15	42	164	6 / 120
453026M	26	37.0	30	15	42	168	6 / 120
453027M	27	38.0	30	16	44	170	6 / 120
453028M	28	41.0	30	16	44	205	6 / 120
453029M	29	41.0	30	17	44	184	6 / 120
453030M	30	42.0	30.5	17	44	197	6 / 120
453032M	32	46.0	30	19	44	226	6 / 120
453033M	33	46.0	30	19	46	246	6 / 96
453034M	34	46.0	30	20	46	217	6 / 96
453036M	36	47.0	30	20	46	214	6 / 96
453038M	38	50.0	30	21	50	279	6 / 60
453041M	41	56.0	30	22	52	402	6 / 60

4530S 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453016S	1/2	20	25	10	38	72	10 / 200
453018S	9/16	22	25	10	38	76	10 / 200
453020S	5/8	24	25	11	38	78	10 / 200
453022S	11/16	26	30	12	38	116	10 / 160
453024S	3/4	28.8	30	13	38	120	10 / 160
453026S	13/16	30	30	14	40	122	8 / 160
453028S	7/8	32	30	14	40	138	8 / 160
453030S	15/16	34	30	15	42	148	6 / 120
453032S	1	36	30	15	42	162	6 / 120
453034S	1-1/16	38	30	16	44	167	6 / 120
453036S	1-1/8	41	30	17	44	189	6 / 120
453038S	1-3/16	42	30.5	17	44	203	6 / 120

Stubby Impact Socket

4525M — 1/2"

- For impact wrench use
- DIN 3129, ISO 2725-2



19, 22, 24 mm



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
452513M	13	20	26	5.5	28.5	57	10 / 160
452514M	14	22	26	5.5	28.5	61	10 / 160
452517M	17	26	26	5.5	28.5	64	10 / 160
452519M	19	28	26	10	28.5	63	10 / 160
452521M	21	30	30	10	28.5	81	8 / 160
452522M	22	32	30	10	28.5	87	8 / 160
452524M	24	34	30	10	28.5	80	6 / 120

Standard Impact Socket

4535M — 1/2"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453508M	8	15.0	25	7	38	67	10 / 200
453509M	9	16.3	25	7	38	69	10 / 200
453510M	10	17.6	25	8	38	70	10 / 200
453511M	11	18.8	25	8	38	71	10 / 200
453512M	12	20.0	25	9	38	73	10 / 200
453513M	13	21.2	25	10	38	75	10 / 200
453514M	14	22.5	25	10	38	78	10 / 200
453515M	15	23.8	30	11	38	117	10 / 160
453516M	16	25.0	30	11	38	118	10 / 160
453517M	17	26.2	30	12	38	121	10 / 160
453518M	18	27.5	30	13	38	123	10 / 160
453519M	19	28.8	30	13	38	117	10 / 160
453520M	20	29.5	30	13	38	115	10 / 160
453521M	21	30.0	30	14	40	118	8 / 160
453522M	22	31.8	30	14	40	132	8 / 160
453523M	23	33.8	30	15	40	144	8 / 160
453524M	24	33.8	30	15	42	139	6 / 120
453525M	25	35.8	30	15	42	156	6 / 120
453526M	26	37.8	30	15	42	173	6 / 120
453527M	27	38.0	30	16	44	175	6 / 120
453528M	28	41.0	30	16	44	204	6 / 120
453529M	29	41.0	30	17	44	198	6 / 120
453530M	30	42.0	30.5	17	44	206	6 / 120
453532M	32	46.0	30	19	44	239	6 / 120
453533M	33	46.0	30	19	46	246	6 / 96
453534M	34	46.0	30	20	46	240	6 / 96
453535M	35	46.0	30	20	46	227	6 / 96
453536M	36	47.0	30	20	46	243	6 / 96
453537M	37	49.0	30	21	48	271	6 / 60
453538M	38	50.0	30	21	50	291	6 / 60
453539M	39	51.0	30	22	50	306	6 / 60
453541M	41	56.0	30	22	52	403	6 / 60
453546M	46	64.0	30	23	55	595	4 / 32

4535S — 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453510S	5/16	15	25	7	38	66	10 / 200
453512S	3/8	17	25	7	38	70	10 / 200
453514S	7/16	18	25	8	38	70	10 / 200
453516S	1/2	20	25	10	38	72	10 / 200
453518S	9/16	22	25	10	38	77	10 / 200
453520S	5/8	24	25	11	38	80	10 / 160
453522S	11/16	26	30	12	38	116	10 / 160
453524S	3/4	28.8	30	13	38	116	10 / 160
453526S	13/16	30	30	14	40	127	8 / 160
453528S	7/8	32	30	14	40	136	8 / 160
453530S	15/16	34	30	15	42	152	6 / 120
453532S	1	36	30	15	42	164	6 / 120
453534S	1-1/16	38	30	16	44	180	6 / 120
453536S	1-1/8	41	30	17	44	199	6 / 120
453538S	1-3/16	42	30.5	17	44	208	6 / 120
453540S	1-1/4	46	30	18	44	237	6 / 120

Impact Socket Set

4472MP

- Standard impact socket

Stand size (mm) :
415 x 336 x 320

4472SP — 1/2"



4472MP / 4472SP

KT NO.	PC.		Contents	Each Q'ty
4472MP	158	4535M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20, 21	6
			22, 23, 24	7
			25, 26, 27, 28	6
			29, 30, 32	5
4472SP	106	4535S	5/16, 3/8, 7/16, 1/2, 9/16	8
			5/8, 11/16, 3/4, 13/16	6
			7/8, 15/16,	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

KT NO.	Spec.	kg	Cuft
4472MP-A	87103	6.37	0.67
4472MP-D	158 PC. socket content	19.63	0.54
4472SP-A	87103	6.37	0.67
4472SP-D	106 PC. socket content	20.4	0.37

Deep Impact Socket

KT No. & D1

4430M 1/2"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443008M	8	15.0	24.8	12	78	125	6 / 120
443009M	9	16.3	24.8	12	78	135	6 / 120
443010M	10	17.6	24.8	12	80	153	6 / 120
443011M	11	18.8	24.8	13	80	150	6 / 120
443012M	12	20.0	24.8	14	80	166	6 / 120
443013M	13	21.2	24.8	14	80	158	6 / 120
443014M	14	22.5	24.8	14	80	172	6 / 120
443015M	15	23.8	29.8	16	80	233	6 / 96
443016M	16	25.0	29.8	16	80	232	6 / 96
443017M	17	26.2	29.8	16	80	240	6 / 96
443018M	18	27.5	29.8	17	80	253	6 / 96
443019M	19	28.8	29.8	18	80	272	6 / 96
443020M	20	29.5	29.8	20	80	253	6 / 96
443021M	21	29.8	29.8	20	80	254	6 / 96
443022M	22	32.4	30.0	22	80	296	5 / 60
443023M	23	33.2	30.0	24	80	291	5 / 60
443024M	24	34.4	30.0	24	80	299	5 / 60
443027M	27	38.0	30.0	27	80	343	5 / 60
443030M	30	42.0	30.5	30	80	397	5 / 50
443032M	32	46.0	30.0	32	80	454	1 / 24
443036M	36	47.0	30.0	36	80	422	1 / 24

4430S 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443020S	5/8	24.0	24.8	16	80	179	6 / 96
443024S	3/4	28.8	29.8	18	80	258	6 / 96
443028S	7/8	32.0	30.0	22	80	284	5 / 60
443030S	15/16	34.0	30.0	24	80	297	5 / 60
443032S	1	36.0	30.0	24	80	328	5 / 60
443034S	1-1/16	38.0	30.0	27	80	340	5 / 60
443036S	1-1/8	41.0	30.0	27	80	394	5 / 50
443040S	1-1/4	46.0	30.0	32	80	477	1 / 24
443042S	1-5/16	46.0	30.0	34	80	440	1 / 24
443048S	1-1/2	50.0	30.0	34	80	454	1 / 24

4435M 1/2"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443508M	8	15.0	24.8	12	78	124	6 / 120
443509M	9	16.3	24.8	12	78	137	6 / 120
443510M	10	17.6	24.8	12	80	149	6 / 120
443511M	11	18.8	24.8	13	80	153	6 / 120
443512M	12	20.0	24.8	14	80	164	6 / 120
443513M	13	21.2	24.8	14	80	169	6 / 120
443514M	14	22.5	24.8	14	80	168	6 / 120
443515M	15	23.8	29.8	16	80	225	6 / 96
443516M	16	25.0	29.8	16	80	233	6 / 96
443517M	17	26.2	29.8	16	80	239	6 / 96
443518M	18	27.5	29.8	17	80	246	6 / 96
443519M	19	28.8	29.8	18	80	254	6 / 96
443520M	20	29.0	29.8	20	80	244	6 / 96
443521M	21	29.8	29.8	20	80	247	6 / 96
443522M	22	31.8	30.0	22	80	278	5 / 60
443523M	23	33.8	30.0	24	80	316	5 / 60
443524M	24	33.8	30.0	24	80	297	5 / 60
443525M	25	35.8	30.0	24	80	326	5 / 60
443526M	26	37.8	30.0	27	80	367	5 / 60
443527M	27	38.0	30.0	27	80	364	5 / 60
443528M	28	41.0	30.0	27	80	424	5 / 50
443529M	29	41.0	30.0	27	80	407	5 / 50
443530M	30	42.0	30.5	30	80	422	5 / 50
443532M	32	46.0	30.0	32	80	503	1 / 24
443533M	33	46.0	30.0	32	80	471	1 / 24
443534M	34	46.0	30.0	33	80	466	1 / 24
443536M	36	47.0	30.0	36	80	445	1 / 24
443538M	38	50.0	30.0	38	80	515	1 / 24
443541M	41	56.0	30.0	38	80	689	1 / 24
443546M	46	64.0	30.0	40	80	943	1 / 24

4435S 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443510S	5/16	14.0	24.8	12	78	123	6 / 120
443512S	3/8	17.0	24.8	12	80	151	6 / 120
443514S	7/16	18.0	24.8	13	80	151	6 / 120
443516S	1/2	20.0	24.8	14	80	157	6 / 120
443518S	9/16	22.0	24.8	14	80	175	6 / 120
443520S	5/8	24.0	24.8	16	80	182	6 / 96
443522S	11/16	26.0	29.8	17	80	247	6 / 96
443524S	3/4	28.8	29.8	18	80	254	6 / 96
443526S	13/16	29.8	29.8	20	80	263	6 / 96
443528S	7/8	32.0	30.0	22	80	294	5 / 60
443530S	15/16	34.0	30.0	24	80	308	5 / 60
443532S	1	36.0	30.0	24	80	337	5 / 60

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443534S	1-1/16	38.0	30.0	27	80	364	5 / 60
443536S	1-1/8	41.0	30.0	27	80	407	5 / 50
443538S	1-3/16	42.0	30.5	30	80	418	5 / 50
443540S	1-1/4	46.0	30.0	32	80	499	1 / 24
443542S	1-5/16	46.0	30.0	34	80	471	1 / 24

Impact Socket Set

4466MP 4466SP 1/2"

- Deep impact socket

Stand size (mm) :
415 x 336 x 320



4466MP / 4466SP

KT NO.	PC.		Contents	Each Q'ty
4466MP	166	4435M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20	7
			21, 22, 23, 24	7
			25, 26, 27, 28, 29	6
			30, 32	5
4466SP	110	4435S	5/16, 3/8, 7/16,	8
			1/2, 9/16	8
			5/8, 11/16, 3/4,	7
			13/16, 7/8, 15/16	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

Packing NO.	Spec.	Kg	Cuft
4466MP-A	87103	5.87	0.54
4466MP-DA	166 PC. socket content	21.63	0.44
4466MP-DB		23.40	0.37
4466SP-A	87103	6.37	0.67
4466SP-D	110 PC. socket content	28.0	0.47

Impact Thin Wall Socket

KT No. & D1

4835M 1/2"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
483510M	10	16	25.0	20	52	93	10 / 180
483511M	11	17	25.0	20	52	88	10 / 180
483512M	12	18	25.0	20	52	92	10 / 180
483513M	13	19	25.0	20	52	95	10 / 180
483514M	14	21	25.0	20	52	99	10 / 180
483516M	16	23	25.0	20	52	101	8 / 80
483517M	17	25	25.0	23	52	106	8 / 80
483519M	19	27	30.0	23	52	150	8 / 80
483521M	21	29	30.0	25	52	142	8 / 80
483522M	22	31	30.0	25	52	158	8 / 80
483523M	23	32	30.0	26	52	172	8 / 80
483524M	24	33	30.0	26	52	165	8 / 80
483526M	26	36	30.0	27	65	241	6 / 60
483527M	27	37	30.0	27	65	249	6 / 60
483530M	30	41	30.5	27	65	294	5 / 50
483535M	35	46	30.0	32	70	367	1 / 24

4930M 1/2"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493008M	8	13.2	25	12	78	118	6 / 120
493009M	9	14.0	25	12	78	118	6 / 120
493010M	10	15.5	25	12	80	134	6 / 120
493011M	11	16.7	25	13	80	136	6 / 120
493012M	12	18.0	25	14	80	142	6 / 120
493013M	13	19.0	25	14	80	165	6 / 120
493014M	14	20.5	25	14	80	153	6 / 120
493015M	15	21.5	30	16	80	204	6 / 96
493016M	16	23.0	30	16	80	219	6 / 96
493017M	17	24.5	30	16	80	218	6 / 96
493018M	18	25.5	30	17	80	267	6 / 96
493019M	19	27.0	30	18	80	241	6 / 96
493020M	20	28.0	30	20	80	235	6 / 96
493021M	21	29.0	30	20	80	241	6 / 96
493022M	22	30.5	30	22	80	252	5 / 60
493023M	23	32.0	30	24	80	267	5 / 60
493024M	24	33.0	30	24	80	277	5 / 60
493027M	27	37.0	30	27	80	318	5 / 60
493030M	30	40.5	30	30	80	355	5 / 50
493032M	32	42.5	30	32	80	356	5 / 50
493036M	36	45.5	30	36	80	361	1 / 24

4935M 1/2"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493510M	10	15.5	25	12	80	133	6 / 120
493511M	11	16.7	25	13	80	134	6 / 120
493512M	12	18.0	25	14	80	140	6 / 120
493513M	13	19.0	25	14	80	142	6 / 120
493514M	14	20.5	25	14	80	142	6 / 120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493516M	16	23.0	30	16	80	201	6 / 96
493517M	17	24.5	30	16	80	211	6 / 96
493519M	19	27.0	30	18	80	222	6 / 96
493521M	21	29.0	30	20	80	230	6 / 96
493522M	22	30.5	30	22	80	261	5 / 60
493523M	23	32.0	30	24	80	273	5 / 60
493524M	24	33.0	30	24	80	285	5 / 60
493526M	26	35.5	30	27	80	303	5 / 60
493527M	27	37.0	30	27	80	335	5 / 60
493530M	30	40.5	30	30	80	376	5 / 50

Impact Thin Wall Socket

4935S 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
493510S	5/16	13.0	25.0	12	80	129	6 / 120
493512S	3/8	16.0	25.0	12	80	144	6 / 120
493514S	7/16	16.7	25.0	13	80	148	6 / 120
493516S	1/2	19.0	25.0	14	80	159	6 / 120
493518S	9/16	20.5	25.0	14	80	165	6 / 120
493520S	5/8	23.0	25.0	16	80	167	6 / 96
493522S	11/16	24.5	30.0	17	80	235	6 / 96
493524S	3/4	27.0	30.0	18	80	224	6 / 96
493526S	13/16	29.0	30.0	20	80	250	6 / 96
493528S	7/8	30.5	30.0	22	80	260	5 / 60
493530S	15/16	33.0	30.0	24	80	336	5 / 60
493532S	1	34.0	30.0	24	80	356	5 / 60
493534S	1-1/16	37.0	30.0	27	80	405	5 / 60
493536S	1-1/8	39.0	30.5	27	80	355	5 / 50
493538S	1-3/16	40.5	30.0	30	80	417	5 / 50
493540S	1-1/4	42.5	30.0	32	80	389	5 / 50

Extra Thin Wall Impact Socket

4415M 1/2"

- Finishing - phosphate sunk
- For aluminum alloy wheel
- Material - chrome molybdenum alloy steel
- Super thin wall version has less strength than a standard deep one
- DIN 3121

Thin walled design (D1)





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
441517M	17	23.8	25	17	80	163	6 / 96
441519M	19	25.8	30	20	80	214	6 / 96
441521M	21	27.8	30	22	80	221	6 / 96
441522M	22	29.5	30	24	80	238	6 / 96

Wheel Nut Impact Socket KT No. & D1

- Material - chrome molybdenum alloy steel
- Durable outer sleeve protects polished wheels and lug nuts
- Plastic sleeve thin wall version





(Except the 15 & 22mm)

4945M 1/2"





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
new 494515M	15	25.0	26.0	25	85	160	5 / 60
494517M	17	27.3	30.0	26	85	213	5 / 60
494519M	19	29.3	30.0	26	85	232	5 / 60
494521M	21	30.9	30.0	26	85	243	5 / 60
new 494522M	22	32.0	31.5	25	85	266	5 / 60

4955MX 1/2"

- Plastic insert to protect the surface of the wheel rim
- 17MX: Especially for wheel mounting and dismounting on AMG-rims and/or alloy rims with deeply located wheel bolts
- 19MX: Particularly suitable for wheel mounting and assembly on SUVs e.g. PORSCHE Cayenne, Macan, AUDI Q7, Q5, VW Touareg
- 21MX: Particularly for wheel mounting and installation of aluminium rims to HYUNDAI, KIA, TOYOTA, MAZDA, TESLA





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
495517MX	17	27.3	30	25	150	310	2 / 48
495519MX	19	29.3	30	25	150	339	2 / 48
495521MX	21	30.9	30	25	150	413	2 / 48

Double - Ended Impact Socket

4915M



4915S 1/2"



KT NO.	mm / inch	D1 mm	D2 mm	L mm	L1 mm	L2 mm	g	
49151719M	17 x 19	26	28	77	22	26	210	6 / 96
49151921M	19 x 21	26	28	77	23	26	200	6 / 96
49152122M	21 x 22	30	32	77	20	26	310	5 / 60
49152123M	21 x 23	30	32	77	22	26	310	5 / 60
49152426S	3/4" x 13/16"	26	28	77	23	26	200	6 / 96

Impact Star Socket

4575M — 1/2"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
457510M	E10	14.0	25.0	7.5	38	68	10 / 200
457512M	E12	15.9	25.0	9.0	38	68	10 / 200
457514M	E14	17.7	25.0	10.0	38	71	10 / 200
457516M	E16	20.0	25.0	11.0	38	75	10 / 200
457518M	E18	22.0	25.0	12.5	38	78	10 / 200
457520M	E20	24.5	30.0	14.0	38	120	10 / 160





CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

Impact Bit Socket

4015M — 4015S — 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	pcs/box
401505M	H5	80	36.0	73	6 / 120
401506M	H6	80	62.4	77	6 / 120
401507M	H7	80	97.0	84	6 / 120
401508M	H8	80	144.0	86	6 / 120
401509M	H9	80	229.0	97	6 / 120
401510M	H10	80	264.0	100	6 / 120
401512M	H12	80	480.0	117	6 / 120
401513M	H13	80	518.0	128	6 / 120
401514M	H14	80	650.0	137	6 / 120
401517M	H17	80	715.0	217	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	inch	L mm	Max. torq N·m	g	pcs/box
401508S	1/4	80	93.6	77	6 / 120
401510S	5/16	80	144.0	86	6 / 120
401512S	3/8	80	264.0	100	6 / 120
401516S	1/2	80	518.0	126	6 / 120

4053 — 4063 — 1/2"

- For torx internal screw
- DIN 3121



4053



4063

KT NO.	Size	L mm	g	pcs/box
405320	T20	60	64	10 / 180
405325	T25	60	65	10 / 180
405327	T27	60	66	10 / 180
405330	T30	60	66	10 / 180
405340	T40	60	68	10 / 180
405345	T45	60	73	10 / 180
405350	T50	60	78	10 / 180
405355	T55	60	87	10 / 180
405360	T60	60	93	10 / 180
405370	T70	60	104	10 /180
406325	T25	100	72	6 / 120
406327	T27	100	76	6 / 120
406330	T30	100	78	6 / 120
406340	T40	100	81	6 / 120
406345	T45	100	88	6 / 120
406350	T50	100	97	6 / 120
406355	T55	100	117	6 / 120
406360	T60	100	137	6 / 120

4055M — 4055S — 1/2"

- Hexagon head
- DIN 3121



- Hexagon head
- ANSI / ASME B107.2



KT NO.	mm	L mm	Max. torq N·m	g	pcs/box
405504M	H4	60	20.8	64	10 / 180
405505M	H5	60	36.0	67	10 / 180
405506M	H6	60	62.4	71	10 / 180
405507M	H7	60	97.0	74	10 / 180
405508M	H8	60	144.0	79	10 / 180
405510M	H10	60	264.0	87	10 / 180
405512M	H12	60	480.0	98	10 / 180
405513M	H13	60	518.0	104	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	125	10 / 180
405517M	H17	60	715.0	178	10 / 80
405518M	H18	60	740.0	186	10 / 80
405519M	H19	60	786.0	195	10 / 80

KT NO.	inch	L mm	Max. torq N·m	g	pcs/box
405506S	3/16	60	36.0	65	10 / 180
405508S	1/4	60	93.6	72	10 / 180
405510S	5/16	60	144.0	78	10 / 180
405512S	3/8	60	264.0	86	10 / 180
405514S	7/16	60	420.0	93	10 / 180
405516S	1/2	60	518.0	104	10 / 180

4056M — 1/2"

- Spline head
- DIN 3121



KT NO.	Size	L mm	Max. torq N·m	g	pcs/box
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

Impact Universal Joint Socket

4B55M 4B55S 1/2"

- Special design for confined spaces
- DIN 3121





• Standard Length

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
4B5510M	10	17.0	27.5	12	64	167	10 / 120
4B5511M	11	19.0	27.5	12	64	166	10 / 120
4B5512M	12	19.0	27.5	12	64	165	10 / 120
4B5513M	13	21.8	27.5	12	64	171	10 / 120
4B5514M	14	22.0	27.5	12	64	178	10 / 120
4B5515M	15	22.0	27.5	12	64	175	10 / 120
4B5516M	16	23.9	27.5	12	64	182	10 / 120
4B5517M	17	25.0	27.5	12	64	190	10 / 120
4B5521M	21	30.0	27.5	12	64	202	10 / 120
4B5522M	22	31.7	27.5	12	64	208	10 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
4B5512S	3/8	17.0	27.5	12	64	161	10 / 120
4B5514S	7/16	19.0	27.5	12	64	166	10 / 120
4B5516S	1/2	21.8	27.5	12	64	176	10 / 120
4B5518S	9/16	22.0	27.5	12	64	174	10 / 120
4B5520S	5/8	23.9	27.5	12	64	180	10 / 120
4B5522S	11/16	25.0	27.5	12	64	173	10 / 120
4B5526S	13/16	30.0	27.5	12	64	190	10 / 120
4B5528S	7/8	31.7	27.5	12	64	196	10 / 120
4B5530S	15/16	35.8	27.5	12	64	217	6 / 96

Impact Accessory

4147 1/2"

- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	
414708S	1/4"	48	73	12 / 216
414710S	5/16"	48	79	12 / 216
414710M	10 mm	48	79	12 / 216

414A08S 1/2"

- Quick-release
- Bit holder
- DIN 3121





KT NO.	Size	Overall length mm	g	
414A08S	1/4"	50	93.6	10 / 180

4260P 1/2"

- Extension bar
- DIN 3121



KT NO.	Overall length inch	mm	g	
4260-03P	3	75	198	4 / 80
4260-04P	4	100	240	4 / 80
4260-05P	5	125	278	2 / 40
4260-06P	6	150	324	4 / 80
4260-08P	8	200	402	4 / 48
4260-10P	10	250	487	4 / 48
4260-12P	12	300	573	2 / 40
4260-16P	16	400	746	2 / 20

Impact Bit Socket

KT No. & D1



CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

1740 409616M 1/2"

- Hex bit & bit holder
- DIN 3121





409616M

1740

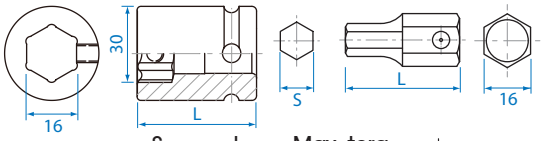

KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264.0	46	20 / 400
174012H	H12	40	480.0	52	20 / 400
174014H	H14	40	684.0	60	20 / 200
174017H	H17	40	680.0	73	20 / 200
174019H	H19	40	680.0	80	20 / 200
174022H	H22	40	680.0	97	12 / 120
409616M	16	38	680.0	145	10 / 160

4065M 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
406504M	H4	100	20.8	73	6 / 120
406505M	H5	100	36.0	78	6 / 120
406506M	H6	100	62.4	85	6 / 120
406508M	H8	100	144.0	95	6 / 120
406510M	H10	100	264.0	114	6 / 120
406512M	H12	100	480.0	138	6 / 120
406514M	H14	100	650.0	164	6 / 120

4075M 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
407505M	H5	150	36.0	115	6 / 120
407506M	H6	150	62.4	115	6 / 120
407508M	H8	150	144.0	116	6 / 120
407510M	H10	150	264.0	148	6 / 120
407512M	H12	150	480.0	187	6 / 120
407514M	H14	150	650.0	231	6 / 120

Impact Accessory & Set

4269 — 1/2"

- Torque extension bar
- Color coded and engraved with N·m and lbf·ft setting
- Helps to eliminate overtorqued lug nut

KT NO.	Color	Max. torq N·m	Max. torq lbf·ft	Overall length inch	Overall length mm	g
4269-08-90		90	65	7-11/16	195	192
4269-08-A0		100	75	7-11/16	195	201
4269-08-B0		110	80	7-11/16	195	217
4269-08-C0		120	90	7-11/16	195	224
4269-08-D5		135	100	7-11/16	195	238
4269-08-F0		150	110	7-11/16	195	263
4269-08-G0		160	120	7-11/16	195	304
4269-08-H5		175	130	7-11/16	195	284
4269-08-J0		190	140	7-11/16	195	331
4269-08-K0		200	150	7-11/16	195	344





How to use torque extension bar

1. Use with 1/2"DR. impact wrench, don't use by hand.
2. Set air pressure 0.6 MPa(90 PSI) and adjust torque value between 190 N·m and 210 N·m.
3. Select suitable torque extension bar according to wheel nut size and indicated tightening torque.
4. Attach the torque extension bar with socket to impact wrench and apply load.
5. Check the actual tightening torque value by torque wrench.
6. Adjust air pressure or torque value according to the result of above.
7. Tight other wheel nuts in diagonal order.

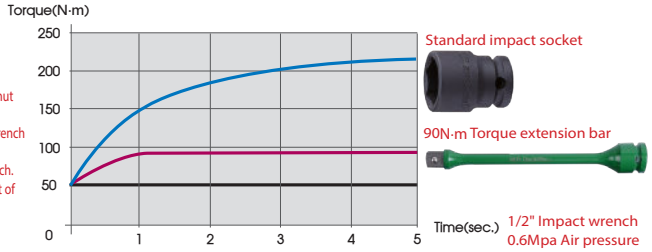

4481PP1 — 1/2"

- Torque extension bar set

Contents — 2.58 kg — 1 / 6

	4269-08-90	90 N·m
	4269-08-A0	100 N·m
	4269-08-B0	110 N·m
	4269-08-C0	120 N·m
	4269-08-D5	135 N·m
	4269-08-F0	150 N·m
	4269-08-G0	160 N·m
	4269-08-H5	175 N·m
	4269-08-J0	190 N·m
	4269-08-K0	200 N·m



9TE41

- Hook for torque extension bar
- Groove capacity : 22 mm



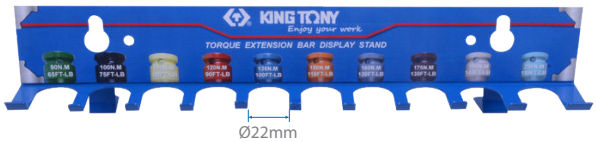

KT NO.	Overall length (mm)	g	
9TE41	311	196.4	1 / 24

Impact Accessory

KT No. & D1

4796P 1/2"

- Universal joint
- DIN 3121





KT NO.	Overall length inch	Overall length mm	D mm	g	
4796P	2-3/8	59	25	124	6 / 96

479AP

- Universal joint
- DIN 3121





479AP

4797P 1/2"



4797P

KT NO.	Overall length inch	Overall length mm	D mm	g	
479AP	2-3/8	61	29.1	160	6 / 96
4797P	2-1/2	65	29.1	168	6 / 96

4798P 1/2"

- Universal joint





KT NO.	Overall length inch	Overall length mm	D mm	D1 mm	g	
4798P	3	74	29.1	29.1	213	6 / 96

4799P 1/2"

- Universal joint
- Durable pinless hex ball locking design
- DIN 3121





KT NO.	Overall length inch	Overall length mm	D mm	g	
4799P	2-3/8	60	30	170	6 / 96

4873P 1/2"

- Adapter
- Convert to 3/8"
- 4873P → Max. torque : 202 N·m
- DIN 3121





KT NO.	Spec.	D mm	g	
4873P	1/2"F x 3/8"M	25	66	10 / 160

4863P 1/2"

- Adapter
- Convert to 3/8", 3/4" drive
- 4863P → Max. torque : 202 N·m
- DIN 3121





4863P & 4866P

4866P 1/2"

KT NO.	Spec.	g	
4863P	1/2"F x 3/8"M	97	10 / 160
4866P	1/2"F x 3/4"M	147	8 / 160

90401 1/2"

- Locking ring
- High tensile rubber material

90402 1/2"

90601 1/2"

- Locking pin
- Chrome vanadium steel
- DIN 3129

90602 1/2"



90401
90402



90601
90602

KT NO.	Type	Ø d	d / ℓ	Applied to socket sizes
90401	ring	3.5	19	4535M (8~14mm) 4535S (15/16"~9/16") 4435M (8~14mm) 4435S (15/16"~9/16") 4015M (5~14mm) 4015S (1/4"~1/2") 4055M (4~14mm) 4055S (3/16"~1/2") 4935M (10~14mm) 4935S (7/16"~9/16") 4415M (17mm) 4575 (E10~E18) 4835M (10~17mm) 4530M (8~14mm)
90601	pin	3.0	20	414A08S.4053.4063.4065.4075.4873.4015 4147.4055.4056
90402	ring	3.5	23	4535M (15~46mm) 4535S (11/16"~1-1/4") 4435M (15~46mm) 4435S (5/8"~1-1/4") 4935M (16~30mm) 4935S (11/16"~1-1/4") 4015M (17.19mm) 4415M (19.21mm) 4530M (15~36mm) 4575M (E20) 4835M (19~30mm)
90602	pin	3.0	25	4260.4796.4797.4863.4873.4866

Impact Socket Rail Set

4423MP 1/2"

▪ Thin wall version



3 PC.

Contents — 0.45 kg — 48

○	4835M	17, 19, 21

7411PP 1/2"



11 PC.

Contents — 0.76 kg — 4 / 32

✪	3575M	E5, E6, E7, E8
✪	4575M	E10, E12, E14, E16, E18, E20
	4863P	1/2"F x 3/8"M

Impact Socket Set

4408MP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents — 1.3 kg — 1 / 20

○	4535M	10, 12, 13, 14, 17, 19, 21, 24

Impact Socket Set

4408SP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents — 1.3 kg — 1 / 20

○	4535S	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 15/16

4412MP 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)



11 PC.

Contents — 1.61 kg — 1 / 8

○	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21

4414MP 1/2" / 4414SP 1/2"

Metal case size (mm) :
270 x 100 x 49 (0.047 cuft)



14 PC.

4414MP



4414SP

KT NO.	Contents		kg	
4414MP	○	4535M	10, 11, 12, 13, 14, 15, 16, 17,18, 19, 21, 22, 24, 27	2.25	1 / 8
4414SP	○	4535S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	2.4	

Impact Socket Set

4419MP 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

19 PC.

Contents		2.7	1 / 6
○	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 26, 27, 30, 32	
	4260-05P		



4410MP

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)

4410MP01

4410SP 1/2"



4410MP / 4410MP01



4410SP

8 PC.

KT NO.		Contents	2.3	1 / 12
4410MP	○ 4435M	12, 13, 14, 17, 19, 21, 22, 23		
4410MP01	○ 4435M	12, 13, 14, 17, 19, 21, 22, 24		
4410SP	○ 4435S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16		

4416SP 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)



14 PC.

Contents		4.8	1 / 6
○	4435S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	

4413MP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents		1.37	1 / 20
○	4835M	10, 12, 13, 14, 17, 19, 21, 24	

4415MP

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)



4415MP

4415MP03 1/2"



4415MP03

15 PC.

KT NO.		Contents	4.9	1 / 6
4415MP	○ 4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32		
4415MP03		10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32		

Impact Socket Set

4815MP04

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

4815MP05 1/2"



15 PC.

4815MP04 / 4815MP05

KT NO.		Contents	Kg	
4815MP04	○ 4430M	10, 12, 13, 14, 15, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	5.1	1 / 6
4815MP05	○ 4430M	8, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	4.3	1 / 6

Wheel Nut Impact Socket Set

44905MP 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Blow case size (mm) :
149 x 132 x 45 (0.031 cuft)



3 PC.

	Contents		Kg 0.83	1 / 16
○		494517M	17 mm	
○		494519M	19 mm	
○		494521M	21 mm	

Impact Socket Set

44906MP 1/2"

- Wheel nut impact socket
- Torque extension bar

Metal case size (mm) :
296 x 130 x 41 (0.056 cuft)



6 PC.

	Contents		Kg 2.13	1 / 10
○		494517M	17 mm	
○		494519M	19 mm	
○		494521M	21 mm	
		4269-08-90	90 N·m	
		4269-08-B0	110 N·m	
		4269-08-D5	135 N·m	

Impact Universal Joint Socket Set

4440MP

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)

KT NO.	Contents		Kg 3.3	1 / 5
4440MP	○ 4A55M	10, 11, 12, 13, 14, 17, 19, 21, 22, 24		
4440SP	○ 4A55S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16		

4440SP 1/2"



10 PC.

Impact Bit Socket Set

4407MP 1/2"

- For hexagon head screw
- 60mmL

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7 PC.

Contents — 0.94 kg / 1 / 20

4055M	H4, H5, H6, H8, H10, H12, H14

4457MP 1/2"

- For hexagon head screw
- 100mmL

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7 PC.

Contents — 1.44 kg / 1 / 18

4065M	H4, H5, H6, H8, H10, H12, H14

4476MP 1/2"

- For hexagon head screw
- 150mmL

Metal case size (mm) :
244 x 118 x 37(0.038 cuft)



6 PC.

Contents — 1.47 kg / 1 / 18

4075M	H5, H6, H8, H10, H12, H14

4418MP 1/2"

- For hexagon head screw
- 60mmL

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents — 1.34 kg / 1 / 20

4055M	H5, H6, H8, H10, H12, H14, H17, H19

4417PP 1/2"

- For torx internal screw
- 60mmL

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7 PC.

Contents — 0.94 kg / 1 / 20

4053	T25, T30, T40, T45, T50, T55, T60

4467PP 1/2"

- For torx internal screw
- 100mmL

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7 PC.

Contents — 1.31 kg / 1 / 18

4063	T25, T30, T40, T45, T50, T55, T60

Standard Impact Socket

KT No. & D1

6510M 3/4"

- Lightweight type
- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651017M	17	29.0	38	10	50	225	8 / 96
651018M	18	30.0	38	10	50	230	8 / 96
651019M	19	32.0	38	10	50	240	8 / 96
651021M	21	35.0	38	13	50	252	8 / 96
651022M	22	36.0	38	13	50	255	8 / 96
651023M	23	37.0	38	15	50	256	8 / 96
651024M	24	38.0	38	15	50	265	8 / 96
651026M	26	38.0	38	15	53	257	6 / 48
651027M	27	42.0	38	18	53	299	6 / 48
651028M	28	44.0	38	18	53	325	6 / 48
651029M	29	45.0	38	18	53	330	6 / 48
651030M	30	46.0	38	20	53	337	6 / 48

Standard Impact Socket

KT No. & D1

6515M — 3/4"

- Lightweight type
- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651514M	14	25.0	38	10	50	206	8 / 96
651515M	15	26.0	38	10	50	210	8 / 96
651516M	16	27.5	38	10	50	216	8 / 96
651517M	17	29.0	38	10	50	228	8 / 96
651518M	18	30.0	38	10	50	232	8 / 96
651519M	19	32.0	38	10	50	241	8 / 96
651521M	21	35.0	38	13	50	254	8 / 96
651522M	22	36.0	38	13	50	260	8 / 96
651523M	23	37.0	38	15	50	261	8 / 96
651524M	24	38.0	38	15	50	265	8 / 96
651525M	25	38.0	38	15	53	275	8 / 96
651526M	26	38.0	38	15	53	259	6 / 48
651527M	27	42.0	38	18	53	311	6 / 48
651528M	28	44.0	38	18	53	332	6 / 48
651529M	29	45.0	38	18	53	345	6 / 48
651530M	30	46.0	38	20	53	348	6 / 48

6530M — 3/4"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653017M	17	29.0	44	10	50	319	6 / 48
653019M	19	32.0	44	10	50	322	6 / 48
653021M	21	35.0	44	13	50	333	6 / 48
653022M	22	36.0	44	13	50	335	6 / 48
653023M	23	37.0	44	15	50	335	6 / 48
653024M	24	38.0	44	15	50	338	6 / 48
653026M	26	40.0	44	15	53	360	6 / 48
653027M	27	42.0	44	18	53	361	6 / 48
653028M	28	44.0	44	18	53	384	6 / 48
653029M	29	45.0	44	18	53	387	6 / 48
653030M	30	46.0	44	20	53	390	6 / 48
653032M	32	48.0	44	20	57	440	6 / 36
653033M	33	50.0	44	20	57	476	6 / 36
653034M	34	51.0	44	22	57	479	6 / 36
653035M	35	52.0	44	22	57	488	6 / 36
653036M	36	53.0	44	22	57	489	6 / 36
653038M	38	56.0	44	22	57	534	4 / 32
653040M	40	58.0	44	22	58	577	4 / 32
653041M	41	59.0	44	24	58	573	4 / 32
653042M	42	61.0	44	24	58	610	2 / 24
653046M	46	66.0	44	24	62	723	2 / 24
653063M	63	84.5	54	40	80	1352	1 / 12
653065M	65	86.5	54	43	80	1381	1 / 12
653070M	70	92.0	54	45	83	1445	1 / 12

6535M — 3/4"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653513M	13	22.0	38	16	50	205	8 / 96
653517M	17	29.0	44	10	50	309	6 / 48
653518M	18	30.0	44	10	50	314	6 / 48
653519M	19	32.0	44	10	50	323	6 / 48
653521M	21	35.0	44	13	50	336	6 / 48
653522M	22	36.0	44	13	50	340	6 / 48
653523M	23	37.0	44	15	50	339	6 / 48
653524M	24	38.0	44	15	50	343	6 / 48
653526M	26	40.0	44	15	53	364	6 / 48
653527M	27	42.0	44	18	53	379	6 / 48
653528M	28	44.0	44	18	53	390	6 / 48
653529M	29	45.0	44	18	53	399	6 / 48
653530M	30	46.0	44	20	53	349	6 / 48
653531M	31	47.0	44	20	53	413	6 / 48
653532M	32	48.0	44	20	57	456	6 / 36
653533M	33	50.0	44	20	57	481	6 / 36
653534M	34	51.0	44	22	57	488	6 / 36
653535M	35	52.0	44	22	57	499	6 / 36
653536M	36	53.0	44	22	57	508	6 / 36
653538M	38	56.0	44	22	57	553	4 / 32
653540M	40	58.0	44	22	58	590	4 / 32
653541M	41	59.0	44	24	58	584	4 / 32
653542M	42	61.0	44	24	58	622	2 / 24
653543M	43	62.0	44	24	58	638	2 / 24
653544M	44	64.0	44	24	62	706	2 / 24
653545M	45	64.0	44	24	62	704	2 / 24
653546M	46	66.0	44	24	62	730	2 / 24
653548M	48	68.0	44	26	65	807	2 / 24
653550M	50	71.0	44	26	65	870	1 / 20
653552M	52	74.0	54	30	68	1083	1 / 20
653554M	54	76.0	54	30	68	1151	1 / 20
653555M	55	77.0	54	30	70	1196	1 / 20
653557M	57	79.0	54	32	70	1211	1 / 20
653558M	58	81.0	54	32	70	1275	1 / 20
653560M	60	84.0	54	32	70	1424	1 / 20
653563M	63	83.5	54	40	80	1317	1 / 12
653565M	65	85.5	54	43	80	1324	1 / 12
653570M	70	92.0	54	45	83	1571	1 / 12

Standard Impact Socket

KT No. & D1

6535S — 3/4"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653522S	11/16	29	38	10	50	226	8 / 96
653524S	3/4	32	38	10	50	240	8 / 96
653526S	13/16	35	38	13	50	254	8 / 96
653528S	7/8	36	38	13	50	259	8 / 96
653530S	15/16	37	38	15	50	256	8 / 96
653532S	1	38	38	15	53	274	8 / 96
653534S	1-1/16	42	40	18	53	328	6 / 48
653536S	1-1/8	44.7	40	18	53	360	6 / 48
653538S	1-3/16	46	40	20	53	368	6 / 48
653540S	1-1/4	48	44	20	57	459	6 / 36
653542S	1-5/16	50	44	20	57	485	6 / 36
653544S	1-3/8	52	44	22	57	495	6 / 36
653546S	1-7/16	54	44	22	57	526	6 / 36
653548S	1-1/2	56	44	22	57	545	4 / 32
653550S	1-9/16	58	44	22	58	596	4 / 32
653552S	1-5/8	59	44	24	58	588	4 / 32
653554S	1-11/16	63.5	44	25	58	681	2 / 24

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653556S	1-3/4	64	44	25	62	710	2 / 24
653558S	1-13/16	66	44	25.5	62	718	2 / 24
653560S	1-7/8	68	44	27	65	806	2 / 24
653562S	1-15/16	70	44	27	65	951	1 / 20
653564S	2	72	54	28	68	1048	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1142	1 / 20
653570S	2-3/16	77	54	30.5	70	1141	1 / 20
653572S	2-1/4	79	54	32.5	70	1178	1 / 20
653574S	2-5/16	81	54	32.5	70	1266	1 / 20
653576S	2-3/8	84	54	33.5	70	1346	1 / 20

Deep Impact Socket

6435M — 3/4"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
643519M	19	32	44	16	90	546	1 / 24
643521M	21	35	44	18	90	567	1 / 24
643522M	22	36	44	18	90	578	1 / 24
643523M	23	37	44	23	90	596	1 / 24
643524M	24	38	44	23	90	598	1 / 24
643525M	25	40	44	25	90	630	1 / 24
643526M	26	40	44	25	90	600	1 / 24
643527M	27	42	44	27	90	625	1 / 24
643528M	28	44	44	27	90	666	1 / 24
643529M	29	45	44	27	90	666	1 / 24
643530M	30	46	44	27	90	693	1 / 24
643532M	32	48	44	30	90	727	1 / 24
643533M	33	50	44	30	90	792	1 / 24
643534M	34	51	44	32	90	795	1 / 24
643535M	35	52	44	32	90	811	1 / 24
643536M	36	53	44	32	90	818	1 / 24
643538M	38	56	44	34	90	882	1 / 24
643540M	40	58	44	34	90	926	1 / 24
643541M	41	59	44	34	90	936	1 / 24
643542M	42	61	44	36	95	1047	1 / 24
643543M	43	62	44	38	95	1092	1 / 10
643544M	44	64	44	38	95	1159	1 / 10
643546M	46	66	44	38	95	1239	1 / 10
643548M	48	68	44	40	95	1218	1 / 10
643550M	50	71	44	40	95	1317	1 / 10
643555M	55	77	54	45	100	1799	1 / 10
643560M	60	84.5	54	50	100	2042	1 / 6
643565M	65	86.5	54	54	100	1904	1 / 6

6435S — 3/4"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
643524S	3/4	32	38	16	90	432	1 / 24
643526S	13/16	35	38	18	90	473	1 / 24
643528S	7/8	36	38	18	90	495	1 / 24
643530S	15/16	37	38	23	90	495	1 / 24
643532S	1	38	38	25	90	478	1 / 24
643534S	1-1/16	42	44	27	90	624	1 / 24
643536S	1-1/8	44.7	44	27	90	665	1 / 24
643538S	1-3/16	46	44	27	90	692	1 / 24
643540S	1-1/4	48	44	30	90	725	1 / 24
643542S	1-5/16	50	44	30	90	782	1 / 24
643544S	1-3/8	52	44	32	90	807	1 / 24
643546S	1-7/16	54	44	32	90	845	1 / 24
643548S	1-1/2	56	44	34	90	874	1 / 24
643550S	1-9/16	58	44	34	90	923	1 / 24
643552S	1-5/8	59	44	34	90	924	1 / 24
643554S	1-11/16	63.5	44	38	95	1181	1 / 10
643556S	1-3/4	64	44	38	95	1139	1 / 10
643558S	1-13/16	66	44	38	95	1212	1 / 10
643560S	1-7/8	68	54	40	95	1354	1 / 10
643562S	1-15/16	70	54	40	95	1256	1 / 10
643564S	2	72	54	40	95	1476	1 / 10

Thin Wall Impact Socket

KT No. & D1

6835M — 3/4"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
683517M	17	28.0	44	16	60	346	6 / 48
683519M	19	30.0	44	16	60	351	6 / 48
683521M	21	33.0	44	18	60	369	6 / 48
683522M	22	34.0	44	18	60	372	6 / 48
683523M	23	35.0	44	23	60	373	6 / 48
683524M	24	36.5	44	23	60	382	6 / 48
683526M	26	39.0	44	25	80	397	1 / 24
683527M	27	40.0	44	26	80	424	1 / 24
683529M	29	43.0	44	26	80	455	1 / 24
683530M	30	44.0	44	26	80	555	1 / 24
683532M	32	46.5	44	26	80	512	1 / 24

6935M — 3/4"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
693519M	19	30.0	44	16	90	513	1 / 24
693521M	21	33.0	44	18	90	546	1 / 24
693522M	22	34.0	44	18	90	541	1 / 24
693523M	23	35.0	44	23	90	519	1 / 24
693524M	24	36.5	44	23	90	573	1 / 24
693526M	26	39.0	44	25	90	578	1 / 24
693527M	27	40.0	44	27	90	574	1 / 24
693529M	29	43.0	44	27	90	578	1 / 24
693530M	30	44.0	44	27	90	622	1 / 24
693532M	32	46.5	44	30	90	683	1 / 24

6935S — 3/4"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
693524S	3/4	30.0	38	16	90	370	1 / 24
693526S	13/16	33.0	38	18	90	380	1 / 24
693528S	7/8	34.0	38	18	90	385	1 / 24
693530S	15/16	36.5	38	23	90	415	1 / 24
693532S	1	38.0	38	23	90	500	1 / 24
693534S	1-1/16	40.0	44	25	90	654	1 / 24
693536S	1-1/8	43.0	44	25	90	680	1 / 24
693538S	1-3/16	44.0	44	27	90	684	1 / 24
693540S	1-1/4	46.5	44	30	90	733	1 / 24

Impact Star Socket

6575M — 3/4"

- For torx external screw
- DIN 3121





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
657524M	E24	32.5	44.0	17.0	50	334	6 / 48
657526M	E26	35.0	44.0	19.0	60	402	6 / 48
657528M	E28	36.5	44.0	25.5	60	401	6 / 48
657530M	E30	37.5	44.0	27.0	65	428	1 / 24
657532M	E32	39.5	44.0	29.0	65	447	1 / 24

Deep Impact Star Socket

6475M — 3/4"

- For torx external screw
- DIN 3121
- For the operation of cylinder head bolts
- E18 application MAN M 2000 / Bus with D 08 engine
- E20 application MAN F 2000 / F 90/ F 8/ Bus with D 25 and D 28 engines
- E24 application MAN D20 engine





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
647518M	E18	26.5	44.0	12.5	110	592	1 / 10
647520M	E20	29.0	44.0	14.0	110	627	1 / 10
647522M	E22	31.0	44.0	15.0	110	662	1 / 10
647524M	E24	32.5	44.0	17.0	110	693	1 / 10

Rear Wheel Socket

KT No. & D1

6514M — 3/4"

- 4 points
- DIN 3121





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
651417M	17	39.8	34	28	53	353	1 / 24
651419M	19	39.8	34	28	53	339	1 / 24
651420M	20	41.8	36	28	53	381	1 / 24
651421M	21	41.8	36	28	53	369	1 / 24

Impact Bit Socket

KT No. & D1

6015M 3/4"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
601514M	H14	87	684	310	2 / 48
601517M	H17	87	1136	342	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	508	1 / 24
601522M	H22	87	2436	524	1 / 24
601524M	H24	87	3190	546	1 / 24
601527M	H27	87	4535	597	1 / 24

609616MxxH

- DIN 3121



609622MxxH 3/4"



609616MxxH



609622MxxH

KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24

1740

609616M 3/4"

- Hex bit & bit holder
- DIN 3121



1740 609616M



KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	55	20 / 400
174014H	H14	40	684	61	20 / 200
174017H	H17	40	880	72	20 / 200
174019H	H19	40	880	83	20 / 200
174022H	H22	40	880	102	12 / 120
609616M	16	52	-	370	6 / 48

1954

609622M 3/4"

- Hex bit & bit holder
- DIN 3121



1954XXH 609622M

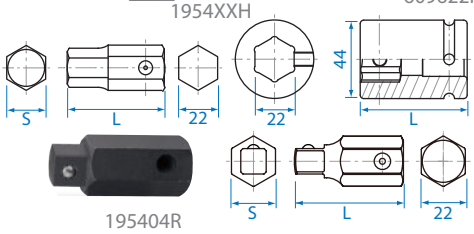

KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	159	12 / 120
195422H	H22	54.5	2436	176	12 / 120
195424H	H24	54.5	2436	191	10 / 100
195427H	H27	54.5	2436	217	10 / 100
195430H	H30	54.5	2436	248	6 / 60
195432H	H32	54.5	2436	276	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	133	12 / 120

Impact Accessory

6797

6797P 3/4"

- Universal joint
- DIN 3121





6797 6797P

KT NO.	Overall length inch	Overall length mm	D mm	g	
6797	4-1/2	114	44	738	2 / 20
6797P	4-1/2	114	44	738	2 / 20

6798

6798P 3/4"

- Universal joint
- DIN 3121





6798 6798P

KT NO.	Overall length inch	Overall length mm	D (mm)	D1 (mm)	g	
6798	4-1/4	108	44	44	749	2 / 20
6798P	4-1/4	108	44	44	749	2 / 20

Impact Accessory

KT No. & D1

6260 6260P 3/4"

- Extension bar
- DIN 3121



6260



6260P

KT NO.	Overall length inch	Overall length mm	g	
6260-04	4	100	566	2 / 20
6260-07	7	175	864	2 / 20
6260-10	10	250	1145	1 / 16
6260-13	13	330	1450	1 / 10
6260-04P	4	100	566	2 / 20
6260-07P	7	175	864	2 / 20
6260-10P	10	250	1145	1 / 16
6260-13P	13	330	1450	1 / 10

6864 6864P

6868 6868P 3/4"

- Adapter
- Convert to 1/2" drive
- 6864 → Max. torque : 512 N·m
- DIN 3121



6864 / 6864P
6868 / 6868P



6864 &6868



6864P &6868P

KT NO.	Spec.	D (mm)	g	
6864	3/4"F x 1/2"M	44	311	6 / 48
6868	3/4"F x 1"M	44	445	6 / 48
6864P	3/4"F x 1/2"M	44	311	6 / 48
6868P	3/4"F x 1"M	44	445	6 / 48

6874 6874P 3/4"

- Adapter
- Convert to 1/2" drive
- 6874 → Max. torque : 512 N·m
- DIN 3121



6874 / 6874P



6874



6874P

KT NO.	Spec.	D (mm)	g	
6874	3/4"F x 1/2"M	38	233	6 / 48
6874P	3/4"F x 1/2"M	38	233	6 / 48

90403 90404 90405 3/4"

- Locking ring
- High tensile rubber material

90603 90604 90607 3/4"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90603
90604
90607



90403
90404
90405

KT NO.	Type	ø	d / ℓ	Applied to socket sizes
90403	ring	3.5	33	6015M (14~19mm) 6435S (3/4"~1") 6510M (17~30mm) 6535S (11/16"~1-3/16") 6515M (17~30mm) 6935S (3/4"~1")
90607	pin	3.0	30	6874
90404	ring	5.5	37	6535M (17~46mm) 6535S (1-1/4" ~1-13/16") 6435M (19~46mm) 6435S (1-1/16"~1-13/16") 6935M (19~32mm) 6935S (1-1/16"~1-1/4")
90603	pin	4.0	35	6015M (21~27mm) 6260.6797.6798.6864 6530M (17~46mm) 6868 6835M (17~32mm) 609616M.609622M
90405	ring	5.5	44	6535M (48~65mm) 6535S (1-7/8" ~ 2-3/8") 6435M (48~50mm) 6435S (1-7/8" ~ 2")
90604	pin	4.0	45	

Impact Bit Socket Set

6411MP 3/4"

Metal case size (mm) :
270 x 100 x 49 (0.048 cuft)



11 PC.

Contents — 2.77 kg — 1 / 8

6096M	16, 22	
1740	H10, H12, H14, H17	
1954	H19, H22, H24, H27, H32	

Impact Socket Set

6408MP | 6408MP10 | 6408SP10 3/4"

Metal case size (mm) :
241 x 124 x 68 (0.07 cuft)



8 PC.

6408MP / 6408MP10 / 6408SP10

KT NO.		Contents	Kg	
6408MP	○ 6535M	19, 22, 24, 27, 30, 32, 36, 38	3.9	1 / 6
6408MP10	○ 6515M	19, 22, 24, 27, 30	3.9	
	○ 6535M	32, 36, 38		
6408SP10	○ 6535S	3/4, 7/8, 15/16, 1-1/16, 1-3/16, 1-1/4, 1-7/16, 1-1/2	3.8	

6409MP | 6409MP03 | 6409SP10 3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)



6409MP / 6409MP03



6409SP10

8 PC.

KT NO.		Contents	Kg	
6409MP	○ 6535M	26, 29, 30, 32, 34, 35, 36, 38	4.7	1 / 2
6409MP03	○ 6535M	21, 22, 24, 27, 30, 32, 36, 41	4.7	
6409SP10	○ 6535S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2	4.8	

6410MP | 6410SP 3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)



6410MP



6410SP

8 PC.

KT NO.		Contents	Kg 7.1	1 / 2
6410MP	○ 6435M	26, 29, 30, 32, 34, 35, 36, 38		
6410SP	○ 6435S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2		

Standard Impact Socket

8535M — 1"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
853519M	19	35	54	15	58	508	1 / 24
853521M	21	37	54	15	58	537	1 / 24
853522M	22	38	54	15	58	548	1 / 24
853523M	23	39	54	17	58	544	1 / 24
853524M	24	41	54	17	58	562	1 / 24
853525M	25	42	54	17	58	562	1 / 24
853526M	26	43	54	19	58	564	1 / 24
853527M	27	44	54	19	58	565	1 / 24
853528M	28	45	54	19	58	570	1 / 24
853529M	29	47	54	19	58	591	1 / 24
853530M	30	48	54	20	60	592	1 / 24
853532M	32	51	54	20	62	647	1 / 24
853533M	33	52	54	20	62	662	1 / 24
853534M	34	53	54	20	62	665	1 / 24
853535M	35	54	54	20	62	665	1 / 24
853536M	36	56	54	20	65	721	1 / 24
853537M	37	56	54	22	65	698	1 / 24
853538M	38	58	54	22	65	733	1 / 24
853540M	40	60	54	22	65	758	1 / 24
853541M	41	61	54	22	70	824	1 / 24
853542M	42	64	54	22	70	905	1 / 20
853544M	44	67	54	26	70	978	1 / 20
853545M	45	67	54	26	70	960	1 / 20
853546M	46	68	54	26	75	1033	1 / 20
853548M	48	70	54	26	75	1061	1 / 20
853550M	50	73	54	26	75	1170	1 / 20
853552M	52	75	54	30	80	1244	1 / 12
853553M	53	76	54	30	80	1278	1 / 12
853554M	54	78	54	30	80	1351	1 / 12
853555M	55	79	54	32	83	1435	1 / 12
853558M	58	83	54	32	83	1514	1 / 12
853560M	60	86	54	32	87	1693	1 / 12
853563M	63	90	54	34	87	1750	1 / 12
853565M	65	92	54	34	90	1750	1 / 12
853566M	66	94	54	34	90	1889	1 / 12
853568M	68	95	54	34	90	1963	1 / 12
853570M	70	97	54	34	93	2036	1 / 8
853571M	71	99	86	36	93	2917	1 / 8
853575M	75	104	86	36	95	3120	1 / 8
853580M	80	110	86	43	95	3387	1 / 4
853585M	85	115	86	43	95	3532	1 / 4
853590M	90	122	86	43	100	4004	1 / 4
853595M	95	130	95	52	105	4924	1 / 2
8535A0M	100	136	95	51	105	4972	1 / 2

8535S — 1"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
853524S	3/4	35	54	15	58	528	1 / 24
853526S	13/16	37	54	15	58	548	1 / 24
853528S	7/8	38	54	15	58	538	1 / 24
853530S	15/16	41	54	17	58	568	1 / 24
853532S	1	42	54	17	58	559	1 / 24
853534S	1-1/16	44	54	19	58	566	1 / 24
853536S	1-1/8	47	54	19	58	586	1 / 24
853538S	1-3/16	48	54	20	60	600	1 / 24
853540S	1-1/4	51	54	20	62	659	1 / 24
853542S	1-5/16	52	54	20	62	660	1 / 24
853544S	1-3/8	54	54	20	62	660	1 / 24
853546S	1-7/16	56	54	20	65	713	1 / 24
853548S	1-1/2	58	54	22	65	728	1 / 24
853550S	1-9/16	60	54	22	65	758	1 / 24
853552S	1-5/8	61	54	22	70	822	1 / 24
853554S	1-11/16	64	54	22	70	886	1 / 20
853556S	1-3/4	67	54	26	70	968	1 / 20
853558S	1-13/16	68	54	26	75	1075	1 / 20
853560S	1-7/8	70	54	26	75	1057	1 / 20
853562S	1-15/16	72	54	26	75	1100	1 / 20
853564S	2	74	54	30	75	1170	1 / 20
853566S	2-1/16	75	54	30	80	1225	1 / 12
853568S	2-1/8	78	54	30	80	1355	1 / 12
853570S	2-3/16	79	54	32	83	1423	1 / 12
853572S	2-1/4	82	54	32	83	1486	1 / 12
853574S	2-5/16	83	54	32	83	1459	1 / 12
853576S	2-3/8	86	54	32	87	1681	1 / 12
853578S	2-7/16	88	54	34	87	1681	1 / 12
853580S	2-1/2	90	54	34	87	1704	1 / 12
853582S	2-9/16	92	54	34	90	1881	1 / 12
853584S	2-5/8	94	54	34	90	1795	1 / 12
853586S	2-11/16	95	54	34	90	1931	1 / 12
853588S	2-3/4	97	54	34	93	2114	1 / 8
853590S	2-13/16	99	86	36	93	2869	1 / 8
853592S	2-7/8	102	86	36	93	2997	1 / 8
853594S	2-15/16	104	86	36	95	3161	1 / 8
853596S	3	106	86	36	95	3279	1 / 8
8535A0S	3-1/8	110	86	43	95	3386	1 / 4
8535A4S	3-1/4	112	86	43	95	3342	1 / 4
8535A8S	3-3/8	117	86	43	100	3873	1 / 4
8535B2S	3-1/2	122	86	43	100	4148	1 / 4

Deep Impact Socket

8435M — 1"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
843524M	24	41	54	25	90	874	1 / 24
843527M	27	44	54	25	90	871	1 / 24
843528M	28	45	54	25	90	887	1 / 24
843530M	30	48	54	28	90	908	1 / 24
843532M	32	51	54	28	90	953	1 / 24
843533M	33	52	54	28	92	1016	1 / 24
843534M	34	53	54	28	92	988	1 / 24
843535M	35	54	54	28	92	1020	1 / 24
843536M	36	56	54	32	92	1034	1 / 24
843538M	38	58	54	32	92	1048	1 / 24
843540M	40	60	54	32	92	1094	1 / 24
843541M	41	61	54	32	92	1103	1 / 24
843542M	42	64	54	32	92	1236	1 / 24
843546M	46	68	54	35	95	1329	1 / 10
843548M	48	70	54	35	95	1378	1 / 10
843550M	50	73	54	35	95	1484	1 / 10
843552M	52	75	54	40	100	1594	1 / 6
843554M	54	78	54	40	100	1714	1 / 6
843555M	55	79	54	40	100	1706	1 / 6
843558M	58	83	54	42	100	1887	1 / 6
843560M	60	86	54	42	100	2022	1 / 6
843565M	65	92	54	50	110	2133	1 / 6
843570M	70	97	54	59	110	2285	1 / 6

8435S — 1"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
843530S	15/16	40.8	54	25	90	872	1 / 24
843532S	1	42	54	25	90	847	1 / 24
843534S	1-1/16	44	54	25	90	868	1 / 24
843536S	1-1/8	46.3	54	25	90	911	1 / 24
843538S	1-3/16	48	54	28	90	926	1 / 24
843540S	1-1/4	51	54	28	90	980	1 / 24
843542S	1-5/16	52	54	28	92	1010	1 / 24
843544S	1-3/8	54	54	28	92	1022	1 / 24
843546S	1-7/16	56	54	32	92	1017	1 / 24
843548S	1-1/2	58	54	32	92	1048	1 / 24
843550S	1-9/16	60	54	32	92	1096	1 / 24
843552S	1-5/8	61	54	32	92	1097	1 / 24
843554S	1-11/16	64	54	32	92	1211	1 / 24
843556S	1-3/4	67	54	32	92	1312	1 / 12
843558S	1-13/16	68	54	35	95	1322	1 / 12
843560S	1-7/8	70	54	35	95	1382	1 / 6
843562S	1-15/16	72	54	35	95	1450	1 / 6
843564S	2	74	54	35	95	1510	1 / 6
843566S	2-1/16	75	54	40	100	1589	1 / 6
843568S	2-1/8	78	54	40	100	1729	1 / 6
843570S	2-3/16	79	54	40	100	1646	1 / 6
843572S	2-1/4	82	54	42	100	1837	1 / 6

Thin Wall Impact Socket

8835M — 1"

- Thin wall version
- 6 points
- Metric size
- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
883524M	24	38.0	54	26	80	690	1 / 24
883527M	27	42.0	54	26	80	710	1 / 24
883529M	29	44.0	54	26	80	750	1 / 24
883530M	30	46.0	54	30	80	750	1 / 24
883532M	32	48.0	54	30	80	743	1 / 24
883533M	33	49.0	54	30	80	776	1 / 24
883534M	34	50.0	54	30	80	761	1 / 24
883535M	35	52.0	54	32	80	800	1 / 24
883536M	36	53.0	54	32	80	781	1 / 24
883538M	38	56.0	54	32	80	831	1 / 24
883541M	41	59.5	54	32	80	882	1 / 24

Rear Wheel Socket

8514M — 8514S — 8524M — 1"

- 4 points
- DIN 3121



8514M



8524M



8514S



KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
851417M	17	40.0	54	30.0	60	612	1 / 24
851419M	19	42.0	54	30.0	60	611	1 / 24
851420M	20	43.0	54	30.0	60	625	1 / 24
851421M	21	44.0	54	30.0	60	618	1 / 24
851422M	22	45.5	54	30.0	60	629	1 / 24
852421M	21	44.0	48	30.0	60	502	1 / 24
851426S	13/16	44	54	30.0	60	617	1 / 24

Rear Wheel Socket

8534M — 1"

- 4 points
- DIN 3121





KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
853417M	17	38.0	54	23.5	76	658	1 / 24
853419M	19	43.0	54	23.5	76	717	1 / 24
853421M	21	47.0	54	23.5	76	773	1 / 24

8545M — 1"

- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan







Use for

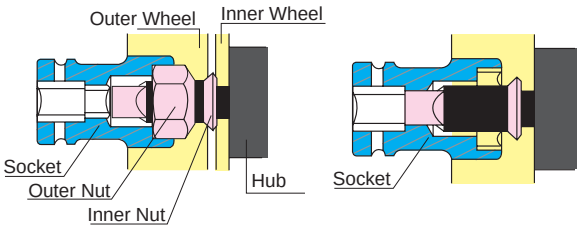

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	SQ	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
85451735M	17	x 35	54	54	13	83	857	1 / 24
85451941M	19	x 41	55	54	14	87	924	1 / 24
85452038M	20	x 38	58	54	14	83	796	1 / 24
85452041M	20	x 41	58	54	14	87	1086	1 / 24
85452141M	21	x 41	58	54	14	87	1017	1 / 24

Impact Bit Socket

8015M — 1"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	g	
801519M	H19	75	656	1 / 24

1954

809622M — 1"

- Hex bit & bit holder
- DIN 3121



1954



809622M

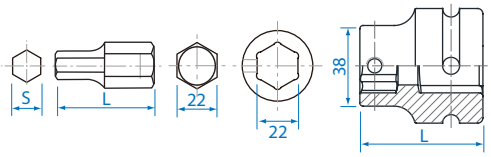

KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	140	12 / 120
195422H	H22	54.5	2436	162	12 / 120
195424H	H24	54.5	2436	176	10 / 100
195427H	H27	54.5	2436	200	10 / 100
195430H	H30	54.5	2436	232	6 / 60
195432H	H32	54.5	2436	243	6 / 60
809622M	22	58.0	-	547	1 / 24

809622MxxH — 1"

- Hexagon head
- DIN 3121





KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
809622M19H	H19	22	93	1577	896	1 / 10
809622M22H	H22	22	93	2436	918	1 / 10
809622M24H	H24	22	93	2436	932	1 / 10
809622M27H	H27	22	93	2436	956	1 / 10
809622M30H	H30	22	93	2436	988	1 / 10
809622M32H	H32	22	93	2436	999	1 / 10

Impact Accessory

8260

8260P 1"

- Extension bar
- DIN 3121

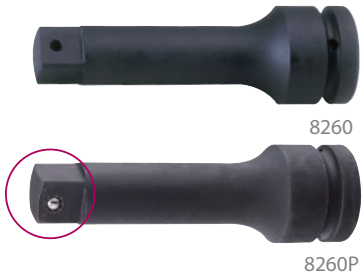

KT NO.	Overall Length inch	Overall Length mm	g	
8260-07	7	175	1400	1 / 12
8260-10	10	250	1932	1 / 12
8260-13	13	330	2458	1 / 8
8260-07P	7	175	1400	1 / 12
8260-10P	10	250	1932	1 / 12
8260-13P	13	330	2458	1 / 8

8869

8869P 1"

- Adapter
- Convert to 1-1/2" drive
- DIN 3121



KT NO.	Spec.	g	
8869	1" F x 1-1/2"M	941	1 / 24
8869P	1" F x 1-1/2"M	941	1 / 24

8797

8797P 1"

- Universal joint
- DIN 3121





KT NO.	Overall Length inch	Overall Length mm	D mm	g	
8797	5	125	60	1491	1 /18
8797P	5	125	60	1491	1 /18

8866

8866P 1"

- Adapter
- Convert to 3/4" drive
- 8866 → Max. torque : 1412 N·m
- DIN 3121



KT NO.	Spec.	g	
8866	1"F x 3/4"M	606	4 / 32
8866P	1"F x 3/4"M	606	4 / 32

90405

90406 1"

- Locking ring
- High tensile rubber material

90605

90606 1"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90605
90606



90405
90406

KT NO.	Type	ø	d / ℓ	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"~2-3/4") 8435M (24~60mm) 8435S (15/16"~2-1/4") 8835M (24~60mm) 8514M.8514S.8534M.806519M 8260.8797.8866.8869
90605	pin	5.0	45	
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"~3-1/2")
90606	pin	5.0	75	

Impact Socket Set

8404MP 1"

Metal case size (mm) :
241 x 124 x 68 (0.51 cuft)



4 PC.

Contents	4.65 kg	1 / 4
8435M	27, 30, 32, 33	

8409MP 1"

Metal case size (mm) :
445 x 100 x 65 (0.104 cuft)

8 PC.



Contents	8.9 kg	1 / 2
8435M	24, 27, 30, 32, 33, 36, 38, 41	

8408MP

8408MP02 1"

- 6 PC. thin wall deep version
- 2 PC. rear wheel, square

Metal case size (mm) :
445 x 120 x 68 (0.128 cuft)

8 PC.



KT NO.	Contents			6.4 kg	1 / 4
8408MP	8835M	24, 27, 32, 36, 38, 41	8534M		17, 21
8408MP02					19, 21

8410MP

8410SP 1"

Metal case size (mm) :
280 x 130 x 74 (0.095 cuft)



8 PC.

KT NO.	Contents	6.4 kg	1 / 4
8410MP	8535M	24, 27, 30, 32, 33, 36, 38, 41	
8410SP	8535S	15/16, 1-1/16, 1-3/16, 1-1/4, 1-5/16, 1-7/16, 1-1/2, 1-5/8	

Impact Accessory

9260

9260P 1-1/2"

- Extension bar
- DIN 3121



9260



9260P

KT NO.	Overall length inch	mm	g	
9260-13	13	330	5900	1 / 4
9260-13P	13	330	5900	1 / 4

9868

9868P 1-1/2"

- Adapter
- Convert to 1" drive
- Max. → torque : 2515 N·m
- DIN 3121



9868



9868P

KT NO.	Spec.	g	
9868	1-1/2" F x 1"M	2250	1 / 6
9868P	1-1/2" F x 1"M	2250	1 / 6

Standard Impact Socket

9535M — 1-1/2"

- DIN 3129





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
953532M	32	56	86	23	80	1.393	1 / 6
953533M	33	57	86	23	80	1.952	1 / 6
953534M	34	58	86	24	80	1.923	1 / 6
953536M	36	62	86	26	80	1.994	1 / 6
953538M	38	64	86	26	80	2.001	1 / 6
953541M	41	68	86	28	80	2.056	1 / 6
953542M	42	70	86	28	80	2.081	1 / 6
953546M	46	73	86	30	85	2.154	1 / 6
953550M	50	78	86	32	85	2.246	1 / 6
953555M	55	85	86	36	93	2.520	1 / 6
953560M	60	90	86	40	95	2.757	1 / 6
953565M	65	96	86	42	100	3.134	1 / 6
953570M	70	103	86	46	103	3.529	1 / 6
953575M	75	108	86	48	105	3.713	1 / 4
953580M	80	115	86	52	105	3.934	1 / 4
953585M	85	121	86	55	110	4.467	1 / 4
953590M	90	127	86	58	110	4.652	1 / 4
953595M	95	134	127	50	110	7.224	1 / 1
9535A0M	100	140	127	53	115	7.729	1 / 1
9535A5M	105	146	127	53	115	7.856	1 / 1
9535B0M	110	152	127	56	125	8.845	1 / 1
9535B5M	115	160	127	60	125	9.454	1 / 1
9535C0M	120	166	127	62	130	9.960	1 / 1
9535C5M	125	172	127	65	135	10.826	1 / 1
9535D0M	130	180	127	68	140	12.423	1 / 1
9535D5M	135	185	127	70	145	13.240	1 / 1
9535E0M	140	190	127	75	150	13.570	1 / 1
9535F0M	150	200	127	80	155	14.270	1 / 1



9535S — 1-1/2"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
9535645	2	81	86	35	85	2.305	1 / 6
9535665	2-1/16	82	86	36	85	2.364	1 / 6
9535685	2-1/8	84	86	36	90	2.508	1 / 6
9535705	2-3/16	85	86	43	93	3.204	1 / 6
9535725	2-1/4	87	86	43	93	5.209	1 / 6
9535745	2-5/16	89	86	43	93	2.560	1 / 6
9535765	2-3/8	90	86	45	95	2.622	1 / 6
9535785	2-7/16	93	86	44	95	2.711	1 / 6
9535805	2-1/2	95	86	46	97	2.833	1 / 6
9535825	2-9/16	96	86	49	100	2.863	1 / 6
9535845	2-5/8	99	86	48	100	2.958	1 / 6
9535865	2-11/16	101	86	48	100	3.055	1 / 6
9535885	2-3/4	103	86	48	103	3.217	1 / 6
9535905	2-13/16	105	86	50	105	3.306	1 / 6
9535925	2-7/8	107	86	50	105	3.600	1 / 6
9535945	2-15/16	108	86	50	105	3.455	1 / 6
9535965	3	111	86	50	105	3.590	1 / 4
9535985	3-1/16	114	86	52	105	3.931	1 / 4
9535A05	3-1/8	116	86	53	105	4.123	1 / 4
9535A25	3-3/16	118	86	53	105	4.089	1 / 4
9535A45	3-1/4	120	86	54	105	4.829	1 / 4
9535A65	3-5/16	122	86	56	105	4.207	1 / 4
9535A85	3-3/8	123	86	56	105	4.306	1 / 4
9535B05	3-7/16	125	86	57	105	4.256	1 / 4
9535B25	3-1/2	129	86	60	110	4.905	1 / 4
9535B45	3-9/16	130	86	60	110	5.435	1 / 4
9535B65	3-5/8	131	86	60	110	4.894	1 / 4
9535B85	3-11/16	133	86	62	113	5.468	1 / 1
9535C05	3-3/4	136	127	62	113	3.741	1 / 1
9535C25	3-13/16	138	127	64	120	9.098	1 / 1
9535C45	3-7/8	139	127	66	120	8.954	1 / 1
9535C65	3-15/16	140	127	66	120	8.931	1 / 1
9535C85	4	142	127	66	120	7.886	1 / 1
9535D05	4-1/16	143	127	68	120	7.843	1 / 1
9535D25	4-1/8	146	127	68	120	8.003	1 / 1
9535D45	4-3/16	146	127	70	120	7.851	1 / 1
9535D65	4-1/4	150	127	72	124	8.385	1 / 1
9535D85	4-5/16	154	127	72	124	8.973	1 / 1
9535E05	4-3/8	155	127	72	124	8.923	1 / 1
9535E25	4-7/16	155	127	75	128	9.033	1 / 1
9535E45	4-1/2	159	127	75	128	9.258	1 / 1
9535E85	4-5/8	164	127	79	132	13.730	1 / 1
9535F25	4-3/4	167	127	79	132	10.386	1 / 1
9535F65	4-7/8	171	127	79	136	10.930	1 / 1
9535G05	5	174	127	79	140	11.338	1 / 1
9535G45	5-1/8	180	127	80	143	12.279	1 / 1
9535G85	5-1/4	184	127	80	145	12.728	1 / 1
9535J25	6	203	127	85	165	14.270	1 / 1

Standard Impact Socket

A535M — 2-1/2"

- DIN 3129





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535041M	41	78	127	39	115	5.98	1 / 4
A535046M	46	83	127	39	115	5.97	1 / 4
A535050M	50	88	127	39	115	6.05	1 / 4
A535051M	51	89	127	39	115	6.06	1 / 4
A535055M	55	94	127	42	115	6.14	1 / 4
A535057M	57	96	127	42	115	6.18	1 / 4
A535060M	60	100	127	45	125	6.87	1 / 2
A535065M	65	105	127	48	125	6.90	1 / 2
A535070M	70	110	127	50	125	6.93	1 / 2
A535075M	75	115	127	55	125	7.14	1 / 2
A535076M	76	120	127	55	125	7.14	1 / 2
A535077M	77	120	127	55	125	7.15	1 / 2
A535080M	80	123	127	57	125	7.22	1 / 2
A535085M	85	127	127	60	130	7.54	1 / 2
A535086M	86	127	127	60	130	7.47	1 / 2
A535090M	90	135	127	65	130	7.90	1 / 2
A535095M	95	140	127	70	140	8.61	1 / 2
A535100M	100	145	127	70	140	8.81	1 / 2
A535105M	105	155	127	70	142	10.18	1 / 2
A535110M	110	160	127	76	155	11.50	1 / 2
A535115M	115	165	127	78	155	18.39	1 / 2
A535120M	120	175	127	80	160	13.18	1 / 1
A535125M	125	180	127	82	165	19.87	1 / 1
A535130M	130	185	127	85	170	20.64	1 / 1
A535135M	135	190	127	90	175	21.75	1 / 1
A535140M	140	200	127	95	180	24.06	1 / 1
A535145M	145	205	127	95	183	24.96	1 / 1
A535150M	150	210	127	100	190	26.91	1 / 1
A535155M	155	215	175	100	195	27.99	1 / 1
A535160M	160	225	175	100	200	31.13	1 / 1
A535165M	165	230	175	105	205	32.45	1 / 1
A535170M	170	235	175	105	205	33.15	1 / 1
A535175M	175	240	175	110	210	34.52	1 / 1
A535180M	180	250	175	110	213	38.23	1 / 1
A535185M	185	255	175	110	213	39.84	1 / 1
A535190M	190	265	175	115	220	41.49	1 / 1
A535200M	200	275	175	120	225	44.44	1 / 1
A535210M	210	285	175	125	235	48.78	1 / 1
A535215M	215	290	175	125	240	51.21	1 / 1
A535225M	225	305	175	135	250	57.57	1 / 1
A535235M	235	315	175	140	260	62.92	1 / 1

(Make - to - order production)

A535S — 2-1/2"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535076S	2-3/8	100	127	45	125	6.89	1 / 2
A535078S	2-7/16	103	127	45	125	6.93	1 / 2
A535080S	2-1/2	103	127	48	125	6.85	1 / 2
A535082S	2-9/16	105	127	48	125	6.90	1 / 2
A535084S	2-5/8	107	127	50	125	6.94	1 / 2
A535088S	2-3/4	110	127	50	125	6.93	1 / 2
A535090S	2-13/16	115	127	50	125	7.04	1 / 2
A535094S	2-15/16	115	127	55	125	7.16	1 / 2
A535096S	3	120	127	55	125	7.20	1 / 2
A535100S	3-1/8	123	127	57	125	7.26	1 / 2
A535108S	3-3/8	127	127	60	130	7.48	1 / 2
A535112S	3-1/2	135	127	65	130	7.98	1 / 2
A535120S	3-3/4	140	127	70	140	8.56	1 / 2
A535124S	3-7/8	145	127	70	140	8.65	1 / 2
A535126S	3-15/16	145	127	70	140	8.76	1 / 2
A535132S	4-1/8	155	127	70	142	9.91	1 / 2
A535136S	4-1/4	160	127	75	155	11.74	1 / 2
A535138S	4-5/16	160	127	75	155	12.52	1 / 2
A535144S	4-1/2	165	127	78	155	12.61	1 / 2
A535148S	4-5/8	175	127	80	160	19.18	1 / 1
A535156S	4-7/8	180	127	82	165	19.87	1 / 1
A535160S	5	185	127	82	165	20.02	1 / 1
A535164S	5-1/8	185	127	85	170	20.42	1 / 1
A535168S	5-1/4	190	127	90	175	21.81	1 / 1
A535172S	5-3/8	200	127	95	180	23.90	1 / 1
A535180S	5-5/8	205	127	95	183	24.43	1 / 1
A535184S	5-3/4	205	127	95	183	26.30	1 / 1
A535188S	5-7/8	210	127	100	190	26.62	1 / 1
A535192S	6	215	175	100	195	29.10	1 / 1
A535196S	6-1/8	220	175	100	195	28.69	1 / 1
A535200S	6-1/4	220	175	100	195	28.58	1 / 1
A535204S	6-3/8	225	175	100	200	30.77	1 / 1
A535208S	6-1/2	230	175	105	205	31.05	1 / 1
A535212S	6-5/8	235	175	105	205	32.17	1 / 1
A535216S	6-3/4	235	175	105	205	33.68	1 / 1
A535220S	6-7/8	240	175	110	210	32.41	1 / 1
A535224S	7	245	175	110	210	35.53	1 / 1
A535240S	7-1/2	265	175	115	220	41.16	1 / 1
A535244S	7-5/8	265	175	115	220	41.52	1 / 1
A535252S	7-7/8	275	175	120	225	44.46	1 / 1
A535256S	8	280	175	120	230	45.89	1 / 1

(Make - to - order production)

Standard Impact Socket

B535M — 3-1/2"

- DIN 3129





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535105M	105	165	175	70	175	18.73	1 / 1
B535110M	110	170	175	75	175	19.19	1 / 1
B535115M	115	175	175	78	180	19.74	1 / 1
B535120M	120	180	175	80	185	20.24	1 / 1
B535125M	125	185	175	82	185	21.86	1 / 1
B535130M	130	190	175	85	194	22.70	1 / 1
B535135M	135	200	175	90	200	24.24	1 / 1
B535140M	140	205	175	95	205	25.59	1 / 1
B535145M	145	210	175	95	210	31.12	1 / 1
B535150M	150	215	175	100	210	32.38	1 / 1
B535160M	160	230	175	100	220	35.85	1 / 1
B535165M	165	235	175	105	224	37.92	1 / 1
B535170M	170	240	175	105	225	38.71	1 / 1
B535175M	175	245	175	110	230	40.05	1 / 1
B535180M	180	255	200	110	230	43.77	1 / 1
B535185M	185	260	200	110	235	46.94	1 / 1
B535190M	190	270	200	115	240	50.60	1 / 1
B535200M	200	280	200	120	245	52.90	1 / 1
B535210M	210	290	200	125	250	57.50	1 / 1
B535215M	215	300	200	125	250	60.06	1 / 1
B535225M	225	310	200	135	265	61.50	1 / 1
B535235M	235	315	200	140	267	67.91	1 / 1

(Make - to - order production)

B535S — 3-1/2"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535132S	4-1/8	165	175	70	175	18.74	1 / 1
B535136S	4-1/4	168	175	75	175	19.08	1 / 1
B535140S	4-3/8	170	175	75	175	19.74	1 / 1
B535144S	4-1/2	175	175	78	180	19.72	1 / 1
B535148S	4-5/8	175	175	80	180	19.95	1 / 1
B535152S	4-3/4	180	175	80	185	20.14	1 / 1
B535156S	4-7/8	185	175	82	185	22.04	1 / 1
B535160S	5	190	175	82	194	21.59	1 / 1
B535164S	5-1/8	190	175	85	194	22.64	1 / 1
B535168S	5-1/4	200	175	90	200	23.59	1 / 1
B535172S	5-3/8	200	175	95	200	24.64	1 / 1
B535176S	5-1/2	205	175	95	205	25.57	1 / 1
B535180S	5-5/8	205	175	95	205	30.53	1 / 1
B535184S	5-3/4	210	175	95	210	31.92	1 / 1
B535188S	5-7/8	215	175	100	210	32.50	1 / 1
B535192S	6	220	175	100	215	33.43	1 / 1
B535196S	6-1/8	220	175	100	215	34.28	1 / 1
B535200S	6-1/4	230	175	100	220	35.13	1 / 1
B535204S	6-3/8	230	175	100	220	36.51	1 / 1
B535208S	6-1/2	235	175	105	224	37.76	1 / 1
B535212S	6-5/8	235	175	105	224	37.98	1 / 1
B535216S	6-3/4	240	175	105	225	38.70	1 / 1
B535220S	6-7/8	245	175	110	230	39.87	1 / 1
B535224S	7	250	200	110	230	41.99	1 / 1
B535228S	7-1/8	255	200	110	230	44.24	1 / 1
B535232S	7-1/4	260	200	110	235	46.61	1 / 1
B535236S	7-3/8	270	200	115	240	48.11	1 / 1
B535240S	7-1/2	270	200	115	240	50.65	1 / 1
B535244S	7-5/8	275	200	115	240	51.49	1 / 1
B535248S	7-3/4	280	200	120	245	52.11	1 / 1
B535252S	7-7/8	280	200	120	245	53.59	1 / 1
B535256S	8	285	200	120	245	55.59	1 / 1
B535260S	8-1/8	290	200	120	250	56.25	1 / 1
B535264S	8-1/4	290	200	125	250	57.50	1 / 1
B535268S	8-3/8	300	200	125	250	59.14	1 / 1
B535272S	8-1/2	300	200	125	250	59.43	1 / 1
B535276S	8-5/8	305	200	135	260	61.94	1 / 1
B535280S	8-3/4	310	200	135	265	64.58	1 / 1
B535284S	8-7/8	315	200	140	267	66.14	1 / 1

(Make - to - order production)

PNEUMATIC TOOLS



New Twin Hammer



Twin Hammer



Jumbo Hammer

Mechanical Structure



Twin Dog



Pinless Hammer


KING TONY

What you need to know

Air supply system :

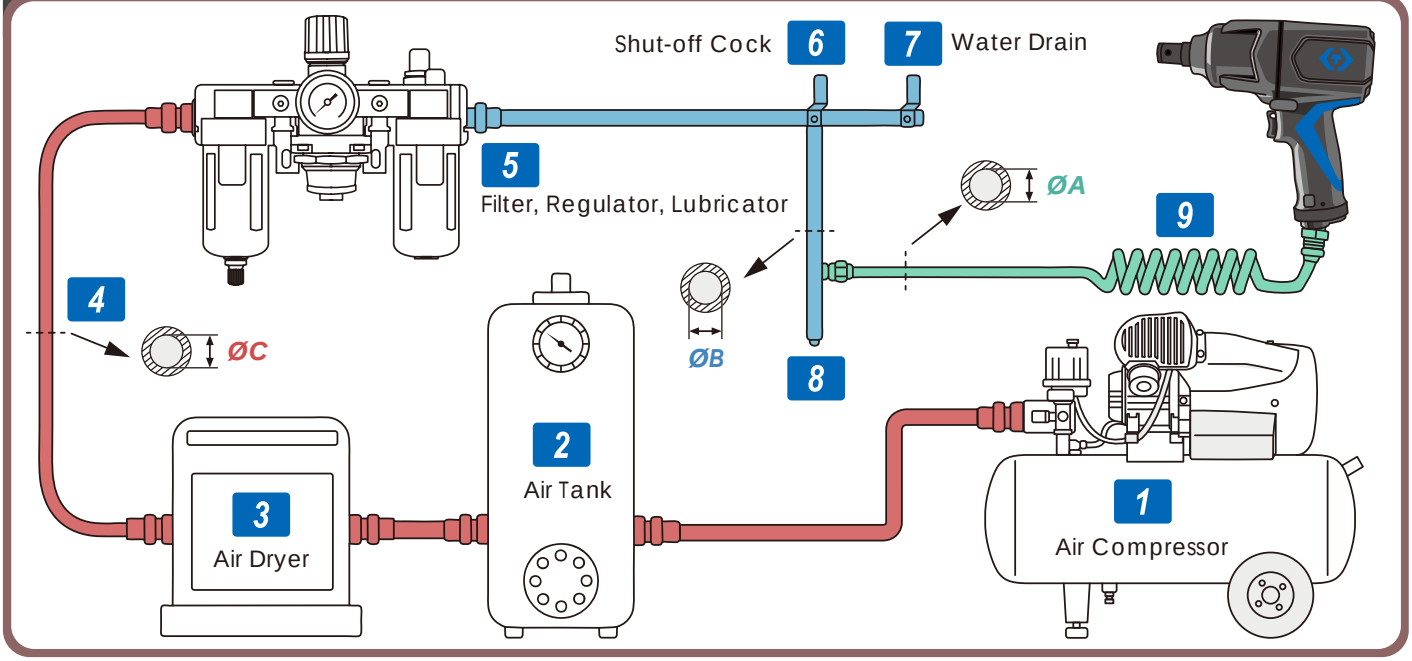

Piping diameters and length requirement :

ØA = Follow air tools specification table, length should be less than 4.5m.

ØB = 2 times tools hose size. (ØB = 2xØA)

ØC = 3 times tools hose size. (ØC = 3xØA)

KING TONY®

Preparation



▪ Set the air pressure

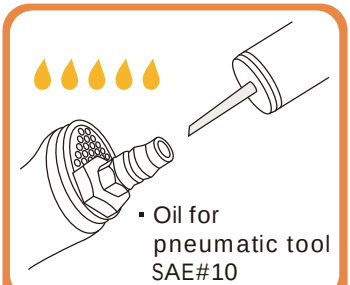

▪ Oil for pneumatic tool SAE#10

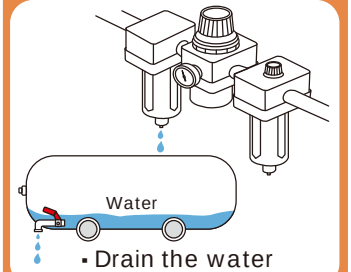

▪ Drain the water



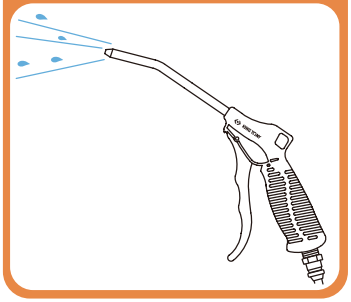

▪ Handle the air tool correctly



Operation





▪ Select the direction



▪ Adjust the torque

Maintenance

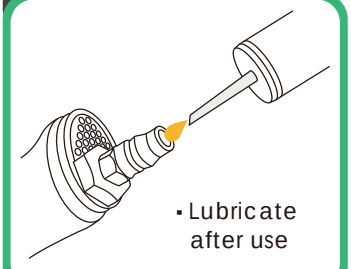

▪ Lubricate after use



▪ Store



▪ Dispose

KT NO.	Drive	Max. torque ft·lb	Max. torque N·m	Type: Standard	Type: Lightweight	Type: Mini.	Working place	Anvil: STD	Anvil: Long	Page
33491-030 33491-031	1/2"	300	407					○		256
33431-050 33431-051		500	678					○		257
33411-040 33411-041		500	678					○		258
33421-040 33421-041		500	678					○		258
33411-050 33411-051		650	881					○		258
33412-050 33412-051		650	881						2"	258
33431-065		650	881					○		259
33461-100 33461-101		1000	1356					○		255
33481-095 33481-096		950	1288					○		260
33611-055 33611-056	3/4"	700	949					○		259
33621-075 33621-076		800	1085					○		259
33622-075 33622-076		800	1085						6"	259
33681-100 33681-101		1100	1491					○		259
33631-110 33631-111		1100	1491					○		260
33632-110 33632-111		1100	1491						6"	260
33671-160 33672-160		1600	2170					○	6"	262
33851-120 33851-121	1"	1200	1626					○		261
33852-120 33852-121		1200	1626						6"	261
33811-150 33812-150		1500	2033					○	6"	263
33871-160 33872-160		1600	2170					○	6"	262
33841-180 33842-180		1800	2440					○	6"	261
33831-180 33832-180		1800	2440					○	6"	263
33861-200 33862-200		2000	2712					○	6"	264
33851-250 33852-250		2500	3388					○	8"	265
33911-250 33912-250	1-1/2"	2500	3388					○	8"	265
33921-300 33922-300		3000	4065					○	8"	265


KING TONY
27 KING TONY
36 KING TONY
22 KING TONY

1/2" DR. Super Duty Composite Impact Wrench



33461-100
33461-101







- TPR ergonomic handle material reduces vibration



- 3-speed power setting, full speed in reverse



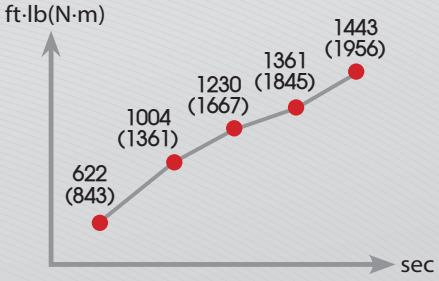

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33461-100	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" BSPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8
33461-101	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" NPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8

Ultra Compact Angle Impact Wrench

33491-030

- Easy to work in confined space, head length 88mm
- Ergonomic handle in hand and great power setting
- Lightweight : 1.4Kg
- Max. torque : 350ft·lb (475N·m) in reverse

Jumbo Hammer



1/2"

33491





- 3-speed power setting

3 2 1

- Full speed in reverse

3





- 360˚ swivel exhaust deflector



- Gearless hammer design Reduces vibration by 50%, Increases torque by 20%



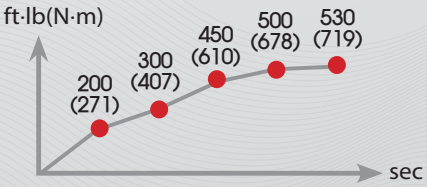

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33491-030	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"BSPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12
33491-031	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"NPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12

Mini Impact Wrench

33431-050

- Mini design, overall length 109mm with 1.35kg
- Nickel chrome molybenum square drive
- Improved jumbo hammer design : 30% higher torque
- One hand operation



1/2"
33431





- One-hand control forward & reverse switch



- Convenient to switch on both sides



- 3-speed regulator for precise control



- Ergonomic design interchangeable rubber grip

- 360 rotation air inlet connector design



- Air exhaust away from the operator



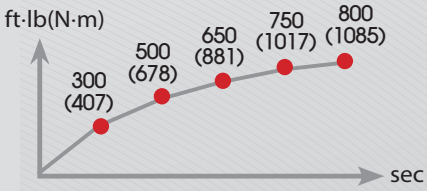

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-050	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"BSPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12
33431-051	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"NPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12

Impact Wrench

33421

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on front exhaust

Twin Hammer





Front exhaust

1/2"

33421

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33421-040	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"BSPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8
33421-041	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"NPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8

33411-040

Twin Hammer





1/2"

33411-040

33411-050 / 33412-050

New Twin Hammer





1/2"

33411-050



1/2"

33412-050

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33411-040	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"BSPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-041	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"NPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-050	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"BSPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33411-051	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"NPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33412-050	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"BSPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8
33412-051	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"NPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8

Impact Wrench

CAUTION Please wear proper safety gear while working.

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip

Twin Hammer



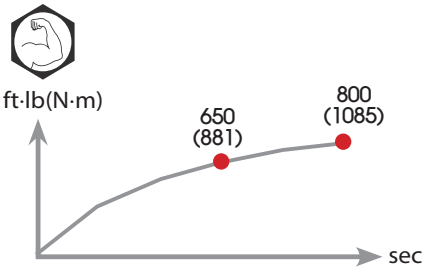



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-065	1/2"	12.70	Std.anvil	3/4"	M19	8000	650	881	6-7/8"	175	1/4"BSPT	3/8"	6.2	90	139	4.9	101.50	9.37	2.58	5.69	1 / 8

33611

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer





33621 / 33622





KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33611-055	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"BSPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33611-056	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"NPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33621-075	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"BSPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33621-076	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"NPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33622-075	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"BSPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4
33622-076	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"NPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4

Composite Impact Wrench

CAUTION Please wear proper safety gear while working.

33481

- One-handed F / R control
- 4-speed power setting, full speed in reverse
- TPR ergonomic handle material reduces vibration





lightweight
20% - 48%

33681





1/2" 33481
3/4" 33681

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33481-095	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33481-096	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33681-100	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8
33681-101	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8

33631 / 33632

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust







3/4" 33631



3/4" 33632

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33631-110	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"BSPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33631-111	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"NPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33632-110	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"BSPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4
33632-111	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"NPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4

Impact Wrench

33851 / 33852

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer





1"

33851



1"

33841



1"

33852



1"

33842

33841 / 33842

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33851-120	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"BSPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33851-121	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"NPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33852-120	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"BSPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33852-121	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"NPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33841-180	1"	25.40	Std. anvil	1-27/64"	M36	4000	1800	2440	12-3/32"	307	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.56	4.37	10.62	23.41	1 / 2
33842-180	1"	25.40	Long anvil	1-27/64"	M36	4000	1800	2440	20-5/64"	510	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	99.85	5.87	12.52	27.60	1 / 2

Impact Wrench

33671 / 33672

- Lightweight durable composite housing
- Nickel chrome molybenum square drive
- Comfortable rubber handle



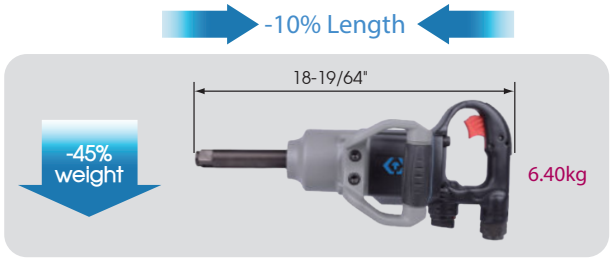

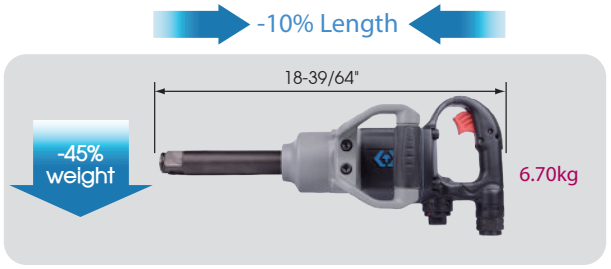

33871 / 33872





3/4"

33671-160



3/4"

33672-160



1"

33871-160



1"

33872-160

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33671-160	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1600	2170	12-1/2"	318	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	105.00	15.40	5.70	12.57	1 / 2
33672-160	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1600	2170	18-19/64"	465	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.80	6.40	14.11	1 / 2
33871-160	1"	25.40	Std. anvil	1-3/16"	M30	5500	1600	2170	12-45/64"	323	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.70	5.80	12.79	1 / 2
33872-160	1"	25.40	Long anvil	1-3/16"	M30	5500	1600	2170	18-39/64"	473	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	104.00	14.98	6.70	14.77	1 / 2

Impact Wrench

33811 / 33812

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust



33831 / 33832



1"

33811-150



1"

33812-150

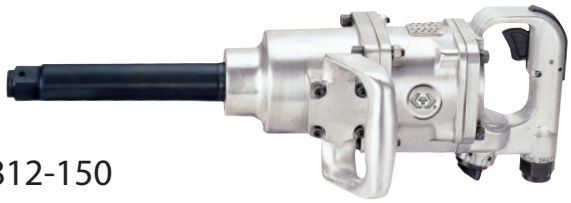

1"

33831-180



1"

33832-180



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33811-150	1"	25.40	Std. anvil	1-1/4"	M36	4000	1500	2033	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.17	10.77	10.30	22.71	1 / 1
33812-150	1"	25.40	Long anvil	1-1/4"	M36	4000	1500	2033	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	100.40	6.13	11.30	24.91	1 / 1
33831-180	1"	25.40	Std. anvil	1-1/2"	M38	4000	1800	2440	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	102.11	8.84	11.50	25.35	1 / 1
33832-180	1"	25.40	Long anvil	1-1/2"	M38	4000	1800	2440	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	103.99	6.60	12.50	27.56	1 / 1

Impact Wrench

33861 / 33862

- Light weight durable composite housing
- Nickel chrome molybdenum square drive
- Comfortable rubber handle





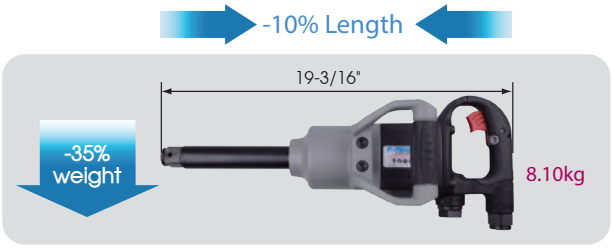



33861-200



33862-200

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33861-200	1"	25.40	Std. anvil	1-27/64"	M36	5000	2000	2712	13-43/64"	347	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	106.00	17.20	7.40	16.31	1 / 2
33862-200	1"	25.40	Long anvil	1-27/64"	M36	5000	2000	2712	19-3/16"	487	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	104.00	14.50	8.10	17.86	1 / 2



Impact Wrench

33851 / 33852 | 33911 / 33912 | 33921 / 33922

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer



1"

33851-250



1"

33852-250

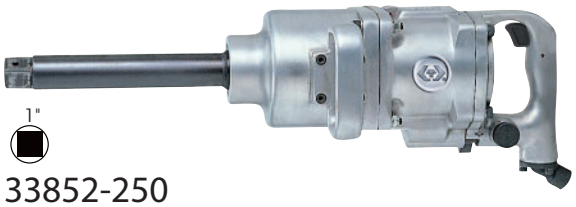

1-1/2"

33911-250

33921-300



1-1/2"

33912-250

33922-300

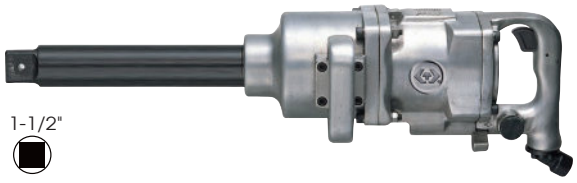

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. ft-lb	Torque N-m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs
33851-250	1"	25.40	Std. anvil	1-25/32"	M45	3000	2500	3388	17-11/64"	436	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.15	6.30	15.80	34.83	1 / 1
33852-250	1"	25.40	Long anvil	1-25/32"	M45	3000	2500	3388	24-7/8"	632	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.91	6.49	18.70	41.23	1 / 1
33911-250	1-1/2"	38.10	Std. anvil	1-25/32"	M45	3000	2500	3388	17-53/64"	453	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	104.13	6.32	15.80	34.83	1 / 1
33912-250	1-1/2"	38.10	Long anvil	1-25/32"	M45	3000	2500	3388	23-53/64"	605	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	103.90	6.53	18.70	41.23	1 / 1
33921-300	1-1/2"	38.10	Std. anvil	2"	M50	3000	3000	4065	17-3/4"	451	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	8.86	19.70	43.43	1 / 1
33922-300	1-1/2"	38.10	Long anvil	2"	M50	3000	3000	4065	25-15/32"	647	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	7.12	22.80	50.27	1 / 1

Impact Socket & Wrench Set

44116MP

1/2"



Blow case size (mm) :
315 x 250 x 120 (0.334 cuft)

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20 & Ø 3 x 25 (6150)
- 1 PC. air inlet adapter

21 PC.

KT NO.	Contents	6.1	1 / 4
44116MP	4535M 9, 10, 11, 13, 14, 17, 19, 22, 24, 27	33411-040	SY-221M (1/4"BSPT)
44116MP04	4415M 17, 19, 21 4260-05 4797		SY-2-11M (1/4"BSPT)
44116MP10	90601 90602 90401 90402	33411-041	SY-231M (1/4"NPT)

44118MP

1/2"



Blow case size (mm) :
420 x 315 x 100 (0.475 cuft)

- 14 PC. deep impact sockets 10~27mm
- 1 PC. impact wrench
- 2 PC. extension bars, 3" & 5" L
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20mm & Ø 3 x 25mm (6150)
- 1 PC. air inlet adapter

23 PC.

KT NO.	Contents	8.4	1 / 2
44118MP	4435M 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 23, 24, 26, 27	33411-040	SY-221M (1/4"BSPT)
44118MP04	4260-03 4260-05 4797		SY-211M (1/4"BSPT)
44118MP10	90601 90602 90401 90402	33411-041	SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44801FMP

1/2"



- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

KT NO.	Contents	5.79	1 / 4
44801FMP	4535M 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24 4945M 17, 19, 21 4260-03P 4797P LUBE15	33481-095	SY-221M (1/4"BSPT) SY-211M (1/4"BSPT)
44801AMP			
44801BMP		33481-096	SY-231M (1/4"NPT)

44801FMP01

1/2"



- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

KT NO.	Contents	6.03	1 / 4
44801FMP01	4535M 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24 4945M 17, 19, 21 4260-03P 4797P LUBE15	33431-065	SY-221M (1/4"BSPT) SY-211M (1/4"BSPT)
44801AMP01			

44802FMP

1/2"



- 11 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
340 x 263 x 80mm (0.253 cuft)

16 PC.

KT NO.	Contents	3.9	1 / 3
44802FMP	4535M 10, 12, 13, 14, 16, 17, 18 ,19, 21, 22, 24, 4260-05P 4796P LUBE15	33431-050	SY-221M (1/4"BSPT) SY-211M (1/4"BSPT)
44802AMP			
44802BMP		33431-051	SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44803FMP — 1/2"



- 7 PC. standard impact sockets 17~27mm
- 1 PC. impact wrench
- 3 PC. deep impact sockets 17, 19, 21mm
- 1 PC. extension bar 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

15 PC.

KT NO.	Contents	5.7	1 / 4
44803FMP	4535M 17, 18, 19, 21, 22, 24, 27	 33461-100	 SY-221M (1/4"BSPT)
44803AMP	 4435M 17, 19, 21		 SY-211M (1/4"BSPT)
44803BMP	4260-05P 4799P LUBE15	 33461-101	 SY-231M (1/4"NPT)

64801FMP — 3/4"



- 8 PC. standard impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar 7" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm(0.35 cuff)

13 PC.

KT NO.	Contents	8.48	1 / 2
64801FMP	6515M 19, 22, 24, 27, 30	 33681-100	 SY-221M (1/4"BSPT)
64801AMP	6535M 32, 36, 38		 SY-211M (1/4"BSPT)
64801BMP	6260-07P 6797P LUBE15	 33681-101	 SY-231M (1/4"NPT)

64114FMP — 3/4"



- 11 PC. impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar, 7" L (w/o ball)
- 1 PC. universal joint
- 1 PC. ring Ø 5.5 x 37mm
- 1 PC. pin Ø 4.0 x 35mm
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

18 PC.

KT NO.	Contents	12.32	1 / 2
64114FMP	6535M 19, 22, 24, 27, 28, 30, 32, 33, 34, 36, 38	 33621-075	 SY-221M (1/4"BSPT)
64114AMP	6260-07 6797 90603 90404		 SY-211M (1/4"BSPT)
64114BMP	LUBE15	 33621-076	 SY-231M (1/4"NPT)

Impact Screwdriver

3312



1/4"

33121
33122



KT NO.	Collect Size inch	Collect Size mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque lbf·ft	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33121	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"BSPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20
33122	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"NPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20

Air Ratchet Wrench

37221 / 37321

- Ergonomically enhanced composite handle
- Dual pawl design provides higher torque





- Dust-free design
- Prevents deformation and triples the life of the parts

37334 / 37434

1/4" & 3/8"

37221
37321

3/8" & 1/2"

37334
37434



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37221-030	1/4"	6.35	Std. anvil	1/4"	M6	250	30	41	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	86.00	2.32	0.67	1.48	1 / 30
37221-031	1/4"	6.35	Std. anvil	1/4"	M6	250	30	41	8-1/16"	205	1/4"NPT	3/8"	6.2	90	79	2.8	86.00	2.32	0.67	1.48	1 / 30
37321-050	3/8"	9.53	Std. anvil	5/16"	M8	270	50	68	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	93.00	2.26	0.67	1.48	1 / 30
37321-051	3/8"	9.53	Std. anvil	5/16"	M8	270	50	68	8-1/16"	205	1/4"NPT	3/8"	6.2	90	79	2.8	93.00	2.26	0.67	1.48	1 / 30
37334-080	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37334-081	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37434-080	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10
37434-081	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10

Super Duty Air Ratchet Wrench

37323

37423

- Ergonomically enhanced composite handle
- 360° exhaust rotation leads the air away from working area
- Unique head design: dust free and prevent deformation and triples the life of parts
- Dual pawl design provides higher torque



3/8" & 1/2"

37323
37423



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37323-080	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37323-081	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37423-080	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12
37423-081	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12

Air Ratchet Wrench

37235 / 37335 / 37435

- Working around tightly packed engines, machinery and equipment

1/4" & 3/8"

37235
37335



3/8"

37335

1/2"

37435



KT NO.	Square drive inch	Square drive mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
37235-030	1/4"	6.35	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37235-031	1/4"	6.35	230	30	41	6-1/8"	155	1/4"NPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37335-030	3/8"	9.53	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37335-075	3/8"	9.53	200	75	102	10-1/4"	260	1/4"BSPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20
37435-075	1/2"	12.70	200	75	102	10-1/4"	260	1/4"BSPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20
37435-076	1/2"	12.70	200	75	102	10-1/4"	260	1/4"NPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20

Continuous Flow Air Grease Gun

9BV14

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle





KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10

9BV1420 For Germany, South Africa, Egypt, etc.

Continuous Flow Air Grease Gun with 12" Tube

9BV14T

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle



9BU8109
9BU8209
9BU8112
9BU8212



KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420T	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BU8109	9" length	1/8"-28NPT								
9BU8209	9" length	M10 x 1.0P								
9BU8112	12" length	1/8"-28NPT								
9BU8212	12" length	M10 x 1.0P								

9BV1420T For Germany, South Africa, Egypt, etc.

Air Blow Gun

7990

- Ideal for cleaning
- Steel nozzle & nylon fiber handle
- Air pressure : 90 psi recommended
- Air consumption : 1/4" hose-13cfm-350l/min, 3/8" hose-15cfm-430l/min
- Sound pressure : 85~90 dB
- Working pressure : 75~120 psi/5.3~8.4 kgf/cm^2
- Max pressure : 200 psi/ 14.07 kgf/cm^2



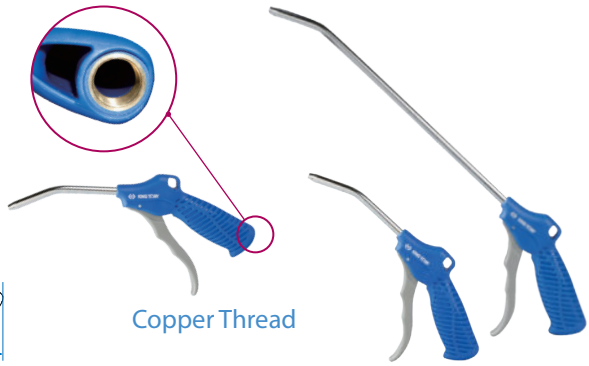

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79900-04	1/4"BSPT	4	100	245	200	20 / 100
79900-10	1/4"BSPT	10	250	420	240	25 / 50
79900-13	1/4"BSPT	13	330	475	260	25 / 50
79900-20	1/4"BSPT	20	500	650	300	25 / 50

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79901-04	1/4"NPT	4	100	245	200	20 / 100
79901-10	1/4"NPT	10	250	420	240	25 / 50
79901-13	1/4"NPT	13	330	475	260	25 / 50
79901-20	1/4"NPT	20	500	650	300	25 / 50

Spray Gun

79982

- Suitable for spraying a wide range of oils, cleaning agents and rustproofing liquids
- Fitted with fluid/air control valve



79982-06



79982-10

KT NO.	Max Capacity	Working Pressure(psi)	Air inlet connection	g	
79982-06	600 c.c	90-150	1/4"	600	1 / 10
79982-10	1000 c.c	90-150	1/4"	800	1 / 10

3-In-1 Inflator

9BM

- Diaphragm pressure gauge
- Accuracy: ANSI B40.100 ±3% ~ ±2% ~ ±3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control positions for inflate/deflate level
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure Range:
  0-160 psi (9BM21) / 0-220 psi (9BM22)
- Built in hang-up hook allows easy storage



9BM2110
9BM2111
9BM2210
9BM2211



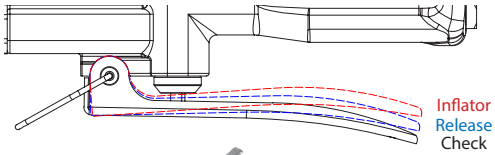



9BM2110A
9BM2111A



9BM2-01



9BM2-02



KT NO.	Pressure range (psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4"BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4"NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4"BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4"NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-

PU Air Spiral Hose

79953

79960

79962

- Super mechanical strength and excellent abrasive resistance
- Superior heat and cold resistance
- Oil resistance
- Light weight
- Temperature resistance from -20° C ~ +60° C



79953



79960



79962

KT NO.	Hose I.D. (mm)	Hose O.D. (mm)	Hose Length (M)	Working Pressure (psi)	(bar)	Maximum Pressure (psi)	(bar)	Type	Male PT Fitting (inch)	Weight (kgs)	(lbs)	
79953-10	8	12	10	108	7.4	320	22.2	-	1/4"BSPT	0.80	1.76	1 / 20
79953-15	8	12	15	108	7.4	320	22.2	-	1/4"BSPT	1.30	2.87	1 / 16
79960-10	8	12	10	160	11.0	640	44.1	Asian	1/4"BSPT	0.93	2.05	1 / 20
79960-15	8	12	15	160	11.0	640	44.1	Asian	1/4"BSPT	1.31	2.87	1 / 16
79960-20	8	12	20	160	11.0	640	44.1	Asian	1/4"BSPT	1.66	3.64	1 / 10
79962-10	8	12	10	160	11.0	640	44.1	EU	1/4"BSPT	0.92	2.02	1 / 20
79962-15	8	12	15	160	11.0	640	44.1	EU	1/4"BSPT	1.31	2.87	1 / 16
79962-20	8	12	20	160	11.0	640	44.1	EU	1/4"BSPT	1.63	3.78	1 / 10

Air Hose Reel

7991

- Automatic rewind with SK5 alloy steel spring
- 16 teeth gear-stop ensures safety
- 300 psi working pressure allowed
- Sturdy structure with 0.7mm thick steel rail stored in iron case
- Replaceable air house design & hanging rack



CAUTION
Do not pull the air hose when seeing tag STOP



• Pull the air hose to the end till it shows joint replacement



• Install new air hose





• Dismantle connection



• 16 teeth gear design can spread stress evenly and stop returning

1 Bar = 1.01972 kgf/cm^2
1 Bar = 14.5036 psi

KT NO.	Hose I.D. mm	Hose O.D. mm	Hose length (M)	Type	Air Inlet / outlet inch	Working pressure psi	kg	
79910-10	8	12	10	Asian	1/4"BSPT	300	5.5	1 / 2
79910-15	8	12	15	Asian	1/4"BSPT	300	6.5	1 / 2
79911-10	8	12	10	US	1/4"NPT	300	5.5	1 / 2
79911-15	8	12	15	US	1/4"NPT	300	6.5	1 / 2
79912-10	8	12	10	EU	1/4"BSPT	300	5.5	1 / 2
79912-15	8	12	15	EU	1/4"BSPT	300	6.5	1 / 2

Air Lubricator

799A

- Semi auto drain valve
- Steel guards offer better protection
- Easy installation and disassembly

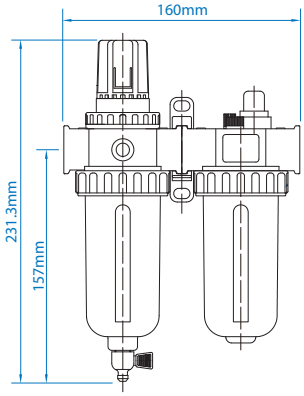



KT NO.	Port Size (inch)	Filter Element (μ)	Max Input Pressure (psi)	Max Output Pressure (psi)	Max Flow (L/min)	Operation Temperature Range (°C)	Drain Capacity (ml)	Oil Capactity (ml)	Air Inlet (inch)	Weight (Kgs)	(lbs)	
799A0-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"BSPT	1.40	3.17	1 / 12
799A1-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"NPT	1.42	3.17	1 / 12
799A0-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"BSPT	1.14	2.51	1 / 12
799A1-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"NPT	1.14	2.51	1 / 12
799A0-43C	1/2"	5	215	7~150	3000	5 ~ 60	80	150	1/2" BSPT / NPT	1.15	2.53	1 / 12

Air Quick Coupler

KT NO.	Size	Type		g	
SY-211M	1/4"BSPT	European		21.4	12 / 504
SY-211F				22.8	10 / 420
SY-210M				88.4	20 / 240
SY-221M	1/4"BSPT	Asian		24.4	12 / 504
SY-221F				28.6	10 / 420
SY-260M				81.6	20 / 240
SY-210H	1/4" hose	European		78.0	15 / 180
SY-211H				18.0	10 / 320
SY-220H		Asian		87.0	10 / 320
SY-221H				31.0	10 / 320
SY-231M	1/4"NPT	American		23.6	12 / 504
SY-231F				21.2	10 / 420
SY-230M				85.5	20 / 240
SY-310H	3/8" hose	European		75.0	15 / 180
SY-311H				22.0	10 / 320
SY-320H		Asian		78.0	15 / 180
SY-321H				23.0	10 / 320
SY-410H	1/2" hose	European		82.0	15 / 180
SY-411H				26.0	10 / 320
SY-421M	1/2" BSPT/NPT	Asian		24.4	12 / 504

Mini Lubricator

33411-71 1/4"



KT NO.	Size	g	
33411-71	1/4"-19BSPT	90	1 / 150

Repair Tools Set

14103GP

- 3 PC. Impact wrench repair tools set
- Suitable for 33411-040, 33411-050, 33412-050, 33611-055, 33621-075, 33622-075

3 PC.

Contents	kg 0.58	1 / 20
33011		
33012		
33013		

Impact Wrench Holder

9145

- Applied for 1/4" & 3/4" DR. air tools



KT NO.	Size	Type	g	
91451-01A	1/4" BSPT	European	268.8	1 / 48
91451-01B	1/4" NPT	American	271.2	1 / 48
91451-01F	1/4" BSPT	Asian	272.8	1 / 48

871061

- Applied for 3/8"&1/2" DR. air tools



KT NO.	Size	Type	g	
871061A	1/4" x 19 BSPT	European		
871061B	1/4" x 18 NPT	American	450	1 / 24
871061F	1/4" x 19 BSPT	Asian		

Tools Display Stand Set

87156A

- Overall Size - W 280 x D 170 x H 45 mm

Kg 1.9 / 1 / 1

Contents


87156


87154-01


SY-210M x3


SY-20A x6


SY-10A x3



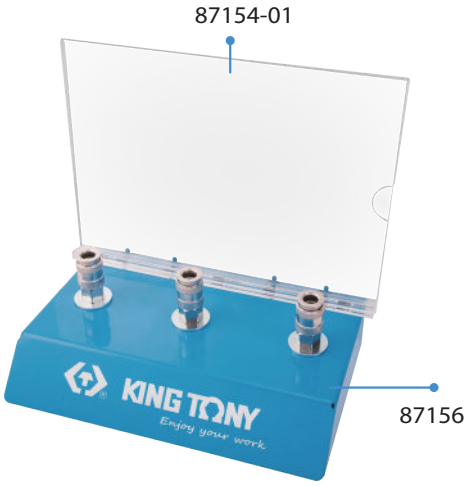

PU Working Gloves

9TH31-XL

9TH31-2L

- Strap design for easy adjustments
- Comfortable and breathable fabric material



KT NO.	Size	Width mm	Overall Length mm	g	
9TH31-XL	XL	107	235	70	100
9TH31-2L	2L	112	240	70	100

Anti-vibration Protective Gloves

9TH21-XL

- Protection from repetitive impact and vibration of pneumatic tools
- Magnet in back of glove for storing metal parts and fasteners


Magnetic



KT NO.	Size	Width mm	Overall Length mm	g	
9TH21XL	XL	112	235	110	100

TORQUE CONTROL & MULTIPLIERS



Recyclable cylindrical package

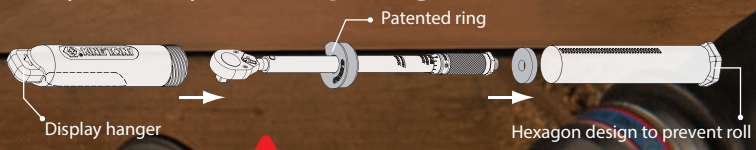

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

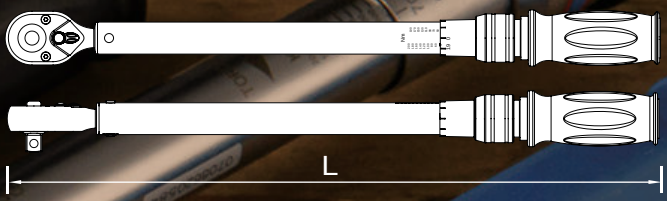

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

Calibration Instruction And Reminder of Torque Wrench

In test conditions, the torque wrench should remain within the tolerances laid down by DIN ISO 6789:2017 & ASME B107.300-2010 for 5000 cycles.

Practically, this may be affected and changed by ingress of dust, causing wear, or by damage caused by using the tool improperly such as to loosen fasteners or being dropped regularly.

Assume the users are trained to use the torque wrenches, and follow the manual, a period of twelve months is reasonable for torque wrenches used in non safety critical areas.

For those tools used in critical applications, a three month or even monthly check would be suggested.



Calibration Certificate

Master Torque Control

62 SERIES



Quick:

- Quick release and fine tooth gears design increases efficiency for safety tightening



Sound:

- Click sound and vibration reminds operator to stop in correct torque



Lubrication:

- Apply top industrial level lubrication to reduce friction and keep performance in good condition much longer



Spring:

- Made of high quality alloy steel to offer extended working cycles



Frame:

- Hardened tube provides extreme durability against friction to assure precision of tolerance



Easy:

- Auto lock design of torque adjustment provides quick and comfortable working experience



• ±3% tolerance of torque and 10,000 cycles durability performs better than international standard "DIN ISO 6789:2017 & ASME B107.300-2010" with ±4% tolerance and 5,000 cycles requirement

Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

Video QR Code



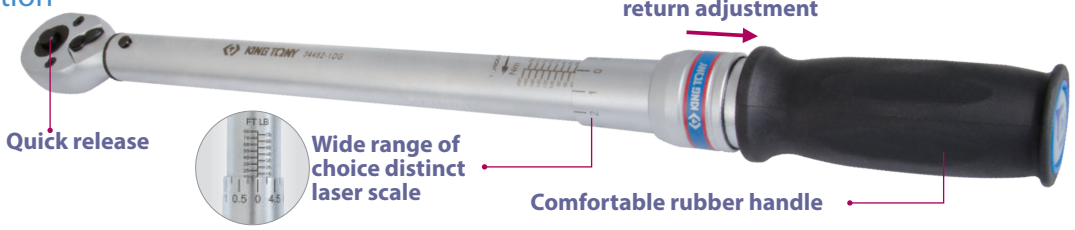

Dual Scale - English & Newton Meter (in·lb / ft·lb & N·m)

KT NO.	Gear teeth	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34262-1CG	24	1/4"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	324	640	1 / 12
34362-1CG	24	3/8"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	324	640	1 / 12
34362-2CG	32	3/8"	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	435	1300	1 / 12
34462-1CG	32	1/2"	20~150 ft·lb	1 ft·lb	34~197 N·m	1.4 N·m	521	1590	1 / 12
34462-2CG	32	1/2"	50~250 ft·lb	1 ft·lb	75~332 N·m	1.4 N·m	613	1810	1 / 12
34662-1CG	24	3/4"	100~450 ft·lb	5 ft·lb	169~576 N·m	6.8 N·m	1048	5500	1 / 2
34662-2CG	24	3/4"	100~600 ft·lb	5 ft·lb	169~779 N·m	6.8 N·m	1234	5600	1 / 2
34662-3CG	24	3/4"	150~750 ft·lb	5 ft·lb	237~983 N·m	6.8 N·m	1238	6150	1 / 2
34862-1CG	24	1"	150~750 ft·lb	5 ft·lb	237~983 N·m	6.8 N·m	1238	6150	1 / 2

Single scale - Newton Meter (N·m)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Overall length mm	g	
34262-1DG	24	1/4"	4~20 N·m	0.1 N·m	324	640	1 / 12
34262-2DG	24	1/4"	2~10 N·m	0.1 N·m	281	560	1 / 12
34262-3DG	24	1/4"	5~30 N·m	0.5 N·m	325	640	1 / 12
34362-1DG	24	3/8"	4~20 N·m	0.1 N·m	324	640	1 / 12
34362-2DG	32	3/8"	20~100 N·m	0.5 N·m	435	1300	1 / 12
34362-3DG	32	3/8"	10~60 N·m	0.5 N·m	325	700	1 / 12
34462-1DG	32	1/2"	40~200 N·m	1 N·m	521	1590	1 / 12
34462-2DG	32	1/2"	60~340 N·m	2 N·m	613	1810	1 / 12
34462-3DG	32	1/2"	20~100 N·m	1 N·m	436	1300	1 / 12
34462-4DG	32	1/2"	80~400 N·m	2 N·m	613	1970	1 / 12
34662-1DG	24	3/4"	100~600 N·m	5 N·m	1048	5500	1 / 2
34662-2DG	24	3/4"	150~800 N·m	5 N·m	1234	5600	1 / 2
34662-3DG	24	3/4"	200~1000 N·m	5 N·m	1238	6150	1 / 2
34862-1DG	24	1"	200~1000 N·m	5 N·m	1238	6150	1 / 2

- 34262-1DK
- 34362-1DK
- 34362-2DK:
  34362-2xx / 3xx
- 34462-1DK
- 34462-3DK: 34462-3DG / 3GG
- 34662-1DK
- 34662-3DK1: 34662-3xxx series
- 34862-2DK: series



Single scale - English (in·lb / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34262-1EG	24	1/4"	40~200 in·lb	1 in·lb	324	640	1 / 12
34362-1EG	24	3/8"	40~200 in·lb	1 in·lb	324	640	1 / 12
34362-2EG	32	3/8"	15~80 ft·lb	0.5 ft·lb	435	1300	1 / 12
34462-1EG	32	1/2"	20~150 ft·lb	1 ft·lb	521	1590	1 / 12
34462-2EG	32	1/2"	50~250 ft·lb	1 ft·lb	613	1810	1 / 12
34662-1EG	24	3/4"	100~450 ft·lb	5 ft·lb	1048	5500	1 / 2
34662-2EG	24	3/4"	100~600 ft·lb	5 ft·lb	1234	5600	1 / 2
34662-3EG	24	3/4"	150~750 ft·lb	5 ft·lb	1238	6150	1 / 2
34662-4EG	24	3/4"	60~300 ft·lb	2 ft·lb	614	1800	1 / 12
34862-1EG	24	1"	150~750 ft·lb	5 ft·lb	1238	6150	1 / 2

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	g	
34262-1FG	24	1/4"	4~20	0.1 N·m	39.8~172.6 ft·lb	0.9 ft·lb	324	650	1 / 12
34362-2FG	32	3/8"	20~100 N·m	0.5 N·m	16.6~71.9 ft·lb	0.4 ft·lb	435	1320	1 / 12
34462-1FG	32	1 / 2"	40~200 N·m	1 N·m	33.2~143.8 ft·lb	0.8 ft·lb	521	1590	1 / 12
34462-2FG	32	1 / 2"	60~340 N·m	2 N·m	51.6~243.4 ft·lb	1.5 ft·lb	613	1720	1 / 12
34662-2FG	24	3/4"	150~800 N·m	5 N·m	129~572 ft·lb	4 ft·lb	1234	6110	1 / 2
34862-1FG	24	1"	200~1000 N·m	5 N·m	166~719 ft·lb	5 ft·lb	1238	6150	1 / 2

Dual Scale - Kilogram-force Centimeter / Kilogram-force meter & Newton Meter (kgf·cm / kgf·m & N·m)

KT NO.	Gear teeth	Square drive	Torque range kgf·cm / kgf·m	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34262-1GG	24	1/4"	40~200 Kgf·cm	1 Kgf·cm	4.4~19.1 N·m	0.92 N·m	324	640	1 / 12
34362-1GG	24	3/8"	40~200 Kgf.cm	1 Kgf·cm	4.4~19.1 N·m	0.92 N·m	324	640	1 / 12
34362-2GG	32	3/8"	200~1000 Kgf.cm	5 Kgf·cm	22.1~95.6 N·m	0.46 N·m	435	1300	1 / 12
34462-1GG	32	1/2"	400~2000 Kgf·cm	10 Kgf·cm	44.1~191.2 N·m	0.46 N·m	521	1590	1 / 12
34462-2GG	32	1/2"	6~34 Kgf·m	0.2 Kgf·m	68.6~323.6 N·m	1.82 N·m	613	1810	1 / 12
34462-3GG	32	1/2"	200~1000 Kgf·cm	5 Kgf·cm	22.1~95.6 N·m	4.9 N·m	436	1470	1 / 12
34662-1GG	24	3/4"	10~60 Kgf·m	0.5 Kgf·m	123~564 N·m	4.9 N·m	1048	5500	1 / 2
34662-2GG	24	3/4"	15~80 Kgf·m	0.5 Kgf·m	172~760 N·m	4.9 N·m	1234	5600	1 / 2
34662-3GG	24	3/4"	20~100 Kgf·m	0.5 Kgf·m	221~956 N·m	4.9 N·m	1238	6150	1 / 2
34862-1GG	24	1"	20~100 Kgf·m	0.5 Kgf·m	221~956 N·m	4.9 N·m	1238	6150	1 / 2

Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

34862-2CF, 34862-2DF
34862-2EF, 34862-2FF





In order to ensure correct torque
the extension bar must be used

34862-2CG, 34862-2DG
34862-2EG, 34862-2FG
34862-2GG



Dual Scale - English & Newton Meter (ft·lb & N·m)

KT NO.	Square drive	Torque Rrange ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-2CG	1"	200~1000 ft·lb	5 ft·lb	305~1322 N·m	6.8 N·m	1850	12.20	1 / 2
34862-2CF	1"	200~1000 ft·lb	5 ft·lb	305~1322 N·m	6.8 N·m	1850	12.20	1 / 2

Single scale - Newton Meter (N·m)

KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	kg	
34862-2DF	1"	300~1500 N·m	10 N·m	1850	12.20	1 / 2
34862-2DG	1"	300~1500 N·m	10 N·m	1850	12.20	1 / 2

Single scale - English (ft·lb)

KT NO.	Square drive	Torque Rrange ft·lb	Incr.	Overall length mm	kg	
34862-2EG	1"	200~1000 ft·lb	5 ft·lb	1850	12.20	1 / 2
34862-2EF	1"	200~1000 ft·lb	5 ft·lb	1850	12.20	1 / 2



34862-2DK-series

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	kg	
34862-2FF	1"	300~1500 N·m	10 N·m	258~1070 ft·lb	7.4 ft·lb	1850	12.20	1 / 2
34862-2FG	1"	300~1500 N·m	10 N·m	258~1070 ft·lb	7.4 ft·lb	1850	12.20	1 / 2

Dual Scale - Kilogram-force meter & Newton Meter (kgf·m & N·m)

KT NO.	Square drive	Torque range kgf·m	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-2GG	1"	30~150 Kgf·m	1 Kgf·m	343~1422 N·m	5 N·m	1850	12.20	1 / 2



Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction



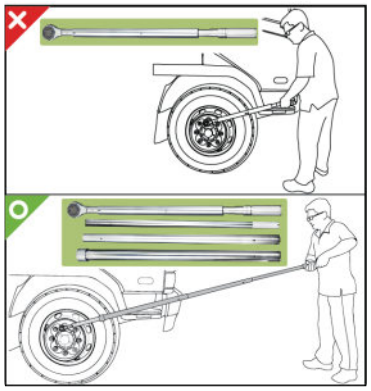

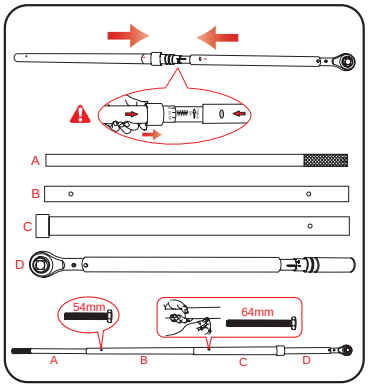

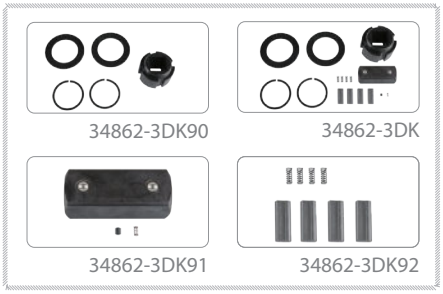

Dual Scale - English & Newton Meter (ft·lb & N·m)

KT NO.	Square drive	Torque range ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-3CF	1"	400~2000 ft·lb	10 ft·lb	610~2644 N·m	13.55 N·m	2755	23.99	1 / 1

KT NO.	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	kg	
34862-3FF	1"	500~2500 N·m	20 N·m	443~1771 ft·lb	14.77 ft·lb	2755	25.38	1 / 1

Heavy Duty Mini-type Torque Wrench

Industrial application
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ±3%(CW)
CW/CCW Direction



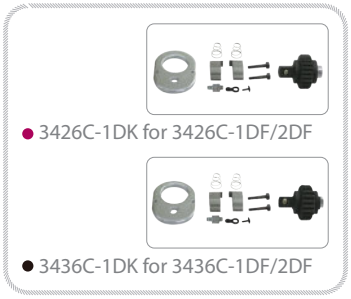

Single scale - Newton Meter (N·m)

	KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	g	
●	3426C-1DF	1/4"	3~15 N·m	0.1 N·m	211	330	24
●	3426C-2DF	1/4"	5~25 N·m	0.2 N·m	249	430	24
●	3436C-1DF	3/8"	3~15 N·m	0.1 N·m	211	450	24
●	3436C-2DF	3/8"	5~25 N·m	0.2 N·m	249	550	24

Heavy Duty 72 Teeth Adjustable Torque Wrench

Colorful quick release button design
Fixed head version allows using in narrow spaces
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

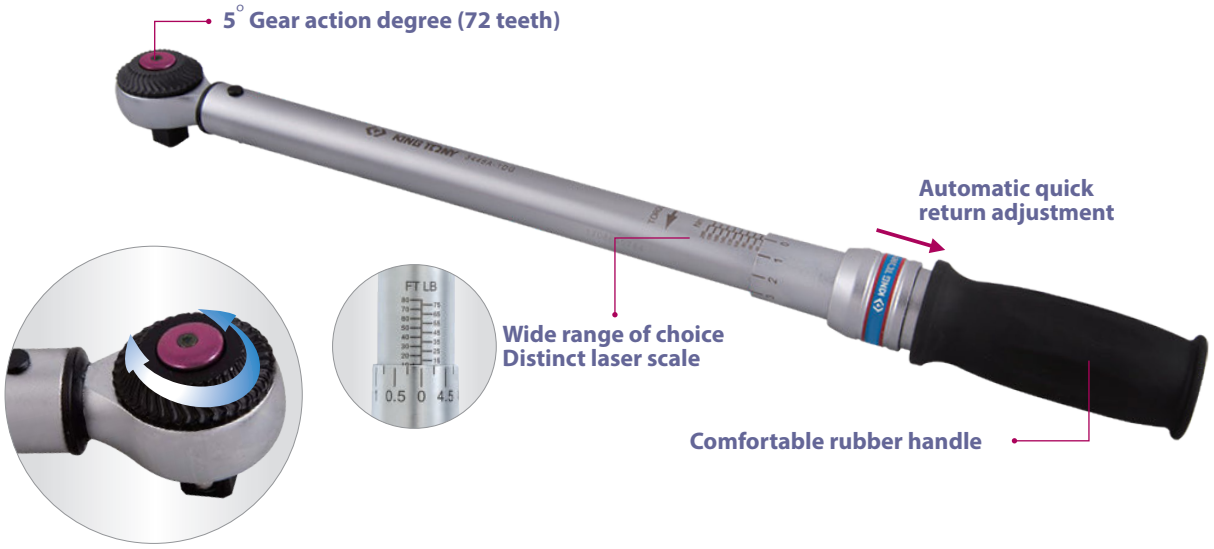

Single scale - Newton Meter (N·m)

	KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	g		
●	3426A-1DG	1/4"	2~10 N·m	0.1 N·m	285	560	1 / 24	
●	3426A-2DG	1/4"	4~20 N·m	0.1 N·m	325	640	1 / 24	
●	3436A-2DG	3/8"	20~100 N·m	0.5 N·m	430	1300	1 / 12	
●	3446A-1DG	1/2"	40~200 N·m	1 N·m	490	1460	1 / 12	
●	3446A-2DG	1/2"	60~340 N·m	2 N·m	590	1750	1 / 12	

Single scale - English (in·lb/ft·lb)

	KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Overall length mm	g		
●	3426A-1EG	1/4"	20~100 in·lb	1 in·lb	285	560	1 / 24	
●	3426A-2EG	1/4"	40~200 in·lb	1 in·lb	325	640	1 / 24	
●	3436A-2EG	3/8"	15~80 ft·lb	0.5 ft·lb	430	1300	1 / 12	
●	3446A-1EG	1/2"	20~150 ft·lb	1 ft·lb	490	1460	1 / 12	
●	3446A-2EG	1/2"	50~250 ft·lb	1 ft·lb	590	1750	1 / 12	



- 3/8"-3426A-2DK03
- 1/2"-3446A-1DK03
- 3/4"-3446A-1DK02
  series No. before 2019







Heavy Duty Interchangeable Torque Wrench

Using standard insert head
Positive button design which removes the insert head easily
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

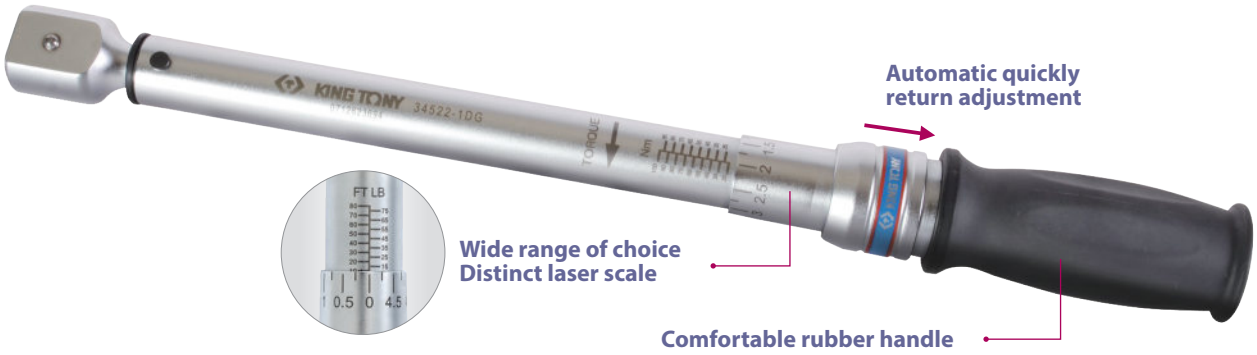

Dual Scale - English & Newton Meter (in·lb/ft·lb & N·m)

KT NO.	Size mm	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34512-1CG	9 x 12	20~100 in·lb	1 in·lb	2.8~10.7 N·m	0.12 N·m	261	510	1 / 12
34512-2CG	9 x 12	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	306	590	1 / 12
34512-3CG	9 x 12	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	430	1270	1 / 12
34522-1CG	14 x 18	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	430	1270	1 / 12
34522-2CG	14 x 18	20~150 ft·lb	1 ft·lb	34~197 N·m	1.4 N·m	485	1410	1 / 12
34522-3CG	14 x 18	50~250 ft·lb	1 ft·lb	75~332 N·m	1.4 N·m	580	1590	1 / 12

Single scale - Newton Meter (N·m)

KT NO.	Size mm	Torque range N·m	Incr.	Overall length mm	g	
34512-1DG	9 x 12	2~10 N·m	0.1 N·m	261	510	1 / 12
34512-2DG	9 x 12	4~20 N·m	0.1 N·m	306	590	1 / 12
34512-4DG	9 x 12	10~60 N·m	0.5 N·m	306	590	1 / 12
34512-3DG	9 x 12	20~100 N·m	0.5 N·m	430	1270	1 / 12
34522-1DG	14 x 18	20~100 N·m	0.5 N·m	430	1270	1 / 12
34522-2DG	14 x 18	40~200 N·m	1 N·m	485	1410	1 / 12
34522-3DG	14 x 18	60~340 N·m	2 N·m	580	1590	1 / 12
34522-4DG	14 x 18	100~600 N·m	5 N·m	1015	6200	1 / 2
34522-5DG	14 x 18	10~60 N·m	0.5 N·m	360	1270	1 / 12
34522-6DG	14 x 18	150~800 N·m	5 N·m	1195	6620	1 / 2
34522-7DG	14 x 18	70~350 N·m	2 N·m	580	1800	1 / 12
34522-8DG	14 x 18	200~1000 N·m	5 N·m	1200	6620	1 / 2
34522-9DG	14 x 18	80~400 N·m	2 N·m	580	1780	1 / 12

Single scale - English (in·lb/ft·lb)

KT NO.	Size mm	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34512-1EG	9 x 12	20~100 in·lb	1 in·lb	261	510	1 / 12
34512-2EG	9 x 12	40~200 in·lb	1 in·lb	306	590	1 / 12
34512-3EG	9 x 12	15~80 ft·lb	0.5 ft·lb	430	1270	1 / 12
34522-1EG	14 x 18	15~80 ft·lb	0.5 ft·lb	430	1270	1 / 12
34522-2EG	14 x 18	20~150 lbf·ft	1 ft·lb	485	1410	1 / 12
34522-3EG	14 x 18	50~250 ft·lb	1 ft·lb	580	1590	1 / 12

Dual Scale - Newton Meter & English (N·m & in·lb/ft·lb)

KT NO.	Size mm	Torque range N·m	Incr.	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34512-1FG	9 x 12	2~10 N·m	0.1 N·m	22.1~84.1 in·lb	0.9 in·lb	261	510	1 / 12
34512-2FG	9 x 12	4~20 N·m	0.1 N·m	39.8~172.6 in·lb	0.9 in·lb	306	590	1 / 12
34512-3FG	9 x 12	20~100 N·m	0.5 N·m	16.6~71.9 ft·lb	0.4 ft·lb	430	1270	1 / 12
34522-1FG	14 x 18	20~100 N·m	0.5 N·m	16.6~71.9 ft·lb	0.4 ft·lb	430	1270	1 / 12
34522-2FG	14 x 18	40~200 N·m	1 N·m	33.2~143.8 ft·lb	0.8 ft·lb	485	1410	1 / 12
34522-3FG	14 x 18	60~340 N·m	2 N·m	51.6~243.4 ft·lb	1.5 ft·lb	580	1590	1 / 12

Insert Tool

345031

• Chrome plated

- Ratchet insert tool
- Square drive size : 9 x 12
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches







●3426A-1DK
●3436A-1DK
●3446A-1DK
series No. before 17086A



●3426A-1DK01
●3436A-1DK01
●3446A-1DK01
series No. after 17086A



●3426A-1DK02
●3436A-1DK02
●3446A-1DK02
series No. after 19106A

KT NO.	Size	Maximum Torque N·m	Lw* mm	L mm	g	
34503102R	1/4" DR.	62	17.0	46.0	68	12 / 192
34503103R	3/8" DR.	202	17.6	49.0	99	10 / 160
34503104R	1/2" DR.	512	25.0	61.9	216	6 / 96

345032

• Chrome plated

- Ratchet insert tool
- Square drive size : 14 x 18
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches







●3436A-2DK
●3446A-1DK
series No. before 17086A



●3436A-2DK01
●3446A-1DK01
series No. after 17086A



●3436A-2DK02
●3446A-1DK02
series No. after 19106A



●3466A-1DK
series No. before 17086A
●3466A-1DK01
series No. after 17086A

KT NO.	Size	Maximum Torque N·m	Lw* mm	L mm	g	
34503203R	3/8" DR.	202	25	70.0	239	6 / 96
34503204R	1/2" DR.	512	25	70.0	248	6 / 96
34503206R	3/4" DR.	800	25	71.5	353	4 / 64

345011

• Chrome plated

- Open end insert tool
- Square drive size : 9 x 12





KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501107M	7	10	17.5	37.4	36	12 / 192
34501108M	8	13	17.5	37.9	38	12 / 192
34501109M	9	19	17.5	37.9	38	12 / 192
34501110M	10	25	17.5	38.2	41	12 / 192
34501111M	11	33	17.5	39.0	39	12 / 192
34501112M	12	42	17.5	39.0	41	12 / 192
34501113M	13	52	17.5	39.3	44	12 / 192
34501114M	14	64	20	43.1	54	12 / 192
34501115M	15	77	20	43.4	58	12 / 192
34501116M	16	93	20	43.9	57	12 / 192
34501117M	17	110	20	44.4	61	12 / 192
34501118M	18	130	20	45.3	62	12 / 192
34501119M	19	150	20	45.0	66	12 / 192
34501121M	21	198	25	52.4	118	10 / 160
34501122M	22	225	25	53.1	124	10 / 160
34501124M	24	287	25	54.1	128	8 / 128
34501127M	27	400	32.5	60.1	198	8 / 128
34501130M	30	537	32.5	60.9	195	10 / 80
34501132M	32	644	32.5	62.6	213	10 / 80
34501136M	36	762	32.5	64.8	213	10 / 80

KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34501108S	1/4	10	17.5	37.4	36	12 / 192
34501110S	5/16	13	17.5	37.9	38	12 / 192
34501112S	3/8	25	17.5	38.2	40	12 / 192
34501114S	7/16	33	17.5	39.0	41	12 / 192
34501116S	1/2	52	17.5	39.3	43	12 / 192
34501118S	9/16	64	20.0	43.1	53	12 / 192
34501120S	5/8	93	20.0	43.9	59	12 / 192
34501122S	11/16	110	20.0	44.4	63	12 / 192
34501124S	3/4	150	20.0	45.0	64	12 / 192

Insert Tool

345014

• Chrome plated

▪ Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501410M	10	25	17.5	42.4	53	12 / 192
34501411M	11	33	17.5	43.0	53	12 / 192
34501412M	12	42	17.5	43.8	53	12 / 192
34501413M	13	52	17.5	43.9	54	12 / 192
34501414M	14	64	17.5	44.3	57.6	12 / 192
34501416M	16	93	17.5	45.0	61	12 / 192
34501417M	17	110	17.5	45.4	62	12 / 192
34501418M	18	130	17.5	46.0	67	12 / 192
34501419M	19	150	17.5	46.7	70	12 / 192
34501421M	21	198	17.5	47.6	72	12 / 192
34501422M	22	225	17.5	48.5	74	12 / 192





345021

• Chrome plated

▪ Ring insert tool

▪ Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34502107M	7	26	17.5	39.8	37	12 / 288
34502108M	8	35	17.5	40.5	37	12 / 288
34502110M	10	60	17.5	41.6	40	12 / 288
34502111M	11	73	17.5	43.3	42	12 / 288
34502112M	12	90	17.5	43.8	51	12 / 288
34502113M	13	108	17.5	44.5	52	12 / 288
34502114M	14	128	17.5	45.2	53	12 / 288
34502115M	15	152	17.5	45.9	55	12 / 288
34502116M	16	175	17.5	46.3	57	12 / 288
34502117M	17	202	17.5	47.0	55	12 / 192
34502118M	18	230	17.5	47.4	61	12 / 192
34502119M	19	262	17.5	49.2	63	12 / 192
34502121M	21	330	17.5	50.3	68	12 / 192
34502122M	22	360	17.5	51.2	73	12 / 192





KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34502108S	1/4	26	17.5	39.8	38	12 / 288
34502110S	5/16	35	17.5	40.5	37	12 / 288
34502112S	3/8	60	17.5	41.6	42	12 / 288
34502114S	7/16	73	17.5	43.3	42	12 / 288
34502116S	1/2	108	17.5	44.5	52	12 / 288
34502118S	9/16	152	17.5	45.2	53	12 / 288
34502120S	5/8	175	17.5	46.3	58	12 / 288
34502122S	11/16	202	17.5	47.0	62	12 / 192
34502124S	3/4	262	17.5	49.2	65	12 / 192
34502126S	13/16	330	17.5	50.3	72	12 / 192
34502128S	7/8	360	17.5	51.2	70	12 / 192

345012

• Chrome plated

▪ Open end insert tool

▪ Square drive size : 14 x 18

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501213M	13	52	25	57.5	114	12 / 192
34501214M	14	64	25	58.0	115	12 / 192
34501215M	15	77	25	58.0	118	12 / 192
34501216M	16	93	25	58.5	125	10 / 160
34501217M	17	110	25	59.5	135	10 / 160
34501218M	18	130	25	60.0	134	10 / 160
34501219M	19	150	25	60.5	136	10 / 160
34501221M	21	198	25	61.0	153	6 / 96
34501222M	22	225	25	62.0	158	6 / 96
34501223M	23	255	25	63.1	166	6 / 96
34501224M	24	287	25	63.1	163	6 / 96
34501225M	25	322	25	69.0	162	6 / 96
34501226M	26	359	30	69.0	230	6 / 96
34501227M	27	400	32.5	69.0	239	6 / 96
34501230M	30	537	32.5	70.6	239	6 / 96
34501232M	32	644	32.5	72.1	248	6 / 72
34501234M	34	762	32.5	73.2	246	6 / 72
34501236M	36	800	32.5	73.3	244	6 / 72
34501238M	38	800	32.5	72.7	222	6 / 72
34501240M	40	800	37	80.5	321	6 / 72
34501241M	41	800	37	80.5	315	6 / 72





KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34501216S	1/2	52	25	57.5	117	12 / 192
34501218S	9/16	64	25	58.0	121	12 / 192
34501220S	5/8	93	25	58.5	127	10 / 160
34501222S	11/16	110	25	59.5	135	10 / 160
34501224S	3/4	150	25	60.5	140	10 / 160
34501226S	13/16	198	25	61.0	156	6 / 96
34501228S	7/8	225	25	62.0	162	6 / 96
34501230S	15/16	287	25	63.1	168	6 / 96
34501232S	1	322	25	69.0	232	6 / 96
34501236S	1-1/8	537	32.5	70.6	243	6 / 96
34501240S	1-1/4	644	32.5	72.1	242	6 / 96
34501248S	1-1/2	800	32.5	72.7	226	6 / 96

Insert Tool

345022

- Chrome plated

▪ Square drive size : 14 x 18

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34502213M	13	108	25	62.2	129	12 / 192
34502214M	14	128	25	63.2	128	12 / 192
34502215M	15	152	25	63.3	125	12 / 192
34502216M	16	175	25	63.1	137	12 / 192
34502217M	17	202	25	65.0	134	12 / 192
34502218M	18	230	25	65.0	134	10 / 160
34502219M	19	262	25	66.7	135	10 / 160
34502221M	21	330	25	67.3	151	10 / 160
34502222M	22	368	25	68.5	156	6 / 96
34502224M	24	452	25	69.9	156	6 / 96
34502227M	27	595	31	78.0	201	6 / 96
34502230M	30	762	31	79.6	198	6 / 96
34502232M	32	800	31	81.0	201	6 / 96
34502234M	34	800	31	82.4	225	6 / 90
34502236M	36	800	31	83.7	230	6 / 90
34502241M	41	800	31	86.6	235	6 / 90





KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34502216S	1/2	108	25	62.2	128	12 / 192
34502218S	9/16	128	25	63.2	128	12 / 192
34502220S	5/8	175	25	63.1	132	12 / 192
34502224S	3/4	262	25	66.7	141	10 / 160

Interchangeable Torque Wrench Set

34510

34520



KT NO.	mm	Contents							Kg	
345102D08MR	9 x 12	34512-2DG	4~20 N·m		34503102R	1/4" DR.	345011M  10, 13, 17	345021M  10, 13, 17	1.3	1 / 15
345104D08MR		34512-4DG	10~60 N·m		34503103R	3/8" DR.			1.3	1 / 15
345101E08MR		34512-1EG	20~100 in·lb		34503102R	1/4" DR.			1.2	1 / 15
345102E08MR		34512-2EG	40~200 in·lb		34503102R	1/4" DR.			1.3	1 / 15

KT NO.	mm	Contents						Kg	
345202C11MR	14 x 18	34522-2CG	20~150 ft·lb 34~197 N·m		34503204R	1/2" DR.	345012M  13, 14, 15, 17, 19, 22, 24, 27, 30	3.8	1/6
345201D11MR		34522-1DG	20~100 N·m		34503203R	3/8" DR.		3.7	1 / 6
345202D11MR		34522-2DG	40~200 N·m		34503204R	1/2" DR.		3.8	1 / 6
345203D11MR		34522-3DG	60~340 N·m		34503204R	1/2" DR.		4	1 / 6
345201E11MR		34522-1EG	15~80 ft·lb		34503203R	3/8" DR.		3.7	1 / 6
345202E11MR		34522-2EG	20~150 ft·lb		34503204R	1/2" DR.		3.8	1 / 6
345203E11MR		34522-3EG	50~250 ft·lb		34503204R	1/2" DR.		4	1 / 6

Classic Type Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

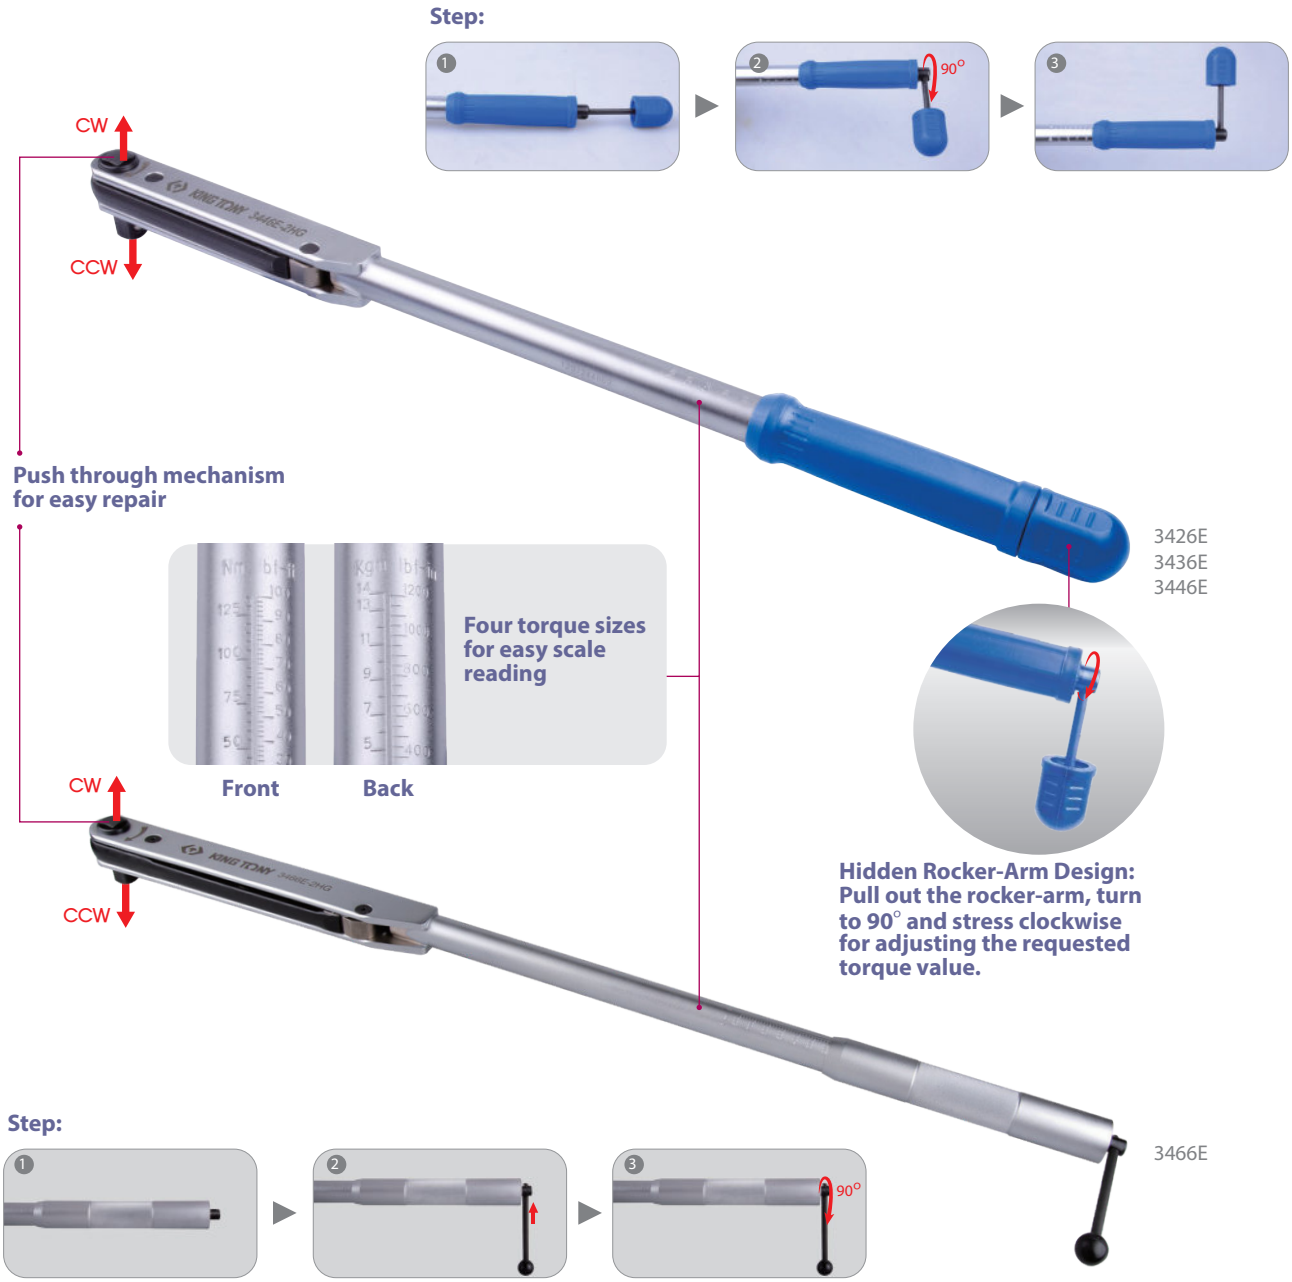



Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb / in·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Incr.	ft·lb	Incr.	in·lb	Incr.	kgf·m	Incr.	Overall length mm	g		
● 3426E-1HG	1/4"	2.5~11 N·m	0.5	2~8 ft·lb	1	20~100 in·lb	10	0.3~1.2 kgf·m	0.1	352	630	1 / 12
● 3436E-1HG	3/8"	2.5~11 N·m	0.5	2~8 ft·lb	1	20~100 in·lb	10	0.3~1.2 kgf·m	0.1	352	740	1 / 12
● 3436E-2HG	3/8"	7~33 N·m	1	5~24 ft·lb	1	60~300 in·lb	10	0.7~3.4 kgf·m	0.1	450	870	1 / 12
● 3436E-3HG	3/8"	14~68 N·m	2	10~50 ft·lb	5	125~600 in·lb	25	1.4~7 kgf·m	0.2	505	1210	1 / 12
● 3446E-1HG	1/2"	25~135 N·m	5	20~100 ft·lb	2	200~1200 in·lb	50	3~14 kgf·m	1	555	1640	1 / 12
● 3446E-2HG	1/2"	50~225 N·m	5	40~160 ft·lb	5	400~2000 in·lb	50	5~23 kgf·m	1	590	1710	1 / 12
● 3446E-3HG	1/2"	70~330 N·m	10	50~250 ft·lb	5	600~3000 in·lb	100	7~35 kgf·m	1	803	3440	1 / 6
● 3466E-1HG	3/4"	140~560 N·m	10	100~410 ft·lb	10	1200~5000 in·lb	100	14~57 kgf·m	1	977	8480	1 / 2
● 3466E-2HG	3/4"	200~800 N·m	20	150~600 ft·lb	20	1800~7200 in·lb	200	22~82 kgf·m	2	1033	8860	1 / 2

Click Type Adjustable Torque Wrench

Industrial application with durability
Loud click sound and strong impulse when required torque is reached
Tolerance of torque ± 3%(CW)
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Ideal for using on oily, chemical and noisy assembling working field
CW/CCW Direction

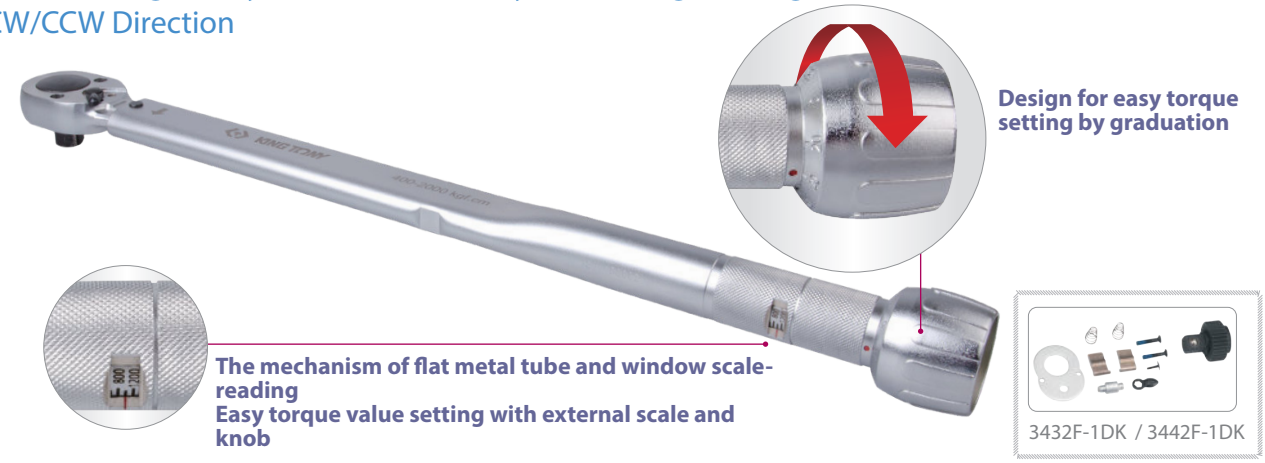

Design for easy torque setting by graduation

The mechanism of flat metal tube and window scale-reading
Easy torque value setting with external scale and knob

3432F-1DK / 3442F-1DK

Dual Scale - Kilogram-force Centimeter(kgf·cm)

KT NO.	Gear teeth	Square drive	Torque range kgf·cm	Incr.	Overall length mm	g	
3432F-1KF	24	3/8"	50-250 kgf·cm	2.5 kgf·cm	240	450	1 / 24
3432F-3KF	24	3/8"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12
3442F-1KF	24	1/2"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12
3442F-3KF	24	1/2"	400-2000 kgf·cm	20 kgf·cm	498	1500	1 / 12

Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction



Comfortable rubber handle

Automatic quick return adjustment

Quick release



- The production of injection molding helps it against come off



- One hand operation
- Quick torque set
- Automatic torque locking



34464-1DK

Dual Scale - Newton Meter & English (N·m / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m / ft·lb	Incr.	Overall length mm	g	
34464-1FG	24	1/2"	40-210 N·m (33.2-151.2 ft·lb)	1.0 N·m	470	1250	1 / 12
34464-2FG	24	1/2"	70-340 N·m (62.7-239.7 ft·lb)	3.0 N·m	590	1590	1 / 12

Adjustable Torque Wrench

Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction

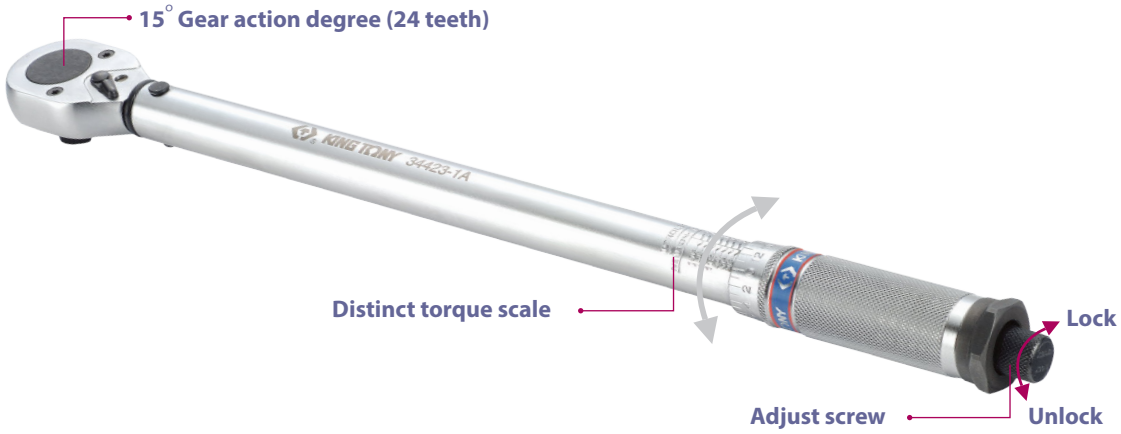

Dual Scale - Newton Meter & Kilogram-force Centimeter / Kilogram-force meter (N·m & kgf·cm / kgf·m)

KT NO.	Square drive	Torque range N·m	Incr.	Torque range kgf·cm / kgf·m	Incr.	Overall length mm	g	
34223-1A	1/4"	5~25 N·m	0.1 N·m	51~255 kgf·cm	1 kgf·cm	280	595	1 / 12
34323-1A	3/8"	5~25 N·m	0.1 N·m	51~255 kgf·cm	1 kgf·cm	280	595	1 / 12
34323-2A	3/8"	20~110 N·m	1 N·m	2.04~11.22 kgf·m	0.1 kgf·m	370	820	1 / 12
34423-1A	1/2"	42~210 N·m	1 N·m	4.3~21.4 kgf·m	0.41 kgf·m	450	1340	1 / 12
34423-2A	1/2"	70~340 N·m	3 N·m	7.1~34.7 kgf·m	0.27 kgf·m	570	2400	1 / 12

Dual Scale - English & Kilogram-force Centimeter / Kilogram-force meter (in·lb / ft·lb & kgf·cm / kgf·m)

KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range kgf·cm / kgf·m	Incr.	Overall length mm	g	
34223-1B	1/4"	55~250 in·lb	1.5 in·lb	63~288 kgf·cm	1.13 kgf·cm	280	595	1 / 12
34323-1B	3/8"	55~250 in·lb	1.5 in·lb	63~288 kgf·cm	1.13 kgf·cm	280	595	1 / 12
34323-2B	3/8"	15~80 ft·lb	0.5 ft·lb	2.1~11.10 kgf·m	0.07 kgf·m	370	820	1 / 12
34423-1B	1/2"	30~150 ft·lb	1 ft·lb	4.2~20.8 kgf·m	0.14 kgf·m	450	1340	1 / 12
34423-2B	1/2"	50~250 ft·lb	2 ft·lb	6.9~34.6 kgf·m	0.27 kgf·m	570	2400	1 / 12

Dual Scale - Newton Meter & English (N·m & in·lb / ft·lb)

KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34223-1C	1/4"	55~250 in·lb	1 in·lb	6.2~28.2 N·m	0.17 N·m	280	595	1 / 12
34323-1C	3/8"	55~250 in·lb	1 in·lb	6.2~28.2 N·m	0.17 N·m	280	595	1 / 12
34323-2C	3/8"	15~80 ft·lb	0.5 ft·lb	20.3~108.5 N·m	0.68 N·m	370	820	1 / 12
34423-1C	1/2"	30~150 ft·lb	1 ft·lb	40.7~203.4 N·m	1.35 N·m	450	1658	1 / 12
34423-2C	1/2"	50~250 ft·lb	2 ft·lb	67.8~339 N·m	2.71 N·m	570	2400	1 / 12


● 34223-1DK1


● 34323-1DK1
● 34323-2DK1


● 34423-1DK1(24T)
-series NO. before 090923xxxx


● 34423-3DK(24T)
-series NO. after 1309230001

Adjustable Torque Wrench Set

344251A12MR 1/2"

Blow case size (mm) :
500 x 125 x 70 (0.15cuft)

Contents			2.85 kg	1 / 10
	34423-1A	42~210 N·m		
	4335MR	13, 14, 15, 16, 17, 18, 19, 21, 22, 24		
	4251-04R			



12 PC.

Heavy Duty Adjustable Aluminum Torque Wrench

Industrial application
Lightweight and robust housing made by aluminium alloy
Multi-lever mechanism brings length independence and accurate torque
Loud click sound and string impulse when torque value reached
Easy lock and adjustment design
Tolerance of torque ± 3%(CW)
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010



Step:

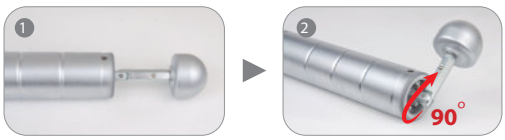

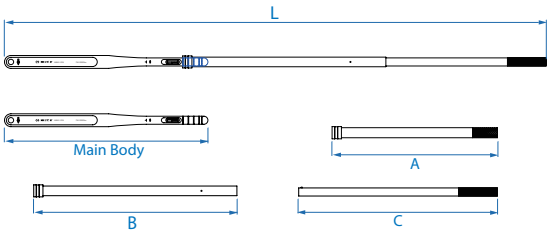

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Square drive	Torque range N·m	Incr.	ft·lb	Incr.	Main Body	A	B	C	Overall length mm	kg	
3445G-1FB	1/2"	40~200 N·m	5	30~150 ft·lb	5	563	-	-	-	563	1.50	1 / 12
3465G-1FB	3/4"	110~550 N·m	10	80~400 ft·lb	10	827	-	-	-	827	3.00	1 / 2
3465G-2FB	3/4"	140~760 N·m	10	100~560 ft·lb	10	827	-	-	-	827	3.00	1 / 2
3465G-3FB	3/4"	200~1000 N·m	10	140~740 ft·lb	10	808	762	-	-	1413	3.80	1 / 2
3485G-1DB	1"	600~1500 N·m	25	-	-	945	-	771	362	1615	10.90	1 / 1
3485G-2DB	1"	750~2000 N·m	50	-	-	947	-	945	924	2370	11.70	1 / 1

Electronic Torque Wrench

Electronic torque value readout
Peak and trace mode selection
Buzzer and LED indicator for presetting target torque
Engineering units (N·m, ft·lb, in·lb, kgf·m) adjustment
Switch off automatically after 60 seconds
DIN ISO 6789:2017 & ASME B107.300-2010
CW ± 2% and CCW ± 2.5% operation



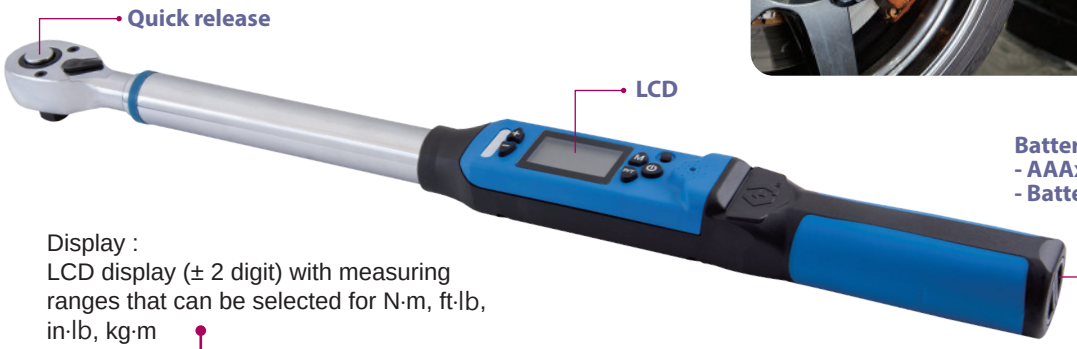

Display :
LCD display (± 2 digit) with measuring ranges that can be selected for N·m, ft·lb, in·lb, kg·m



Signal :
3-way signal when the maximum torque value is reached, as a result the wrench can be used in noisy places.

LED warning light

- Electronic Torque Wrench

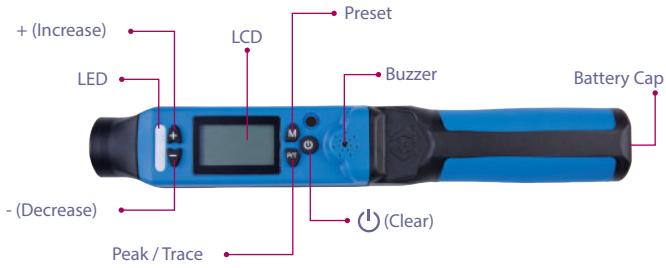

Torque Accuracy	CW ± 2% / CCW ± 2.5%
Preset Function	10
Display Resolution	0.1 N·m/ ft·lb , 1.0 in·lb, 0.01 kgf·m
Operation Mode	Peak/Trace
Battery	AAAx3
Backlight	Yes (Nagative)
Alert	LED & Buzzer
Operating Ambient Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operation Relative Humidity	15 to 90% noncodensing



● 34367-2DK
● 34467-1DK

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / in·lb / ft·lb & kgf·m)

KT NO.	Gear teeth	Square drive	Torque range N·m	in·lb	ft·lb	kgf·m	Overall length mm	g	
● 34367-2AG	72	3/8"	27-135 N·m	239~1195 in·lb	19.9-99.6 ft·lb	2.75~13.76 kgf·m	460	1400	3 / 6
● 34467-1AG	36	1/2"	40-200 N·m	354~1770 in·lb	29.5-147.5 ft·lb	4.08~20.38 kgf·m	530	1500	3 / 6

Electronic Torque Adapter

34207-1A | 34307-1A | 34407-1A CE

▪ Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AAA x 2 PC.
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	34207-1A: 37.5 N·m (27.6 ft·lb) 34307-1A: 168.8 N·m(124.5 ft·lb) 34407-1A: 250 N·m (184.4 ft·lb)





Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34207-1A	1/4"	6~30 N·m	4.4~22.1 ft·lb	0.61~3.06 kgf·m	L75 x W45 x H40	124	12 / 48
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m	L75 x W45 x H40	198	12 / 48
34407-1A	1/2"	40~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	L75 x W45 x H40	199	12 / 48

34407T-1A

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m 1Psi /0.001 Bar /0.001 kgf·cm² /0.01 Kpa
Operation Mode	Peak/Trace
Unit Selection	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m Kpa, Bar, psi, kgf·cm²
Battery	AAA x 2 PC.
Battery Life	50hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Auto Shut Off	60 seconds







Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / lbf·ft & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Pressure range	Size mm	g	
34407T-1A	1/2"	40-200 N·m	29.5-147.5 ft·lb	4.08~20.38 kgf·m	1-100 psi (0.069~6.6bar)	L75 x W67 x H46 mm	343	1 / 24

Electronic Torque Adapter

34607-1A

- Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m / ft·lb , 0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AA x 2 PC.
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	1250 N·m (922 ft·lb)

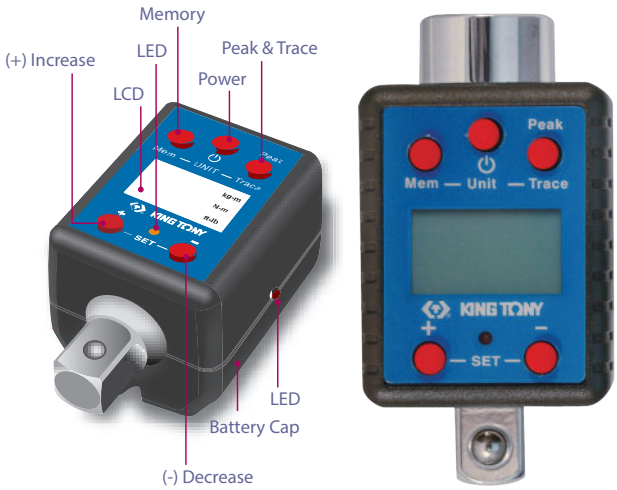

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34607-1A	3/4"	200 ~1000 N·m	147.6~738 ft·lb	20.4~102 kgf·m	L110 x W56 x H60	585	6 / 24



Torque Screwdriver

34111

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque ± 5%(CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010



• Tolerance of torque within ± 5%(CW)

34211

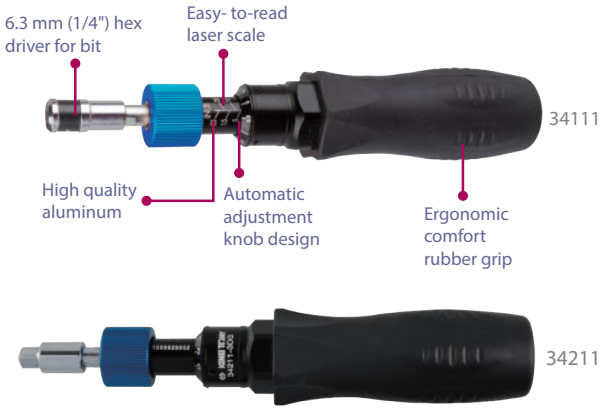

KT NO.	1/4"DR.	Torque range cN·m / N·m / in·lb	Incr.	Overall length mm	g	
34111-1DG	○	30~120 cN·m	1 cN·m	180	207	1 / 24
34111-1EG	○	3~15 in·lb	0.1 in·lb	180	207	1 / 24
34111-2DG	○	1.5~6.5 N·m	0.1 N·m	196	475	1 / 24
34111-2EG	○	10~50 in·lb	1.0 in·lb	196	475	1 / 24
34211-3DG	■	4~9 N·m	0.1 N·m	196	475	1 / 24

Torque Angle Gauge

34440

34440A

34660

34660A

- Square Drive :
  34440 (1/2" x 1/2")
  34660 (3/4" x 3/4")
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°
- Indicator etched on clear plastic plate, protects angle scale from dirt and grease
- Adjustable arm keeps angle scale stationary
- Arm has two lengths for additional flexibility in placement against components
- Tough composite dial and rotating index allow operator to accurately tighten to meet standard



34440



34660



• Step 1 : Set up the torque value by torque wrench



• Step 2 : Adjust the angle by angle gauge



34660A



34440A

KT NO.	Spec.	g	
34440	1/2"F x 1/2"M	190	12 / 48
34440A	1/2"F x 1/2"M	375	6 / 24
34660	3/4"F x 3/4"M	666	6 / 12
34660A	3/4"F x 3/4"M	908	6 / 12



Torque Multiplier

34486 | 34488 | 34688

- Torque multiplication with 5:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places













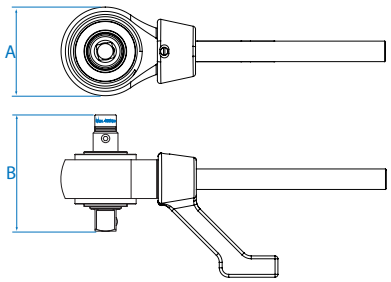





Contents

	34486-05A 34488-05A 34688-05A	Multiplier head 1 PC.
	34688-P01	Reaction bar 1 PC.
	34688-P02	Reaction bar 1 PC.
	34486-P03 34488-P03 34688-P03	Torque-Limit Adapter 1 PC.

KT NO.	Ratio	Input square	Output square	Max input torque N·m /ft·lb	Max output torque N·m / ft·lb	A mm	B mm	kg	
34486	5 : 1	1/2"	3/4"	300 / 220	1500 / 1100	108	136.3	7.1	1 / 2
34488	5 : 1	1/2"	1"	400 / 290	2000 / 1450	108	140.3	7.5	1 / 2
34688	5 : 1	3/4"	1"	540 / 400	2700 / 2000	108	161.0	7.7	1 / 2



Torque Multiplier

34488-26

- Torque multiplication with 26:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- High ratios offers an idea to replace long lever arm and heavy wrench
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places
- Anti-backlash device







34488-26DK

Contents



Multiplier head 1 PC.



Reaction bar 2 PC.









KT NO.	Ratio	Input square	Output square	Max input torque N·m / ft·lb	Max output torque N·m / ft·lb	kg	
34488-26	26 : 1	1/2"	1"	175 / 130	4500 / 3300	15.7	1 / 1



Universal Torque Converter Set

3488A03MP

- It is a newly designed wheel wrench for truck or car tires by using less labor to reach a sufficient output torque
- Suitable for trucks, buses, and other heavy duty vehicles



Contents

	Power enhanced device 1 PC.
	Prolonged pole 1 PC.
	Handle 1 PC.
 8835M	32, 33

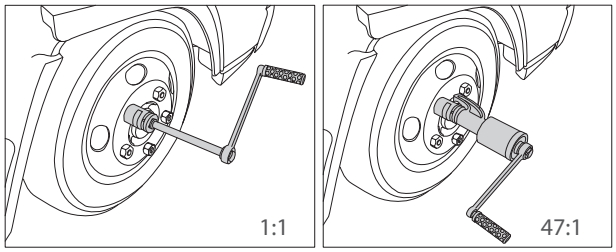

KT NO.	Ratio	Input square	Output square	Max output torque N·m / ft·lb	kg	
3488A03MP	47 : 1	1"	1"	4700 / 3466	9.3	1 / 2



Torque Tester

ZV011

7.7 kg | 1 / 1

Calibration Range	2~60 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	10mm
Square Drive Adaptor (inch)	1/4", 3/8", 1/2"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


233510M


333510M


433510MR



ZV011A		Europe
ZV011B		America & Asia
ZV011D		Australia & New Zealand

ZV012

8.1 kg | 1 / 1

Calibration Range	8~400 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	22mm
Square Drive Adaptor (inch)	3/8", 1/2", 3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


333522M


433522MR


633522M



ZV012A		Europe
ZV012B		America & Asia
ZV012D		Australia & New Zealand

ZV013

8.9 kg | 1 / 1

Calibration Range	100~1500 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m
Input Hex A/F (mm)	36mm
Square Drive Adaptor (inch)	3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


633536M



ZV013A		Europe
ZV013B		America & Asia
ZV013D		Australia & New Zealand


TORQUE WRENCH TESTER
KING TONY
ZV01
PEAK LATCHED
ZERO RESET
UNIT
MODE
PRINT
KING TONY 3445A-1DG
KING TONY 3445G-1FB
40-200 Nm
30-150 Lbf.ft

WRENCHES




KING TONY
1062
14-30mm
Ø12mm - 28mm
Ø20mm - 48mm
1062-10
12D12MRS
KING TONY
65

KING TONY UNIT DRIVE Profile

1. A large contact surface provides a secure force closure even for bolts whose sizes are out of the tolerances.
2. Radiate distribution of the force on the bolt flanks, reducing notch effect, which prevents the bolt from being rounded.
3. Gentle torque transfer enables worn bolts to be loosened.
4. Optimally distributed force up to 20 % higher torques can be transferred.

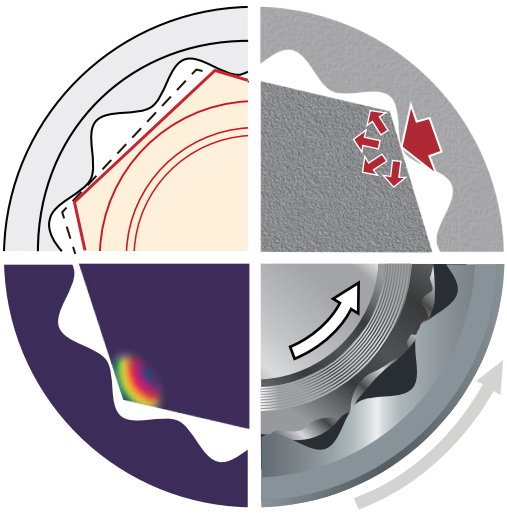

The KING TONY UNIT DRIVE prevents the bolts from being damaged by using of a wave form without any tipped or sharp edges.
Enlarged, round contact surfaces ensure that torque is reliably transferred - acting radiately, as it does, on the bolt.
Minimising notch effect prevents any damage to the bolt.

Wrench Made



1 Raw material

2 Hot forge



3 Barreling



4 Polishing



5 Punching & Broaching



6 Marking



7 Heat treatment



8 Vibrating



9 Sand blast



10 Plating

Advanced structure saves time

There are more and more improved tool structures come out every year. King Tony selects useful idea and engineering function on developing new product within quality and economic concern. Every piece of component is designed for the comfort to users.







King Tony



Other brand

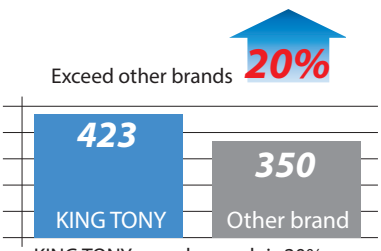

KING TONY speed wrench is 20% stronger than others.

Ultra-Light & Long Combination Wrench & Set

KT No. & D1



1061

PAT.

- New forge technologies I-Beam shank offers 20% lightweight and better strength
- 15° open slimline type
- 13° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A / ISO 7738

TAIWAN EXCELLENCE 2016





New slimline I-Beam shank offers superior strength with less effort



More powerful open end with big thumb point delivers more torque



13 degree offset ring provides better accessibility







KT NO.	Size mm	L mm	g	
1061-06	6	128	19	12 / 768
1061-07	7	148	31	12 / 576
1061-08	8	148	29	12 / 576
1061-09	9	167	46	12 / 384
1061-10	10	167	47	12 / 384
1061-11	11	186	58	12 / 240
1061-12	12	196	62	12 / 192
1061-13	13	205	85	12 / 192
1061-14	14	223	101	12 / 120
1061-15	15	233	121	12 / 144
1061-16	16	243	135	12 / 144
1061-17	17	262	168	12 / 96
1061-18	18	272	187	12 / 96

KT NO.	Size mm	L mm	g	
1061-19	19	281	203	12 / 96
1061-20	20	301	273	8 / 48
1061-21	21	301	269	8 / 48
1061-22	22	319	304	8 / 48
1061-23	23	319	301	8 / 48
1061-24	24	338	370	5 / 40
1061-25	25	358	450	5 / 40
1061-26	26	358	431	5 / 40
1061-27	27	383	510	5 / 40
1061-28	28	383	508	5 / 40
1061-29	29	408	617	5 / 20
1061-30	30	408	599	5 / 20
1061-32	32	433	789	5 / 20



► Pouch material : Tetoron

KT NO.	PC.		Contents	Kg	
12C7MRN01	7		8, 10, 12, 13, 14, 17, 19	0.77	1 / 24
12C8MRN	8		6, 7, 8, 9, 10, 11, 12, 13	0.77	1 / 24
12A0MRN	10		10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.35	1 / 12
12A1MRN	11	1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24	2.06	1 / 12
12A3MRN	13		8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 22, 24	2.16	1 / 12
12A4MRN	14		8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 21, 22, 24	2.44	1 / 8
12B4MRN	24		6, 8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	7	1 / 2

Combination Wrench



1062 PAT.







- 15° open end reinforcement design in slim profile
- 13° ring end high relief zone design with thin wall access ability
- Chrome vanadium alloy steel
- Metric - DIN 3113 from A, ISO 7738



KT NO.	Size mm	L mm	g	
1062-06	6	105	17	12 / 504
1062-07	7	115	19	12 / 504
1062-08	8	125	27	12 / 504
1062-09	9	135	28	12 / 504
1062-10	10	145	36	12 / 504
1062-11	11	155	45	12 / 504
1062-12	12	165	58	12 / 216
1062-13	13	175	73	12 / 216
1062-14	14	185	88	12 / 216
1062-15	15	195	94	12 / 192
1062-16	16	205	108	12 / 192
1062-17	17	215	129	12 / 192
1062-18	18	225	151	12 / 144

KT NO.	Size mm	L mm	g	
1062-19	19	235	159	12 / 144
1062-20	20	245	186	12 / 144
1062-21	21	255	203	12 / 96
1062-22	22	265	221	12 / 96
1062-23	23	275	262	12 / 96
1062-24	24	285	281	6 / 54
1062-25	25	295	309	6 / 54
1062-26	26	305	343	6 / 54
1062-27	27	315	393	6 / 54
1062-28	28	325	416	6 / 48
1062-29	29	335	456	6 / 48
1062-30	30	345	491	6 / 48
1062-32	32	365	573	6 / 48

Combination Wrench Set



► MRN / SRN : Tetoron pouch bag

KT NO.	PC.		Contents	Package	Kg	
12D09MRN	9	1062	8, 9, 10, 11, 12, 13, 14, 17, 19	Tetoron	0.80	1 / 24
12D10MRN	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Tetoron	1.44	1 / 16
12D13MRN	13		6, 8, 10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24	Tetoron	1.68	1 / 12
12D14MRN05	14		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	Tetoron	1.27	1 / 12
12D15MRN	15		10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.32	1 / 8
12D15MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.96	1 / 12
12D18MRN	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Tetoron	2.36	1 / 8
12D26MRN	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Tetoron	5.20	1 / 4

Portable Wrench Set

12D06MRS

6 PC.

KT NO.	PC.		Contents	Package	Kg	
12D06MRS	6	1062	10, 12, 13, 14, 17, 19	color box	1.0	1 / 24



12D12MRS

- Wrench safely locked in support

12 PC.



- Easy to recognize



- One-handed carry



- Quick storage



- Elastic structure design



- Hanging hole



KT NO.	PC.		Contents	Package	Kg	
12D12MRS	12	1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22	color box	1.4	1 / 12

Combination Wrench

KT No. & D1



1060

- European slimline type
- 15° open end angle
- 15° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
1060-55	5.5	105	17	12 / 504
1060-06	6	105	16	12 / 504
1060-07	7	115	22	12 / 504
1060-08	8	125	24	12 / 504
1060-09	9	135	32	12 / 504
1060-10	10	145	41	12 / 504
1060-11	11	155	46	12 / 504
1060-12	12	165	59	12 / 216
1060-13	13	175	70	12 / 216
1060-14	14	185	87	12 / 216
1060-15	15	195	96	12 / 192
1060-16	16	205	111	12 / 192
1060-17	17	215	131	12 / 192
1060-18	18	225	156	12 / 144
1060-19	19	235	163	12 / 144
1060-20	20	245	189	12 / 144
1060-21	21	255	206	12 / 96
1060-22	22	265	243	12 / 96
1060-23	23	275	258	12 / 96
1060-24	24	285	290	6 / 54
1060-25	25	295	312	6 / 54
1060-26	26	305	349	6 / 54
1060-27	27	315	367	6 / 54
1060-28	28	325	415	6 / 48
1060-29	29	335	463	6 / 48
1060-30	30	345	492	6 / 48
1060-32	32	365	566	6 / 48

5060

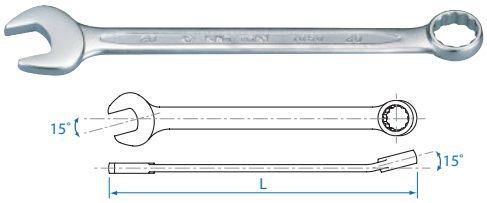

KT NO.	Size inch	L mm	g	
5060-08	1/4	105	17	12 / 504
5060-10	5/16	125	24	12 / 504
5060-12	3/8	145	40	12 / 504
5060-14	7/16	155	47	12 / 504
5060-16	1/2	175	70	12 / 216
5060-18	9/16	185	87	12 / 216
5060-20	5/8	205	113	12 / 192
5060-22	11/16	215	136	12 / 192
5060-24	3/4	235	175	12 / 144
5060-26	13/16	255	214	12 / 96
5060-28	7/8	265	234	12 / 96
5060-30	15/16	285	280	6 / 54
5060-32	1	295	309	6 / 54
5060-34	1-1/16	315	370	6 / 54
5060-36	1-1/8	335	462	6 / 48
5060-40	1-1/4	365	560	6 / 48

1071

- Jumbo type
- 15° open end angle
- 15° ring end offset from shaft
- Polished, chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
1071-33	33	410	802	5 / 20
1071-34	34	410	819	5 / 20
1071-35	35	425	920	5 / 20
1071-36	36	425	918	5 / 20
1071-38	38	455	1079	5 / 20
1071-41	41	495	1464	5 / 15
1071-42	42	495	1448	5 / 15
1071-44	44	495	1584	5 / 15
1071-46	46	495	1581	5 / 15
1071-48	48	563	2235	5 / 10
1071-50	50	563	2180	5 / 10

KT NO.	Size mm	L mm	g	
1071-55	55	610	2260	5
1071-60	60	645	3523	5
1071-65	65	670	3346	5
1071-70	70	708	5672	2
1071-75	75	708	5770	2
1071-80	80	730	7778	2
1071-85	85	730	7575	2

5071



KT NO.	Size inch	L mm	g	
5071-42	1-5/16	410	816	5 / 20
5071-44	1-3/8	425	951	5 / 20
5071-46	1-7/16	425	920	5 / 20
5071-48	1-1/2	455	1085	5 / 20
5071-50	1-9/16	495	1532	5 / 15
5071-52	1-5/8	495	1520	5 / 15
5071-54	1-11/16	495	1598	5 / 15
5071-56	1-3/4	495	1609	5 / 15
5071-58	1-13/16	495	1554	5 / 15
5071-60	1-7/8	563	2317	5 / 10
5071-62	1-15/16	563	2245	5 / 10
5071-64	2	563	2248	5 / 10

Combination Wrench Set

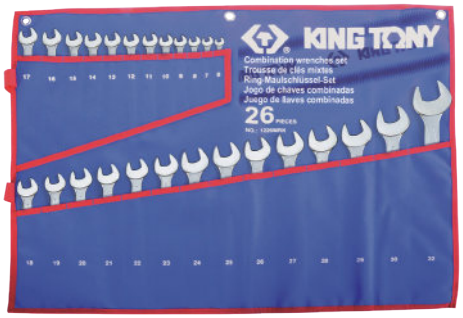

► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1207MR	7		10, 11, 12, 13, 14, 17, 19	Nylon	0.71	1 / 30
1208MR	8		10, 11, 12, 13, 14, 17, 19, 22	Nylon	0.95	1 / 24
1210MR	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Nylon	1.38	1 / 16
1211MR	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Nylon	1.33	1 / 16
1212MR	12		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	Nylon	1.28	1 / 16
1212MR01	12		6, 8, 10, 12, 13, 14, 17, 19, 24, 27, 30, 32	Nylon	3.23	1 / 8
1214MR	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Nylon	3.18	1 / 8
1214MRN	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.31	1 / 8
1214MR01	14		10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	Nylon	3.25	1 / 8
1215MR	14	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24	Nylon	1.86	1 / 12
1215MR01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Nylon	3.22	1 / 12
1215MR02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	2.92	1 / 8
1211MRN	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Tetoron	1.33	1 / 16
1214MRN01	14		10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.35	1 / 8
1214MRN05	14		6, 7 ,8 ,9 ,10 ,11 ,12 ,13 ,14 ,15, 16, 17, 18, 19	Tetoron	1.24	1 / 12
1215MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.92	1 / 12
1215MRN02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Tetoron	2.92	1 / 8
1218MR01	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Nylon	2.5	1 / 9
1218MRN	18			Tetoron	1.34	1 / 9
1226MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	5.67	1 / 4
1226MRN	26			Tetoron	5.67	1 / 4
1207SR	7		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	Nylon	0.61	1 / 30
1211SR	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	Nylon	1.48	1 / 16
1211SR01	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 1	Nylon	1.46	1 / 16
1211SR02	11		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Nylon	1.63	1 / 12
1214SR	14	5060	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4	Nylon	3.02	1 / 8
1216SR	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Nylon	3.44	1 / 8
1216SRN	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.63	1 / 6
1213SRN	13		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Tetoron	1.96	1 / 10
1214SRN01	14		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.54	1 / 8
1296MRN	6	1071	34, 36, 38, 41, 46, 50	Tetoron	8.87	1 / 2
1224CRN	24	1060	7, 8, 10, 11, 12, 13, 14, 15, 16, 17 19, 22	Tetoron	2.93	1 / 6
		5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16			

Offset Combination Wrench & Set

1063

- Chrome vanadium alloy steel
- Offset ring ideal for deep-seated nuts or bolts
- 15° open end angle
- Chrome plated
- Metric - DIN 3113 from B, ISO 7738, ISO 3318



KT NO.	Size mm	L mm	g	
1063-06	6	110	17	20 / 360
1063-08	8	130	32	20 / 320
1063-11	11	160	50	20 / 320
1063-14	14	190	93	15 / 240
1063-15	15	200	105	15 / 180
1063-16	16	210	118	15 / 180

5063



KT NO.	Size mm	L mm	g	
1063-18	18	230	165	12 / 96
1063-21	21	260	226	10 / 80
1063-22	22	270	252	10 / 80
1063-30	30	350	535	6 / 48
1063-32	32	370	596	6 / 48

KT NO.	Size inch	L mm	g	
5063-14	7/16	160	59	20 / 320
5063-16	1/2	180	78	20 / 240
5063-18	9/16	190	103	15 / 240

1067

- Chrome vanadium alloy steel
- Offset ring ideal for deep-seated nuts or bolts
- 15° open end angle
- Chrome plated
- DIN 3113 from B, ISO 7738, ISO 3318





KT NO.	Size mm	L mm	g	
1067-06	6	105	18	10 / 640
1067-07	7	115	23	10 / 640
1067-08	8	125	32	10 / 640
1067-09	9	135	37	10 / 480
1067-10	10	145	45	6 / 288
1067-11	11	155	56	12 / 240
1067-12	12	165	61	10 / 200
1067-13	13	175	73	8 / 160
1067-14	14	185	96	10 / 160
1067-15	15	195	105	10 / 160
1067-16	16	205	122	10 / 160
1067-17	17	215	138	8 / 128
1067-18	18	225	161	12 / 144

KT NO.	Size mm	L mm	g	
1067-19	19	235	192	10 / 120
1067-20	20	235	256	10 / 80
1067-21	21	265	248	10 / 80
1067-22	22	265	252	10 / 80
1067-23	23	290	316	8 / 64
1067-24	24	290	307	8 / 64
1067-25	25	300	327	10 / 60
1067-26	26	320	423	10 / 40
1067-27	27	320	402	10 / 40
1067-28	28	330	494	10 / 40
1067-29	29	350	402	6 / 48
1067-30	30	350	522	6 / 48
1067-32	32	370	621	4 / 32



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1271MR	11	1067	6, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	Nylon	1.23	1 / 15
1271MRN	11			Tetoron		
1272MR	12		6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	Nylon	1.21	1 / 15
1275MR	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	3.3	1 / 8
1275MRN	15			Tetoron		
1266MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	6.85	1 / 2

Stubby Combination Wrench & Set

KT No. & D1



10D0

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A





KT NO.	Size mm	D1	D2	H1	H2	L mm	g	
10D0-08	8	18.1	13.8	4.6	6.0	85	20	20 / 360
10D0-09	9	19.3	14.5	4.8	6.4	90	23	20 / 360
10D0-10	10	20.5	15.1	4.8	6.4	95	28	20 / 360
10D0-11	11	22.7	16.7	5.9	7.9	100	45	20 / 360
10D0-12	12	24.7	18.0	6.2	8.3	105	46	20 / 360
10D0-13	13	27.2	19.1	6.5	8.7	110	56	20 / 360
10D0-14	14	28.8	21.4	7.0	9.2	115	69	15 / 270
10D0-15	15	31.0	22.4	7.4	9.7	120	76	15 / 270
10D0-16	16	33.0	23.8	7.8	10.3	125	93	15 / 270
10D0-17	17	35.0	26.2	8.1	10.7	130	106	15 / 180
10D0-18	18	37.0	27.3	8.6	11.3	135	126	15 / 180
10D0-19	19	39.0	28.6	9.0	11.8	140	143	12 / 144

1282MR

Contents	Kg	
10D0 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.03	1 / 24



12 PC.

► Nylon pouch bag

Single Open End Wrench

CAUTION Please wear proper safety gear while working.

10F0

- Features : The open end is thicker for very high tightening torques. Examples : public work, rail worksite, naval construction, agriculture, oil platforms, metallic construction
- Hanging hole at end of handle: wrenches stored on panel or hung to avoid loss or fall
- Chrome vanadium alloy steel
- Finished with phosphate sunk
- DIN 894





KT NO.	Size mm	L mm	g	
10F0-17P	17	178	107	10 / 120
10F0-19P	19	178	107	10 / 120
10F0-21P	21	203	161	10 / 100
10F0-22P	22	203	161	10 / 100
10F0-23P	23	220	203	8 / 80
10F0-24P	24	220	203	8 / 80
10F0-26P	26	240	290	6 / 60
10F0-27P	27	240	290	6 / 60
10F0-29P	29	267	341	6 / 48
10F0-30P	30	267	335	6 / 48
10F0-32P	32	285	410	5 / 30

KT NO.	Size mm	L mm	g	
10F0-36P	36	317	556	5 / 30
10F0-38P	38	320	740	5 / 30
10F0-41P	41	340	875	4 / 24
10F0-46P	46	395	1060	3 / 12
10F0-50P	50	425	1402	1 / 12
10F0-55P	55	425	1403	1 / 12
10F0-60P	60	470	2544	1 / 6
10F0-65P	65	470	2441	1 / 6
10F0-70P	70	500	3457	1 / 6
10F0-75P	75	500	3333	1 / 6

Open End Wrench & Set

1900

- European slimline type
- 15° open end angle
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3110
- Inch - ANSI / ASME B107.6



KT NO.	Size mm	L mm	g	
19005507	5.5 x 7	123	20	12 / 576
19000607	6 x 7	123	23	12 / 576
19000708	7 x 8	140	33	12 / 576
19000809	8 x 9	140	32	12 / 576
19000810	8 x 10	140	33	12 / 576
19000911	9 x 11	156	56	12 / 288
19001011	10 x 11	156	46	12 / 288
19001012	10 x 12	156	45	12 / 288
19001113	11 x 13	172	65	12 / 288
19001213	12 x 13	172	80	12 / 288
19001214	12 x 14	172	64	12 / 288
19001314	13 x 14	172	81	12 / 288
19001317	13 x 17	195	104	12 / 192
19001415	14 x 15	188.5	89	12 / 192
19001417	14 x 17	195	106	12 / 192
19001617	16 x 17	204	122	12 / 192
19001618	16 x 18	221	158	12 / 144
19001719	17 x 19	221	158	12 / 144
19001819	18 x 19	221	160	12 / 144
19001921	19 x 21	237	207	12 / 144
19001922	19 x 22	237	203	12 / 144
19002022	20 x 22	237	209	12 / 144
19002123	21 x 23	247	241	6 / 72
19002224	22 x 24	247	235	6 / 72
19002326	23 x 26	263	305	6 / 72
19002426	24 x 26	263	295	6 / 72
19002427	24 x 27	263	301	6 / 72

5900



KT NO.	Size mm	L mm	g	
19002430	24 x 30	263	306	6 / 72
19002528	25 x 28	279	348	6 / 48
19002632	26 x 32	285	438	6 / 48
19002729	27 x 29	279	348	6 / 48
19002730	27 x 30	285	431	6 / 48
19002732	27 x 32	285	434	6 / 48
19003032	30 x 32	298	439	6 / 48
19003036	30 x 36	351	715	6 / 36
19003236	32 x 36	351	723	5 / 30
19003436	34 x 36	351	717	5 / 30
19003641	36 x 41	380	998	4 / 24
19004146	41 x 46	430	1337	4 / 16

KT NO.	Size inch	L mm	g	
59000810	1/4 x 5/16	123	23	12 / 576
59001012	5/16 x 3/8	140	32	12 / 576
59001214	3/8 x 7/16	156	45	12 / 288
59001416	7/16 x 1/2	172	69	12 / 288
59001618	1/2 x 9/16	172	70	12 / 288
59001820	9/16 x 5/8	188.5	88	12 / 192
59002022	5/8 x 11/16	204	120	12 / 192
59002224	11/16 x 3/4	221	163	12 / 144
59002628	13/16 x 7/8	237	202	12 / 144
59003032	15/16 x 1	247	311	6 / 72
59003034	15/16 x 1-1/16	263	304	6 / 72
59003236	1 x 1-1/8	279	341	6 / 48
59003640	1-1/8 x 1-1/4	298	431	6 / 48



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1106MR	6	1900	8 x 9, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23	Nylon	0.83	1 / 24
1106MR01	6		8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	Nylon	0.81	1 / 24
1108MR	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	0.91	1 / 24
1110MR	10		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 24 x 27, 25 x 28	Nylon	1.67	1 / 16
1112MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Nylon	2.37	1 / 10
1112MRN	12			Tetoron	2.45	
1108SR	8	5900	1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8	Nylon	0.91	1 / 24
1110SR	10		1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8, 15/16 x 1-1/16, 1 x 1-1/8	Nylon	1.67	1 / 16
1112SR	12		1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8, 15/16 x 1, 15/16 x 1-1/16, 1 x 1-1/8, 1-1/8 x 1-1/4	Nylon	2.5	1 / 10

45° Offset Ring Wrench & Set



KT No. & D1

1960

- 45° offset ring
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6



KT NO.	Size mm	L mm	g	
19600607	6 x 7	165	47	12 / 360
19600809	8 x 9	175	55	12 / 360
19600810	8 x 10	185	70	12 / 360
19601011	10 x 11	195	90	12 / 360
19601012	10 x 12	185	90	12 / 360
19601113	11 x 13	205	105	12 / 240
19601213	12 x 13	205	103	12 / 240
19601214	12 x 14	220	126	12 / 240
19601415	14 x 15	235	138	12 / 144
19601417	14 x 17	235	156	12 / 144
19601617	16 x 17	240	180	12 / 144
19601719	17 x 19	250	204	6 / 72
19601819	18 x 19	250	210	6 / 72

5960



KT NO.	Size mm / inch	L mm	g	
19601921	19 x 21	270	253	6 / 72
19602022	20 x 22	270	242	6 / 72
19602123	21 x 23	320	460	6 / 48
19602224	22 x 24	320	372	6 / 48
19602326	23 x 26	360	451	6 / 48
19602426	24 x 26	360	460	6 / 48
19602427	24 x 27	360	437	6 / 48
19602732	27 x 32	385	658	6 / 36
19603032	30 x 32	392	697	6 / 36
59601214	3/8 x 7/16	185	79	12 / 360
59601618	1/2 x 9/16	220	122	12 / 240
59602022	5/8 x 11/16	240	167	12 / 144
59602428	3/4 x 7/8	270	243	6 / 72
59603032	15/16 x 1	360	420	6 / 48



► Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1606MR	6	 1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26	1.6	1 / 16
1609MR	9		8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	1.93	1 / 8
1611MR	11		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 30 x 32	3.0	1 / 16



1961

- Mini type
- 45° offset ring
- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric - DIN 838



KT NO.	Size mm	L mm	g	
19611415	14 x 15	140	87	12 / 240



KT NO.	Size mm	L mm	g	
19611617	16 x 17	150	96	10 / 200
19611819	18 x 19	157	115	6 / 120

75° Offset Ring Wrench & Set

KT No. & D1



1970

- European slimline type
- 75° deep ring offset
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6

5970

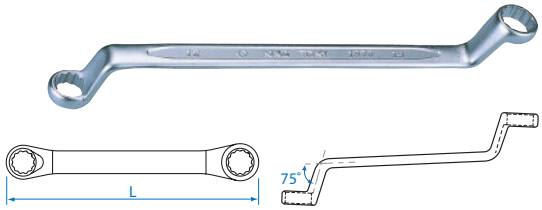

KT NO.	Size mm	L mm	g	
19700607	6 x 7	168	46	12 / 360
19700809	8 x 9	183	69	12 / 360
19700810	8 x 10	183	68	12 / 360
19701011	10 x 11	198	95	12 / 240
19701012	10 x 12	198	87	12 / 240
19701113	11 x 13	217	129	12 / 144
19701213	12 x 13	217	125	12 / 144
19701214	12 x 14	217	125	12 / 144
19701314	13 x 14	217	124	12 / 144
19701415	14 x 15	239	175	12 / 144
19701417	14 x 17	260	191	6 / 96
19701617	16 x 17	260	225	6 / 96
19701719	17 x 19	292	297	6 / 72
19701819	18 x 19	292	289	6 / 72
19701921	19 x 21	318	340	6 / 60
19701922	19 x 22	318	318	6 / 60
19702022	20 x 22	318	319	6 / 60
19702123	21 x 23	326.5	379	6 / 60
19702224	22 x 24	326	370	6 / 60
19702326	23 x 26	344	451	6 / 48
19702426	24 x 26	329	477	6 / 48
19702427	24 x 27	329	469	6 / 48
19702528	25 x 28	347	503	6 / 48
19703032	30 x 32	362	638	6 / 36

KT NO.	Size inch	L mm	g	
59700810	1/4 x 5/16	168	49	12 / 360
59701012	5/16 x 3/8	183	63	12 / 360
59701214	3/8 x 7/16	198	93	12 / 240
59701416	7/16 x 1/2	217	123	12 / 144
59701618	1/2 x 9/16	217	126	12 / 144
59701820	9/16 x 5/8	260	158	12 / 96
59702022	5/8 x 11/16	260	223	6 / 96
59702224	11/16 x 3/4	292	277	6 / 96
59702428	3/4 x 7/8	318	319	6 / 60
59702628	13/16 x 7/8	326.5	377	6 / 60
59703032	15/16 x 1	329	460	6 / 48
59703436	1-1/16 x 1-1/8	347	515	6 / 48
59703640	1-1/8 x 1-1/4	365	703	6 / 48
59703842	1-3/16 x 1-5/16	375	750	5 / 30



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1706MR	6	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17	Nylon	0.88	1 / 24
1708MR	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23	Nylon	1.64	1 / 12
1708MR01	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	1.52	1 / 12
1710MR	10		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23, 24 x 27, 30 x 32	Nylon	2.83	1 / 8
1712MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	Nylon	3.78	1 / 6
1712MRN	12			Tetoron	3.78	1 / 6
1712MRN01	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Tetoron	3.78	1 / 6
1707SR	7	5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8	Nylon	2.0	1 / 12

Straight Ring Wrench & Set

KT No. & D1



19C0

- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- DIN 837

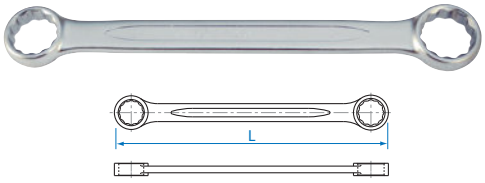



KT NO.	Size mm	L mm	g	
19C00607	6 x 7	121	20	20 / 480
19C00809	8 x 9	137	33	20 / 480
19C01011	10 x 11	154	52	20 / 320
19C01213	12 x 13	164	69	20 / 240
19C01415	14 x 15	182	85	20 / 240
19C01617	16 x 17	211	127	12 / 144
19C01819	18 x 19	226	160	12 / 144
19C02022	20 x 22	240	208	10 / 120
19C02123	21 x 23	255	238	10 / 120
19C02426	24 x 26	270	316	6 / 72
19C02528	25 x 28	285	368	6 / 72
19C03032	30 x 32	335	540	5 / 40



► Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1C08MR	8	19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	0.79	1 / 24
1C12MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	2.23	1 / 12

0° Offset Ring Wrench

19B0

- Ideal for crowded or confined spaces
- Ultra-compact ring head
- Chrome molybdenum alloy steel
- Chrome plated
- DIN 3113

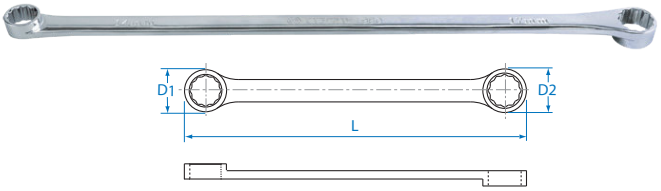





KT NO.	Size mm	D1 mm	D2 mm	L mm	g	
19B00810	8 x 10	12.5	15	235	72	12 / 240
19B01011	10 x 11	14.3	17	291	95	12 / 192
19B01012	10 x 12	14.3	17	291	95	12 / 192
19B01113	11 x 13	17.8	20.3	328	157	12 / 120
19B01214	12 x 14	17.8	20.3	328	157	12 / 120
19B01315	13 x 15	20.2	23.3	368	217	12 / 96
19B01417	14 x 17	20.2	23.3	368	217	12 / 96
19B01618	16 x 18	23.7	26.6	407	284	12 / 72
19B01719	17 x 19	23.7	26.6	407	284	12 / 72
19B01921	19 x 21	27.5	29.7	415	376	8 / 64
19B02224	22 x 24	31.3	34.0	430	482	6 / 48

0° Offset Ring Wrench Set

1F06MRN

Contents			
19B0	10 x 11, 12 x 14, 13 x 15, 16 x 18, 17 x 19, 22 x 24	1.81	1 / 8



► Tetoron pouch bag

6 PC.

Half Moon Ring Wrench & Set

1950

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113







KT NO.	Size mm	D1 mm	D2 mm	L mm	H1 mm	H2 mm	H mm	g	
19500810	8 x 10	15.6	14.3	137	6.5	6.2	42	40	12 / 288
19501012	10 x 12	15.6	18.2	141	6.6	6.5	50	61	12 / 288
19501113	11 x 13	18.2	21.0	166	8.2	8.0	63	101	8 / 128
19501214	12 x 14	18.2	21.0	166	8.2	8.0	63	95	8 / 128
19501315	13 x 15	22.0	25.0	190	9.2	8.2	75	133	6 / 72
19501417	14 x 17	22.0	25.0	190	9.2	8.2	75	130	6 / 72
19501618	16 x 18	25.5	28.0	220	9.6	8.8	79	164	6 / 72
19501719	17 x 19	25.5	28.0	220	9.6	8.8	79	163	6 / 72
19501922	19 x 22	28.6	32.5	256	11.1	10.1	91	257	6 / 48



KT NO.	PC.		Contents		
9-1905MR	5	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22	0.82	1 / 10



Crowfoot Wrench & Set

1031

- 12 points
- Chrome vanadium alloy steel
- Chrome plated







KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-10R	10	3/8"	27.0	9.2	36.5	17.1	40	12 / 192
1031-11R	11	3/8"	27.0	9.2	36.5	17.0	40	12 / 192
1031-12R	12	3/8"	27.5	9.2	36.5	16.8	40	12 / 192
1031-13R	13	3/8"	27.2	9.3	36.5	16.7	40	12 / 192
1031-14R	14	3/8"	29.8	9.6	42.0	20.0	42	12 / 192
1031-15R	15	3/8"	31.4	9.2	42.0	19.2	44	12 / 192
1031-16R	16	3/8"	30.2	10.1	42.0	19.5	48	12 / 192
1031-17R	17	3/8"	34.0	11.4	45.6	23.5	68	12 / 192
1031-18R	18	3/8"	33.6	10.0	45.6	22.5	63	12 / 192
1031-19R	19	3/8"	33.7	10.8	45.8	23.0	63	12 / 192
1031-22R	22	1/2"	38.5	13.0	55.0	23.0	82	15 / 180
1031-24R	24	1/2"	38.5	12.5	55.0	24.5	74	15 / 180
1031-26R	26	1/2"	42.5	13.5	60.0	24.0	105	15 / 180
1031-27R	27	1/2"	42.5	13.5	61.0	25.0	98	15 / 180
1031-30R	30	1/2"	49.0	14.0	68.5	30.0	136	12 / 144
1031-32R	32	1/2"	50.0	14.0	70.0	30.0	136	12 / 144

- Use to reach limit place with extension bar
- Use with torque wrench and 90° extension bar, will not effectively change the torque value

KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-33R	33	3/4"	55.6	22.5	84.5	38.0	355	12 / 60
1031-34R	34	3/4"	55.6	22.5	84.5	38.0	345	12 / 60
1031-35R	35	3/4"	55.6	22.5	84.5	39.0	334	12 / 60
1031-36R	36	3/4"	55.6	22.5	84.5	39.0	315	12 / 60
1031-38R	38	3/4"	61.7	23.0	90.5	43.0	346	12 / 60
1031-41R	41	3/4"	61.7	23.0	90.5	43.0	357	12 / 60
1031-46R	46	3/4"	70.0	25.0	101	47.0	517	12 / 24
1031-48R	48	3/4"	75.5	28.5	104	47.0	482	12 / 24
1031-50R	50	3/4"	75.5	28.5	104	48.0	587	12 / 24



KT NO.	PC.		Contents	Kg	
1E10MR	10	1031	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	0.59	1 / 30
1E11MR	11		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	0.68	1 / 30

Star Box End Wrench & Set

1920

- Chrome vanadium alloy steel
- Chrome plated
- ANSI / ASME B107.6





KT NO.	Size	L mm	g	
19200608	E6 x E8	114.0	21	12 / 504
19200711	E7 x E11	126.5	31	12 / 504
19201012	E10 x E12	142.5	43	12 / 384
19201418	E14 x E18	183.0	90	12 / 240
19201622	E16 x E22	205.0	114	12 / 192
19202024	E20 x E24	225.0	159	12 / 144

1406PR

Metal case size (mm):
280 x 130 x 41 (0.053 cuft)



6 PC.

Contents	Kg 0.46	1 / 15
1920	E6 x E8, E7 x E11, E10 x E12, E14 x E18, E16 x E22, E20 x E24	

Flare Nut Wrench

1930

- 6 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3118
- Inch - ANSI / ASME B107.6

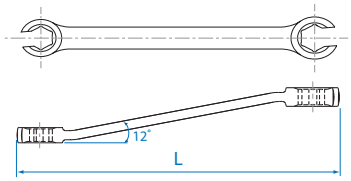

KT NO.	Size mm	L mm	g	
19300810	8 x 10	130	56	12 / 216
19300911	9 x 11	150	74	12 / 216
19301011	10 x 11	150	76	12 / 192
19301012	10 x 12	150	73	12 / 192
19301113	11 x 13	170	96	12 / 144
19301213	12 x 13	170	102	12 / 144
19301214	12 x 14	170	100	12 / 144
19301315	13 x 15	178	122	12 / 144
19301417	14 x 17	190	138	12 / 144
19301719	17 x 19	210	170	8 / 128
19301922	19 x 22	230	245	9 / 108

5930



KT NO.	Size inch	L mm	g	
59301012	5/16 x 3/8	130	60	12 / 216
59301214	3/8 x 7/16	150	76	12 / 192
59301618	1/2 x 9/16	180	125	12 / 144
59301820	9/16 x 5/8	190	169	12 / 144
59302224	11/16 x 3/4	210	184	6 / 96
59302428	3/4 x 7/8	230	249	6 / 72



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1306MR	6	1930	8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19, 19 x 22	Nylon	0.90	1 / 30
1306MRN	6			Tetoron	0.90	1 / 30
1306SR	6	5930	5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8	Nylon	0.86	1 / 30

Flare Nut Wrench & Set

1931

- 12 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3118

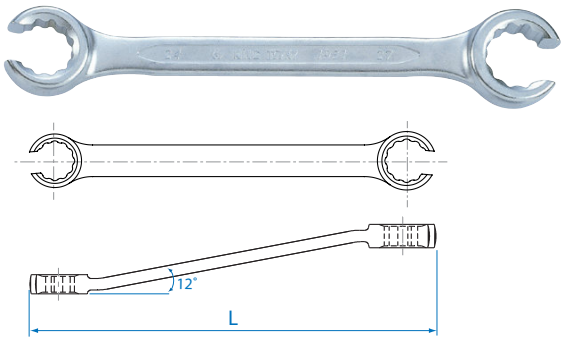

KT NO.	Size mm	L mm	g	
19312224	22 x 24	250	309	6 / 72
19312427	24 x 27	270	406	6 / 48
19313032	30 x 32	290	546	5 / 40

Flexible Head Wrench & Set

1020

- Combination flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated



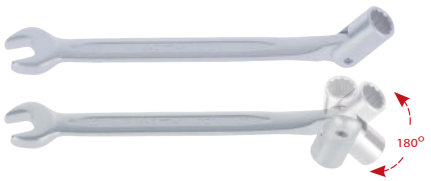

KT NO.	Size mm	L mm	g	
1020-08	8	170	64	10 / 180
1020-09	9	170	68	10 / 180
1020-10	10	180	81	10 / 160
1020-11	11	188	106	10 / 160
1020-12	12	190	107	10 / 120
1020-13	13	206	135	10 / 120

KT NO.	Size mm	L mm	g	
1020-14	14	225	167	10 / 120
1020-15	15	225	193	6 / 72
1020-16	16	234	224	6 / 72
1020-17	17	234	237	4 / 48
1020-18	18	252	295	4 / 48
1020-19	19	250	290	4 / 48

1910

- Double end flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated





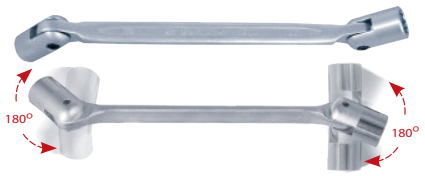

KT NO.	Size mm	L mm	g	
19100607	6 x 7	182	76	12 / 216
19100809	8 x 9	182	81	12 / 216
19100810	8 x 10	185	88	10 / 160
19101011	10 x 11	200	109	10 / 160
19101012	10 x 12	205	122	10 / 120
19101213	12 x 13	220	158	10 / 120
19101214	12 x 14	225	178	10 / 80
19101415	14 x 15	240	232	10 / 120
19101417	14 x 17	244	256	10 / 120
19101617	16 x 17	259	317	10 / 80

KT NO.	Size mm	L mm	g	
19101719	17 x 19	260	341	10 / 80
19101819	18 x 19	275	393	6 / 54
19101921	19 x 21	300	526	6 / 36
19102022	20 x 22	305	579	6 / 36
19102123	21 x 23	305	631	6 / 36
19102427	24 x 27	335	797	6 / 24

KT NO.	PC.		Contents	Kg	
1B06MR	6	1020	10, 12, 13, 14, 17, 19	1.06	1 / 24
1A06MR	6	1910	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	1.49	1 / 16



► Nylon pouch bag

Slogging Wrench

CAUTION Please wear proper safety gear while working.

10A0

- Open end slogging
- Finished with phosphate sunk
- DIN 133





KT NO.	Size mm	L mm	D mm	H mm	g	
10A0-24	24	178	52	15	286	6 / 72
10A0-27	27	180	55	16	339	6 / 72
10A0-30	30	190	60	16	416	6 / 60
10A0-32	32	190	61	17	401	6 / 60
10A0-36	36	215	72	17	573	6 / 24
10A0-41	41	233	83	19	855	5 / 20
10A0-46	46	255	94	20	1102	4 / 16
10A0-50	50	275	105	22	1502	2 / 16
10A0-55	55	298	115	24	2161	2 / 12
10A0-60	60	320	127	24	2374	1 / 10
10A0-65	65	340	138	27	3204	1 / 8
10A0-70	70	370	156	32	3785	1 / 5
10A0-75	75	372	153	31	3715	1 / 5
10A0-80	80	395	175	33	6820	1 / 4
10A0-85	85	395	175	33	6300	1 / 4
10A0-90	90	440	197	38	9270	1 / 2
10A0-95	95	440	197	38	8700	1 / 2
10A0-A0	100	480	230	45	10500	1 / 2
10A0-A5	105	480	230	45	10300	1 / 2
10A0-B0	110	505	238	47	14420	1 / 1
10A0-B5	115	505	250	53	14420	1 / 1
10A0-C0	120	530	258	53	15450	1 / 1
10A0-C5	125	530	258	56	15015	1 / 1

10B0

- Ring slogging
- Finished with phosphate sunk
- DIN 7444





KT NO.	Size mm	L mm	D mm	H mm	g	
10B0-24	24	162	42	16	238	6 / 72
10B0-26	26	180	46	17	341	6 / 72
10B0-27	27	180	46	17	330	6 / 72
10B0-30	30	190	52	18	431	6 / 72
10B0-32	32	190	52	18	404	6 / 60
10B0-36	36	205	58	19	534	6 / 36
10B0-41	41	230	66	21	728	6 / 24
10B0-46	46	240	74	23	877	4 / 16
10B0-50	50	250	82	23	1085	4 / 16
10B0-55	55	265	88	24	1429	2 / 16
10B0-60	60	275	95	26	1644	2 / 12
10B0-65	65	295	104	28	1875	2 / 12
10B0-70	70	325	112	33	2965	1 / 8
10B0-75	75	325	115	33	2735	1 / 8
10B0-80	80	345	128	36	3675	1 / 6
10B0-85	85	345	130	36	3710	1 / 6
10B0-90	90	380	152	40	5850	1 / 4
10B0-95	95	380	152	40	5350	1 / 4
10B0-A0	100	410	161	43	6445	1 / 4
10B0-A5	105	415	172	45	6500	1 / 3
10B0-B0	110	440	172	47	8000	1 / 3
10B0-B5	115	440	172	47	7500	1 / 3
10B0-C0	120	470	194	53	9000	1 / 2

Heavy Duty Offset Ring Wrench

10C0

- To be used with extension tubes item "11"
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	L mm	Applied tube	g	
10C0-24	24	178	111946	463	6 / 48
10C0-27	27	188	111946	523	6 / 48
10C0-30	30	198	111946	579	4 / 36
10C0-32	32	233	112261	841	4 / 24
10C0-36	36	241	112261	946	4 / 24
10C0-41	41	260	112261	1099	2 / 16
10C0-46	46	277	112576	1365	2 / 16
10C0-50	50	287	112576	1642	2 / 16
10C0-55	55	298	112576	1766	1 / 12
10C0-60	60	345	113086	2800	1 / 9
10C0-65	65	356	113086	3183	1 / 4

11

- Tube for item 10C0
- Chrome plated



KT NO.	⌀ mm	L mm	Applied wrench size	g	
111946	19	460	24mm, 27mm, 30mm	1050	20
112261	22	610	32mm, 36mm, 41mm	1450	16
112576	24	760	46mm, 50mm, 55mm	2400	6
113086	30	860	60mm, 65mm	2610	4

End Tubular Wrench

19A0

- Chrome vanadium alloy steel
- Chrome plated

KT NO.	mm	D1 mm	D2 mm	L2 mm	L3 mm	L mm	g	
19A00607	6 x 7	10	11	5	6	105	41	30 / 180
19A00809	8 x 9	13	14	6	7	110	55	30 / 180
19A01011	10 x 11	15	16	7.5	8	120	84	24 / 144
19A01213	12 x 13	18	19	9	9.5	140	141	18 / 144
19A01415	14 x 15	20	22	10	11	145	137	12 / 96
19A01617	16 x 17	23	24	11	12	155	186	10 / 90
19A01819	18 x 19	25	26	13	15	165	240	8 / 72
19A02022	20 x 22	28	30	15	16	170	291	8 / 72
19A02123	21 x 23	29	31	15	17	185	346	6 / 54
19A02426	24 x 26	33	35	19	21	190	425	4 / 36
19A02528	25 x 28	34	37	19	21	205	497	4 / 24
19A02729	27 x 29	37	39	21	22	210	590	2 / 12
19A03032	30 x 32	40	42	22	26	210	680	2 / 12

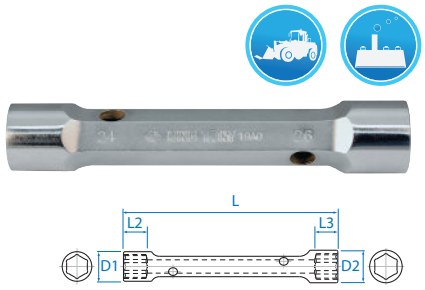



- Double end socket wrench for the hollow tube design, a long-type screw may be used.

19A0-09

19A0-15



KT NO.	L mm	Ø mm	Ø1 mm	Ø2 mm	Ø3 mm	Ø4 mm	Applied to socket wrench sizes
19A0-09	220	7.8	6.75	4.75	5.75	2.8	19A00607~19A02022
19A0-15	300	12.7	11.75	9.75	-	-	19A02123~19A03032



Flexible Speed Wrench & Set

KT No. & D1

3730M

- Flexible head, open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373008M	8	16.2	16.7	4.3	6.5	127.0	35	12 / 432
373009M	9	18.2	18.6	4.6	6.9	131.5	42	12 / 384
373010M	10	20.3	20.0	5.0	7.3	136.0	55	12 / 384
373011M	11	22.5	21.8	5.4	7.7	141.0	65	10 / 320
373012M	12	24.3	23.0	5.8	8.2	147.5	80	10 / 240
373013M	13	26.8	25.2	6.1	8.6	154.0	93	10 / 240
373014M	14	28.7	26.8	6.4	9.0	160.0	109	10 / 200
373015M	15	30.5	28.3	6.9	9.4	169.0	129	10 / 160
373016M	16	32.9	29.8	7.2	9.9	179.0	149	10 / 160
373017M	17	34.5	31.8	7.6	10.3	190.0	178	10 / 160
373018M	18	37.0	32.8	8.0	10.7	203.0	201	10 / 160
373019M	19	39.2	33.9	8.6	11.2	215.0	231	10 / 80
373021M	21	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373022M	22	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373024M	24	52.2	46.0	10.0	14.5	296.0	547	6 / 54







KT NO.	PC.		Contents	Kg	
12007MRN	7	3730M	8, 10, 12, 13, 14, 17, 19	0.93	1 / 10



► Tetoron pouch bag

Flexible Speed Wrench & Set

13012MR

Blow case size (mm) :
275 x 310 x 65 (1.68 Cuft)



12 PC.

Contents — 2.17 kg — 1 / 6

3730M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

13013MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)



13 PC.

Contents — 1.66 kg — 1 / 8

3730M	8, 10, 12, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R

Speed Wrench & Set

KT No. & D1

3731M

- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373108M	8	16.7	17.0	4.0	6.5	140.0	30	12 / 384
373109M	9	18.7	18.6	4.4	6.9	149.0	39	12 / 384
373110M	10	20.8	20.2	4.8	7.3	158.0	49	12 / 240
373111M	11	23.0	22.0	5.2	7.7	165.0	60	12 / 240
373112M	12	24.6	23.4	5.5	8.2	171.0	74	12 / 240
373113M	13	26.8	25.5	5.8	8.6	178.0	83	10 / 160
373114M	14	29.0	26.9	6.2	9.0	190.0	98	10 / 160
373115M	15	31.0	28.3	6.5	9.4	199.0	123	10 / 160
373116M	16	33.0	29.8	6.8	9.9	208.0	134	10 / 160

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373117M	17	35.5	31.8	7.2	10.3	225.0	164	6 / 60
373118M	18	37.5	32.7	7.7	10.7	236.0	193	6 / 60
373119M	19	39.4	34.0	8.2	11.2	247.0	215	6 / 60
373121M	21	45.8	40.1	9.0	13.0	287.8	322	6 / 54
373122M	22	45.8	40.1	9.0	13.0	287.8	315	6 / 54
373124M	24	51.8	46.5	10.0	14.5	321.0	476	6 / 54
373127M	27	56.4	52.4	10.5	15.5	356.6	637	6 / 36
373130M	30	62.7	58.1	11.4	17.0	400.7	856	4 / 24
373132M	32	66.4	61.9	12.5	17.5	423.5	1011	4 / 24

KT NO.	PC.		Contents	kg	
12107MRN	7	3731M	10, 11, 12, 14, 15, 17, 19	0.91	1 / 24
12107MRN01	7		8, 10, 11, 12, 13, 17, 19	0.84	1 / 24
12114MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
12112MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	1.95	1 / 8



► Tetoron pouch bag

13113MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — 1.64 kg — 1 / 8

3731M	8, 10, 12, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R



13 PC.

Ringstop Speed Wrench

KT No. & D1

373AM

- Ringstop function
- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Reversible
- Take - up : 13°
- Chrome vanadium alloy steel
- Chrome plated



373AS new





	KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	
new	373A07M	7	16.7	16.6	4.6	6.5	140	12 / 384
	373A08M	8	16.7	16.6	4.6	6.5	140	12 / 384
new	373A09M	9	18.8	18.4	4.9	6.9	150	12 / 384
	373A10M	10	20.8	20.0	5.3	7.3	159	12 / 240
	373A11M	11	23.0	21.8	5.6	7.7	165	12 / 240
	373A12M	12	25.0	22.7	6.0	8.2	172	12 / 240
	373A13M	13	27.1	24.7	6.4	8.6	178	10 / 160
	373A14M	14	29.2	27.0	6.8	9.0	191	10 / 160
new	373A15M	15	31.3	28.3	7.0	9.4	200	10 / 160
new	373A16M	16	33.4	30.0	7.2	9.9	208	10 / 60
	373A17M	17	35.5	31.8	7.7	10.3	226	6 / 60
new	373A18M	18	37.6	32.6	8.2	10.7	237	6 / 60
	373A19M	19	39.7	33.8	8.8	11.2	248	6 / 60
new	373A21M	21	46.0	40.0	9.0	13.0	290	6 / 54
new	373A22M	22	46.0	40.0	9.0	13.0	290	6 / 54
new	373A24M	24	52.2	46.0	10.0	14.5	323	6 / 54

KT NO.	Size inch	D1 mm	D2 mm	H1 mm	H2 mm	L mm	
373A10S	5/16	16.7	16.6	4.6	6.5	140	12 / 384
373A12S	3/8	20.8	20.0	5.3	7.3	159	12 / 240
373A14S	7/16	23.8	21.8	5.6	7.7	165	12 / 240
373A16S	1/2	27.1	24.7	6.4	8.6	178	10 / 160
373A18S	9/16	29.2	27.0	6.8	9.0	191	10 / 160
373A20S	5/8	33.4	30.0	7.2	9.9	208	10 / 60
373A22S	11/16	35.5	31.8	7.7	10.3	226	6 / 60
373A24S	3/4	39.7	33.8	8.8	11.2	248	6 / 60
373A28S	7/8	46.0	40.0	9.0	13.0	290	6 / 54
373A30S	15/16	52.5	46.0	10.0	14.5	323	6 / 54

Speed Wrench Set

	KT NO.	PC.		Contents	Kg	
new	122A07MRN01	7	373AM	8, 10, 11, 12, 13, 17, 19	0.91	1 / 24
new	122A07MRN02	7		8, 10, 12, 13, 14, 17, 19	0.97	1 / 16
new	122A14MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
new	122A12MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	2.06	1 / 8
new	122A07SRN	7	373AS	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	0.91	1 / 24



► Tetoron pouch bag

132A13MR new

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents	Kg 1.64	1 / 8
373AM	8, 10, 12, 13, 14, 16, 17, 18, 19	


02H


02R


03R


04R



13 PC.

Double End Speed Wrench

3736M

- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37360809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37361011M	10 x 11	20.2	21.8	7.3	7.7	150	61	10 / 200
37361013M	10 x 13	20.2	24.8	7.3	8.6	150	75	10 / 200
37361213M	12 x 13	23.0	24.8	8.2	8.6	170	88	10 / 200
37361415M	14 x 15	26.5	29.5	9.0	9.4	190	126	10 / 160
37361618M	16 x 18	29.5	33.5	9.9	10.7	210	182	10 / 120
37361719M	17 x 19	31.5	33.5	10.3	11.2	230	206	10 / 120

Double End Speed Wrench & Set

3737M

- 5° gear action (72 teeth)
- Reversible
- Take-up :13°
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37370607M	6 x 7	14.2	17.2	6.3	6.5	115	32	10 / 320
37370809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37371011M	10 x 11	20.2	21.8	7.3	7.7	150	59	10 / 200
37371213M	12 x 13	23.0	24.8	8.2	8.6	170	87	10 / 200
37371415M	14 x 15	26.5	29.5	9.0	9.4	190	127	10 / 160
37371618M	16 x 18	29.5	33.5	9.9	10.7	210	178	10 / 120
37371719M	17 x 19	31.5	33.5	10.3	11.2	230	197	10 / 120
37372123M	21 x 23	40.0	46.0	13	14.5	260	413	8 / 64
37372224M	22 x 24	40.0	46.0	13	14.5	260	385	8 / 64



► Color box

KT NO.	PC.	Contents		Package	Kg	
12706MR	6	 3737M	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 18, 17 x 19	Color box	0.72	1 / 16

Stubby Speed Wrench & Set

3738M

- Open-ended and ratchet ring-wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373810M	10	22.0	21.5	4.6	7.6	95	47	15 / 360
373811M	11	23.8	23.0	5.1	8.0	103	55	15 / 360
373812M	12	26.0	24.8	5.3	8.5	106	65	15 / 360

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373813M	13	27.5	26.1	5.6	8.7	108	75	15 / 360
373814M	14	30.5	27.6	6.0	9.3	115	88	15 / 360
373815M	15	31.8	29.2	6.3	9.9	119	104	15 / 360

Open-side Speed Wrench & Set

KT No. & D1

3721M

- Open-side speed wrench
- Torque rating exceeds ANSI specifications by 30% plus
- The special ratcheting open end design will not slip off the screw when torque is applied
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
372108M	8	17.8	13.3	5.0	6.0	136	38	12 / 384
372111M	11	25.4	17.5	6.6	7.4	168	68	12 / 288
372112M	12	26.3	19.2	7.5	7.9	174	83	12 / 288
372113M	13	28.2	20.3	7.9	8.6	180	100	10 / 240
372114M	14	31.5	21.3	8.5	9.2	193	123	10 / 120
372115M	15	32.8	23.6	8.5	9.7	200	143	10 / 120
372116M	16	34.9	23.6	9.0	10.8	207	171	10 / 120
372117M	17	37.4	28.1	9.5	10.9	227	191	10 / 100
372118M	18	39.0	28.0	9.8	11.2	239	220	10 / 100

3721S

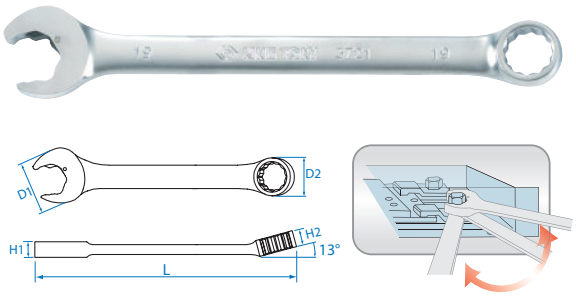

KT NO.	Size inch	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
372110S	5/16	17.8	13.3	5.0	6.0	136	38	12 / 384
372112S	3/8	22.2	16.6	6.0	7.2	161	59	12 / 288
372114S	7/16	25.4	17.5	6.6	7.4	168	68	12 / 288
372116S	1/2	28.2	20.3	7.9	8.6	180	97	10 / 240
372118S	9/16	31.5	21.3	8.5	9.2	193	120	10 / 120
372120S	5/8	34.9	25.6	9.0	10.8	207	163	10 / 120
372122S	11/16	37.4	28.1	9.5	10.9	227	184	10 / 100
372124S	3/4	41.2	29.3	9.8	12.2	250	246	6 / 60



► Tetoron pouch bag

KT NO.	PC.		Contents	Kg	
14108SRN	8	3721S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	1.11	1 / 16

Speed Wrench Adapter

H / R

KT NO.	Apply to speed wrench		Function
02H		10 mm	1/4" Bit
02R		10 mm	1/4" drive
03R		13 mm	3/8" drive
25H		13 mm	5/16" Bit
04R		19 mm	1/2" drive



Podger Ratchet Wrench

1500

- Double sizes ratchet head
- Reversible switch for tightening and loosening the screw
- Taper end bar
- For scaffolding construction work
- 32 teeth

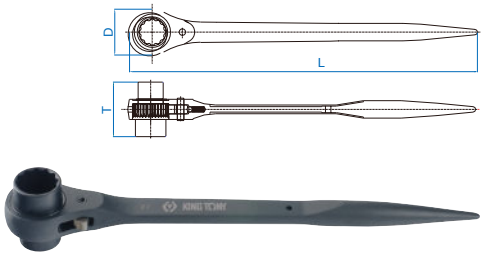

KT NO.	mm	T mm	D mm	L mm	g	
15001012P	10 x 12	38	31	241	209.4	2 / 120
15001113P	11 x 13	38	31	241	209.4	2 / 120
15001214P	12 x 14	38	31	241	220	2 / 120
15001317P	13 x 17	45	34	280	280	2 / 90
15001415P	14 x 15	45	34	280	280	2 / 90
15001417P	14 x 17	45	34	280	280	2 / 90
15001719P	17 x 19	50	42	320	506	2 / 40
15001721P	17 x 21	50	42	320	506	2 / 40
15001921P	19 x 21	50	42	320	506	2 / 40
15001922P	19 x 22	50	42	320	506	2 / 40
15001924P	19 x 24	56	51.5	365	820	2 / 24
15002123P	21 x 23	56	51.5	365	820	2 / 24
15002224P	22 x 24	56	51.5	365	830	2 / 24
15002326P	23 x 26	56	51.5	365	830	2 / 24
15002427P	24 x 27	56	51.5	365	870	2 / 24
15002430P	24 x 30	63	61.5	402	1110	2 / 16
15002632P	26 x 32	63	61.5	402	1150	2 / 16
15002730P	27 x 30	63	61.5	402	1150	2 / 16
15002732P	27 x 32	63	61.5	402	1150	2 / 16
15003032P	30 x 32	63	61.5	402	1150	2 / 16
15003236P	32 x 36	67	67	450	1525	2 / 8
15003638P	36 x 38	67	67	450	1525	2 / 8
15003641P	36 x 41	67	67	450	1525	2 / 8
15003841P	38 x 41	67	67	450	1470	2 / 8



Angled Socket Wrench & Set

1084 | 5084

- Conic profile and thin walled
- Convenient to facilitate the force-depth objects
- Chrome plated

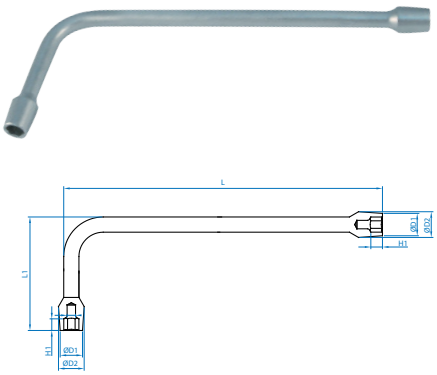

KT NO.	mm	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
1084-08	8	12.5	14.0	10	88	230	152	12 / 48
1084-09	9	14.0	15.5	10	88	230	153	12 / 48
1084-10	10	15.0	16.5	10	88	230	187	10 / 40
1084-11	11	16.0	17.5	11	88	230	192	10 / 40
1084-12	12	17.4	19.5	12	98	245	298	6 / 30
1084-13	13	18.9	21.0	12	98	245	313	6 / 30
1084-14	14	19.8	22.0	12	98	260	332	6 / 24
1084-15	15	21.7	24.0	13	98	260	344	6 / 24
1084-16	16	22.2	24.5	13	98	260	350	6 / 24
1084-17	17	24.5	27.0	14	98	260	475	6 / 24
1084-18	18	25.5	28.0	15	98	260	484	6 / 24
1084-19	19	27.1	30.0	15	98	260	588	6 / 24

KT NO.	inch	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
5084-16	1/2	18.9	21.0	23	12	245	315	6 / 30
5084-18	9/16	19.8	22.0	23	12	260	338	6 / 24



► Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1842MR	12	1084	8, 9, 10, 11, 12, 13, 14 ,15, 16, 17, 18, 19	4.2	1 / 6

Angled Socket Wrench & Set

1080

- Angle and through-hole design
- Deep concave at one side and open end socket at the other, easily fit over protruding studs
- Chrome plated
- ISO 2236





1081



KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1080-06	6	11.0	7.0	18.5	29	110	43	12 / 240
1080-07	7	11.5	8.0	21.0	30.5	114	57	12 / 240
1080-08	8	13.0	10.0	21.5	30	120	68	12 / 216
1080-09	9	14.0	10.0	22.0	33	125	85	12 / 216
1080-10	10	15.0	11.0	25.5	35	131	102	6 / 60
1080-11	11	16.5	12.0	26.5	37	137	125	6 / 60
1080-12	12	17.5	12.0	27.0	40	144	143	6 / 60
1080-13	13	19.0	14.0	30.0	47	152.5	173	6 / 60
1080-14	14	20.0	14.0	33.0	48	160	191	6 / 60
1080-15	15	21.5	15.0	35.0	50	174	236	6 / 60
1080-16	16	22.5	17.0	39.5	54	185	281	6 / 60
1080-17	17	24.0	18.0	39.5	56	197	314	6 / 60
1080-18	18	25.0	19.5	42.0	58	211	336	4 / 40
1080-19	19	26.5	20.5	45.0	62	218	374	4 / 40
1080-20	20	27.5	21.5	45.0	63	222	445	2 / 20
1080-21	21	29.0	23.5	49.0	65	231	488	2 / 20
1080-22	22	30.0	23.5	49.0	67	247	537	2 / 16
1080-23	23	31.5	24.5	54.0	74	255	600	2 / 16
1080-24	24	32.5	25.5	56.0	77	266	657	2 / 16
1080-25	25	34.0	25.5	58.0	79	278	692	2 / 16
1080-26	26	35.0	25.5	59.0	80	289	863	2 / 16
1080-27	27	36.5	27.5	59.0	84	299	942	2 / 16
1080-28	28	37.5	27.5	60.0	86	310	1080	2 / 16
1080-29	29	39.0	28.5	62.0	90	319	1167	2 / 16
1080-30	30	40.0	28.5	65.0	93	332	1194	2 / 12
1080-32	32	42.5	28.5	69.0	95	353	1355	2 / 12

KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1081-06	6	11.0	7.0	18.5	29	110	44	12 / 240
1081-07	7	11.5	8.0	21.0	30.5	114	54	12 / 240
1081-08	8	13.0	10.0	21.5	30	120	69	12 / 216
1081-09	9	14.0	10.0	22.0	33	125	88	12 / 216
1081-10	10	15.0	11.0	25.5	35	131	105	6 / 60
1081-11	11	16.5	12.0	26.5	37	137	132	6 / 60
1081-12	12	17.5	12.0	27.0	40	144	148	6 / 60
1081-13	13	19.0	14.0	30.0	47	152.5	178	6 / 60
1081-14	14	20.0	14.0	33.0	48	160	185	6 / 60
1081-15	15	21.5	15.0	35.0	50	174	245	6 / 60
1081-16	16	22.5	17.0	39.5	54	185	285	6 / 60
1081-17	17	24.0	18.0	39.5	56	197	315	6 / 60
1081-18	18	25.0	19.5	42.0	58	211	355	4 / 40
1081-19	19	26.5	20.5	45.0	62	218	425	4 / 40
1081-20	20	27.5	21.5	45.0	63	222	441	2 / 20
1081-21	21	29.0	23.5	49.0	65	231	483	2 / 20
1081-22	22	30.0	23.5	49.0	67	247	589	2 / 16
1081-23	23	31.5	24.5	54.0	74	255	661	2 / 16
1081-24	24	32.5	25.5	56.0	77	266	658	2 / 16
1081-25	25	34.0	25.5	58.0	79	278	798	2 / 16
1081-26	26	35.0	25.5	59.0	80	289	825	2 / 16
1081-27	27	36.5	27.5	59.0	84	299	914	2 / 16
1081-28	28	37.5	27.5	60.0	86	310	1005	2 / 16
1081-29	29	39.0	28.5	62.0	90	319	1161	2 / 16
1081-30	30	40.0	28.5	65.0	93	332	1214	2 / 12
1081-32	32	42.5	28.5	69.0	95	353	1362	2 / 12



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag



► Color box

KT NO.	PC.		Contents	Package	Kg	
1805MR	5		10, 11, 13, 14, 17	Color box	1.12	1 / 22
1808MR	8	1080	8, 10, 11, 12, 13, 14, 17, 19	Nylon	1.73	1 / 18
1812MR	12		8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1826MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	14.0	1 / 2
1912MR	12	1081	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1912MRN	12			Tetoron	3.38	1 / 4
1926MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	15.0	1 / 2

Adjustable Wrench

3611

- Chrome vanadium alloy steel
- Polish, phosphate & chrome plated
- DIN 3117


3611R


3611HR


3611P


3611HP

KT NO.	mm	H1 mm	L mm	g	
3611-04R	14	4.3	109	91	12 / 108
3611-06R	20	7	150	136	12 / 108
3611-08R	25	8	200	245	12 / 48
3611-10R	30	11	250	415	10 / 60
3611-12R	35	13	300	713	5 / 40
3611-06P	20	7	150	127	12 / 108
3611-08P	25	8	200	246	12 / 48
3611-10P	30	11	250	415	10 / 60
3611-12P	35	13	300	691	5 / 40



KT NO.	mm	H1 mm	L mm	g	
3611-15HR	43	13	365	1351	1 / 20
3611-18HR	52	18	450	1877	1 / 6
3611-24HR	62	23	600	3720	1 / 6
3611-15HP	43	13	365	1348	1 / 20
3611-18HP	52	18	450	1750	1 / 6
3611-24HP	62	23	600	3669	1 / 6

Reversible Jaw Adjustable Wrench

3614-08R

- Chrome vanadium alloy steel
- Dual function wide jaws can be used as an adjustable wrench or pipe Wrench. On one side, the jaw is flat for traditional usage to avoid damaging the parts.
- On the other side, the jaw is finely serrated for powerful tightening on tubes and other parts requiring strong grip and high torque.
- Super wide jaw opening, 50% wider than regular adjustable wrenches
- Deep throat, 30% longer jaws than traditional adjustable wrenches
- Screw pin with front side metric or SAE scale
- 15°, perfectly matched knurl and teeth of jaw for smooth running
- TPR handle with end hole button







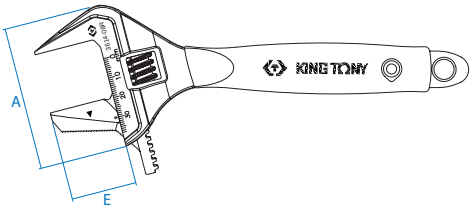





KT NO.	mm	A mm	E mm	H1 mm	H2 mm	L mm	g	
3614-08R	38	69	32.4	5.7	13.9	212	298.6	4 / 40

Ratcheting Adjustable Wrench

3631-10R

- Chrome vanadium alloy steel
- Magic button to switch ratchet function on/ off
- Wider jaw opening, comfortable & durability
- Excellent in each movement of knurl, tension enhanced and precise
- Patented, more than 130% of ASME standard



KT NO.	mm	Overall length mm	g	
3631-10R	32	257	470	6 / 36

Double Sides Self-Adjusting Wrench

3616-10

- Self-locking function grip, ideal for fastener 8~32mm
- Anti-slip teeth effective on worn screws
- Slim jaw allows for working in confined area
- Multi-purpose to all shape of fastener

KT NO.	Capacity mm	g	
3616-10	8~17 14~32	466	6 / 36

Spline 12 points
Square
Torx
Hexagon
70% Rounded bolt





Adjustable Hook Wrench

3641

- The joint is equipped with a spring washer to ensure smooth and reliable operation
- Chrome vanadium alloy steel

KT NO.	Capacity mm	L	g	
3641-35	13-35	174	104	12 / 144
3641-50	35-50	212	170	12 / 108
3641-80	50-80	285	395	10 / 60
3641-C0	80-120	348	689	5 / 30
3641-I0	120-180	480	1554	4 / 16



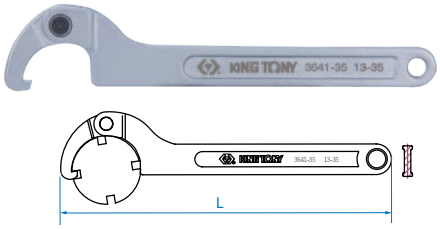

Chain Wrench

3204

- Chain wrench for oil filter





KT NO.	Overall length inch	mm	Capacity(M) mm	g	
3204	8-3/4	225	Ø 60~140	411	50

Strap Wrench

3203

- Strap wrench for oil filter





KT NO.	Overall length inch	mm	Capacity(M) mm	g	
3203	8-3/4	223	Ø 60~140	276	50
320300		Strap		46	80
3203A0	8-3/4	223	Ø 60~260	300	45
320301		Strap		73	80

320670

- Aluminum alloy handle and strong polyester strap for tight grip
- Suitable for oil filter or any polished pipe





KT NO.	Overall Length inch	mm	Capacity mm	g	
320670	12	295	Ø 60~180	344	25 / 50
320600		Polyester strap		35	25 / 50



Wheel Nut Wrench

1991

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3119, ISO 6788

KT NO.	■ inch	○ mm	L mm	g	
19911722	1/2	17, 19, 21, 22	400	1700	6
199104R	1/2	19	34	84	10 / 240





1993

- Designed for removing wheel nuts on cars and heavy vehicles
- Replaceable bit on wrenches featuring a square drive
- Chrome vanadium alloy steel
- Chrome plated







KT NO.	■ inch	○ mm	L mm	g	
19932427	3/4	24, 27, 32	700	4333	4





- T-type 90° universal joint driver

KT NO.	■ inch	○ mm	L mm	g	
19932433	3/4	24, 27, 30, 33	700	5.02	2
199306R	3/4	30	48	0.21	-

Assembling Wheel Nut Wrench

1996

PAT. 192461

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated

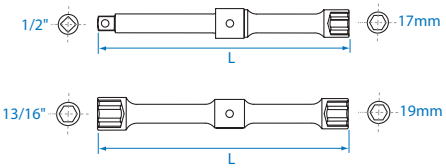





KT NO.	○ inch	■ inch	○ mm	L mm	g	
19961721	13/16	1/2	17, 19	300	1100	20



Double-End Truck Wrench & Set

1999

- Chrome vanadium alloy steel
- Chrome plated



1999R

1999A



Wrench KT NO.	Size mm	ø mm	Overall length mm	Tommy Bar KT NO.	Overall length mm	Set KT NO.	g	
19991921	19 x 21	ø16	300	19980016	300	19991921A	1183	1 / 20
19992224	22 x 24	ø19	406	199920R	400	19992224A	2330	1 / 8
19992427	24 x 27	ø19	406	199920R	400	19992427A	2673	1 / 8
19992432	24 x 32	ø19	406	199920R	400	19992432A	2360	1 / 8
19992730	27 x 30	ø19	406	199920R	400	19992730A	2740	1 / 8
19992732	27 x 32	ø19	406	199920R	400	19992732A	2762	1 / 8
19992733	27 x 33	ø19	406	199920R	400	19992733A	2796	1 / 8
19992833	28 x 33	ø19	406	199920R	400	19992833A	2440	1 / 8
19993032	30 x 32	ø19	406	199920R	400	19993032A	2853	1 / 8
19993233	32 x 33	ø19	406	199920R	400	19993233A	2875	1 / 8
19993238	32 x 38	ø19	406	199920R	400	19993238A	3055	1 / 4
19993821	○ 38 x □ 21 SQ.	ø25	406	199925R	595	19993821A	3794	3
19993822	○ 38 x □ 22 SQ.	ø25	406	199925R	595	19993822A	3794	3
19994121L	○ 41 x □ 21 SQ.	ø25	450	199925R	595	19994121LA	4074	3 / 3

T-Spin Lug Wrench Set

4503MR

- Fast spinning action extension wrench
- Reach deep area with soft grip handle
- Suitable for passenger vehicles





4506MR



4 PC.

4503MR



6 PC.

4506MR





KT NO.	Size	ℓ mm	L mm	kg	
4503MR	■ 1/2"	300	265	1.36	10
	○ 19, 21 mm 4335MR				
4506MR	■ 1/2"			1.56	
	○ 17, 19, 21, 23 mm 4335MR				

T-type Deep Socket Wrench

115HM

- Shank material - chrome vanadium alloy steel
- Shank finishing - chrome plated
- Grip material - PP

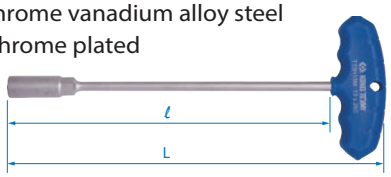

KT NO.	mm	ℓ mm	L mm	g	
115H05M-10	5	260	300	127	12 / 96
115H06M-10	6	260	300	147	12 / 96
115H07M-10	7	260	300	162	12 / 96
115H08M-10	8	260	300	158	12 / 96
115H09M-10	9	260	300	161	12 / 96
115H10M-10	10	260	300	170	12 / 96
115H11M-10	11	260	300	203	12 / 96
115H12M-10	12	260	300	205	12 / 96
115H13M-10	13	260	300	205	12 / 96
115H08M-14	8	350	394	212	10 / 60
115H10M-14	10	350	394	221	10 / 60
115H13M-14	13	350	394	233	8 / 32

1184M

- T-shaped deep socket wrench
- Chrome vanadium alloy steel
- DIN 475

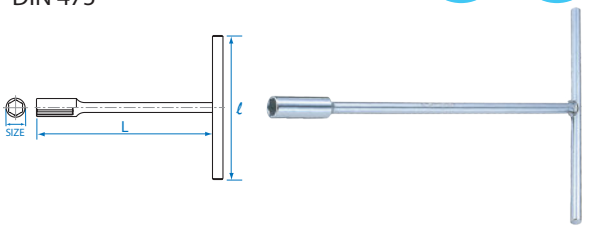

KT NO.	Size mm	ℓ mm	L mm	g	
118406M	6	120	190	59	10 / 40
118407M	7	120	190	77	10 / 40
118408M	8	200	300	306	10 / 60
118409M	9	200	300	306	10 / 60
118410M	10	200	300	317	10 / 60
118411M	11	200	300	323	10 / 60
118412M	12	200	300	326	10 / 60
118413M	13	200	300	333	10 / 60
118414M	14	200	300	344	10 / 60
118417M	17	250	300	599	6 / 36

T-type Standard Socket Wrench

1185M

- T-shaped standard socket wrench
- Chrome vanadium alloy steel
- DIN 475

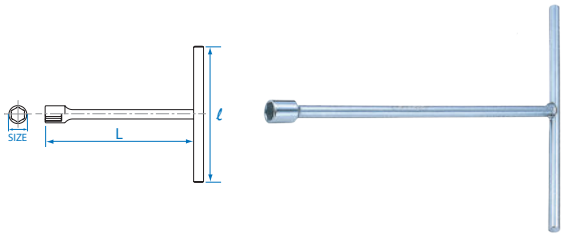

KT NO.	Size mm	ℓ mm	L mm	g	
118508M	8	200	250	186	10 / 100
118509M	9	200	250	230	10 / 100
118510M	10	200	250	230	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	390	10 / 60

KT NO.	Size mm	ℓ mm	L mm	g	
118513M	13	250	300	425	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	360	710	6 / 36
118519M	19	300	360	727	6 / 36

T-type Spark Plug Socket

1563

- T-type 25° universal spark plug socket (rubber)
- Chrome vanadium alloy steel

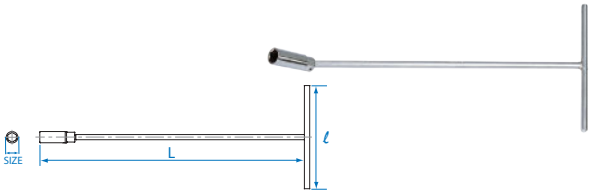

KT NO.	Size mm	ℓ mm	L mm	g	
15631612	16	200	300	363	10 / 40
15631615	16	200	385	400	10 / 40
15631618	16	200	460	450	10 / 40
15631818	18	200	460	450	10 / 40
15632112	21	200	300	388	10 / 40
15632115	21	200	385	438	10 / 40
15632118	21	200	460	488	10 / 40

1566

- T-type 25° universal spark plug socket with magnet
- Chrome vanadium alloy steel

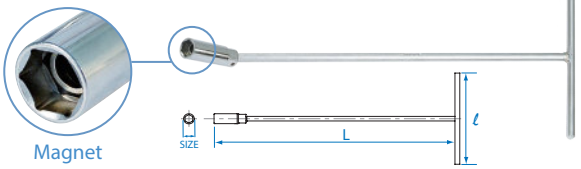

KT NO.	Size mm	ℓ mm	L mm	g	
15661615	16	200	385	420	10 / 40
15661618	16	200	460	460	10 / 40
15661818	18	200	460	450	10 / 40
15662115	21	200	385	460	10 / 40

T-type Universal Standard Socket Wrench

5722M

- T-type 25° universal standard socket wrench





KT NO.	Size mm	ℓ mm	L mm	g	
572210M	10	150	170	400	10 / 60
572212M	12	150	170	400	10 / 60

5742M

- T-type 25° universal standard socket wrench





KT NO.	Size mm	ℓ mm	L mm	g	
574208M	8	200	320	328	10 / 40
574212M	12	200	320	332	10 / 40
574213M	13	200	320	333	10 / 40
574214M	14	200	320	335	10 / 40

5752M

- T-type 25° universal standard socket wrench





KT NO.	Size mm	ℓ mm	L mm	g	
575208M	8	200	450	427	10 / 40
575210M	10	200	450	430	10 / 40
575212M	12	200	450	432	10 / 40
575213M	13	200	450	433	10 / 40
575214M	14	200	450	435	10 / 40
575217M	17	200	450	440	10 / 40

5762M

- T-type 25° universal standard socket wrench





KT NO.	Size mm	ℓ mm	L mm	g	
576208M	8	200	600	519	10 / 40
576210M	10	200	600	520	10 / 40
576213M	13	200	600	523	10 / 40
576214M	14	200	600	525	10 / 40
576217M	17	200	600	540	10 / 40

5774M

- T-type 90° universal standard socket wrench
- 2 PC. sliding handle for easy storage





KT NO.	Size mm	ℓ mm	L mm	g	
577406M	6	200	390	420	10 / 30
577407M	7	200	390	420	10 / 30
577408M	8	200	390	420	10 / 30
577409M	9	200	390	420	10 / 30
577410M	10	200	500	480	10 / 30
577411M	11	200	500	480	10 / 30
577412M	12	200	500	480	10 / 30
577413M	13	200	500	480	10 / 30
577414M	14	200	500	500	10 / 30
577415M	15	200	500	500	10 / 30
577416M	16	200	500	500	10 / 30
577417M	17	200	500	500	10 / 30
577418M	18	200	500	500	10 / 30
577419M	19	200	500	500	10 / 30

T-shaped Driver

- Chrome vanadium alloy steel
- Chrome plated

3511 3/8"

- Chrome vanadium alloy steel

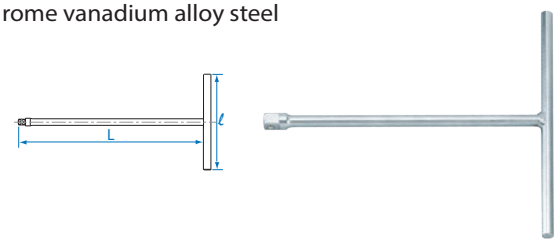

KT NO.	ℓ mm	L mm	g	
3511-06	170	268	324	5 / 30
3511-10	250	268	383	6 / 30

3795 3/8"

- T-type 90° universal joint driver
- Chrome vanadium alloy steel

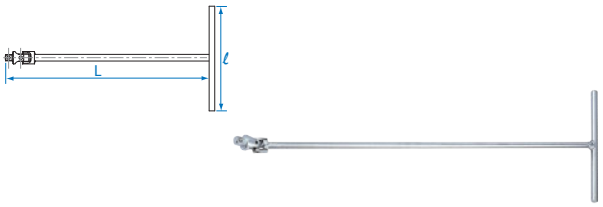

KT NO.	ℓ mm	L mm	g	
3795-18	200	455	425	10 / 40
3795-24	200	600	500	10 / 40
3795-30	200	750	600	10 / 30

4795 1/2"

- T-type 90° universal joint driver
- Chrome vanadium alloy steel

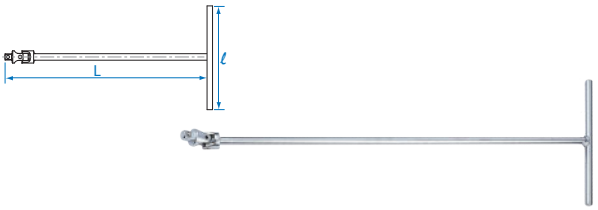

KT NO.	ℓ mm	L mm	g	
4795-18	200	460	567	10 / 30
4795-36	200	900	1000	10 / 20

4511 1/2"

- Chrome vanadium alloy steel

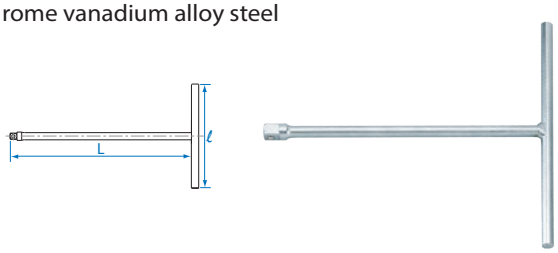

KT NO.	ℓ mm	L mm	g	
4511-06	170	268	396	5 / 30
4511-10	250	268	463	6 / 30

21A107

- Applied with power bit

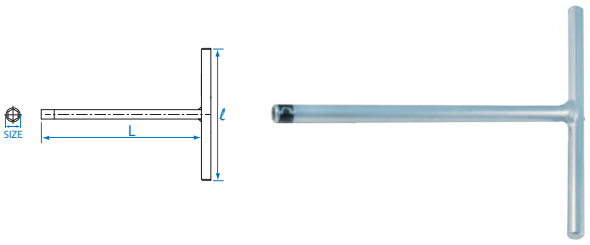

KT NO.	Size inch	ℓ mm	L mm	g	
21A107	1/4	150	175	194	10 / 60


KING TONY 3616S-08P
Ø12mm - 28mm
KING TONY 3
Ø20mm - 48mm
KING TONY 1062
KING TONY 3614-08R
KING TONY

PLIERS




KING TONY



CUTTING EDGES
TECHNICAL BASICS

High performance for cutting

A greater hardness at the edge makes it very sharp and easy to cut. Wear-resistant design is for different purposes pliers and cutters. Our high leverage combination pliers quality is tested by cutting piano wire with sharp performance.

Over 2000 times cutting result for 1.6mm piano wire (2200N/mm2, HRC48)



King Tony Brand:
Wore down 0.19mm
(good)



Other Brand:
Wore down 0.33mm
(not good)

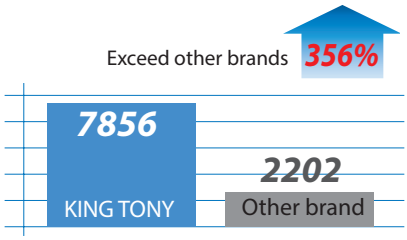

KING TONY combination pliers are sharp and triple of its life for cutting than others.

CUTTING EDGE SHAPES



With bevel
(outside bevel)





With very small bevel
(outside bevel)





With small bevel
(outside bevel)





Without bevel
(outside bevel)



WIRE CLASSES

Soft wire



Copper / Aluminium

Medium hard wire



Steel nail

Hard wire



Spring wire / Steel nail

Piano wire



Hardend spring steel

TECHNICAL BASICS

Thin serrated



Coarse serrated



With opening
spring



JAWS TYPES

Round jaws



Half-round jaws



Flat & point jaws



GRIP MATERIAL

PP + TPR



item no. with "C" is made of
PVC



Mini Combination Pliers

6114

- Mini type
- DIN ISO 5746






KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	g	
6114-05	5	122	3.0	2.0	87	8 / 160

Combination Pliers

6111

- Polished head
- DIN ISO 5746





KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	●	●	g	
6111-06	6-1/2	164	4.0	2.8	1.8	1.6	220	8 / 96
6111-07	7-1/2	180	4.0	3.0	2.0	1.6	294	8 / 48
6111-08	8-1/4	205	4.0	3.0	2.0	1.6	396	8 / 48

Hi-leverage Combination Pliers

6112

- Hi-leverage type
- Polished head






KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	●	●	g	
6112-09	9	232	4.0	3.0	2.2	2.0	395	6 / 60

Plastic Cutting Pliers

CAUTION In order to get a normal product life of pliers, do not cut steel wire.

6921

- European type
- Polished head








KT NO.	L inch	L mm	g	
6921-05	5	122	106	6 / 120
6921-06	6	155	171	6 / 72
6921-07	7	170	268	6 / 60
6921-05C	5	122	91	6 / 120
6921-06C	6	155	200	8 / 96
6921-07C	7	178	220	6 / 60

Diagonal Cutting Pliers

6214

- Mini type






KT NO.	L inch	L mm	Ø Max. mm ⊙ ø mm	g	
6214-45	4-1/2	115	0.6	83	8 / 160
6214-05	5	125	1.25	94	8 / 160

6211

- European type
- DIN 5749






KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	●	●	g	
6211-06	6-1/2	160	4.0	2.8	2.0	1.6	194	8 / 96

Heavy Duty Diagonal Cutting Pliers

6231

- Heavy duty type
- DIN ISO 5749





KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	●	●	g	
6231-07	7-1/2	180	4.0	3.0	2.2	2.0	243	8 / 80

6232





KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	●	●	g	
6232-08	8	196	5.0	3.5	2.2	2.0	285	8 / 80

6213

- Japanese type






KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	Wire stripper mm	g	
6213-06	6-1/2	168	1.25	1.4 / 1.6	175	8 / 96

Mini Long Nose Pliers

6314

- Mini type
- DIN ISO 5745





KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	g	
6314-05	5-1/2	136	3.0	2.0	1.6	94	8 / 160

Long Nose Pliers

6311

- European type
- DIN ISO 5745



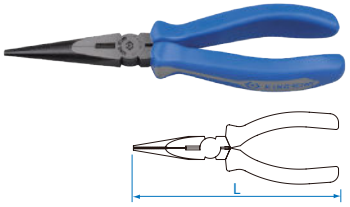

KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	●	g	
6311-06	6-1/2	160	4.0	2.8	1.8	1.6	155	10 / 120
6311-08	8	200	4.0	3.0	2.0	1.6	220	8 / 80

6313

- Japanese type
- DIN ISO 5745



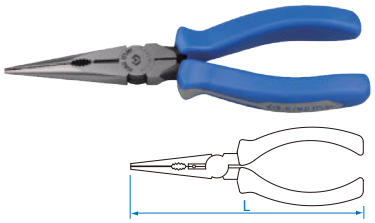

KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	●	g	
6313-06	6-1/2	170	4.0	2.8	1.8	1.6	146	10 / 120

Extra Long Nose Pliers

6319

- Slim jaws design for gripping components in recessed areas

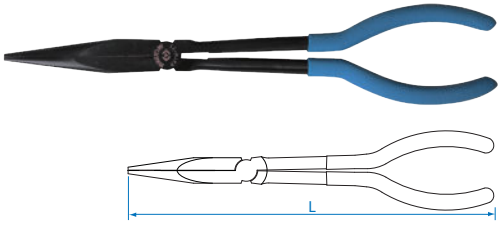

KT NO.	L inch	L mm	g	
6319-11C	11	280	292	6 / 48

Double Joint Long Nose Pliers

6329

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip









KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)	g	
6329-13C	13	340	50	110	355	5 / 40

Double Joint Best Nose Pliers

6339

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip





KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)	g	
6339-13C	13	335	50	110	369	5 / 40

Mini Bent Nose Pliers

6334

- Mini type
- DIN ISO 5745





KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	g	
6334-05	5	136	3.0	2.0	1.6	95	8 / 160

Bent Nose Pliers

6331

- European type
- DIN ISO 5745





KT NO.	L inch	L mm	ø mm Cutting capacities					
6331-06	6-1/2	160	4.0	2.8	1.8	1.6	142	10 / 120
6331-08	8	200	4.0	3.0	2.0	1.6	222	8 / 80

End Cutting Pliers

6411

- European type
- DIN ISO 5748





KT NO.	L inch	L mm	ø mm Cutting capacities					
6411-06	6-1/2	164	4.0	3.0	1.6	1.6	273	8 / 96

6431

- European type
- DIN ISO 9242



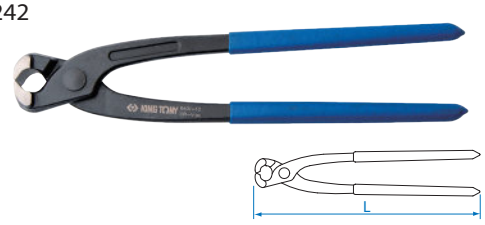

KT NO.	L inch	L mm	Cutting capacities			
6431-10C	10	254	2.0	1.6	441	6 / 48
6431-11C	11	280	2.2	1.8	507	6 / 48

Stripping Pliers

6711

- With spring and adjusting screw





KT NO.	L inch	L mm	ø mm	Wire stripper mm²		
6711-06	6	170	5	10	196	8 / 96

Slip Joint Pliers

6463

- 2 positions adjustment
- Serrate jaws



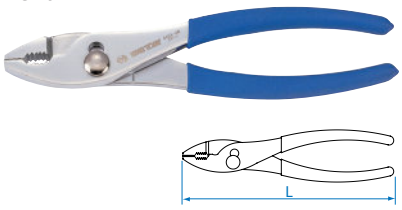

KT NO.	L inch	L mm		
6463-08C	8	210	290	8 / 80

Quick-Lock Groove Joint Pliers

6517

QUICK LOCK

- Quick lock
- Grip material-PVC
- DIN ISO 8976



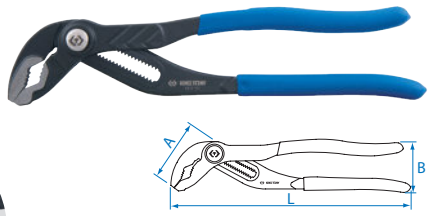



KT NO.	L inch	L mm	A mm	B mm		
6517-08C	8	200	40	54	44	190	10 / 40
6517-10C	10	250	60	68	56	361	6 / 48
6517-12C	12	310	70	89	73	570	5 / 40

Groove Joint Pliers

6516

- German type
- 7 positions opening
- DIN ISO 8976





6516-10



6516C



KT NO.	L inch	L mm	A mm	B mm		
6516-10	10	250	36	58	61	383	6 / 48
6516-10C	10	250	36	58	61	347	6 / 48

Groove Joint Pliers

6511

- 7 positions opening
- DIN ISO 8976





KT NO.	L inch	L mm	mm	A mm	B mm	g	
6511-10	10	253	50	33	61.5	435	6 / 48
6511-10C	10	253	50	33	58.5	400	6 / 48
6511-13C	13	325	65	43	74.0	808	2 / 16
6511-17C	17	425	100	58	55.0	1150	2 / 12


6511-10


6511C


6511-17C

Bolt Cutter

6131

GS / TUV

- Chrome vanadium alloy steel
- Center cut





KT NO.	L inch	L mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12	12	300	ø5	ø4	0.74	1 / 20
6131-14	14	350	ø7	ø5	1.04	1 / 20
6131-18	18	450	ø8	ø6	1.45	1 / 12
6131-24	24	600	ø10	ø8	2.32	1 / 10
6131-30	30	750	ø13	ø10	3.74	1 / 6
6131-36	36	900	ø16	ø11	5.50	1 / 5
6131-42	42	1050	ø18	ø13	8.56	1 / 3

6131P01

- Spare blade for 6131
- Center cut



KT NO.	Overall length mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12P01	95 x 57	ø5	ø4	0.26	1 / 40
6131-14P01	110 x 65	ø7	ø5	0.40	1 / 40
6131-18P01	125 x 72	ø8	ø6	0.85	1 / 20
6131-24P01	150 x 86	ø10	ø8	0.87	1 / 20
6131-30P01	170 x 97	ø13	ø10	1.25	1 / 10
6131-36P01	190 x 112	ø16	ø11	1.85	1 / 10
6131-42P01	205 x 122	ø18	ø13	3.10	1 / 5

Compact Bolt Cutter

6133

- Heavy duty type
- DIN ISO 5749
- Center cut







KT NO.	L inch	L mm	Cutting capacities ø mm	ø mm	ø mm	ø mm	g	
6133-08	8	212	6.0	5.0	4.0	3.5	399.6	8 / 48

KING TONY

6518-10C Pliers Wrench

Suitable for gripping, holding, pressing and bending workpieces
Strong gripping power, 8:1 great lever transmission



8:1 force provide

- Smooth jaws for the gentle assembly of plated fittings .
- Excellent for gripping, holding, pressing and bending work pieces .

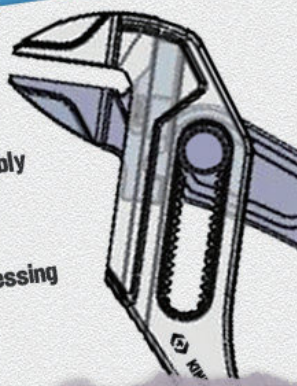





Parallel jaws provide a more solid grip .



17 positions quick lock design with 42mm Max. jaws capacity .



Ratchet function allows quick and easy tighten or release bolts .

KT NO.	L inch	L mm	mm	A mm	B mm		
6518-10C	10	267.5	42	35.5	57	509	4 / 32

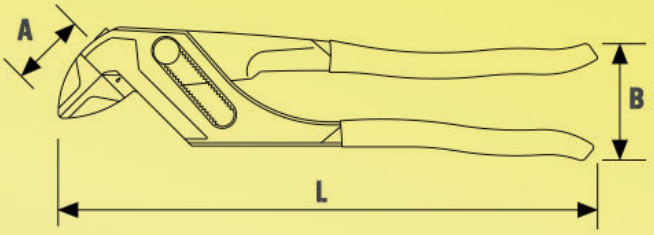

KING TONY

Circlip Pliers

- Grip material - PVC

66HS | 66HB | 66SS | 66SB

- Design of hidden spring
- Straight and angled pattern
- High strength of tip
- DIN 5254, DIN 5256





KT NO.	Tips	Overall length inch	Overall length mm	Ø-tips	Capacity Ø mm	g	
66HS-07		7	188	1.8	19~60	176	8 / 48
66HB-07		7	175	1.8	19~60	176	8 / 48
66SS-07		7	188	1.8	19~60	195	8 / 48
66SB-07		7	175	1.8	19~60	195	8 / 48

67HS | 67HB | 68HS | 68HB

- For internal retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256



67SS | 67SB | 68SS | 68SB

- For external retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256



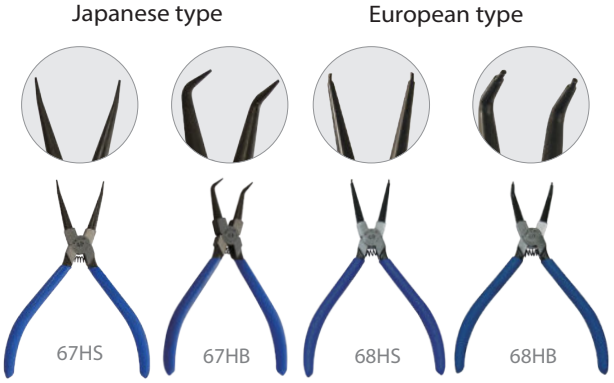

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67HS-07		7	180	1.8	19~60	129	12 / 144
67HB-07		7	180	1.8	19~60	131	12 / 144
68HS-05		5	125	1.3	12~28	83	10 / 80
68HS-07		7	180	1.8	19~60	134	12 / 144
68HS-10		10	250	2.3	40~100	322	8 / 64
68HB-05		5	125	1.3	12~28	94	10 / 80
68HB-07		6-3/4	170	1.8	19~60	131	12 / 144
68HB-10		9-1/2	241	2.3	40~100	317	6 / 48

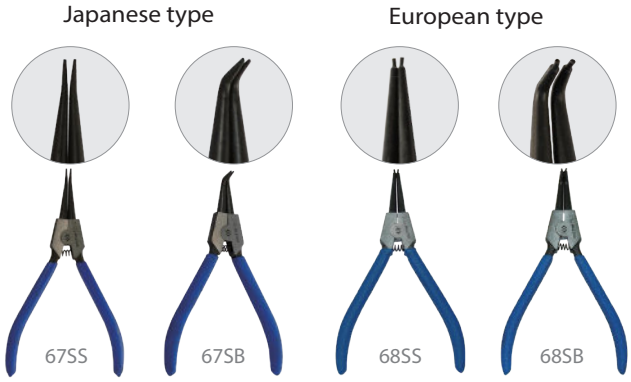

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67SS-07		7	180	1.8	19~60	151	12 / 144
67SB-07		7	180	1.8	19~60	150	12 / 144
68SS-05		5	125	1.3	12~28	97	10 / 80
68SS-07		7	180	1.8	19~60	154	12 / 144
68SS-10		10	250	2.3	40~100	323	8 / 64
68SB-05		5	125	1.3	12~28	96	10 / 80
68SB-07		6-3/4	170	1.8	19~60	152	12 / 144
68SB-10		9-1/2	241	2.3	40~100	316	6 / 48

Circlip Pliers

- Grip material - PVC

65SS

- Design of hidden spring
- DIN 5254 & DIN 5256





External type



KT NO.	Overall length inch	Overall length mm	Capacity Ø mm	g	
65SS-07	7	188	19~60	195	8 / 48

68HB-07L

- For removing or installing the intimal retaining rings
- 90 angel and extra long tip design for narrow space



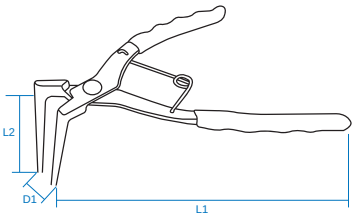

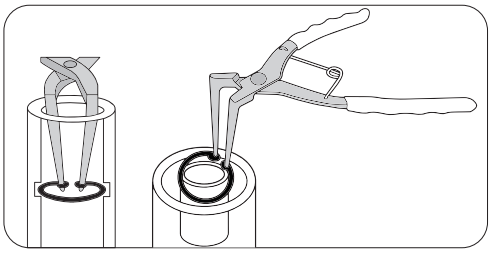

KT NO.	L1 inch	L1 mm	L2 (mm)	D1 (mm)	Ø tips	Capacity Ømm	g	
68HB-07L	7	180	56	23	1.3	19~60	222	12 / 48

Pliers Set



► Nylon pouch bag



► Color box

KT NO.	PC.	Contents				Package	Kg	
42104GP	4	6511-10	6111-06	6211-06	6311-08	Nylon	1.17	1 / 18
42104GP01	4	6516-10C				Nylon	1.17	1 / 18
42124GP	4	6511-10C	6111-08	6311-08	6231-08	Nylon	1.48	1 / 18
42124GP01	4	6516-10C				Nylon	1.48	1 / 18
42124GP04	4	6111-08	6311-08	6232-08	6517-10C	Nylon	1.48	1 / 18
42213GP01	3	6111-08	6311-08	6231-08		Color box	1.05	1 / 20

Circlip Pliers Set

KT NO.	PC.	Contents	Kg	
42114GP	4	 68HS-07 68SS-07 68HB-07 68SB-07	062	1 / 32
42154GP	4	 66HS-07 66SB-07 66HB-07 66SS-07	0.84	1 / 32
42116GP	6	 68HS-07 68HB-07 68HS-10 68SS-07 68SB-07 68SS-10	1.33	1 / 18



► Nylon pouch bag

- Finishing - option 1 : chrome plated (R) / option 2 : nickel plated (N)

Locking Pliers

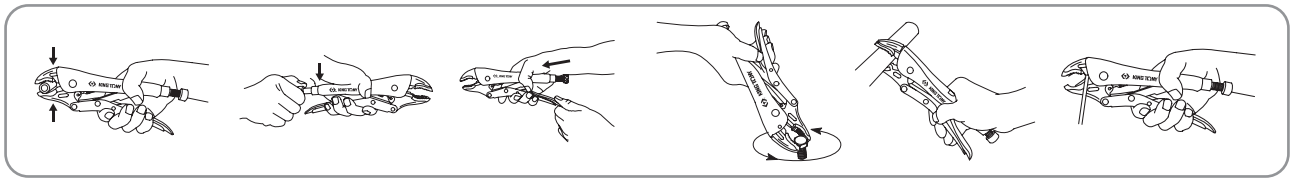

6011

- Curved jaw with wire cutter
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel


6011R


6011N

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6011-05R	5-1/2	142	29	173	6 / 48
6011-07R	7	185	38	352	8 / 32
6011-07N	7	185	38	351	8 / 32
6011-10R	10	254	48	542	8 / 32
6011-10N	10	254	48	506	8 / 32

6012

- V jaw with wire cutter
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6012-07N	7	175	33	357	8 / 32
6012-10N	10	254	45	541	8 / 32

6013-10R

- Large curved jaw
- 3X more grinpping power hold object tighter
- Turn hexagon screw adjust pressure
- Quick trigger release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6013-10R	10	254	50	550	8 / 32

6031

- Straight jaw
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel


6031R


6031N

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6031-07R	7	185	33	372	8 / 32
6031-07N	7	185	33	371	8 / 32
6031-10R	10	254	45	538	8 / 32
6031-10N	10	254	45	535	8 / 32

Long Nose Pliers

6315

- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6315-06	6	166	51	186	8 / 80
6315-09	9	221	70	393	6 / 36



Locking Pliers Set

KT NO.	PC.	Contents		Kg	
42503PR	3	6011-10R	6031-07R	1.24	1 / 20
42504PR	4	6011-05R, 6013-10R	6315-06	1.43	1 / 15



► Nylon pouch bag

Lock Sheet Metal Clamp

6605

- With adjusting screw and release lever
- Makes bending, forming, and crimping sheet metal easier

MATERIAL - Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6605-08	8	206	13	475	1 / 18

Locking Welding Clamp

6665

- U-shaped jaws allow enhanced visibility and more working space
- Holds work in proper alignment
- For use in welding or holding awkward shapes in place

MATERIAL - Chrome molybdenum alloy steel





KT NO.	Overall length inch	Overall length mm	Clamping range (W) mm	g	
6665-09	9	230	0-41	622	1 / 18

Locking Chain Clamp

6655

- Chain can hold around any shape or size
- Convenient for awkward shaped pieces
- With adjusting screw and release lever

MATERIAL - Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6655-09	9	225	Ø 60~140	733	1 / 18



C-clamp Grip Pliers

6615

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6615-06	6-3/4	170	50	247	6 / 72
6615-11	11	280	100	790	1 / 20
6615-18	18	456	200	1136	1 / 10

6625

- C-clamp grip pliers with moving jaw

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6625-06	7	175	54	274	6 / 72
6625-11	11	280	96	840	1 / 20
6625-18	18-1/2	457	200	1220	1 / 10

Wire Twisting Pliers

6121

- Simple pull action twisting wires into a tight uniform fastener
- Material : Chrome vanadium alloy steel
- Twist wire up to 0.04 inch

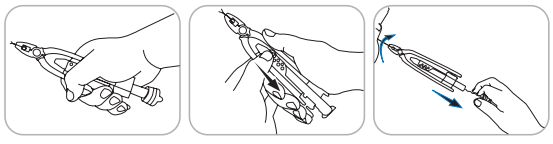

- Grip wire and pull down the bar
- Pull the lock
- Pull the knob





KT NO.	Type	L	g	
6121-06X	wire twisting pliers 6"	215	250	12 / 48
6121-09X	wire twisting pliers 9"	262	380	12 / 48


CHROME VANADIUM

PIPE TOOLS




KING TONY
7GA1S-10A
TUBE CUTTER FOR BRASS PIPE Ø 22mm
KING TONY
KING TONY
7913-42
TYPE 42MM
7HA2T

Tube Cutter for Steel

7918-A0

- For steel pipes
- Strong cast housing
- Extra-long shank provides for quick & easy adjustment
- Possible for large pipe sizes
- Perfectly balanced

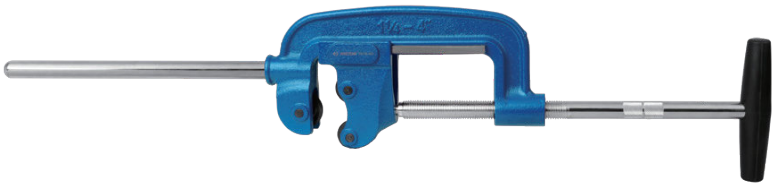

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7918-A0	1-11/32~3-9/16	43~114	3	28-1/8	900	5020	1 / 4
7918-A011			Spare cutting blade			66	1 / 200

Ratchet Tubing Cutter for Stainless Steel

7912-21

7912-22

- Cuts without having to rotate tool completely around tubing
- Ratchet mechanism allows for tight area operation
- Cuts through some of the toughest surfaces: stainless steel, wall conduit, copper and aluminum
- Exclusive one hand operation, limited risks of hand-fatigue and injuries



- Comes with spare blade.
- Provided with foldable reamer.

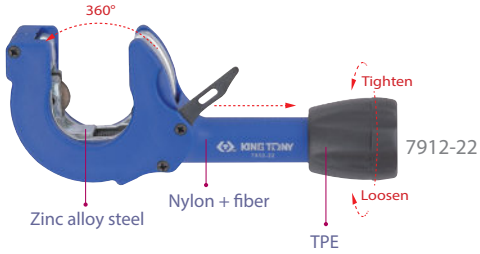



- Use Phillips screwdriver to take out the back-up blade located in the handle base.



- Deploy foldable reamer provided to smoothen sharp edges. (only 7912-22)

KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	Remark	g	
7912-21	8-28	2	3.0	spare blade	389	1 / 40
7912-22	12-35	2	3.0	spare blade / reamer	452	1 / 40
7912-0111		Spare cutting blade			5	25 / 250

7912-23

- Apply to cut car's exhaust pipe.









- Use Phillips screwdriver to take out the back-up blade located in the handle base.

KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	g	
7912-23	28-67	2	3.0	1122.6	1 / 10
7912-2311		Spare cutting blade		5	25 / 250

Tube Cutter for Copper

7914A-35

- For copper, brass, aluminum pipes
- Ergonomic handle design for comfortable operation
- Includes one piece spare cutting wheel
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel









KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914A-35	1/8~1-3/8	3~35	1.2	5-1/2	140	333	10 / 60
7914A-0111			Spare cutting blade			13	25 / 250

7914C-70

- For copper, brass, aluminum pipes
- Ergonomic handle design for comfortable operation
- Includes one piece spare cutting wheel & retractable deburring tool
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel





KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914C-70	1/4~2-3/4	6~70	1.2	8-3/4	222	802	4 / 24
7914A-0111			Spare cutting blade			13	25 / 250
7914C-7021			Spare deburring tool			17	1 / 300

7915-30



KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915-30	1/8~1-1/8	3~30	1.2	5-1/2	140	231	1 / 20
7915-3011		Spare cutting blade				10	25 / 250

Tube Cutter for Copper

7916M

- For copper pipes
- Easy to use in restricted space
- Self-alignment for adjustment





- Ideal for hard to reach places



KT NO.	mm	max. (mm)	Overall length mm	g	
7916-12M	12	1.2	52	176	10 / 100
7916-15M	15	1.2	56	207	10 / 100
7916-21M	21	1.2	68	248	10 / 60
7916-22M	22	1.2	68	248	10 / 60
7916-0111	Spare cutting blade			11	25 / 250

Mini Tube Cutter for Copper

- Full-stop feed system prevents wheels and rollers from coming into contact
- Ergonomic handle design for comfortable operation
- Quick adjustment and easy to change the cutting wheel
- For copper, brass, aluminum pipes
- Specifically design for using in restricted place
- With two guide rollers

7915A-19



7915A-28



KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915A-19	1/8~3/4	3~19	1.2	2-1/2	62	152	10 / 100
7915A-28	1/8~1-1/8	3~28	1.2	2-3/4	70	205	10 / 100
7914A-0111	Spare cutting blade					13	25 / 250

Tube Cutter for PVC Soft Plastic Pipe

7913B-35

- For PVC, PP, PE, PEX, PB
- For soft plastic pipe
- Aluminum body
- One-hand operation
- Burr-free cutting
- Reversible blade





KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913B-35	1/8~1-3/8	3~35	8-1/4	211	215	20 / 60
7913B-3511	Spare cutting blade				36	1 / 100

Ratchet Tubing Cutter for PVC Pipe

7913

- For PVC, PP, PE, PEX, PB pipes
- Ratchet design for quick cutting





KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913-42	1/2~1-5/8	6~42	8	201	360	10 / 50
7913-4211	Spare cutting blade				60	10 / 200

2-in-1 Ratchet Tubing Cutter for PVC Pipe

7913A-63

- Easy one-hand operation
- Cut into thick pipe and thin pipe
- Easily apply for max. 63 O.D.
- Comfortable TPR handle
- For unitary material tube: PE, PP, PVDF, PB, PVC or similar tube
- Advanced tool steel blade and aluminum body
- Ratchet design for quick cutting



KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913A-63	1/4~2-1/2	6~63	11-1/2	293	802	6 / 24
7913A-6311	Spare cutting blade				190	1 / 100

S Type Pipe Wrench

6521

- For nuts, bolts, flat material
- A non-detachable adjusting nut with round thread ensures a wide adjustment
- For working in confined space
- DIN 5234



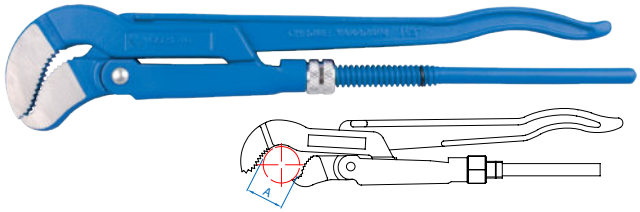

KT NO.	A mm	Size inch	Overall length inch	Overall length mm	g	
6521-13	40	1	13	330	791	1 / 20
6521-16	55	1-1/2	16-1/2	420	1450	1 / 12
6521-21	67	2	21	535	2404	1 / 6
6521-26	103	3	25-5/8	652	5030	1 / 2

Pipe Wrench

6531

- Professional stillson type
- High quality steel





KT NO.	A inch	A mm	Overall length inch	Overall length mm	g	
6531-10	1-3/16	34	10	231	600	1 / 24
6531-12	1-9/16	42	12	271	780	1 / 24
6531-14	1-7/8	48	14	315	1050	1 / 12
6531-18	2-3/8	60	18	407	1720	1 / 12
6531-24	2-15/16	76	24	539	3150	1 / 6
6531-36	4	102	36	825	6280	1 / 2
6531-48	5-1/2	140	48	1034	9750	1 / 2

Pipe Wrench

6532

- Extra heavy straight type
- Forged parts tempered
- Teeth offset against direction of rotation and induction-hardened

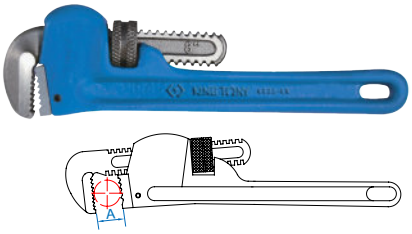

KT NO.	A mm	Overall length inch	Overall length mm	g	
6532-08	27	8	180	380	1 / 40
6532-10	30	10	245	700	1 / 20
6532-12	40	12	275	1050	1 / 20
6532-14	50	14	315	1340	1 / 12
6532-18	60	18	395	1960	1 / 12
6532-24	75	24	525	3640	1/ 6
6532-36	85	36	765	6300	1 / 2
6532-48	110	48	1025	9100	1 / 2

Aluminum Offset Pipe Wrench 90°

6541L

- Suitable for walls and floors, ceilings and other places beside the pipe work

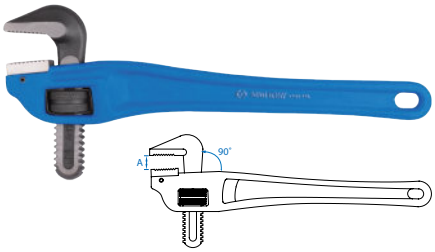

KT NO.	A mm	Overall length inch	Overall length mm	g	
6541-14L	60	14	356	856	1 / 20
6541-18L	76	18	457	1486	1 / 10

Aluminum Pipe Wrench

6533L

- 25% lighter than heavy-duty models, easy to use
- Straight pipe wrench is suitable for all types of pipe work
- Drop-forged jaw is heat-treated to resist distortion
- Easy-spin adjusting nut, quick to adjust size

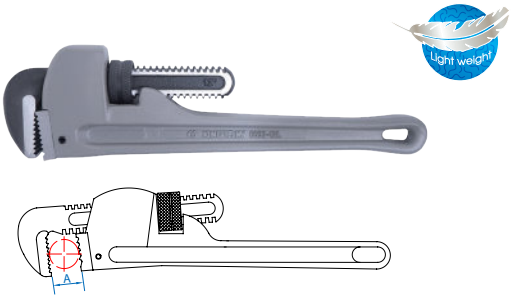

KT NO.	A mm	Overall length inch	Overall length mm	g	
6533-10L	30	10	254	530	6 / 24
6533-12L	40	12	300	790	6 / 18
6533-14L	50	14	356	940	6 / 12
6533-18L	60	18	455	1480	3 / 6
6533-24L	75	24	600	2470	2 / 4
6533-36L	85	36	910	4670	1 / 2
6533-48L	110	48	1200	7960	1 / 2



Flaring Tool Set

7CA0107M

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning





7 PC.

Contents	Kg 1.07	1 / 18
7CA22BP10M		4.75, 5, 6, 8, 10 mm
7CA22BP01		
Adapters for expander		4.75, 5, 6, 8, 10 mm

7CA0110S

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning





10 PC.

Contents	Kg 1.68	1 / 12
7915-30		3-30 mm 1/8~1-1/8"
7CA22P20S		3/16", 1/4", 5/16", 3/8", 7/16",1/2", 5/8"
7CA22P01		
Adapter for expander		3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8"

Type of the flares

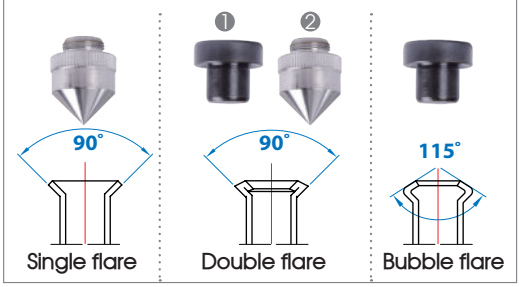



Ratchet Pipe Threader Set

7CA0606S

- Use to thread pipe for attach fitting and connector
- Thread sizes:
  4pcs interchangeable dies 1/2", 3/4", 1" and 1-1/4"
- Ratchet threader assembly with extension handle



7CA0606S1



7 PC.

KT NO.	Thread Plug Gauge	Capacity	Contents			
						7.1 kg / 1 / 2
7CA0606S	BSPT	1/2"	7CA61-A01	7CA61-A011		
		3/4"	7CA61-A02	7CA61-A021		
		1"	7CA61-A03	7CA61-A031		
		1-1/4"	7CA61-A04	7CA61-A041		
7CA0606S1	NPT	1/2"	7CA61-B01	7CA61-B011		
		3/4"	7CA61-B02	7CA61-B021		
		1"	7CA61-B03	7CA61-B031		
		1-1/4"	7CA61-B04	7CA61-B041		



7CA61P01

7CA61P02



7CA61P03

180° Tube Bender

7CA11M

7CA11S

- Suitable for use in refrigeration and air-conditioning, oil supply, heating installations, floor heating
- Able to accurately bend soft copper pipes, brass pipes, aluminum pipes, and thin-walled iron pipes (walls less than 0.6 mm) up to 180°
- Bending with the bending radius display and measurement scale







7CA11-12S
7CA11-16S



7CA11-15M / 7CA11-16M
7CA11-20S / 7CA11-24S

KT NO.	mm	max. (mm)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-15M	15	1.2	2-1/4	57	30	758	2832	1 / 8
7CA11-16M	16	1.2	2-1/4	57	30	758	2832	1 / 8

KT NO.	inch	max. (inch)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-12S	3/8	0.035	15/16	24	13	334	964	1 / 20
7CA11-16S	1/2	0.049	1-1/2	38	20	493	1833	1 / 12
7CA11-20S	5/8	0.049	2-1/4	57	30	758	2832	1 / 6
7CA11-24S	3/4	0.049	3	76	30	758	3500	1 / 6

90° Tube Bender

7CA15-10M

- 4 in 1 design, easy and quick to change the bend size
- Bend 5mm, 6mm, 8mm and 10mm outside diameter brass, copper or aluminum tubing
- Unique design allows bending in tight spaces
- Comfort grip handles reduce hand fatigue and slippage






KT NO.	inch	max. (mm)	Overall length inch	mm	g	
7CA15-10M	3/16, 1/4, 5/16, 3/8	0.9	10-7/8	275	958	6 / 24

Stepped Ratchet Radiator Key Set

7HA03

- Suitable for installation and removal of most radiator valves and tank connectors
- Key has fittings from small to large, stepped along the length of the key, for different internal hexagon and internal lug valve sizes
- Stepped hexagon key with 3/8", 7/16", 1/2", 3/4", 1"
- 1/2"DR. ratchet makes installations quickly and easily
- 4724-11G can be used as general ratchet, DIN 3122, 11° gear action degree (32 teeth)





Contents	Kg 0.74		1 / 24
	4724-11G		
	7HA11		
	4724-01		


4724DK



Hexagon A/F

SCREWDRIVERS & L-WRENCHES & BITS




KING TONY
HEX KEY
10
8
6
5
4

Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1421

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14210023	PH0	60	2-3/8	3.2	35	12 / 144
14210132	PH1	80	3-1/8	4.5	57	12 / 96
14210104	PH1	100	4	4.5	59	12 / 96
14210214	PH2	38	1-1/2	6.5	45	12 / 144
14210204	PH2	100	4	6.0	84	12 / 96
14210206	PH2	150	6	6.0	94	12 / 144
14210306	PH3	150	6	8.0	142	12 / 144



KT NO.	No.	mm	inch	mm	g	
14210112	PH1	300	12	4.5	85	12 / 96
14210212	PH2	300	12	6.0	129	12 / 96
14210116	PH1	400	16	4.5	97	12 / 96
14210216	PH2	400	16	6.0	151	12 / 96



1421xx12
1421xx16

1422

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14220303	3	1/8	0.5	75	3	3.2	38	12 / 144
14220404	4	5/32	0.8	100	4	4.0	56	12 / 96
14220503	5	3/16	0.8	75	3	5.0	59	12 / 96
14220504	5	3/16	0.8	100	4	5.0	63	12 / 96
14225503	5.5	7/32	1.0	75	3	5.0	71	12 / 96
14225504	5.5	7/32	1.0	100	4	5.0	75	12 / 96
14225505	5.5	7/32	1.0	125	5	5.0	79	12 / 144
14225506	5.5	7/32	1.0	150	6	5.0	83	12 / 144
14226514	6.5	1/4	1.2	38	1-1/2	6.5	46	12 / 144
14226504	6.5	1/4	1.2	100	4	6.0	83	12 / 96
14226506	6.5	1/4	1.2	150	6	6.0	95	12 / 144
14220806	8	5/16	1.2	150	6	8.0	141	12 / 144
14220807	8	5/16	1.2	175	7	8.0	153	12 / 144
14220808	8	5/16	1.2	200	8	8.0	163	12 / 144
14221008	10	3/8	1.6	200	8	10.0	214	12 / 72



KT NO.	mm	inch	mm	mm	inch	mm	g	
14220512	5	3/16	0.8	300	12	5.0	94	12 / 96
14220516	5	3/16	0.8	400	16	5.0	109	12 / 96
14226512	6.5	1/4	1.2	300	12	6.0	129	12 / 96
14226516	6.5	1/4	1.2	400	16	6.0	150	12 / 96



1422xx12
1422xx16

Screwdriver

KT No. & D1



- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1423

- For torx head screw, round shank

14232010, 14232510, 14233010 at the dashboard, car body, engine compart ment as well as in industry.



KT NO.	Size	mm	inch	mm	g	
14230602	T6	48	2	3.2	35	12 / 144
14230702	T7	48	2	3.2	35	12 / 144
14230803	T8	75	3	3.2	37	12 / 144
14230903	T9	75	3	3.2	37	12 / 144
14231003	T10	75	3	3.2	37	12 / 144
14231503	T15	75	3	4.0	54	12 / 144
14231510	T15	250	10	5.0	86	12 / 96
14232004	T20	100	4	5.0	63	12 / 144
14232010	T20	250	10	5.0	87	12 / 96
14232504	T25	100	4	6.0	84	12 / 144
14232510	T25	250	10	6.0	118	12 / 96
14232704	T27	100	4	6.0	84	12 / 144
14233005	T30	125	5	6.0	91	12 / 144
14233010	T30	250	10	6.0	119	12 / 96
14234006	T40	150	6	8.0	143	12 / 144

1424

- Square head



KT NO.	Size	mm	inch	mm	g	
14240206	RB2	150	6	6.0	94	12 / 144

1427

- For torx head screw, round shank
- Tamper-resistant type



KT NO.	Size	mm	inch	mm	g	
14270803	T8H	75	3	3.2	36	12 / 144
14270903	T9H	75	3	3.2	36	12 / 144
14271003	T10H	75	3	3.2	36	12 / 144
14271503	T15H	75	3	4.0	54	12 / 144
14272004	T20H	100	4	5.0	63	12 / 144
14272504	T25H	100	4	6.0	84	12 / 144
14272704	T27H	100	4	6.0	84	12 / 144
14273005	T30H	125	5	6.0	89	12 / 144
14274006	T40H	150	6	8.0	142	12 / 144

1428

- Pozidriv head, round shank
- DIN ISO 8764



KT NO.	No.	mm	inch	mm	g	
14280023	PZ0	60	2-3/8	3.2	37	12 / 96
14280132	PZ1	80	3-1/8	4.5	57	12 / 96
14280104	PZ1	100	4	4.5	59	12 / 96
14280204	PZ2	100	4	6.0	83	12 / 96
14280306	PZ3	150	6	8.0	142	12 / 144

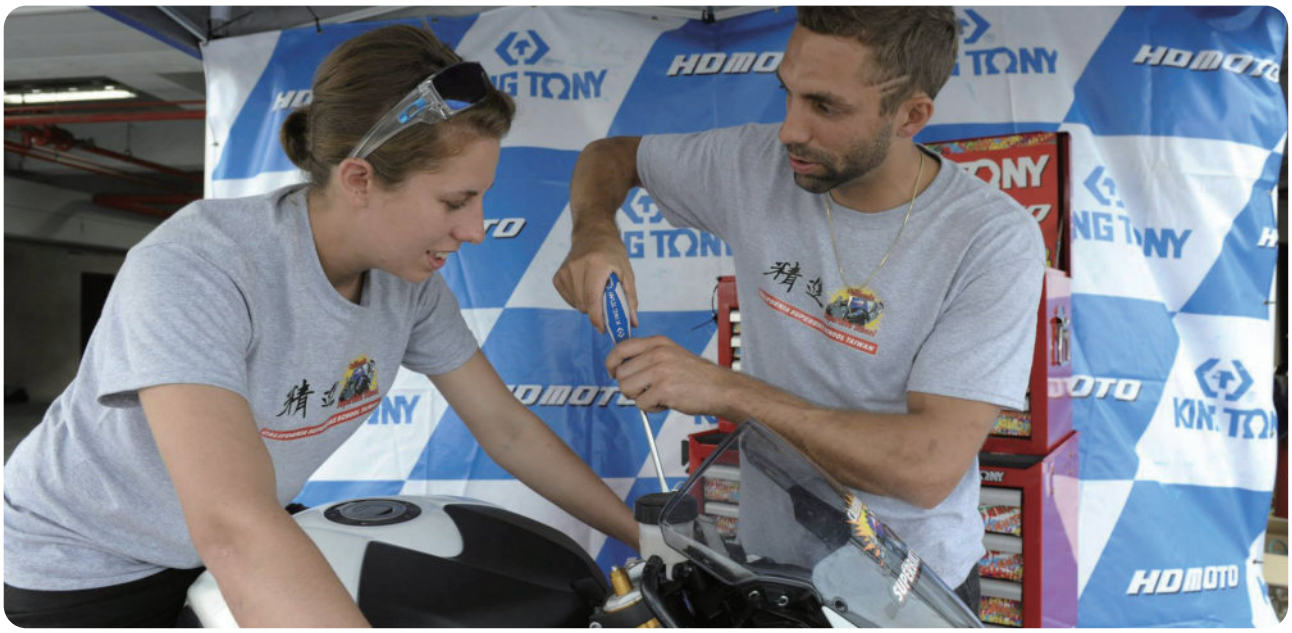

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



KT NO.	PC.	Contents	Kg	
31107MR	7	1421 PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	0.70	1 / 20
30118MR	8	1422 3 x 75, 5 x 75, 5 x 100, 8 x 150, 8 x 200, 6.5 x 100, 6.5 x 150, 6.5 x 38	0.90	1 / 20
30115MR	5	1421 PH1 x 80, PH2 x 100 1422 4 x 100, 5.5 x 125, 6.5 x 150	0.54	1 / 20
31116MR	6	1421 PH0 x 60, PH1 x 80, PH2 x 100 1422 3 x 75, 5.5 x 100, 6.5 x 150	0.56	1 / 20
31216MR	6	1421 PH1 x 80, PH2 x 100 1422 5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150	0.65	1 / 20
30117MR	7	1421 PH1 x 80, PH2 x 100 1422 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175	0.77	1 / 20
33108MR	8	1421 PH0 x 60, PH1 x 100, PH2 x 100, PH2 x 38 1422 3 x 75, 5.5 x 100, 6.5 x 38, 6.5 x 100	1.30	1 / 10
30127MR	7	1428 PZ1 x 80, PZ2 x 100, PZ3 x 150 1422 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175	0.82	1 / 20
30315PR	5	1423 T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125	0.37	1 / 20
30316PR	6	1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125, T40 x 150	0.48	1 / 20
30317PR	7	1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.78	1 / 20
30319PR	9	1423 T8 x 75, T9 x 75, T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.88	1 / 20
30307PR	7	1427 T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.78	1 / 20
30309PR	9	1427 T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.88	1 / 20

Screwdriver & Set

KT No. & D1



- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14A1

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A10132	PH1	80	3-1/8	5.0	60	12 / 96
14A10214	PH2	38	1-1/2	6.0	45	12 / 144
14A10204	PH2	100	4	6.0	88	12 / 96
14A10306	PH3	150	6	8.0	144	12 / 144



14A2

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14A20303	3	1/8	0.6	75	3	3.0	37	12 / 144
14A20404	4	5/32	0.8	100	4	4.0	56	12 / 96
14A25504	5.5	5/32	1.0	100	4	5.5	82	12 / 96
14A25505	5.5	7/32	1.0	125	5	5.5	86	12 / 144
14A26514	6.5	1/4	1.2	38	1-1/2	6.5	47	12 / 144
14A26506	6.5	1/4	1.2	150	6	6.5	105	12 / 144
14A20808	8	5/16	1.6	200	8	8.0	166	12 / 144



14A8

- Pozidriv head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A80132	PZ1	80	3-1/8	5.0	60	12 / 96
14A80204	PZ2	100	4	6.0	89	12 / 96





KT NO.	PC.		Contents	Kg	
30106AMRB	6	14A1	PH1 x 80, PH2 x 100	0.56	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30116AMRB	6	14A8	PZ1 x 80, PZ2 x 100	0.56	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30107AMRB	7	14A1	PH1 x 80, PH2 x 100, PH3 x 150	0.82	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		

Screwdriver & Set

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1411

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14110003	PH0	75	3	3.0	28	12 / 240
14110104	PH1	100	4	5.0	41	12 / 240
14110214	PH2	38	1-1/2	6.5	30	12 / 144
14110204	PH2	100	4	6.0	68	12 / 96
14110204-E*	PH2	100	4	6.0	86	12 / 96
14110205-E*	PH2	125	5	6.0	92	12 / 144
14110206	PH2	150	6	6.0	80	12 / 144
14110206-E*	PH2	150	6	6.0	96	12 / 144
14110208-E*	PH2	200	8	6.0	108	12 / 144
14110306	PH3	150	6	8.0	123	12 / 144
14110308	PH3	200	8	8.0	146	12 / 144

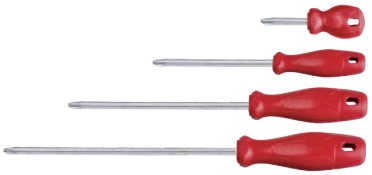

* Enlarged handle

1412

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14120303	3.0	1/8	0.5	75	3	3.0	27	12 / 240
14120404	4.0	5/32	0.8	100	4	4.0	33	12 / 240
14125504	5.5	7/32	0.8	100	4	5.0	40	12 / 240
14126514	6.5	1/4	1.2	38	1-1/2	6.5	30	12 / 144
14126504	6.5	1/4	1.2	100	4	6.0	71	12 / 96
14126504-E*	6.5	1/4	1.2	100	4	6.0	86	12 / 96
14126506	6.5	1/4	1.2	150	6	6.0	79	12 / 144
14126506-E*	6.5	1/4	1.2	150	6	6.0	105	12 / 144
14120806	8.0	5/16	1.2	150	6	8.0	126	12 / 144
14120808	8.0	5/16	1.2	200	8	8.0	142	12 / 144

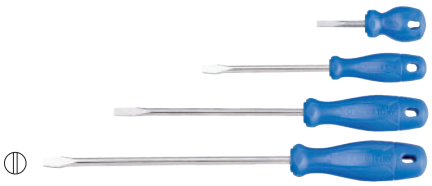

* Enlarged handle

2411

- Two-way screwdriver hex shank

KT NO.	No.	mm	mm	mm	inch	g	
24110204	PH2	7	1.2	100	4	89	20 / 240
24110214	PH2	7	1.2	38	1-1/2	42	20 /240



24110204



24110214

KT NO.	PC.	Contents	Kg	
35105MR	5	1411 PH1 x 100, PH2 x 100 1412 4 x 100, 5.5 x 100, 6.5 x 150	0.54	1 / 20
35116MR01	6	1411 PH1 x 100, PH2 x 100, PH3 x 150 1412 4 x 100, 5.5 x 100, 6.5 x 150	0.65	1 / 20
35107MR	7	1411 PH1 x 100, PH2 x 100, PH3 x 150 1412 4 x 100, 5.5 x 100, 6.5 x 150, 8 x 150	0.72	1 / 20



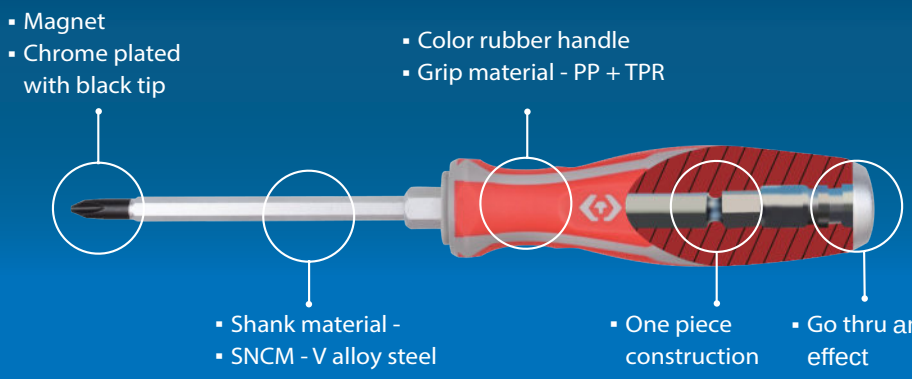

Go Thru Screwdriver & Set

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tips

1461

▪ Phillips head, hex-shank
▪ DIN ISO 8764

KT NO.	No.	mm	inch	mm	mm	g	
14610103	PH1	75	3	5.0	10	121	12 / 96
14610204	PH2	100	4	6.0	10	135	12 / 96
14610206	PH2	150	6	6.0	10	148	12 / 144
14610306	PH3	150	6	8.0	13	219	12 / 96



1462

▪ Slotted head, hex-shank
▪ DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	mm	g	
14625504	5.5	7/32	1.0	100	4	5.0	10	125	12 / 96
14626504	6.5	1/4	1.2	100	4	6.0	10	134	12 / 96
14626506	6.5	1/4	1.2	150	6	6.0	10	147	12 / 144
14620806	8.0	5/16	1.2	150	6	8.0	13	217	12 / 144
14620807	8.0	5/16	1.2	175	7	8.0	13	228	12 / 144
14621008	10.0	3/8	1.6	200	8	10.0	16	310	12 / 72
14621012	10.0	3/8	1.6	300	12	10.0	16	377	10 / 60
14621210	12.0	15/32	2.0	250	10	10.0	16	347	10 / 40



30206MR

Contents		1.20 kg	1 / 20
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	5.5 x 100, 6.5 x 150, 8.0 x 175		



6 PC.

35208MR

Blow case size (mm) :
430 x 300 x 50 (1.29 cuft)

Contents		2.16 kg	1 / 4
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	6.5 x 100, 8.0 x 175, 10 x 300		
1421	PH2 x 38		
1422	6.5 x 38		

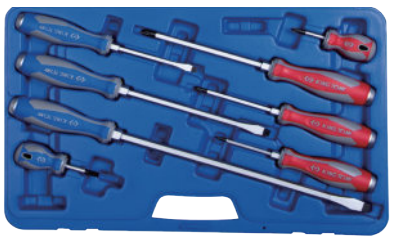

8 PC.

Go Thru Screwdriver & Set

- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14B1

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14B10103	PH1	75	3	5.0	130	12 / 96
14B10204	PH2	100	4	6.0	134	12 / 96
14B10206	PH2	150	6	6.0	145	12 / 144
14B10306	PH3	150	6	8.0	241	12 / 96



14B2

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14B25504	5.5	7/32	1.0	100	4	5.5	139	12 / 96
14B26506	6.5	1/4	1.2	150	6	6.5	164	12 / 144
14B20807	8.0	5/16	1.6	175	7	8.0	252	12 / 96



30206AMRB

Contents — 1.20 kg — 1 / 12

14B1	PH1 x 75, PH2 x 100, PH3 x 150
14B2	5.5 x 100, 6.5 x 150, 8.0 x 175



6 PC.

Go Thru Screwdriver

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1481

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14810103	PH1	75	3	5.0	55	12 / 240
14810204	PH2	100	4	6.0	93	12 / 144
14810204-E*	PH2	100	4	6.0	112	12 / 96
14810205	PH2	125	5	6.0	99	12 / 144
14810205-E*	PH2	125	5	6.0	118	12 / 144
14810306	PH3	150	6	8.0	175	12 / 144
14810412	PH4	300	12	10.0	328	10 / 40



* Enlarged handle

Go Thru Screwdriver & Set

KT No. & D1

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1482

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14825503	5.5	7/32	0.8	75	3	5.0	54	12 / 240
14826504	6.5	1/4	1.2	100	4	6.0	93	12 / 144
14826504-E*	6.5	1/4	1.2	100	4	6.0	112	12 / 96
14826505-E*	6.5	1/4	1.2	125	5	6.0	116	12 / 144
14826506	6.5	1/4	1.2	150	6	6.0	103	12 / 144
14820806	8.0	5/16	1.2	150	6	8.0	174	12 / 144
14821012	10.0	12/32	1.6	300	12	10.0	326	10 / 40

* Enlarged handle



36206MR

Contents — 0.97 Kg — 1 / 20

1481	PH1 x 75, PH2 x 100, PH3 x 150
1482	5.5 x 75, 6.5 x 150, 8.0 x 150



6 PC.

35114MR

- Standard & insulated & go thru screwdriver set

35114MR01

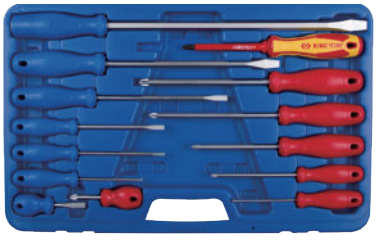

14 PC.

KT NO.			Contents
35114MR	1472	6.5 x 150	1411: PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 150, PH2 x 38, PH3 x 150 1412: 3 x 75, 4 x 100, 5.5 x 100, 6.5 x 150, 6.5 x 38, 8 x 200 1482: 10 x 300
35114MR01	1478	PZ2 x 100	

Kg 2.40 — 1 / 4

Screwdriver Set

31416MR

- Standard screwdriver set

KT NO.	Contents		Each Q'ty
31416MR	⊕ 1421	PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	6
	⊖ 1422	3.0 x 75, 4.0 x 100, 5.5 x 75, 5.5 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8.0 x 150	



96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31416MR-D	6.20	0.71

31516MR

- Standard & go thru screwdriver set

KT NO.	Contents		Each Q'ty
31516MR	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	6
	⊕ 1461	PH1 x 75, PH2 x 100, PH3 x 150	
	⊖ 1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8.0 x 175	



96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31516MR-D	10.10	0.71

31519MR

- Standard Screwdriver set

KT NO.	Contents		Each Q'ty
31519MR	⊕ 1411	PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 100E*, PH2 x 150, PH2 x 150E*, PH2 x 38, PH3 x 150, PH3 x 200	6
	⊖ 1412	3.0 x 75, 4.0 x 100, 5.5 x 100, 6.5 x 100, 6.5 x 150, 6.5 x 100E*, 6.5 x 38, 8 x 150, 8 x 200, 6.5 x 150E*	

* Enlarged handle



114 PC.

Screwdriver shelf size (mm) : 650 x 250 x 210

KT NO.	Kg	CUFT
87111	3.50	1.97
31519MR-D	10.34	0.71

31512MR | 31512MR01

- Standard & go thru screwdriver set

KT NO.	Contents			Each Q'ty
31512MR	⊕ 1481	PH2 x 125	⊕⊖ PH2 x 100 24110204	6
	⊖ 1482	6.5 x 150	⊕⊖ PH2 x 38 24110214	
31512MR01	⊕ 1481	PH2 x 125E*	⊕ 1481 PH2 x 100, PH1 x 75, PH2 x 100E*, PH3 x 150	
	⊖ 1482	6.5 x 125E*	⊖ 1482 5.5 x 75, 6.5 x 100, 6.5 x 100E*, 8 x 150	



72 PC.

Screwdriver shelf size (mm) : 420 x 250 x 210

KT NO.	Kg	CUFT
87110	2.47	0.78
31512MR-D	8.23	0.71
87110	3.50	1.50
31512MR01-D	7.86	0.38

Screwdriver Set

31427MR

- Standard screwdriver set

KT NO.	Contents	
31427MR	1421	PH0 x 60, PH1 x 80 x2, PH1 x 100 x2, PH2 x 38 x2, PH2 x 100 x2, PH2 x 150 x2, PH3 x 150 x2
	1422	3.0 x 75 x3, 4.0 x 100 x2, 5.5 x 100 x2, 5.5 x 125 x2, 5.5 x 150 x2, 6.5 x 38 x2, 6.5 x 100 x2, 6.5 x 150 x2
	1423	T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125
	1427	T10H x 75, T15H x 75, T20H x 100, T25H x 100, T30H x 125



40 PC.

Screwdriver shelf size (mm) : 325 x 205 x 270

KT NO.	Kg	CUFT
87104	1.40	0.30
31427MR-D	2.66	0.27

Screwdriver Display

87104

- Overall size -W 325 x D 205 x H 270 mm
- Weight - 1.4 Kg / Cuft - 0.3



Magnetizer / Demagnetizer

79B1-01

- Quickly magnetize / demagnetize screwdriver tips or screw bits
- Magnetize your screwdrivers to allow them to grab small screws
- Demagnetize your screwdrivers to safely work on sensitive electronics



• Magnetizer



• Demagnetizer



KT NO.	Size (mm)	g	
79B1-01	52 x 50 x 30	88.6	20 / 80

Interchangeable Handle

91232

KT NO.	mm	inch	g	
91232	135	5-1/4	84	12 / 144



Power Bit

1317

- Bits for screwdriver handle 91232
- Material - SNCM - V alloy steel

KT NO.	Size	mm	inch	g	
1317012PN	PH1 PH2	175	7	45	40 / 400
1317012ZN	PZ2 PZ1	175	7	45	40 / 400
1317046SN	4.0 6.0	175	7	43	40 / 400
1317057SN	5.0 7.0	175	7	43	40 / 400
1317115TN	T10 T15	175	7	42	40 / 400
1317225TN	T20 T25	175	7	45	40 / 400
1317340TN	T30 T40	175	7	45	40 / 400
1317401PN	4.0 PH1	175	7	43	40 / 400
131744BHN	B4 H4	175	7	45	40 / 400
1317501ZN	5.0 PZ1	175	7	43	40 / 400
131755BHN	B5 H5	175	7	45	40 / 400
1317602PN	6.0 PH2	175	7	43	40 / 400
131766BHN	B6 H6	175	7	46	40 / 400
1317702ZN	7.0 PZ2	175	7	44	40 / 400

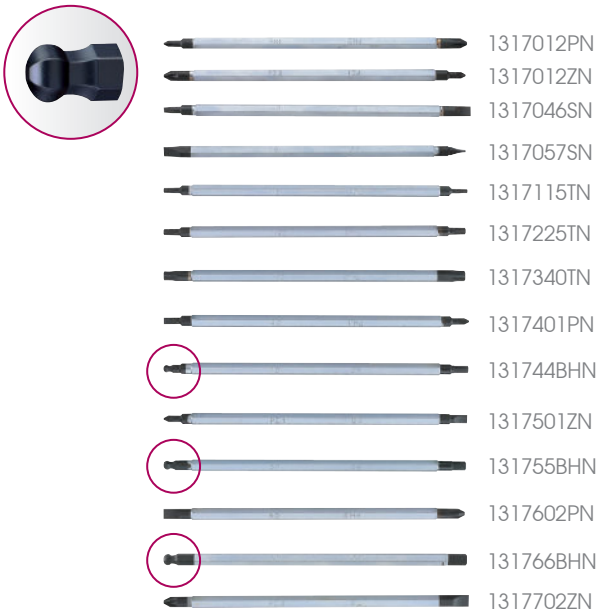

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Shank finishing - chrome plated

32518MR

- Two-way screwdriver set

Contents		kg 0.70	1 / 20	
1317012PN	PH1			PH2
1317012ZN	PZ2			PZ1
1317046SN	4.0			6.0
1317057SN	5.0			7.0
1317115TN	T10			T15
1317225TN	T20			T25
1317340TN	T30			T40
131744BHN	B4			H4
131755BHN	B5			H5
131766BHN	B6			H6
91232				



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Screwdriver Set

32518MR01

- Two-way screwdriver set



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents					0.76	1 / 20
1317115TN	T10			T15		
1317225TN	T20			T25		
1317340TN	T30			T40		
1317401PN	4.0			PH1		
131744BHN	B4			H4		
1317501ZN	5.0			PZ1		
131755BHN	B5			H5		
1317602PN	6.0			PH2		
131766BHN	B6			H6		
1317702ZN	7.0			PZ2		
91232						

32518MR02

- Two-way screwdriver set



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents					0.70	1 / 20
1317115TN	T10			T15		
1317225TN	T20			T25		
1317340TN	T30			T40		
1317401PN	4.0			PH1		
131744BHN	B4			H4		
1317012PN	PH1			PH2		
131755BHN	B5			H5		
1317602PN	6.0			PH2		
131766BHN	B6			H6		
1317057SN	5.0			7.0		
91232						

Nut Spinner

- Shank material - chrome vanadium alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated

1450



KT NO.	mm	mm	mm	mm	g	
1450-04	4.0	4.5	125	225	74	12 / 144
1450-45	4.5	4.5	125	225	75	12 / 144
1450-05	5.0	5.0	125	225	75	12 / 144
1450-55	5.5	5.0	125	225	82	12 / 144
1450-06	6.0	6.0	125	225	81	12 / 144
1450-07	7.0	6.0	125	235	103	12 / 144
1450-08	8.0	7.0	125	235	108	12 / 144
1450-09	9.0	7.0	125	235	110	12 / 144
1450-10	10.0	8.0	125	235	114	12 / 144
1450-11	11.0	9.0	125	245	165	12 / 144
1450-12	12.0	10.0	125	245	169	12 / 144
1450-13	13.0	10.0	125	245	172	10 / 120

5450



KT NO.	inch	mm	mm	mm	g	
5450-08	1/4	12.0	125	223	81	12 / 144
5450-10	5/16	8.2	125	223	109	12 / 144

Flexible Nut Spinner

1453

- For the hose clamps on radiator hoses

KT NO.	mm	mm	mm	mm	g	
1453-05	5	14.3	190	300	132	12 / 144
1453-06	6	14.1	190	300	132	12 / 144
1453-07	7	14.5	190	300	137	12 / 144
1453-08	8	13.2	190	300	133	12 / 144
1453-10	10	12.7	190	300	135	12 / 144



Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted
- Total length : 25 mm



Item No.xxxxxxx.B

1/4" Hex size shank driver



order unit :one box

1025P

- DIN ISO 2351-2



KT NO.	No.	g	
102500P (102500P.B)	PH0	5	20 / 300 (50 / 1000)
102501P (102501P.B)	PH1	5	
102502P (102502P.B)	PH2	6	
102503P (102503P.B)	PH3	6	
102504P (102504P.B)	PH4	6	

102512P

- Reduced for dry-wall
- DIN ISO 2351-2



KT NO.	No.	g	
102512P (102512P.B)	PH2	6	20 / 300 (50 / 1000)

1025S

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	g	
102503S1 (102503S1.B)	3.0	0.5	5	20 / 300 (50 / 1000)
102535S1 (102535S1.B)	3.5	0.6	5	
102504S1 (102504S1.B)	4.0	0.5	5	
102504S2 (102504S2.B)	4.0	0.8	5	
102545S1 (102545S1.B)	4.5	0.6	5	
102505S1 (102505S1.B)	5.0	0.8	5	
102555S1 (102555S1.B)	5.5	0.8	5	
102555S2 (102555S2.B)	5.5	1.0	5	
102506S1 (102506S1.B)	6.0	1.0	5	
102565S1 (102565S1.B)	6.5	1.2	6	
102507S1 (102507S1.B)	7.0	1.2	6	
102508S1 (102508S1.B)	8.0	1.2	6	
102508S2 (102508S2.B)	8.0	1.6	6	

1025H 5025H

- DIN ISO 2351-3



KT NO.	mm	g	
102515H (102515H.B)	H1.5	4	20 / 300 (50 / 1000)
102502H (102502H.B)	H2	5	
102525H (102525H.B)	H2.5	5	
102503H (102503H.B)	H3	5	
102504H (102504H.B)	H4	6	
102505H (102505H.B)	H5	6	
102506H (102506H.B)	H6	6	
102507H (102507H.B)	H7	8	
102508H (102508H.B)	H8	9	
102510H (102510H.B)	H10	12	

KT NO.	inch	g	
502503H (502503H.B)	3/64	4	20 / 300 (50 / 1000)
502504H (502504H.B)	1/16	4	
502505H (502505H.B)	5/64	5	
502506H (502506H.B)	3/32	5	
502507H (502507H.B)	7/64	5	
502508H (502508H.B)	1/8	5	
502509H (502509H.B)	9/64	5	
502510H (502510H.B)	5/32	5	

1025T

- For torx head screw



KT NO.	Size	g	
102506T (102506T.B)	T6	5	20 / 300 (50 / 1000)
102507T (102507T.B)	T7	5	
102508T (102508T.B)	T8	5	
102509T (102509T.B)	T9	5	
102510T (102510T.B)	T10	5	
102515T (102515T.B)	T15	5	
102520T (102520T.B)	T20	5	
102525T (102525T.B)	T25	5	
102527T (102527T.B)	T27	5	
102530T (102530T.B)	T30	5	
102535T (102535T.B)	T35	6	
102540T (102540T.B)	T40	6	
102545T (102545T.B)	T45	7	
102550T (102550T.B)	T50	8	

1025U

- For torx head screw
- Tamper-resistant type



KT NO.	Size	g	
102507U (102507U.B)	T7H	4	20 / 300 (50 / 1000)
102508U (102508U.B)	T8H	5	
102509U (102509U.B)	T9H	5	
102510U (102510U.B)	T10H	5	
102515U (102515U.B)	T15H	5	
102520U (102520U.B)	T20H	5	
102525U (102525U.B)	T25H	5	
102527U (102527U.B)	T27H	5	
102530U (102530U.B)	T30H	6	
102540U (102540U.B)	T40H	6	

1025M

- DIN 65254



KT NO.	size	g	
102504M	M4	5	20 / 300
102505M	M5	5	
102506M	M6	6	
102508M	M8	7	
102510M	M10	10	

1025V

- For inside 5-star screw
- Tamper-resistant type



KT NO.	Size	g	
102508V	IPR 8	5	20 / 300
102509V	IPR 9	5	
102510V	IPR 10	5	
102515V	IPR 15	5	
102520V	IPR 20	5	
102525V	IPR 25	5	
102527V	IPR 27	5	
102530V	IPR 30	5	
102540V	IPR 40	6	

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1/4" Hex size shank driver



order unit : one blister card



Item No.xxxxxxx.B

5/16" Hex size shank driver



order unit : one box

1025Z

- Pozidriv type
- DIN ISO 2351-2



KT NO.	No.	g	pcs / box
102501Z (102501Z.B)	PZ1	5	20 / 300 (50 / 1000)
102502Z (102502Z.B)	PZ2	6	
102503Z (102503Z.B)	PZ3	6	

1025R



KT NO.	Size	g	pcs / box
102500R (102500R.B)	RB0	5	20 / 300 (50 / 1000)
102501R (102501R.B)	RB1	5	
102502R (102502R.B)	RB2	6	
102503R (102503R.B)	RB3	6	

1360Z



KT NO.	No.	Overall length (mm)	g	pcs / box
1360022Z	PZ2 / PZ2	60	14	10 / 150
1360023Z	PZ2 / PZ3	60	14	

1360Z



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
1360451Z	PZ1	4.5	0.6	60	13	10 / 150
1360552Z	PZ2	5.5	1.0	60	14	10 / 150

1360P



KT NO.	No.	Overall length (mm)	g	pcs / box
1360012P	PH1 / PH2	60	13	10 / 150
1360022P	PH2 / PH2	60	14	
1360023P	PH2 / PH3	60	14	

1360P



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
1360451P	PH1	4.5	0.6	60	13	10 / 150
1360552P	PH2	5.5	0.8	60	14	
1360703P	PH3	7.0	1.2	60	14	

1800P

- 36 / 80 / 125mmL
- DIN ISO 2251-2



KT NO.	No.	Overall length (mm)	g	pcs / box
183601P	PH1	36	12	20 / 200
183602P	PH2	36	12	20 / 200
183603P	PH3	36	12	20 / 200
183604P	PH4	36	12	20 / 200
188002P	PH2	80	31	10 / 100
188003P	PH3	80	31	10 / 100
188004P	PH4	80	31	10 / 100
181202P	PH2	125	50	10 / 100
181203P	PH3	125	50	10 / 100

1800S

- 36 / 80mmL
- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
183608S	8	1.2	36	12	20 / 300
183609S	9	1.6	36	13	20 / 300
183610S	10	1.6	36	15	20 / 240
183611S	11	2.0	36	16	20 / 240
183612S	12	2.0	36	18	12 / 120
183614S	14	2.5	36	21	12 / 120
188008S	8	1.2	80	32	10 / 150
188010S	10	1.6	80	33	10 / 120
188012S	12	2.0	80	34	6 / 60

1800H

- 32 / 36 mmL



KT NO.	mm	Overall length (mm)	g	pcs / box
183203H	H3	32	9	20 / 300
183204H	H4	32	10	20 / 300
183205H	H5	32	10	20 / 300
183206H	H6	32	11	20 / 300
183207H	H7	32	12	20 / 300
183208H	H8	32	13	20 / 300
183210H	H10	32	17	20 / 240
183212H	H12	32	22	12 / 120
183604H	H4	36	11	20 / 300
183605H	H5	36	12	20 / 300
183606H	H6	36	13	20 / 300
183607H	H7	36	14	20 / 300
183608H	H8	36	15	20 / 300
183610H	H10	36	19	20 / 240
183612H	H12	36	25	12 / 120
183614H	H14	36	31	12 / 120

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

5/16" Hex size shank driver



order unit : one box

10mm Hex size shank driver



order unit : one blister card

1800T

- For torx internal screws
  32 / 36 / 70 mmL



KT NO.	Size	Overall length (mm)	g	
183215T	T15	32	10	20 / 300
183220T	T20	32	10	20 / 300
183225T	T25	32	10	20 / 300
183227T	T27	32	11	20 / 300
183230T	T30	32	11	20 / 300
183240T	T40	32	11	20 / 300
183245T	T45	32	11	20 / 300
183250T	T50	32	11	20 / 300
183620T	T20	36	11	20 / 300
183625T	T25	36	11	20 / 300
183627T	T27	36	11	20 / 300
183630T	T30	36	12	20 / 300
183635T	T35	36	12	20 / 300
183640T	T40	36	13	20 / 300
183645T	T45	36	13	20 / 300
183650T	T50	36	14	20 / 300
183655T	T55	36	19	20 / 240
183660T	T60	36	22	20 / 120
187015T	T15	70	22	10 / 150
187020T	T20	70	22	10 / 150
187025T	T25	70	22	10 / 150
187027T	T27	70	22	10 / 150
187030T	T30	70	22	10 / 150
187040T	T40	70	22	10 / 150
187045T	T45	70	22	10 / 150
187050T	T50	70	22	10 / 150

1836Z

- 36 mmL



KT NO.	No.	Overall length (mm)	g	
183602Z	PZ2	36	12	20 / 300
183603Z	PZ3	36	12	20 / 300
183604Z	PZ4	36	13	20 / 300

1600H

- 36 / 80mmL



1636xxH



1680xxH

KT NO.	mm	Overall length (mm)	g	
163604H	H4	36	17	12 / 144
163605H	H5	36	19	12 / 144
163606H	H6	36	19	12 / 144
163607H	H7	36	20	12 / 144
163608H	H8	36	21	12 / 144
163609H	H9	36	23	12 / 144
163610H	H10	36	24	12 / 144
163612H	H12	36	31	12 / 120
168004H	H4	80	47	6 / 72
168005H	H5	80	48	6 / 72
168006H	H6	80	49	6 / 72
168007H	H7	80	50	6 / 72
168008H	H8	80	51	6 / 72
168009H	H9	80	52	6 / 72
168010H	H10	80	54	6 / 72
168012H	H12	80	73	6 / 60

1600T

- For torx head screw
- 36 / 80mmL



1636xxT



1680xxT

KT NO.	Size	Overall length (mm)	g	
163610T	T10	36	17	12 / 144
163615T	T15	36	17	12 / 144
163620T	T20	36	18	12 / 144
163625T	T25	36	18	12 / 144
163627T	T27	36	18	12 / 144
163630T	T30	36	18	12 / 144
163640T	T40	36	20	12 / 144
163645T	T45	36	21	12 / 144
163650T	T50	36	23	12 / 144
163655T	T55	36	28	12 / 144
163660T	T60	36	33	12 / 120
168010T	T10	80	46	6 / 72
168015T	T15	80	47	6 / 72
168020T	T20	80	47	6 / 72
168025T	T25	80	47	6 / 72
168027T	T27	80	47	6 / 72
168030T	T30	80	47	6 / 72
168040T	T40	80	48	6 / 72
168045T	T45	80	49	6 / 72
168050T	T50	80	50	6 / 72
168055T	T55	80	52	6 / 72
168060T	T60	80	70	6 / 60

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

10mm Hex size shank driver



order unit : one blister card

1600E

- For torx Plus head screw
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163610E	IP10	36	15	12 / 144
163615E	IP15	36	16	12 / 144
163620E	IP20	36	16	12 / 144
163625E	IP25	36	16	12 / 144
163627E	IP27	36	17	12 / 144
163630E	IP30	36	17	12 / 144
163640E	IP40	36	18	12 / 144
163645E	IP45	36	20	12 / 144
163650E	IP50	36	21	12 / 144
163655E	IP55	36	25	12 / 144
163660E	IP60	36	31	12 / 120
168010E	IP10	80	45	6 / 72
168015E	IP15	80	45	6 / 72
168020E	IP20	80	45	6 / 72
168025E	IP25	80	46	6 / 72
168027E	IP27	80	46	6 / 72
168030E	IP30	80	47	6 / 72
168040E	IP40	80	48	6 / 72
168045E	IP45	80	49	6 / 72
168050E	IP50	80	50	6 / 72
168055E	IP55	80	60	6 / 72
168060E	IP60	80	79	6 / 60

1600U

- For torx head screw
- Tamper-resistant type
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163610U	T10H	36	17	12 / 144
163615U	T15H	36	17	12 / 144
163620U	T20H	36	18	12 / 144
163625U	T25H	36	18	12 / 144
163627U	T27H	36	18	12 / 144
163630U	T30H	36	18	12 / 144
163640U	T40H	36	20	12 / 144
163645U	T45H	36	21	12 / 144
163650U	T50H	36	23	12 / 144
163655U	T55H	36	28	12 / 144
163660U	T60H	36	33	12 / 120
168010U	T10H	80	46	6 / 72
168015U	T15H	80	47	6 / 72
168020U	T20H	80	47	6 / 72
168025U	T25H	80	47	6 / 72
168027U	T27H	80	47	6 / 72
168030U	T30H	80	47	6 / 72
168040U	T40H	80	48	6 / 72
168045U	T45H	80	49	6 / 72
168050U	T50H	80	50	6 / 72
168055U	T55H	80	52	6 / 72
168060U	T60H	80	70	6 / 60

1600M

- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163605M	M5	36	18	12 / 144
163606M	M6	36	19	12 / 144
163608M	M8	36	20	12 / 144
163609M	M9	36	21	12 / 144
163610M	M10	36	22	12 / 144
163612M	M12	36	28	12 / 120
163614M	M14	36	30	12 / 120
168005M	M5	80	47	6 / 72
168006M	M6	80	48	6 / 72
168008M	M8	80	49	6 / 72
168009M	M9	80	51	6 / 72
168010M	M10	80	52	6 / 72
168012M	M12	80	70	6 / 60
168014M	M14	80	71	6 / 60

Bit Display Box

87352

- Overall size - W 318 x D 235 x H 183 mm
- Weight - 1.3 Kg / Cuft - 0.4

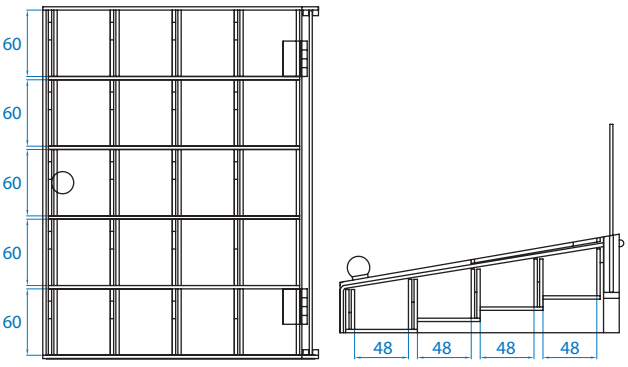



Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1011MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



11 PC.

Contents — 0.82 kg — 1 / 20

1636M	M5, M6, M8, M10, M12	
1680M	M5, M6, M8, M10, M12	
414810M		

1015MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15 PC.

Contents — 0.96 kg — 1 / 20

1636H	H4, H5, H6, H7, H8, H10, H12	
1680H	H4, H5, H6, H7, H8, H10, H12	
414810M		

1015PQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15 PC.

Contents — 0.90 kg — 1 / 20

1636T	T20,T25, T30, T40, T45, T50, T55	
1680T	T20,T25, T30, T40, T45, T50, T55	
414810M		

1023EQ

Metal case size (mm) : 244 x 118 x 37 (0.038 cuft)



23 PC.

Contents — 1.60 kg — 1 / 18

1636E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP	
1680E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP	
414810M		

1040CQ

Metal case size (mm) : 320 x 153 x 31 (0.054 cuft)



40 PC.

Contents — 2.0 kg — 1 /10

1630M	M5, M6, M8, M10, M12	
1630H	H4, H5, H6, H7, H8, H10, H12	
1630T	T20, T25, T30, T40, T45, T50, T55	
1675M	M5, M6, M8, M10, M12	
1675H	H4, H5, H6, H7, H8, H10, H12	
1675T	T20, T25, T30, T40, T45, T50, T55	
314810M, 414810M		

1042CQ

Metal case size (mm) : 205 x 80 x 42 (0.024 cuft)



42 PC.

Contents — 0.52 kg — 1 / 20

1025H	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10	
1025T	T6	
1025U	T7H, T8H, T9H , T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025S	3 x 0.5, 3.5 x 0.6, 4 x 0.5, 4.5 x 0.6, 5 x 0.8, 5.5 x 0.8, 6 x 1.0, 6.5 x 1.2, 7 x 1.2, 8 x 1.2	
1025P	PH0, PH1, PH2, PH3	
1025Z	PZ1, PZ2, PZ3	
1025R	RB0, RB1, RB2, RB3	

1043CQ

Metal case size (mm) : 290 x 130 x 41 (0.056 cuft)



43 PC.

Contents — 2.50 kg — 1 / 10

1636H	H4, H5, H6, H7, H8, H10, H12	
1636M	M5, M6, M8, M10, M12	
1636T	T20, T25, T27, T30, T40, T45, T50,T55, T60	
1680H	H4, H5, H6, H7, H8, H10, H12	
1680M	M5, M6, M8, M10, M12	
1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60	
414710M		

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1044CQ

Metal case size (mm) : 296 x 130 x 41 (0.056 cuft)



44 PC.

Contents — 2.5 kg — 1 /10

1636H	H4, H5, H6, H7, H8, H10, H12	
1636M	M5, M6, M8, M10, M12	
1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60	
1680H	H4, H5, H6, H7, H8, H10, H12	
1680M	M5, M6, M8, M10, M12	
1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60	
314810M, 414810M		

5169PR

Metal case size (mm) : 445 x 187 x 50 (0.147 cuft)



69 PC.

Contents — 4.15 kg — 1 /4

3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18	
1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	
1636H	H4, H5, H6, H7, H8, H10, H12	
1636M	M5, M6, M8, M10, M12	
1636T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60	
1680H	H4, H5, H6, H7, H8, H10, H12	
1680M	M5, M6, M8, M10, M12	
1680T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60	
314810M	3792	3779-08G

Ratchet Screwdriver & Set

2166DF

- Two position L-handle design for greater torque
- PC+TPR Handle



KT NO.	Gear	Overall Length (mm)	kg	
2166DF	46 teeth	167	0.28	6 / 72

32809MR

- 9-in-1 ratchet screwdriver set
- Reversible ratchet with 1/4" bit holder



9 PC.

Contents — 0.32 kg — 6 / 72

1025S	4.0, 5.0	
1025P	PH1, PH2, PH3	
1025Z	PZ1, PZ2	
750-60		
2166DF		

2555MR 1/4"

- Ratchet screwdriver set
- Blow case size (mm) : 260 x 160 x 64 (0.094 cuft)



55 PC.

Contents — 1.00 kg — 1 / 10

1025S	3.0, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 8.0	
1025P	PH0, PH1, PH2, PH3	
1025Z	PZ0, PZ1, PZ2, PZ3	
1025T	T10, T15, T20, T25, T27, T30, T40	
1025H	H2, H2.5, H3, H4, H5, H6, H8	
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025R	RB1, RB2	
7702-25		
750-60		
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2166DF		

Palm Ratchet Screwdriver & Set



2746 1/4"

- 48 teeth
- With an internal soft structure, it allows the operator to spin fasteners on and off in hard-to-reach areas
- Stubby grip fitting the palm, good to use in a confined space



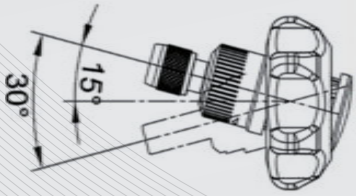

KT NO.	D (mm)	L (mm)	g	
2746	60	72	95	1 / 48







1048MR 1/4"

49 PC.

Contents

0.53 kg | 1 / 12

1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
1025P	PH1 x 2, PH2 x 2 ø6mm, PH3, PH2 ø4.7mm
1025T	T10, T15, T20 x 2, T25, T27, T30, T40
1025H	H3, H4, H5, H6
1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
1025Z	PZ2 x 2
7150T	T15, T20, T25,
7150P	PH2 x 2
7150Z	PZ2
7150S	4.0 x 0.8, 6.0 x 1.0
7150H	H3, H4, H5, H6, H7, H8
750-75	1/4"
753-63	1/4"


2746





Plastic case size (mm) : 150 x 102 x 46 (0.025 cuft)

Ratchet Screwdriver & Set



32808MR 1/4"

8 PC.

- 8-in-1 ratchet screwdriver set
- Reversible ratchet screwdriver with max torque 45 Nm
- 45 teeth
- Magnetic nut setter 1/4" and bit holder
- Extended blades max. 135mmL
- Extended drive gets into hard-to-reach space easily



▪ Ergonomic grip



▪ Extended magnetic bit holder



▪ Forward, reverse and neutral



▪ 6 bit storage compartment cap

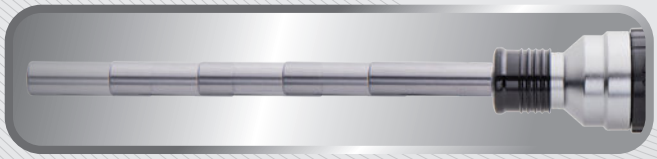

▪ Telescopic ratchet screwdriver

Contents — 0.27 kg — 1 /48

	1025P	PH1, PH2
	1025Z	PZ2
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	2155-06	
	2155DF	

32526MRN

16 PC.



Contents — 0.7 kg — 1 / 30

PH1	PH2	1317012PN
4.0	6.0	1317046SN
5.0	7.0	1317057SN
T10	T15	1317115TN
T20	T25	1317225TN
B4	H4	131744BHN
B5	H5	131755BHN
B6	H6	131766BHN
		2155DF

Contents

	1025S	4.0, 5.5, 6.5
	1025P	PH1, PH2
	1025Z	PZ2
	2155-06	

Atom Series

Asymmetrical line design

PAT.



26 PC.

1026CQ-AM

Plastic case size (mm) :
140 x 65 x 36







▪ Easy to pick up



▪ Automatic raising bit rack



▪ Suitable in pocket

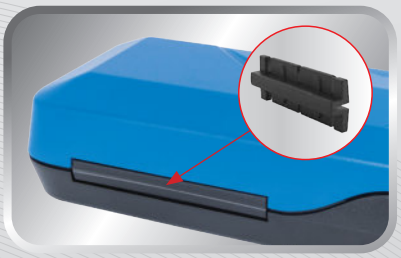

▪ Built-in rotation axis design

Contents

0.39 kg | 1 / 40

⊕	1025P	PH1, PH2, PH3
✳	1025Z	PZ1, PZ2, PZ3
✪	1025U	T10H, T15H, T20H, T25H, T30H
⬣	1025H	H3, H4, H5, H6, H8
✪	1025T	T10, T15, T20, T25, T27, T30, T40
■	7702-25	
○	753-63	
	276B-35	



Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1032CQ

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)



32 PC.

Contents		0.30	1 / 20
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
7702-25			
753-63			

1032CQ01

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)



33 PC.

Contents		0.30	1 / 20
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025R	RB2		
7702-25			
753-63			

Bit Set

KT NO.	PC.	Contents		g	
102502P-S1	25	1025P	PH2 x 25 PC.	161	12 / 72
102502Z-S1	25	1025Z	PZ2 x 25 PC.	161	12 / 72
102510T-S1	25	1025T	T10 x 25 PC.	136	12 / 72
102515T-S1	25	1025T	T15 x 25 PC.	140	12 / 72
102520T-S1	25	1025T	T20 x 25 PC.	142	12 / 72
102525T-S1	25	1025T	T25 x 25 PC.	144	12 / 72
102530T-S1	25	1025T	T30 x 25 PC.	146	12 / 72



Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic **1/4"** Hex size shank driver



order unit : one blister card

7100P

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	
715000P	PH0	50	8	
715001P	PH1	50	9	
715002P	PH2	50	11	
715003P	PH3	50	11	
715004P	PH4	50	14	10 / 150
716502P	PH2	65	15	
717001P	PH1	70	16	
717002P	PH2	70	17	
717003P	PH3	70	17	
719001P	PH1	90	18	
719002P	PH2	90	20	
719003P	PH3	90	20	
711002P	PH2	100	24	10 / 120
711501P	PH1	150	23	
711502P	PH2	150	33	
711503P	PH3	150	33	

7100H

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	g	
715002H	H2	50	6	
715025H	H2.5	50	6	
715003H	H3	50	6	
715004H	H4	50	9	
715005H	H5	50	10	
715006H	H6	50	11	
715007H	H7	50	13	
715008H	H8	50	17	
715012SH	3/16	50	20	10 / 150
715014SH	7/32	50	22	
717002H	H2	70	8	
717025H	H2.5	70	8	
717003H	H3	70	9	
717004H	H4	70	13	
717005H	H5	70	15	
717006H	H6	70	18	
717007H	H7	70	21	
717008H	H8	70	25	
711102H	H2	110	11	
711125H	H2.5	110	11	
711103H	H3	110	14	
711104H	H4	110	18	
711105H	H5	110	24	10 / 120
711106H	H6	110	29	
711107H	H7	110	34	
711108H	H8	110	42	
711110H	H10	110	62	8 / 80
711502H	H2	150	16	
711503H	H3	150	18	
711504H	H4	150	25	
711505H	H5	150	34	10 / 120
711506H	H6	150	40	
711507H	H7	150	47	
711508H	H8	150	59	
711512SH	3/16	150	68	

7150S

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	
715003S1	3.0	0.5	50	6	
715035S1	3.5	0.5	50	6	
715004S2	4.0	0.5	50	7	
715004S1	4.0	0.8	50	7	
715045S1	4.5	0.6	50	7	10 / 150
715005S1	5.0	0.8	50	8	
715055S1	5.5	0.8	50	8	
715055S2	5.5	1.0	50	8	
715006S1	6.0	1.0	50	8	
715065S1	6.5	1.2	50	9	

7100T

- For torx head screw



KT NO.	Size	Overall length (mm)	g	
715006T	T6	50	5	
715007T	T7	50	5	
715008T	T8	50	5	
715009T	T9	50	5	
715010T	T10	50	6	
715015T	T15	50	6	
715020T	T20	50	7	
715025T	T25	50	8	
715027T	T27	50	9	
715030T	T30	50	9	
715040T	T40	50	10	
715050T	T50	50	15	10 / 150
717006T	T6	70	7	
717007T	T7	70	7	
717008T	T8	70	7	
717009T	T9	70	7	
717010T	T10	70	8	
717015T	T15	70	8	
717020T	T20	70	10	
717025T	T25	70	11	
717027T	T27	70	14	
717030T	T30	70	14	
717040T	T40	70	15	
711110T	T10	110	14	
711115T	T15	110	14	
711120T	T20	110	18	
711125T	T25	110	19	
711127T	T27	110	24	
711130T	T30	110	24	
711140T	T40	110	28	
711506T	T6	150	16	
711507T	T7	150	16	
711508T	T8	150	16	10 / 120
711509T	T9	150	16	
711510T	T10	150	17	
711515T	T15	150	18	
711520T	T20	150	24	
711525T	T25	150	24	
711527T	T27	150	32	
711530T	T30	150	33	
711540T	T40	150	39	

Power Driving

7100Z

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	
715001Z	PZ1	50	9	
715002Z	PZ2	50	11	
715003Z	PZ3	50	12	10 / 150
717001Z	PZ1	70	11	
717002Z	PZ2	70	15	
717003Z	PZ3	70	15	
719001Z	PZ1	90	13	
719002Z	PZ2	90	19	10 / 120
719003Z	PZ3	90	19	

7100U

- For torx head screw
- Tamper-resistant type



KT NO.	Size	Overall length (mm)	g	
715006U	T6H	50	7	
715007U	T7H	50	5	
715008U	T8H	50	5	
715009U	T9H	50	5	
715010U	T10H	50	7	
715015U	T15H	50	7	
715020U	T20H	50	7	
715025U	T25H	50	8	
715027U	T27H	50	9	10 / 150
715030U	T30H	50	9	
715040U	T40H	50	11	
717010U	T10H	70	8	
717015U	T15H	70	8	
717020U	T20H	70	10	
717025U	T25H	70	11	
717027U	T27H	70	13	
717030U	T30H	70	13	
717040U	T40H	70	15	
711110U	T10H	110	14	
711115U	T15H	110	14	
711120U	T20H	110	18	
711125U	T25H	110	19	10 / 120
711127U	T27H	110	24	
711130U	T30H	110	24	
711140U	T40H	110	28	

7100R



KT NO.	Size	Overall length (mm)	g	
715000R	RB0	50	7	
715001R	RB1	50	8	
715002R	RB2	50	8	
715003R	RB3	50	8	10 / 150
717000R	RB0	70	9	
717001R	RB1	70	11	
717002R	RB2	70	13	
717003R	RB3	70	13	

2128PR

- torx head tamper-resistant & L-type holder set



8 PC.

Contents

Kg 0.17 | 10 / 60

7170U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
158902ERA	

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver



order unit : one blister card

2138PR

- Hexagon head power bits & L-type holder set



8 PC.

Contents

Kg 0.24 | 10 / 60

7150H	H2, H3, H4, H5, H6, H7, H8
158902ERA	

7400P

- Short head type



KT NO.	No.	Overall length (mm)	g	
745002P	PH2	50	11	10 / 150
747501P	PH1	75	16	10 / 150
747502P	PH2	75	15	10 / 150
747503P	PH3	75	16	10 / 150
741002P	PH2	100	23	10 / 120
741502P	PH2	150	37	10 / 100
742002P	PH2	200	50	10 / 100
743002P	PH2	300	70	10 / 40
743003P	PH3	300	77	10 / 40

7300P

- Long head type



KT NO.	No.	Overall length (mm)	g	
734501P	PH1	45	9	
734502P	PH2	45	9	
734503P	PH3	45	10	10 / 150
736501P	PH1	65	14	
736502P	PH2	65	14	
736503P	PH3	65	14	
731101P	PH1	110	26	
731102P	PH2	110	26	
731103P	PH3	110	26	10 / 120
731502P	PH2	150	32	
731503P	PH3	150	33	



5mm Hex size shank driver order unit : one box

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

7200P

- Long head typed



KT NO.	No.	Overall length (mm)	g	
726502P	PH2	65	8	
727502P	PH2	75	10	10 / 100
721102P	PH2	110	14	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver

order unit : one blister card



7100P-S1

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	set /
715000P-S1	PH0	50	16	1 / 20
715001P-S1	PH1	50	18	
715002P-S1	PH2	50	22	
715003P-S1	PH3	50	22	
715004P-S1	PH4	50	28	
716502P-S1	PH2	65	30	
717001P-S1	PH1	70	32	
717002P-S1	PH2	70	34	
717003P-S1	PH3	70	34	
719001P-S1	PH1	90	36	
719002P-S1	PH2	90	40	
719003P-S1	PH3	90	40	
711002P-S1	PH2	100	48	
711501P-S1	PH1	150	46	
711502P-S1	PH2	150	66	
711503P-S1	PH3	150	66	

7100H-S1

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	g	set /
715002H-S1	H2	50	12	1 / 20
715025H-S1	H2.5	50	12	
715003H-S1	H3	50	12	
715004H-S1	H4	50	18	
715005H-S1	H5	50	20	
715006H-S1	H6	50	22	
715007H-S1	H7	50	26	
715008H-S1	H8	50	34	
715012SH-S1	3/16	50	20	
715014SH-S1	7/32	50	22	
717005H-S1	H5	70	30	
717006H-S1	H6	70	36	
717007H-S1	H7	70	42	
711102H-S1	H2	110	22	
711125H-S1	H2.5	110	22	
711103H-S1	H3	110	28	
711104H-S1	H4	110	36	
711105H-S1	H5	110	48	
711106H-S1	H6	110	58	
711107H-S1	H7	110	68	
711505H-S1	H5	150	68	
711507H-S1	H7	150	94	
711512SH-S1	3/16	150	68	

7150S-S1

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set /
715003S1-S1	3.0	0.5	50	12	1 / 20
715035S1-S1	3.5	0.5	50	12	
715004S2-S1	4.0	0.5	50	14	
715004S1-S1	4.0	0.8	50	14	
715045S1-S1	4.5	0.6	50	14	
715005S1-S1	5.0	0.8	50	16	
715055S1-S1	5.5	0.8	50	16	
715055S2-S1	5.5	1.0	50	16	
715006S1-S1	6.0	1.0	50	16	
715065S1-S1	6.5	1.2	50	18	

7100T-S1

- For torx head screw



KT NO.	Size	Overall length (mm)	g	set /
715006T-S1	T6	50	10	1 / 20
715007T-S1	T7	50	10	
715008T-S1	T8	50	10	
715009T-S1	T9	50	10	
715010T-S1	T10	50	12	
715015T-S1	T15	50	12	
715020T-S1	T20	50	14	
715025T-S1	T25	50	16	
715027T-S1	T27	50	18	
715030T-S1	T30	50	18	
715040T-S1	T40	50	20	
715050T-S1	T50	50	30	
717006T-S1	T6	70	14	
717007T-S1	T7	70	14	
717008T-S1	T8	70	14	
717009T-S1	T9	70	14	
717010T-S1	T10	70	14	
717015T-S1	T15	70	16	
717020T-S1	T20	70	16	
717025T-S1	T25	70	20	
717027T-S1	T27	70	22	
717030T-S1	T30	70	28	
717040T-S1	T40	70	28	
711110T-S1	T10	110	30	
711115T-S1	T15	110	28	
711120T-S1	T20	110	28	
711125T-S1	T25	110	36	
711127T-S1	T27	110	38	
711130T-S1	T30	110	48	
711140T-S1	T40	110	48	
711506T-S1	T6	150	56	
711507T-S1	T7	150	32	
711508T-S1	T8	150	32	
711509T-S1	T9	150	32	
711510T-S1	T10	150	34	
711515T-S1	T15	150	36	
711520T-S1	T20	150	48	
711525T-S1	T25	150	48	
711527T-S1	T27	150	64	
711530T-S1	T30	150	66	
711540T-S1	T40	150	78	

Power Driving

7100Z-S1

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	set
715001Z-S1	PZ1	50	18	1 / 20
715002Z-S1	PZ2	50	22	
715003Z-S1	PZ3	50	24	
717001Z-S1	PZ1	70	22	
717002Z-S1	PZ2	70	30	
717003Z-S1	PZ3	70	30	
719001Z-S1	PZ1	90	26	
719002Z-S1	PZ2	90	38	
719003Z-S1	PZ3	90	38	

7100U-S1

- For torx head screw
- Tamper-resistant type



KT NO.	Size	Overall length (mm)	g	set
715006U-S1	T6H	50	14	1 / 20
715007U-S1	T7H	50	10	
715008U-S1	T8H	50	10	
715009U-S1	T9H	50	10	
715010U-S1	T10H	50	14	
715015U-S1	T15H	50	14	
715020U-S1	T20H	50	14	
715025U-S1	T25H	50	16	
715027U-S1	T27H	50	18	
715030U-S1	T30H	50	18	
715040U-S1	T40H	50	22	
717010U-S1	T10H	70	16	
717015U-S1	T15H	70	16	
717020U-S1	T20H	70	20	
717025U-S1	T25H	70	22	
717027U-S1	T27H	70	26	
717030U-S1	T30H	70	26	
717040U-S1	T40H	70	30	
711110U-S1	T10H	110	28	
711115U-S1	T15H	110	28	
711120U-S1	T20H	110	36	
711125U-S1	T25H	110	38	
711127U-S1	T27H	110	48	
711130U-S1	T30H	110	48	
711140U-S1	T40H	110	56	

7100R-S1



KT NO.	Size	Overall length (mm)	g	set
715000R-S1	RB0	50	14	1 / 20
715001R-S1	RB1	50	16	
715002R-S1	RB2	50	16	
715003R-S1	RB3	50	16	
717000R-S1	RB0	70	18	
717001R-S1	RB1	70	22	
717002R-S1	RB2	70	26	
717003R-S1	RB3	70	26	

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver

order unit : one blister card



7400P-S1

- Short head type



KT NO.	No.	Overall length (mm)	g	set
745002P-S1	PH2	50	22	1 / 20
747501P-S1	PH1	75	32	
747502P-S1	PH2	75	30	
747503P-S1	PH3	75	32	
741002P-S1	PH2	100	46	
741502P-S1	PH2	150	74	

7300P-S1

- Long head type



KT NO.	No.	Overall length (mm)	g	set
734501P-S1	PH1	45	18	1 / 20
734502P-S1	PH2	45	18	
734503P-S1	PH3	45	20	
736501P-S1	PH1	65	28	
736502P-S1	PH2	65	28	
736503P-S1	PH3	65	28	
731101P-S1	PH1	110	52	
731102P-S1	PH2	110	52	
731103P-S1	PH3	110	52	
731502P-S1	PH2	150	64	
731503P-S1	PH3	150	66	

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

5mm Hex size shank driver order unit : one box



7200P-S1

- Long head typed



KT NO.	No.	Overall length (mm)	g	set
726502P-S1	PH2	65	16	1 / 20
727502P-S1	PH2	75	20	
721102P-S1	PH2	110	28	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Nickel plated
- Magnetic

1/4" Hex size shank driver



order unit : one box

1300P

- Long head type



KT NO.	No.	Overall length (mm)	g	
134501P	PH1	45	8	10 / 300
134502P	PH2	45	9	10 / 300
134503P	PH3	45	9	10 / 300
136501P	PH1	65	14	10 / 200
136502P	PH2	65	14	10 / 200
136503P	PH3	65	14	10 / 200
131101P	PH1	110	26	10 / 150
131102P	PH2	110	26	10 / 150
131103P	PH3	110	26	10 / 150
131501P	PH1	150	36	10 / 100
131502P	PH2	150	36	10 / 100
131503P	PH3	150	37	10 / 100

1500P

- Short head type



KT NO.	No.	Overall length (mm)	g	
155001P	PH1	50	10	10 / 300
155002P	PH2	50	10	10 / 300
155003P	PH3	50	10	10 / 300
157501P	PH1	75	16	10 / 200
157502P	PH2	75	16	10 / 200
157503P	PH3	75	17	10 / 200
151001P	PH1	100	23	10 / 150
151002P	PH2	100	23	10 / 150
151003P	PH3	100	23	10 / 150
151501P	PH1	150	36	10 / 100
151502P	PH2	150	37	10 / 100
151503P	PH3	150	37	10 / 100

7300P

- Long head type



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	
734551P	PH1	5.0	0.8	45	8	10 / 300
734552P	PH2	5.0	0.8	45	8	10 / 300
736552P	PH2	5.0	0.8	65	13	10 / 200
731152P	PH2	5.0	0.8	110	25	10 / 150
731552P	PH2	5.0	0.8	150	36	10 / 100

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver



order unit : one box

13A6502P

- Long head type
- For ironwork screws



KT NO.	No.	Overall length (mm)	g	
13A6502P	PH2	65	8	10 / 100

13B6502P

- Long head type
- For woodwork screws



KT NO.	No.	Overall length (mm)	g	
13B6502P	PH2	65	8	10 / 100

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver



750

- Magnetic bit holder
- 750-50A : with spring clip
- DIN 7427

750-50A



KT NO.	inch	Overall length (mm)	g	
750-60	1/4	60	20	6 / 84
750-50A	1/4	50	22	6 / 84

KT NO.	inch	Overall length (mm)	g	
750-75	1/4	75	30	1 / 20
750-100	1/4	100	37	1 / 20
750-150	1/4	150	50	1 / 20

751

- Magnetic bit holder
- With spring clip
- DIN 7427



KT NO.	inch	Overall length (mm)	g	
751-60	1/4	60	24	6 / 84
751-75	1/4	75	36	6 / 84

Power Driving

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

752

- Magnetic bit holder
- With quick-release sleeve
- DIN 7427



KT NO.	inch	Overall length (mm)	g	
752-60	1/4	63	33	6 / 72

KT NO.	inch	Overall length (mm)	g	
752-75	1/4	75	32	1 / 20
752-100	1/4	100	38	1 / 20
752-150	1/4	150	52	1 / 20
752-300	1/4	300	92	1 / 20

753

- 753-63
  -Magnetic bit holder
  -With quick-release sleeve
  -For 1025 bit
  -DIN 7427



KT NO.	inch	Overall length (mm)	g	
753-63	1/4	63	33	6 / 72

753A

- 753A-370
  -Quick release bit holder
  -Extra-long extended driver for limited space
  -Magnetic bit holder
  -For power bits



KT NO.	inch	Overall length (mm)	g	
753A-370	1/4	370	170	1 / 4

1/4" Hex size shank driver

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode





KT NO.	inch	Overall Length (mm)	g	
754-90	1/4	90	52	1 / 20

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits



KT NO.	inch	Overall length (mm)	g	
755-300	1/4	300	293	1 / 6
755-400	1/4	400	385	1 / 12

Angle Driver

- The body is zin alloy steel
- The arm is chrome vanadium alloy steel
- The chuck is aluminum alloy steel
- Magnetic

1/4" Hex size shank driver

759

- Heavy duty right angle bit holder
- This heavy duty 90 degree offset driver with 24 position gripped stabilizer arm is designed for use with power drivers 18-24 Volts
- Its head is shorter than 2.5" which is suitable to use in limited space
- Locking magnetic chuck accepts any 1/4" hex drive accessory such as twist drills, spade drills, step drills, grinding stones, buffer pads, nut drivers and screwdriver bits
- Durable all metal housing and steel gears with ball bearing construction
- Gripped stabilizer arm with 1 screwdriver bit storage
- It's amazing capacity for up to 500 inch lbs with 2000 RPM

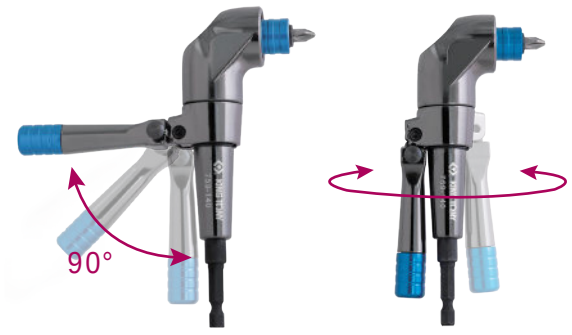



KT NO.	inch	Overall length (mm)	g	
759-140	1/4	140	305	12 / 48

Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted

1/4" Hex size shank driver



75A1

- Threaded rod socket
- Fastest tool available to tighten or loosen threaded rods
- Automatic locking cams
- Will not damage the threads when used properly





KT NO.	Size mm	Size inch	D mm	L mm	Capacity Ø mm	g	
75A105M	5	3/16	22	66	4.6~5.0	60	10 / 72
75A106M	6	1/4	24	66	5.6~6.35	75	10 / 80
75A108M	8	5/16	24	66	7.6~8.0	74	10 / 80
75A110M	10	3/8	28	66	9.0~10.0	99	10 / 107
75A112M	12	1/2	28	66	11.4~12.7	98	10 / 103
75A114M	14	9/16	32	66	13.2~14.3	126	10 / 127
75A116M	16	5/8	32	66	15.2~16.0	125	10 / 125

760M

- Nut setter
- Non magnetic type
- DIN 3126



760S



KT NO.	mm	ℓ mm	Overall length (mm)	g	
7605512M	12	7.0	55	55	6 / 72
7606512M	12	6.8	65	50	6 / 72
7607510M	10	6.0	75	38	6 / 72

KT NO.	mm	ℓ mm	Overall length (mm)	g	
7601012M	12	7.5	100	61	1 / 25
7601013M	13	7.0	100	70	1 / 25

KT NO.	inch	ℓ mm	Overall length (mm)	g	
7606508S	1/4	4.8	65	20	6 / 84
7606510S	5/16	6.6	65	30	6 / 84
7606512S	3/8	6.8	65	36	6 / 72

761M

- Nut setter
- Magnetic type
- DIN 3126



761S



KT NO.	mm	ℓ mm	Overall length (mm)	g	
7616505M	5	2.3	65	27	6 / 84
7616506M	6	2.6	65	26	6 / 84
7616507M	7	2.9	65	25	6 / 84
7616508M	8	3.5	65	30	6 / 84
7616510M	10	4.5	65	37	6 / 72
7616512M	12	5.6	65	52	6 / 72
7616513M	13	6.0	65	54	6 / 72
7616514M	14	6.5	65	52	6 / 20

KT NO.	mm	ℓ mm	Overall length (mm)	g	
7611006M	6	2.6	100	38	1 / 25
7611008M	8	3.5	100	48	1 / 25
7611010M	10	4.5	100	54	1 / 25
7611012M	12	5.6	100	68	1 / 25
7611013M	13	6.0	100	71	1 / 25
7611014M	14	6.5	100	77	1 / 25
7611506M	6	2.6	150	58	1 / 25
7611507M	7	2.9	150	65	1 / 25
7611508M	8	3.5	150	67	1 / 25
7611510M	10	4.5	150	68	1 / 25
7611512M	12	5.6	150	103	1 / 25
7611513M	13	6.0	150	110	1 / 25
7611514M	14	6.5	150	115	1 / 25
7612006M	6	2.6	200	78	1 / 20
7612008M	8	3.5	200	93	1 / 20
7612010M	10	4.5	200	89	1 / 20
7612012M	12	5.6	200	128	1 / 20
7612014M	14	6.5	200	128	1 / 20

KT NO.	inch	ℓ mm	Overall length (mm)	g	
7614208S	1/4	2.7	42	15	6 / 84
7614210S	5/16	3.7	42	17	6 / 84
7614512S	3/8	4.7	45	22	6 / 84
7616508S	1/4	4.8	65	30	6 / 84
7616510S	5/16	6.6	65	31	6 / 84
7616512S	3/8	6.8	65	37	6 / 72
7616514S	7/16	6.8	65	39	6 / 72

Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted

1/4" & 3/8" & 1/2"
Hex size shank driver



76B

- Deep well nut setter
- Deep hole for bolt & nut
- Press-fitted high-durability shank
- Use for tightening step clamp in construction

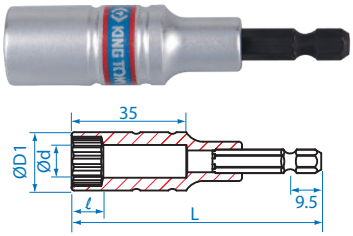

KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76B808M	8	13	6	6	80	41	15 / 300
76B809M	9	13	6	7	80	40	15 / 300
76B812M	12	17	8	9	80	57	12 / 240
76B813M	13	18	9	10	80	62	12 / 240
76B814M	14	20	9	12	80	70	12 / 240
76B815M	15	21	10	12	80	77	12 / 240
76B816M	16	22	10	14	80	76	12 / 240
76B817M	17	24	11	14	80	95	12 / 144
76B819M	19	26	13	15	80	112	10 / 120
76B821M	21	28	13	19	80	113	10 / 120

76C

- 110mm length easy to reach at confined spaces
- Extra depth dimension 63mm perfectly go through various bolts
- Press-fit structure with durability socket suitable for 18V power tools
- Ideal for construction assembling, scaffolding and roof work

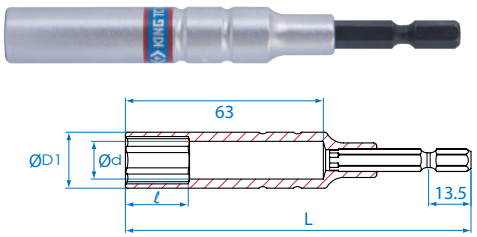

KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76C1108M	8	14.0	12	7	110	71	12 / 216
76C1109M	9	14.0	14	8	110	64	12 / 216
76C1110M	10	15.0	15	9	110	67	12 / 216
76C1111M	11	17.0	17	10	110	84	10 / 180
76C1112M	12	17.0	18	11	110	74	10 / 180
76C1113M	13	18.0	20	12	110	79	10 / 180
76C1114M	14	20.0	21	13	110	99	10 / 180
76C1117M	17	24.0	26	16	110	139	10 / 180
76C1119M	19	26.0	29	18	110	158	10 / 180
76C1121M	21	28.0	30	20	110	161	8 / 144
76C1123M	23	29.8	30	22	110	200	8 / 96
76C1124M	24	32.0	30	23	110	216	8 / 96

770

- Socket adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)	g	
7702-25	1/4"	25	6	20 / 200
7702-50	1/4"	50	13	10 / 100
7702-75	1/4"	75	23	10 / 100
7703-50	3/8"	50	23	6 / 84
7704-50	1/2"	50	24	6 / 72

774

- Bit adapter
- Wobble function provides up to 15° accessibility



KT NO.	Size	L mm	g	
7743-56	3/8"	56	30	6 / 72
7744-60	1/2"	60	42	6 / 72







Power Bit Pocket Case

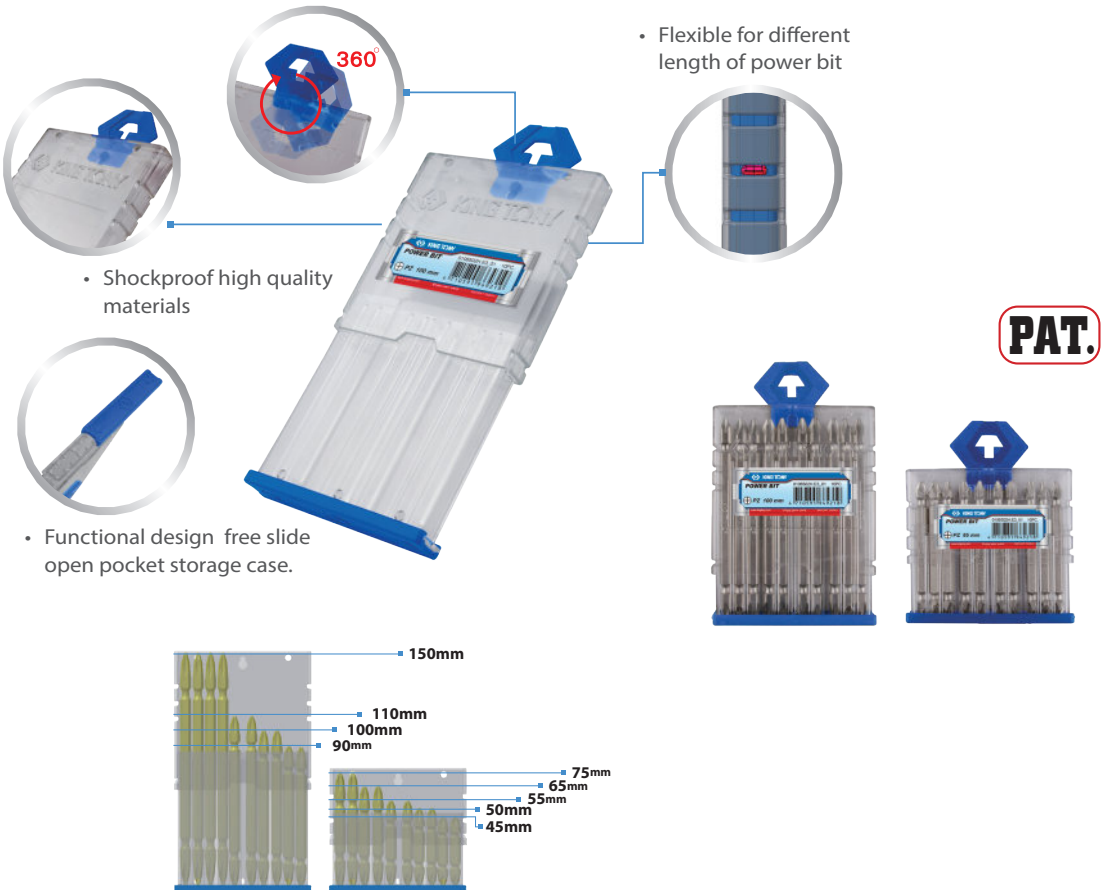

Spot Weld Drill Bit

7E511

- Material : HSS M35
- Special drill bit for removal of spot welds effectively
- Two cutting edge

KT NO.	Diameter mm	Length mm	g	
7E51180-60	8	60	32	100 / 600
7E51180-80	8	80	35	100 / 600



Titanium Coated HSS Drill Bit Set

11101SQ 1/4"

- Titanium coated HSS drill set with standard 1/4" hex shank that will fit cordless screwdrivers, hand drills and impact drivers etc. or use in standard drill chuck
- Suitable for use with steel, wood, plastic etc
- Titanium nitride drill bits run cooler, drill smoother and last longer than standard bits
- High speed steel
- 120 deg. tips
- 1/4" hex shank for fast changes

Ø mm	Overall length mm
1.5	62
2	69
2.5	77
3	82
3.2	85
3.5	90
4	95
4.5	100
4.8	105
5	106



10 PC.

Power Driving Set

1035MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.62 kg / 1 / 32
⊖	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
⊕	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
✱	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
◉	1025H	H3, H4, H5, H6
✳	1025Z	PZ2 x 2
○	7E111	2.5, 3.0, 3.5, 4.0, 5.0
○	754-90	1/4"
○	7400P	PH2
○	761M x 65L	8, 10, 13
	752-60	1/4"



35 PC.

1036MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.59 kg / 1 / 32
⊖	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
⊕	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
✱	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
◉	1025H	H3, H4, H5, H6
✳	1025Z	PZ2 x 2
✱	7150T	T20, T25, T30
✳	7150Z	PZ2 x 2
⊖	7150S	5.5 x 0.8
⊕⊕	7450P	PH2 x 2
○	761M x 65L	8, 10, 13
○	753-63	1/4"



36 PC.

1044MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.63 kg / 1 / 32
⊖	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
⊕	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
✱	1025T	T10, T15, T20 x 2, T25, T27, T30, T40
◉	1025H	H3, H4, H5, H6
✪	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
✳	1025Z	PZ2 x 2
✱	7170T	T15, T20, T25,
⊕	7170P	PH2 x 2
✳	7170Z	PZ2
⊖	7150S	4.0 x 0.8, 6.0 x 1.0
○	761M x 65L	6, 8, 10
○	753-63	1/4"



44 PC.

Power Driving Set

1045MR 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.64	1 / 32
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2	
	1025P	PH2 x 2 ø4.7mm	
	1025T	T10, T15, T20, T25, T27, T30, T35, T40	
	1025H	H2, H3, H4, H5, H6	
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H	
	1025Z	PZ1, PZ2, PZ3	
	1025R	RB1, RB2, RB3	
	1550P	PH1, PH2 x 2, PH3	
	7150P	PH2	
	7E111	3, 4, 5	
	761M x 65L	8, 10, 13	
	750-50A	1/4"	
	7702-50	1/4" DR.	



45 PC.

1049CQ 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.51	1 / 32
	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 x 2 ø4.7mm, PH3 x 2	
	1025S	4.0 x 0.5 x 2, 5.5 x 0.8 x 2, 6.5 x 1.2 x 2	
	1025H	H2, H2.5, H3, H4, H5, H6, H7, H8	
	1025Z	PZ1 x 2, PZ2 x 2, PZ3 x 2	
	1025U	T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	
	1025T	T9, T10, T15, T20, T25, T27, T30,T40	
	1025R	RB1, RB2,	
	2141	1/4" DR. x 1/4"H	
	750-50A	1/4"	
	7702-25	1/4" DR.	



49 PC.

Hex Key & Set

KT No. & D1



- Material - SNCM - V alloy steel
- Finishing - chrome plated

1145MR

- Standard arm type
- Allen head
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
114515MR	H1.5	16	47	1	20 / 400
114502MR	H2	18	52	1	20 / 400
114525MR	H2.5	21	59	3	20 / 400
114503MR	H3	24	66	5	20 / 400
114504MR	H4	30	74	10	20 / 400
114505MR	H5	33	85	18	20 / 400
114555MR	H5.5	36	91	23	10 / 200
114506MR	H6	38	97	29	10 / 200
114507MR	H7	41	102	43	10 / 200
114508MR	H8	44	108	58	10 / 200
114510MR	H10	50	122	101	10 / 200

1145SR



KT NO.	inch	mm	mm	g	
114502SR	1/16	18	49	1	20 / 400
114525SR	5/64	20	52	1.5	20 / 400
114503SR	3/32	21	56	3	20 / 400
114504SR	1/8	25	63	5	20 / 400
114505SR	5/32	28	70	9	20 / 400
114506SR	3/16	31	77	15	20 / 400
114508SR	1/4	37	91	31	10 / 200
114510SR	5/16	42	106	55	10 / 200
114512SR	3/8	47	120	93	10 / 120
114516SR	1/2	54	146	195	10 / 120
114518SR	9/16	59	160	267	6 / 72
114520SR	5/8	64	175	362	6 / 72
114524SR	3/4	73	203	599	6 / 24

1125MR

- Extra long arm type
- Allen head
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
112515MR	H1.5	16	92	1	20 / 400
112502MR	H2	18	102	3	20 / 400
112525MR	H2.5	21	115	5	20 / 400
112503MR	H3	23	129	9	20 / 480
112504MR	H4	29	144	17	20 / 300
112505MR	H5	33	165	31	20 / 300
112506MR	H6	38	186	51	20 / 400
112507MR	H7	41	197	74	20 / 240
112508MR	H8	44	208	100	10 / 100
112510MR	H10	50	234	176	10 / 100
112512MR	H12	57	262	286	8 / 48
112514MR	H14	70	294	445	8 / 48
112517MR	H17	80	337	770	4 / 32
112519MR	H19	89	380	863	4 / 16
112522MR	H22	102	422	1590	2 / 16

1125SR



KT NO.	inch	mm	mm	g	
112502SR	1/16	16	92	2	20 / 400
112525SR	5/64	18	102	3	20 / 400
112503SR	3/32	21	115	5	20 / 400
112504SR	1/8	23	129	9	20 / 400
112505SR	5/32	29	144	17	20 / 300
112506SR	3/16	33	165	28	20 / 300
112508SR	1/4	38	186	57	10 / 100
112510SR	5/16	44	208	100	10 / 100
112512SR	3/8	50	234	160	10 / 100
112516SR	1/2	57	262	319	8 / 48
112518SR	9/16	70	294	459	8 / 48







KT NO.	PC.	Spec.		Contents	Kg	
20218MR	8	Knife type		H2, H2.5, H3, H4, H5, H6, H8, H10	0.29	12 / 72
20219MR	9	Standard arm	1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.33	6 / 48
20219SR	9		1145SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.33	6 / 48
20208MR	8	Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20209MR	9		1125MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20209SR02	9		1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.47	8 / 48

Hex Key Set

20208MR01 | 20208SR01



8 PC.

KT NO.	Spec.	Contents	1.25 / 1 / 20
20208MR01	Extra long arm	1125MR	H3, H4, H5, H6, H8, H10, H12, H14
20208SR01		1125SR	1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 1/2, 9/16

20210MR

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)



10 PC.

Spec.	Contents	3.03 / 1 / 6
Extra long arm	1125MR	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17

L- wrench Set With Display Stnad

2020H0MR

- 5mm durable acrylic sheets to increase structural strength
- Transparent design for demonstrating product feature
- Great capacity, suitable for multi-size
- Size : 220 x 260 x 270mm



KT NO. 87125

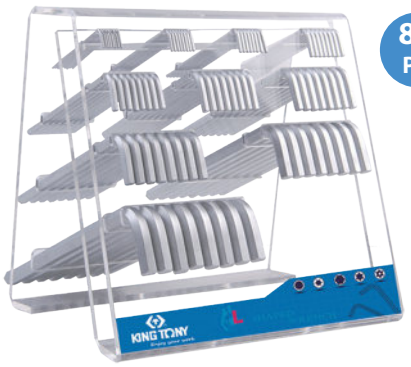

80 PC.

Spec.	Contents	7.68 / 1 / 4	Each Q'ty
Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12	8

Spline L- wrench & Set

1146MR

- Standard arm type
- For spline head screw



KT NO.	Size	mm	mm	g	
114605MR	M5	29	83	15	20 / 320
114606MR	M6	33	90	24	20 / 320
114608MR	M8	39	98	47	10 / 300
114610MR	M10	44	111	82	10 / 200
114612MR	M12	53	126	127	10 / 180

1126MR

- Extra long arm type



KT NO.	Size	mm	mm	g	
112605MR	M5	33	165	29	20 / 300
112606MR	M6	38	186	47	20 / 300
112608MR	M8	44	208	91	10 / 100
112610MR	M10	50	234	160	10 / 100
112612MR	M12	53	264	239	10 / 80

20505PR01 | 20515PR01

5 PC.



KT NO.	Spec.	Contents			
20505PR01	Standard arm type	1146MR	M5, M6, M8, M10, M12	0.33	6 / 54
20515PR01	Extra long arm type	1126MR	M5, M6, M8, M10, M12	0.63	4 / 32

Ball Hex Key & Set

KT No. & D1



- Material - SNCM - V alloy steel
- Finishing - chrome plated

1130MR

- Long arm with ball point type
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
113015MR	H1.5	16	64	1	20 / 400
113002MR	H2	18	77	2	20 / 400
113025MR	H2.5	21	88	4	20 / 400
113003MR	H3	23	93	7	20 / 400
113004MR	H4	29	104	14	20 / 400
113005MR	H5	33	120	25	20 / 300
113006MR	H6	38	141	41	10 / 160
113008MR	H8	44	158	84	10 / 150
113010MR	H10	50	180	145	10 / 150

1130SR



KT NO.	inch	mm	mm	g	
113002SR	1/16	18	80.0	2	20 / 400
113025SR	5/64	19	85.0	2	20 / 400
113003SR	3/32	21	90.0	4	20 / 400
113004SR	1/8	24	101.0	8	20 / 400
113005SR	5/32	27	111.0	14	20 / 400
113006SR	3/16	30	121.0	24	20 / 300
113007SR	7/32	34	131.0	31	10 / 150
113008SR	1/4	36	142.0	44	10 / 150
113010SR	5/16	42	162.5	78	10 / 150
113012SR	3/8	46	183.0	138	10 / 150

1120MR

- Extra long arm with ball point type
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
112015MR	H1.5	16	92	1	20 / 400
112002MR	H2	18	102	3	20 / 400
112025MR	H2.5	21	115	5	20 / 400
112003MR	H3	23	129	9	20 / 480
112004MR	H4	29	144	17	20 / 300
112005MR	H5	33	165	31	20 / 300
112006MR	H6	38	186	51	20 / 400
112007MR	H7	41	197	73	20 / 400
112008MR	H8	44	208	99	10 / 100
112010MR	H10	50	234	174	10 / 100



20107MR01 20109MR 20119MR01

KT NO.	PC.	Spec.		Contents	Kg	
20107MR01	7	Long arm / ball	1130MR	H2.5, H3, H4, H5, H6, H8, H10	0.37	10 / 60
20107SR	7		1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.36	10 / 60
20108MR	8	Extra long arm / ball	1120MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20109MR	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20119MR01	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8	0.36	6 / 48
20110MR	9	Long arm / ball	1130MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.39	6 / 60
20129SR	9		1130SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.39	6 / 60

Star L- wrench

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated

1143R

- Standard arm type
- For torx head screw



KT NO.	Size	mm	mm	g	
114310R	T10	19	49	3	20 / 400
114315R	T15	20	57	5	20 / 400
114320R	T20	23	62	7	20 / 400
114325R	T25	25	70	10	20 / 400
114327R	T27	29	77	14	20 / 400
114330R	T30	35	86	23	10 / 200
114340R	T40	42	97	37	10 / 200
114345R	T45	47	110	54	10 / 200
114350R	T50	50	124	76	10 / 200

1147R

- Standard arm type
- Tamper-resistant type
- For torx head screw



KT NO.	Size	mm	mm	g	
114710R	T10H	18	50	3	20 / 400
114715R	T15H	20	56	5	20 / 400
114720R	T20H	24	62	7	20 / 400
114725R	T25H	26	68	10	20 / 400
114727R	T27H	30	76	14	20 / 400
114730R	T30H	36	86	23	10 / 200
114740R	T40H	41	97	36	10 / 200
114745R	T45H	46	107	54	10 / 200
114750R	T50H	52	122	75	10 / 200

1123R

- Extra long arm type
- For torx head screw



KT NO.	Size	mm	mm	g	
112310R	T10	18	92	6	20 / 400
112315R	T15	20	103	9	20 / 400
112320R	T20	22	115	12	20 / 400
112325R	T25	25	130	18	20 / 300
112327R	T27	29	146	25	20 / 300
112330R	T30	35	165	40	20 / 300
112340R	T40	40	182	61	10 / 100
112345R	T45	45	202	89	10 / 100
112350R	T50	49	225	126	10 / 100

1127R

- Extra long arm type
- Tamper-resistant type
- For torx head screw

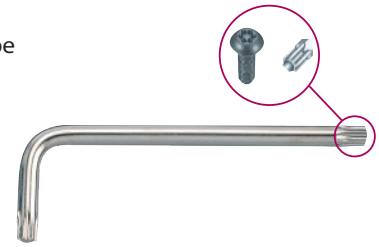

KT NO.	Size	mm	mm	g	
112710R	T10H	18	92	5	20 / 400
112715R	T15H	20	103	8	20 / 400
112720R	T20H	22	115	12	20 / 400
112725R	T25H	25	130	17	20 / 300
112727R	T27H	29	146	25	20 / 300
112730R	T30H	35	165	40	20 / 300
112740R	T40H	40	182	60	10 / 100
112745R	T45H	45	202	89	10 / 100
112750R	T50H	49	225	126	10 / 100

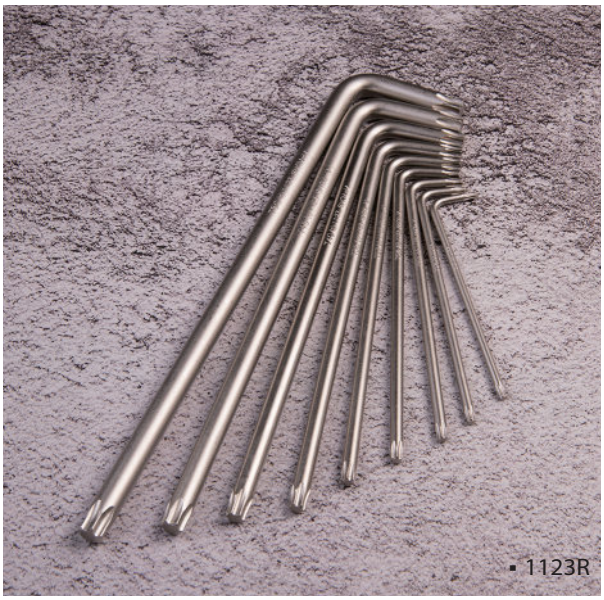

▪ 1123R



▪ 1147R

Extension Pipe

- Material - SNCM - V alloy steel
- Finishing - chrome plated

20002UB

128 | 6/ 36

Contents	Overall length (mm)	AØ mm	BØ mm
S : 5 x 6mm	110	11	10
L : 8 x 10mm	150	16	14



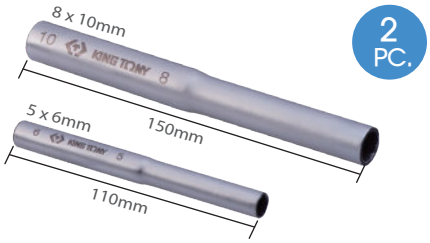

2 PC.

L- wrench & Extension Pipe Set



Caution :
Please be careful not to overtighten.
Do not use any other L-wrench that is incompatible with the pipe size.



KT NO.	PC.	Spec.	Contents		Kg	
20109MRU	11	Extra long arm / ball	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.62	11 / 66
			20002UB	5 x 6, 8 x 10		
20319PRU	11	Extra long arm	1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.67	11 / 66
			20002UB	5(T40) x 6(T45), 8(T50) x 10		

Stubby L- wrench Set

- The "SPECIAL SHORT ARM" L1 length is designed to be 1/3 as short as other wrenches to allow easy work in cramped places
- The "SPECIAL SHORT ARM" is made with a 90 degree bend for high workability in small spaces without risk of pinched fingers

33% shorten





KT NO.	PC.	Spec.	Contents		Kg	
201A09MR	9	Extra long arm / ball		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	10 / 60
203A19PR	9	Extra long arm		T10, T15, T20, T25, T27, T30 T40, T45, T50	0.45	10 / 60

Ball Hex Key & Set

201B09MR

- Set of ball head offset key wrench, extra long arm







KT NO.	PC.	Spec.	Contents	Kg	
201B09MR	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	8 / 48

Ball End Star L-wrench Set

204B29PR

- Set of ball head offset key wrench, long modle, for torx internal screw



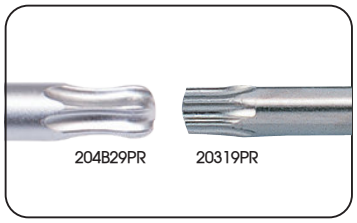





KT NO.	PC.	Spec.	Contents	Kg	
204B29PR	9	Standard arm / ball	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.37	6 / 48



Star L-wrench Set



knife type



Standard arm



Extra long arm

KT NO.	PC.	Spec	Contents	Kg	
20307PR	7	Standard arm 1143R	T10, T15, T20, T25, T27, T30, T40	0.13	15 / 120
20407PR	7	Standard arm / Tamper-resistant 1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.13	15 / 120
20308PR	8	Knife type	T9, T10, T15, T20, T25, T27, T30, T40	0.20	12 / 72
20318PR	8	Knife type	T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.20	12 / 72
20309PR	9	Standard arm 1143MR	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.30	6 / 48
20319PR	9	Extra long arm 1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.45	8 / 48
20409PR	9	Standard arm / Tamper-resistant 1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.34	6 / 48
20419PR	9	Extra long arm / Tamper-resistant 1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.47	8 / 48

Bicycle Repair Tool

20A16MR

- 16-in-1 bicycle repair tool set

Contents	300 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
8, 9, 10 mm		
PH2		
5.0		
Spoke Wrench: 14GE	Extension bar 1/4" DR.	
Wrench: 8 / 10 / 15 mm		



20A17MR

- 20-in-1 bicycle repair tool set

Contents	305 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
9, 10, 12, 13, 15		
PH2		
5.0		
Socket : 8mm		
Spoke Wrench: 14GE / 15GE / 0.136"		
Chain Wrench x 1	Tire Lever x 2	



Aluminum Folding Hex Key Wrench Set

20317MR

- 7-in-1 aluminum folding hex key wrench set

Spec	Contents	90 g	10 / 200
knife type	H1.5, H2, H2.5, H3, H4, H5, H6		



L- type Wrench

KT No. & D1



- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1160MR

- Hexagon with ball point head

KT NO.	mm	mm	mm	g	
116002MR	H2	95	145	14	10 / 200
116025MR	H2.5	95	145	17	10 / 200
116003MR	H3	95	145	20	10 / 200
116004MR	H4	95	145	29	10 / 200
116005MR	H5	150	215	66	10 / 200
116006MR	H6	150	215	84	10 / 200
116007MR	H7	150	215	105	10 / 200
116008MR	H8	200	280	188	10 / 80
116010MR	H10	200	280	265	10 / 80

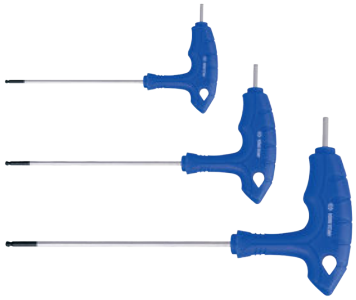

1163R

- For torx internal screw
- Tamper-resistant type

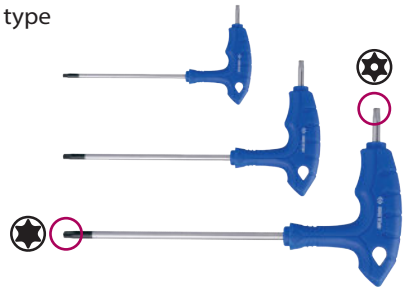

KT NO.	Size	mm	mm	g	
116310R	T10H	95	145	22	10 / 200
116350R	T50H	200	280	209	10 / 80

1165MR

- For hexagon head screw

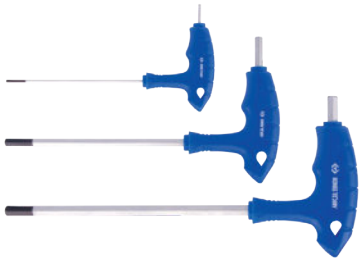

KT NO.	mm	mm	mm	g	
116502MR	H2	95	145	14	10 / 200
116525MR	H2.5	95	145	17	10 / 200
116503MR	H3	95	145	20	10 / 200
116504MR	H4	95	145	29	10 / 200
116505MR	H5	150	215	66	10 / 200
116506MR	H6	150	215	84	10 / 200
116507MR	H7	150	215	107	10 / 200
116508MR	H8	200	280	190	10 / 80
116510MR	H10	200	280	289	10 / 80

1163TR

- For torx internal screw
- Tamper-resistant type

KT NO.	Size	mm	mm	g	
116310TR	T10	95	145	22	10 / 200
116315TR	T15	95	145	23	10 / 200
116320TR	T20	95	145	31	10 / 200
116325TR	T25	95	145	31	10 / 200
116327TR	T27	150	215	78	10 / 200
116330TR	T30	150	215	78	10 / 200
116340TR	T40	150	215	97	10 / 200
116345TR	T45	200	280	176	10 / 80
116350TR	T50	200	280	209	10 / 80

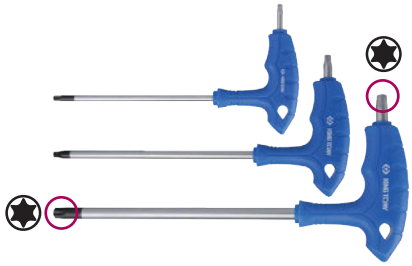

L- type Wrench Set



► Tray



► Shelf

KT NO.	PC.	Spec	Contents	Package	Kg	
22106MR	6	Ball & hex two way type	1160MR H3, H4, H5, H6, H7, H8	Tray	0.68	1 / 20
22108MR	8	Ball & hex two way type	1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22208MR	8	Hex head	1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22306TR	6	torx head	1163TR T10, T15, T20, T25, T30, T40	Tray	0.46	1 / 20
22309TR	9	torx head	1163TR T10, T15, T20, T25, T27, T30, T40, T45, T50	Tray	1.00	1 / 10
22118MR	8	Ball & hex two way type	1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22218MR	8	Hex head	1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22319TR	9	torx head	1163TR T10, T15, T20, T25, T27, T30, T40, T45, T50	Shelf	1.12	1 / 12

T - type Wrench

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1150MR

▪ Hexagon with ball point head



KT NO.	mm	mm	mm	mm	g	
115002MR	H2	100	137	90	28	10 / 200
115025MR	H2.5	100	137	90	30	10 / 200
115003MR	H3	100	137	90	32	10 / 200
115004MR	H4	100	137	90	38	10 / 200
115005MR	H5	150	188	100	65	10 / 200
115006MR	H6	150	188	100	79	10 / 200
115008MR	H8	200	240	120	159	10 / 120
115010MR	H10	200	240	120	217	10 / 120

1155MR

▪ Hexagon head

1155SR



KT NO.	mm / inch	mm	mm	mm	g	
115502MR	H2	100	137	90	28	10 / 200
115525MR	H2.5	100	137	90	30	10 / 200
115503MR	H3	100	137	90	32	10 / 200
115504MR	H4	100	137	90	38	10 / 200
115505MR	H5	150	188	100	65	10 / 200
115506MR	H6	150	188	100	79	10 / 200
115508MR	H8	200	240	120	159	10 / 120
115510MR	H10	200	240	120	217	10 / 120
115525SR	5/64	100	137	90	19	10 / 200
115503SR	3/32	100	137	90	21	10 / 200
115504SR	1/8	100	137	90	25	10 / 200
115505SR	5/32	100	137	90	30	10 / 200
115506SR	3/16	150	188	100	56	10 / 200
115508SR	1/4	150	188	100	78	10 / 200
115510SR	5/16	200	240	120	158	10 / 120
115512SR	3/8	200	240	120	202	10 / 120

T - type Wrench & Set



KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1153R

- For torx head screw



KT NO.	Size	mm	mm	mm	g	
115310R	T10	100	137	90	40	10 / 200
115315R	T15	100	137	90	40	10 / 200
115320R	T20	100	137	90	40	10 / 200
115325R	T25	100	137	90	40	10 / 200
115327R	T27	150	188	100	73	10 / 200
115330R	T30	150	188	100	74	10 / 200
115340R	T40	150	188	100	88	10 / 200
115345R	T45	200	240	120	173	10 / 120
115350R	T50	200	240	120	173	10 / 120

11A3R

- For torx head screw



KT NO.	Size	mm	mm	mm	g	
11A310R	T10	200	237	90	53	12 / 192
11A315R	T15	200	237	90	53	12 / 192
11A320R	T20	200	237	90	53	12 / 192
11A325R	T25	200	237	90	53	12 / 192
11A327R	T27	200	238	100	86	10 / 160
11A330R	T30	200	238	100	86	10 / 160
11A340R	T40	200	238	100	105	10 / 160



KT NO.	PC.	Spec		Contents	Kg	
21108MR	8	Ball hex type	1150MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208MR	8	Hexagon type	1155MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208SR	8		1155SR	5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	1.10	1 / 12
21309PR	9	torx head type	1153R	T10, T15, T20, T25, T27, T30, T40, T45, T50	1.20	1 / 12

23208MR

- Perfect for when you need more leverage than a standard hex, or space is limited and you can't get a good swing on a standard wrench
- Spring and ball detent to secure the Sliding T
- It turns fasteners quickly and continuously with free spinning collar

8 PC.



• Speed & Efficiency



• Locking Stopper



• Extension



KT NO.	PC.	Spec		Contents	Kg	
23208MR	8	Hexagon type	1195AM	H2, H2.5, H3, H4, H5, H6, H8, H10	1.64	1 / 6

T - handle Wrench

- Material - Chrome vanadium steel
- Finishing - chrome plated

1195M

- 6 Points
- For hexagon head screw
- The handle pin can be removed for another wrench
- The 10mm size is with chrome plated end





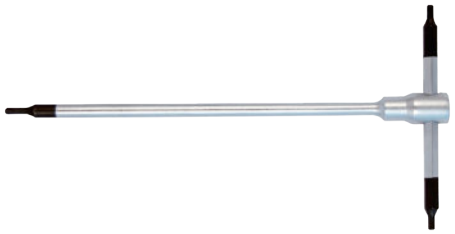

KT NO.	mm	mm	mm	g	
119502M	H2	64	127	22	10 / 200
119525M	H2.5	64	127	22	10 / 200
119503M	H3	64	127	22	10 / 200
119504M	H4	90	181	64	10 / 200
119505M	H5	90	182	65	10 / 200
119506M	H6	105	210	135	6 / 48
119508M	H8	124	250	224	4 / 32
119510M	H10	145	300	386	5 / 50

Wing Handle torx Screwdriver & Set

1153A



KT NO.	Size	mm	mm	mm	g	
1153A05R	T5	45	84	35	7	20 / 200
1153A06R	T6	45	84	35	7	20 / 200
1153A07R	T7	45	84	35	7	20 / 200
1153A08R	T8	45	84	35	7	20 / 200
1153A09R	T9	45	84	35	10	20 / 200
1153A10R	T10	45	84	35	10	20 / 200
1153A15R	T15	45	84	35	10	20 / 200
1153A20R	T20	45	84	35	10	20 / 200

23308PR

8 PC.



Contents

0.26 kg | 1 / 20



1153A

T5, T6, T7, T8, T9, T10, T15, T20

Flag Handle torx Screwdriver & Set

1163A



KT NO.	Size	mm	mm	mm	g	
1163A05R	T5	45	84	31	6	20 / 200
1163A06R	T6	45	84	31	6	20 / 200
1163A07R	T7	45	84	31	6	20 / 200
1163A08R	T8	45	84	31	6	20 / 200
1163A09R	T9	45	84	31	9	20 / 200
1163A10R	T10	45	84	31	9	20 / 200
1163A15R	T15	45	84	31	9	20 / 200
1163A20R	T20	45	84	31	9	20 / 200

24308PR

8 PC.



Contents

0.27 g | 1 / 20



1163A

T5, T6, T7, T8, T9, T10, T15, T20





VDE INSULATED TOOLS

Ps. VDE insulated ratchet and VDE insulated socket and accessory series must be used with KING TONY VDE insulated tools.

They cannot be used with hand tools or other brands of VDE insulated tools.





Standard Socket

2335VE — 1/4"

- IEC 60900:2012



KT NO.	mm	L mm	g	
2335VE05M	5	41	14	5 / 45
2335VE06M	6	41	15	5 / 45
2335VE07M	7	41	15	5 / 45
2335VE08M	8	41	15	5 / 45
2335VE09M	9	41	16	5 / 45
2335VE10M	10	41	18	5 / 45
2335VE11M	11	41	21	5 / 45
2335VE12M	12	41	23	5 / 45
2335VE13M	13	41	23	5 / 45
2335VE14M	14	41	26	5 / 45

Bit Socket

2035VE — 1/4"

- IEC 60900:2012



KT NO.	mm	L mm	g	
2035VE03	H3	54	18	5 / 45
2035VE04	H4	54	18	5 / 45
2035VE05	H5	54	19	5 / 45
2035VE06	H6	54	20	5 / 45

Ratchet

2771VE — 1/4"

- IEC 60900:2012



KT NO.	Overall length mm	g	
2771VE-55	150	140	2 / 32

Accessory

2221VE — 1/4"

IEC 60900:2012



KT NO.	Overall length mm	g	
2221VE-04	100	47	4 / 36
2221VE-06	150	68	4 / 48

2178VE — 1/4"

- IEC 60900:2012



KT NO.	mm	g	
2178VE-05	125	82	4 / 40

Insulated Tool Set

25VE01MRV — 1/4"

- IEC 60900:2012

Handy case size (mm) :
294 x 231 x 66 (1.835cuft)

Contents		1.30 kg	1 / 10
2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14,		
2035VE	H3, H4, H5, H6		
2221VE	4, 6		
2771VE-55	2178VE-05		



18 PC.

Standard Socket

3335VE — 3/8"

- IEC 60900:2012



KT NO.	mm	L mm	g	
3335VE06M	6	44.5	25	5 / 45
3335VE07M	7	44.5	26	5 / 45
3335VE08M	8	44.5	27	5 / 45
3335VE09M	9	44.5	27	5 / 45
3335VE10M	10	44.5	28	5 / 45
3335VE11M	11	44.5	29	5 / 45
3335VE12M	12	44.5	29	5 / 45
3335VE13M	13	44.5	32	5 / 45
3335VE14M	14	44.5	35	5 / 45
3335VE15M	15	46	40	5 / 45
3335VE16M	16	46	42	5 / 45
3335VE17M	17	46	47	5 / 45
3335VE18M	18	46	48	5 / 60
3335VE19M	19	46	51	5 / 60
3335VE20M	20	46	55	5 / 60
3335VE21M	21	46	59	5 / 60
3335VE22M	22	46	63	5 / 60
3335VE24M	24	46	66	5 / 60

Deep Socket

3235VE — 3/8"

- IEC 60900:2012



KT NO.	mm	L mm	g	
3235VE08M	8	79	52	5 / 50
3235VE10M	10	79	60	5 / 50
3235VE12M	12	79	68	5 / 50
3235VE14M	14	79	76	5 / 50

Bit Socket

3025VE — 3/8"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
3025VE04	H4	65	37	5 / 50
3025VE05	H5	65	38	5 / 50
3025VE06	H6	65	39	5 / 50
3025VE08	H8	65	42	5 / 50
3025VE10	H10	65	51	5 / 50

Ratchet

3771VE — 3/8"

- IEC 60900:2012



KT NO.	Overall length mm	g	
3771VE-08	200	300	2 / 20

Accessory

3221VE — 3/8"

- IEC 60900:2012



KT NO.	Overall length mm	g	
3221VE-06	150	150	4 / 48
3221VE-10	250	250	4 / 24

3178VE — 3/8"

- IEC 60900:2012



KT NO.	mm	g	
3178VE-08	200	240	2 / 12

Insulated Tool Set

35VE01MRV — 3/8"

- IEC 60900:2012

Handy case size (mm) :
389 x 229 x 66 (1.49cuft)

Contents — 2.16 kg | 1 / 6

3335VE	10, 11, 12, 13, 14, 17, 19	
3025VE	5, 6, 8,	
3221VE	6, 10,	
3771VE-08	3178VE-08	



14 PC.

VDE INSULATED TOOL

Standard Socket

4335VE 1/2"

- IEC 60900:2012



KT NO.	mm	L mm	g	
4335VE08M	8	55	54	5 / 40
4335VE10M	10	55	55	5 / 40
4335VE11M	11	55	57	5 / 40
4335VE12M	12	55	58	5 / 40
4335VE13M	13	55	59	5 / 40
4335VE14M	14	55	62	5 / 40
4335VE15M	15	55	60	5 / 40
4335VE16M	16	55	60	5 / 40
4335VE17M	17	55	70	5 / 50
4335VE18M	18	55	77	5 / 50
4335VE19M	19	55	72	5 / 50
4335VE20M	20	55	80	5 / 50
4335VE21M	21	55	73	5 / 50
4335VE22M	22	55	87	5 / 50
4335VE24M	24	55	96	5 / 50
4335VE27M	27	59	125	5 / 50
4335VE30M	30	59	146	5 / 50
4335VE32M	32	59	170	5 / 50

Bit Socket

4025VE 1/2"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
4025VE04	H4	75	78	5 / 50
4025VE05	H5	75	78	5 / 50
4025VE06	H6	75	79	5 / 50
4025VE08	H8	75	80	5 / 50
4025VE10	H10	75	89	5 / 50

4035VE 1/2"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
4035VE04	H4	120	99	5 / 50
4035VE05	H5	120	99	5 / 50
4035VE06	H6	120	100	5 / 50
4035VE08	H8	120	102	5 / 50
4035VE10	H10	120	121	5 / 50

Ratchet

4771VE 1/2"

- IEC 60900:2012



KT NO.	Overall length mm	g	
4771VE-10	250	570	2 / 20

Accessory

4251VE 1/2"

- IEC 60900:2012



KT NO.	Overall length mm	g	
4251VE-05	125	210	4 / 40
4251VE-10	250	410	4 / 40

4178VE 1/2"

- IEC 60900:2012



KT NO.	mm	g	
4178VE-08	200	330	2 / 12

Insulated Tool Set

45VE01MRV 1/2"

- IEC 60900:2012

Handy case size (mm) :
389 x 229 x 66 (1.49cuft)

Contents	Kg 3.22	1 / 6
4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24	
4025VE	H8, H10	
4251VE	5, 10	
4771VE-10	4178VE-08	



16 PC.

Open End Wrench & Set

10F0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10F0VE-07	7	88	20	5 / 50
10F0VE-08	8	104	26	5 / 50
10F0VE-09	9	104	26	5 / 50
10F0VE-10	10	114	40	5 / 50
10F0VE-11	11	124	60	5 / 50
10F0VE-12	12	124	60	5 / 50
10F0VE-13	13	154	90	5 / 50
10F0VE-14	14	154	90	5 / 50
new 10F0VE-15	15	171	127	5 / 50
10F0VE-16	16	170	125	5 / 50
10F0VE-17	17	170	125	5 / 50



KT NO.	Size mm	L mm	g	
10F0VE-18	18	180	150	5 / 50
10F0VE-19	19	180	150	5 / 50
new 10F0VE-20	20	202	215	5 / 50
10F0VE-21	21	202	215	5 / 50
10F0VE-22	22	202	215	5 / 50
new 10F0VE-23	23	238	323	5 / 40
10F0VE-24	24	237	318	5 / 40





►MRN : Tetoron pouch bag

KT NO.	PC.		Contents	Package	Kg	
12FVE08MRN	8		10, 11, 12, 13, 14, 17, 18, 19	Tetoron	0.91	1 / 10
12FVE10MRN	10	10F0VE	10, 11, 12, 13, 14, 16, 17, 18, 19, 22	Tetoron	1.28	1 / 10

75° Offset Ring Wrench

10G0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10G0VE-07	7	149	62	5 / 50
10G0VE-08	8	164	70	5 / 50
10G0VE-09	9	164	70	5 / 50
10G0VE-10	10	174	80	5 / 50
10G0VE-11	11	184	90	5 / 50
10G0VE-12	12	184	90	5 / 50
10G0VE-13	13	205	140	5 / 40
10G0VE-14	14	205	140	5 / 40
new 10G0VE-15	15	218	164	5 / 40



KT NO.	Size mm	L mm	g	
10G0VE-16	16	221	185	5 / 40
10G0VE-17	17	221	185	5 / 40
10G0VE-18	18	237	235	5 / 50
10G0VE-19	19	237	235	5 / 50
10G0VE-21	21	257	295	5 / 40
10G0VE-22	22	257	295	5 / 40
10G0VE-24	24	287	390	5 / 40

Adjustable Wrench

3611VE

- IEC 60900:2012

KT NO.	mm	L mm	g	
3611VE-06	24	164	167	4 / 32
3611VE-08	28	212	273	4 / 32
3611VE-10	32	260	497	4 / 32
3611VE-12	38	310	679	4 / 24



- Grip material-TPR
- Chrome vanadium steel
- Polished head
- IEC DIN EN 60900

Combination Pliers

6116





KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6116-07A	7-1/2	185	4.0	3.0	2.0	1.6	290	10 / 60
6116-08A	8	200	4.0	3.0	2.0	1.6	386	10 / 60

Cable Cutting Pliers

6146




KT NO.	L inch	L mm	ø mm	g	
6146-08A	8-1/4	214	14	360	10 / 60

Diagonal Cutting Pliers

6216




KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6216-06A	6-1/2	167	4.0	2.8	2.0	1.6	230	10 / 60

Heavy Duty Diagonal Cutting Pliers

6236




KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6236-07A	7-1/2	190	5.0	3.5	2.4	2.0	280	10 / 60

Long Nose Pliers

6318


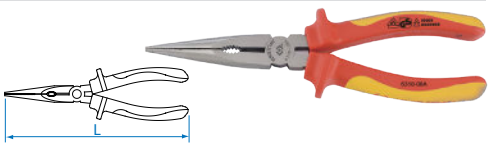

KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6318-08A	8-1/4	210	4.0	2.8	2.0	1.6	230	10 / 60

Bent Nose Pliers

6336


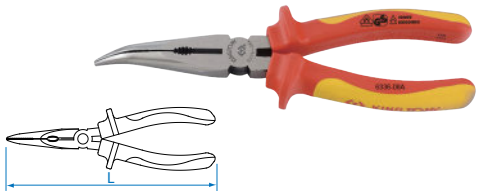

KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6336-08A	8	200	4.0	3.0	2.0	1.6	250	10 / 60

Groove Joint Pliers

6516

- Box joint





KT NO.	A mm	B mm	L inch	L mm	mm	g	
6516-10A	55	63	10	250	36	420	10 / 50

Stripping Pliers

6716

- With spring


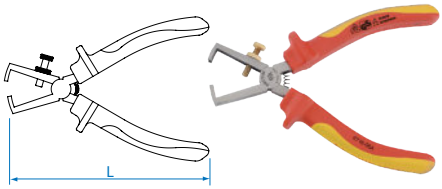

KT NO.	L inch	L mm	ø mm	Wire stripper mm²	g	
6716-06A	6-1/4	160	5	10	205	10 / 60

Insulated Pliers Set

40603GP

3 PC.



Contents — 0.89 kg — 1 / 20


6116-07A


6318-08A


6216-06A

Insulated Screwdriver

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1471

- Phillips head, round shank
- IEC 60900:2012

KT NO.	No.	mm	inch	mm	g	
14710003	PH0	75	3	3.0	37	12 / 144
14710104	PH1	100	4	4.5	54	12 / 216
14710204	PH2	100	4	6.0	77	12 / 144
14710306	PH3	150	6	8.0	135	12 / 144



147E

- Terminal Block Screwdriver
- Phillips / Slotted hand, round shake
- IEC 60900:2012



KT NO.	No.	mm	inch	mm	g	
147E0104	SL/PH1	100	4	4.5	61	12 / 216
147E0204	SL/PH2	100	4	6.0	85	12 / 144



1472

- Slotted head, round shank
- IEC 60900:2012

KT NO.	mm	inch	mm	mm	inch	mm	g	
14722503	2.5	-	0.4	75	3	2.5	35	12 / 144
14720303	3	1/8	0.5	75	3	3.0	38	12 / 144
14720404	4	3/16	0.8	100	4	4.0	44	12 / 96
14723504	3.5	1/8	0.6	100	4	3.5	54	12 / 144
14725505	5.5	7/32	1	125	5	5.5	72	12 / 144
14726506	6.5	1/4	1.2	150	6	6.5	87	12 / 144
14720807	8	5/16	1.2	175	7	8.0	143	12 / 144



1474

- Square head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14740105	RB1	125	5	5.5	72	12 / 144
14740206	RB2	150	6	6.5	87	12 / 144



1478

- Pozidriv head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14780003	PZ0	75	3	3.0	37	12 / 144
14780104	PZ1	100	4	4.5	54	12 / 96
14780204	PZ2	100	4	6.0	77	12 / 144
14780306	PZ3	150	6	8.0	135	12 / 144



Insulated Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



0.86 | 1 / 20

KT NO.	PC.	Contents	
30606MR	6	1471	PH0 x 75, PH2 x 100, PH3 x 150
		1472	3 x 75, 4 x 100, 6.5 x 150
30607MR	7	1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175
		1478	PZ1 x 100, PZ2 x 100, PZ3 x 150
30607MR02	7	1471	PH1 x 100, PH2 x 100
		1472	4 x 100, 5.5 x 125, 6.5 x 150
		1474	1 x 125, 2 x 150
30617MR	7	1471	PH1 x 100, PH2 x 100, PH3 x 150
		1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175



0.50 | 1 / 30

KT NO.	PC.	Contents	
30605MR	5	1472	4 x 100, 5.5 x 125, 6.5 x 150
		1478	PZ1 x 100, PZ2 x 100
30615MR	5	1471	PH1 x 100, PH2 x 100
		1472	4 x 100, 5.5 x 125, 6.5 x 150



VDE INSULATED TOOL

IC SPECIALIZED TOOLS & MEASURING TOOLS




KING TONY
7946-07
KING TONY
6761-07
6AB33-

Precision Pliers

6207-05

Diagonal cutting nippers

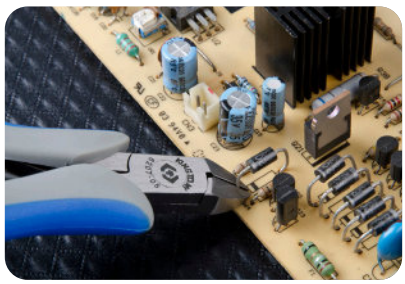



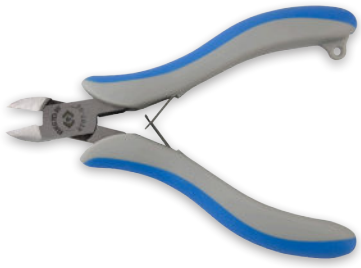

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	g	
6207-05	4-3/4	118	2.0	1.6	10.8	11.5	7.1	88	6 / 120

6927-05

For plastic

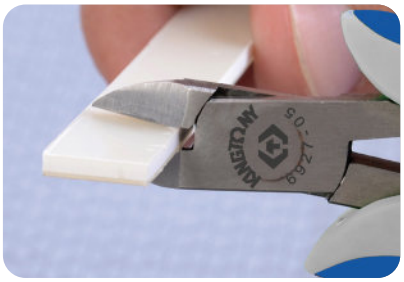



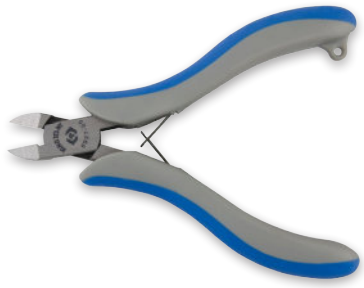

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	g	
6927-05	4-3/4	118	10.3	11.5	7.1	71	6 / 120

6217-05

Diagonal cutting nippers









KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6217-05	4-3/4	118	2.0	1.0	35°	11.8	17	12.7	17.7	76	6 / 120

6247-05

Diagonal cutting nippers

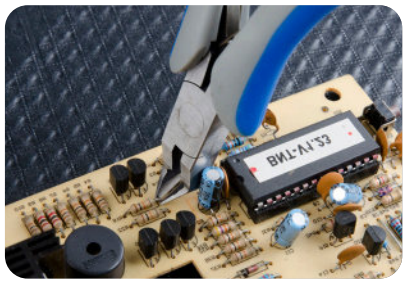



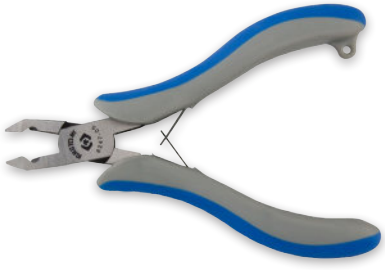

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6247-05	5	125	1.0	0.5	45°	11.4	19.4	7.5	55	73	6 / 120

Precision Pliers

6271C

Diagonal cutting nippers

- The cutting edge hardness at least 73° HRC up





- The cutting edge is made from tungsten steel for an extremely long service life.





KT NO.	Overall length inch	Overall length mm	●	A mm	B mm	C mm	g	
6271-05C	5	125	0.6	13.2	15	7.1	77	6 / 120
6271-65C	6-1/2	160	0.6	19.2	26	10.7	151	6 / 120

6317-06

Long nose pliers

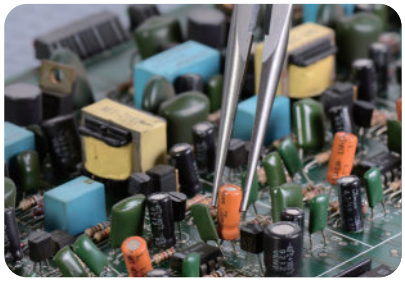





KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	D mm	E mm	g	
6317-06	6	157	2.0	1.6	11.6	50	7.5	2	2	84	6 / 120

6367-06

Half-round nose pliers

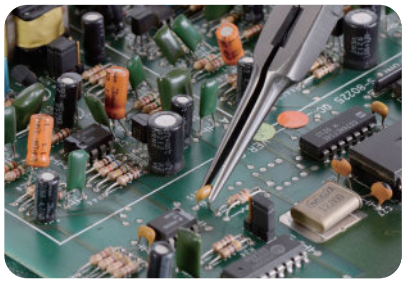





KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	D mm	E mm	g	
6367-06	6	154	2.0	1.6	11.7	46	7.5	1.5	1.7	78	6 / 120

6377-55

Half-round nose pliers





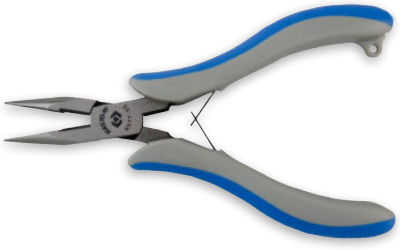

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	D mm	E mm	g	
6377-55	5-1/2	138	2.0	1.6	11.3	30	7.5	1.5	1.5	97	6 / 120

Precision Pliers

6337-06

Bent nose pilers







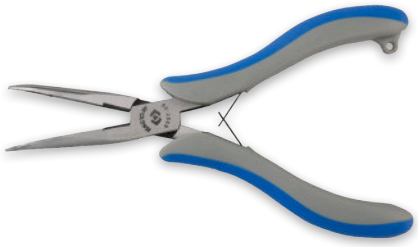

KT NO.	Overall length inch	Overall length mm	Cutting capacities ø mm	Cutting capacities ø mm	α	A mm	B mm	C mm	D mm	E mm	F mm	g	
6337-06	6	154	2.0	1.6	40°	11.3	50	7.5	2	2.5	14	84	6 / 120

6347-05

Round-nose pliers

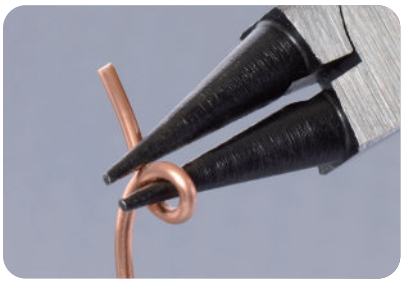



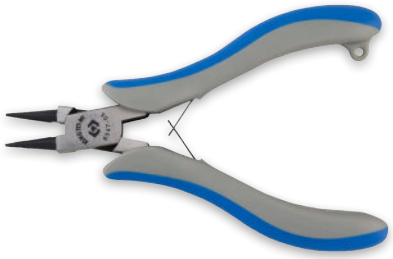

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
6347-05	5	128	11.4	24.9	7.5	1	2.14	74	6 / 120

63A7-05

Round-nose pliers

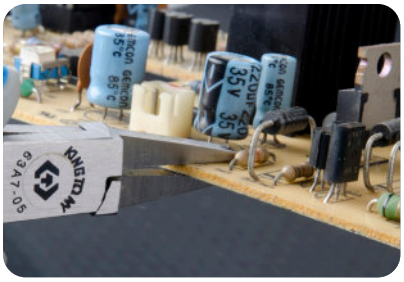



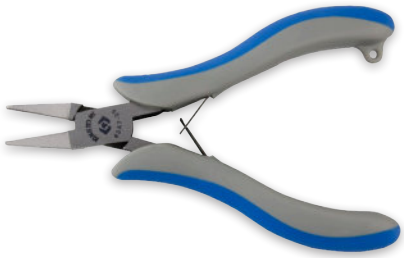

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63A7-05	5	128	11.5	24.7	7.5	3.3	1.8	75	6 / 120

63B7-05

Round-nose pliers

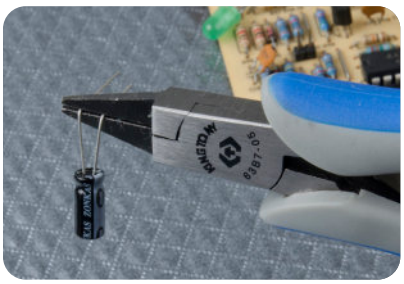



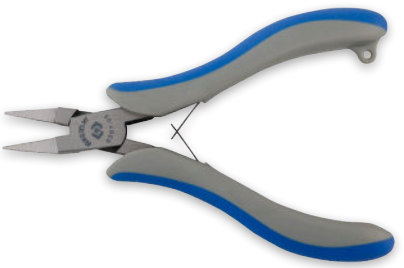

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63B7-05	5	128	11.5	24.7	7.5	1.3	1.8	74	6 / 120

Precision Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP
- Finishing - chrome plated with black tip

1431

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	Ø mm	mm	g	
14313015	PH000	1.5	40	7	10 / 320
14312015	PH00	2.0	40	7	10 / 320
14311015	PH0	3.0	40	13	10 / 100
14311115	PH1	4.0	40	16	10 / 100
14313003	PH000	1.5	75	8	10 / 320
14312003	PH00	2.0	75	8	10 / 320
14311003	PH0	3.0	75	14	10 / 100
14311103	PH1	4.0	75	18	10 / 100



1432

- Slotted head, round shank
- Metric size
- DIN 5263

KT NO.	mm	mm	mm	Ø mm	g	
14320615	0.6	0.15	40	3.0	9	10 / 320
14320815	0.8	0.19	40	3.0	9	10 / 320
14321015	1.0	0.20	40	3.0	9	10 / 320
14321515	1.5	0.23	40	3.0	10	10 / 320
14321815	1.8	0.30	40	3.0	10	10 / 320
14322015	2.0	0.40	40	2.0	11	10 / 100
14322515	2.5	0.40	40	2.5	12	10 / 100
14323015	3.0	0.50	40	3.0	13	10 / 100
14323515	3.5	0.60	40	3.5	14	10 / 100
14324015	4.0	0.80	40	4.0	16	10 / 100
14321003	1.0	0.20	75	3.0	11	10 / 320
14321503	1.5	0.23	75	3.0	11	10 / 320
14321803	1.8	0.30	75	3.0	11	10 / 320
14322003	2.0	0.40	75	2.0	11	10 / 100
14322503	2.5	0.40	75	2.5	13	10 / 100
14323003	3.0	0.50	75	3.0	15	10 / 100
14323503	3.5	0.60	75	3.5	16	10 / 100
14324003	4.0	0.80	75	4.0	18	10 / 100



1433

- For torx head, round shank

KT NO.	Size	Ø mm	mm	g	
14330415	T4	3	40	10	10 / 320
14330515	T5	3	40	10	10 / 320
14330615	T6	3	40	10	10 / 100
14330715	T7	3	40	10	10 / 100
14330815	T8	3	40	10	10 / 320
14330902	T9	4	50	16	10 / 100
14331002	T10	4	50	16	10 / 100
14331502	T15	4	50	16	10 / 100
14332002	T20	4	50	16	10 / 100
14330403	T4	3	75	11	10 / 320
14330503	T5	3	75	11	10 / 320
14330603	T6	3	75	11	10 / 320
14330703	T7	3	75	11	10 / 320
14330803	T8	3	75	11	10 / 320
14330903	T9	4	75	18	10 / 100
14331003	T10	4	75	18	10 / 100
14331503	T15	4	75	18	10 / 100
14332003	T20	4	75	18	10 / 100



Precision Screwdriver & Set

91230

- Screwdriver handle for interchangeable blades 2431, 2433
- Handle material - polypropylene (PP)



KT NO.	mm		
91230	100	12	10 / 100

2431

- Combination type
- Phillips / Slotted head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip



KT NO.	No.	mm	mm	mm	mm		
24312020	PH00	2.0	0.30	4	120	11	20 / 200
24311030	PH0	3.0	0.50	4	120	11	20 / 200
24311140	PH1	4.0	0.60	4	120	11	20 / 200

2433

- Combination type
- Torx head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip



KT NO.	Size	mm	mm		
24330610	T6 x T10	4	120	11	20 / 200
24330715	T7 x T15	4	120	11	20 / 200
24330820	T8 x T20	4	120	11	20 / 200
24330915	T9 x T15	4	120	11	20 / 200

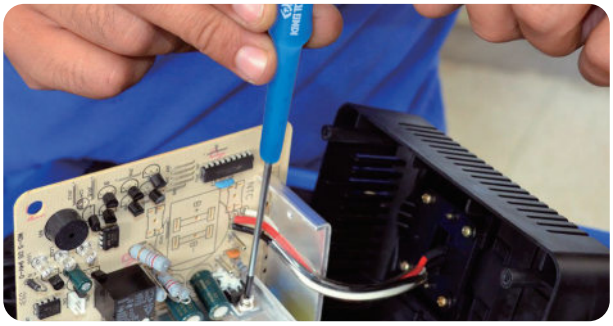

KT NO.	PC.	Contents		
32218MR	8	1432 — 1.0 x 75, 1.5 x 75, 1.8 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75, 3.5 x 75, 4.0 x 75	0.32	1 / 30
32209MR	9	1432 — 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	0.26	1 / 30
32108MR	8	1431 — PH000 x 40, PH00 x 40,PH0 x 40, PH1 x 40 1432 — 1.5 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40	0.29	1 / 30
32118MR	8	1431 — PH000 x 75, PH.00 x 75, PH0 x 75, PH1 x 75 1432 — 1.5 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75	0.36	1 / 30
32308PR	8	1433 — T5 x 40, T6 x 40, T7 x 40, T8 x 40, T9 x 50, T10 x 50, T15 x 50, T20 x 50	0.32	1 / 30
32309PR	9	1433 — T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40, T9 x 50, T10 x 50, T15 x 50, T20 x 50	0.26	1 / 30
32607MR	8	91230 2431 — PH00 x 2.0, PH0 x 3.0, PH1 x 4.0 2433 — T6 x T10, T7 x T15, T8 x T20, T9 x T15	0.22	1 / 30



Precision Screwdriver Set

31419MR

- Precision screwdriver set

KT NO.	Contents		Each Q'ty
31419MR	1431	PH000 x 40, PH00 x 40, PH0 x 40, PH1 x 40	6
	1432	0.6 x 40, 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	
	1433	T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40	



114 PC.

Screwdriver shelf size (mm) : 383 x 136 x 130

Packing NO.	Spec.	kg	CUFT
31419MR-A	87107	0.86	0.47
31419MR-D	114 PC. content	1.17	0.14

Soldering Iron

6BC23 — 30W

6BC26 — 60W

- 110V~240V, 30W, 40W, 60W, 100W
- For electrical and stained glass work

KT NO.	Voltage V	Rating W	g	
6BC23A	220-240	30	160	54
6BC23B	220-240	30	125	54
6BC23C	220-240	30	196	32
6BC23D	220-240	30	160	32
6BC23F	110-120	30	125	54
6BC24A	220-240	40	125	54
6BC24B	220-240	40	125	54
6BC24C	220-240	40	196	32
6BC24F	110-120	40	125	54
6BC26A	220-240	60	166	54
6BC26B	220-240	60	166	54
6BC26C	220-240	60	216	32
6BC26F	110-120	60	166	54
6BC210A	220-240	100	210	20
6BC210B	220-240	100	210	20
6BC210C	220-240	100	330	20
6BC210D	220-240	100	288	20
6BC210F	110-120	100	210	20

6BC24 — 40W

6BC210 — 100W

- Lightweight handle
- Replaceable tip
- No CE certification



6BC210



6BC23 / 6BC24 / 6BC26

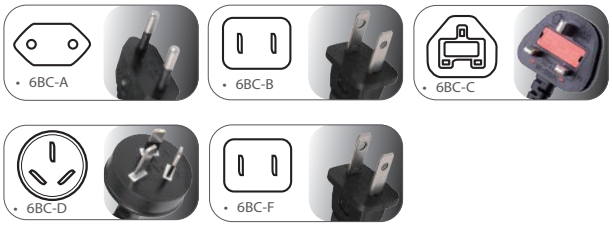

Soldering Iron Tip (Conical Type)

6BC23-1

6BC26-1

6BC26-3

- Copper-based iron tips are manufactured using patented process which produces a uniform iron and chrome plating thickness
- All tips are pre-tinned

KT NO.	Rating W	Ø mm	g	/
6BC23-1	30 / 40	4	13	100 / 4200
6BC26-1	60	6	16	100 / 1600
6BC26-3	60	6	16	100 / 1600



6BC23-1

6BC26-1

6BC26-3

Gas Soldering Iron Set

6BC3007

- Gas soldering iron set with four tips, reflector and desolder wire
- Power range: 30W-150W
- Soldering temperature: 400°C~450°C (750°F~840°F)
- Torch temperature: 1300°C (2400°F)
- Fuel capacity: 20ml
- Tank fuel for 90 minutes operation
- Ready to use 45 seconds after ignition



8 PC.

KT NO.	Contents	0.45	20
6BC372	Gas saldering iron 257mm		
6BC372-1	+ Conical		
6BC372-2	2.5mm round		
6BC372-3	3.5mm chisel		
6BC372-4	4.5mm angle		
6BC372-5	Reflector		
6BF21-17	Desolder wire / Sn 99.3%, Cu 0.7%		
	Foam		










Desolder Wire

6BF11-17

- 40% lead and 60% tin



KT NO.	Size mm		
6BF11-17	1.0	17	20 / 480

Desoldering Pump

6BD11

- One-hand operation
- ABS Body, teflon nozzle


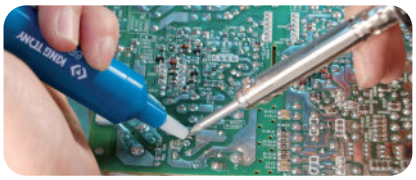

KT NO.	Overall length mm		
6BD11	195	42	8 / 32

6BD22

- Anti-static solder desoldering pump
- Teflon suction head
- Aluminum body





• Turn down the body




• Clean

• Turn up the body

KT NO.	Overall length mm		
6BD22	197	85	50 / 100

Soldering Aid

6BE11-07

- Brush / Scraper :
  For removing flux residue and surplus solder

6BE12-07

- Scraper / Curved Probe :
  For component and lead extraction

6BE16-07

- Pointed / Slotted Probe :
  Fits wire up to 22AWG
  For wrapping and unwrapping etc

KT NO.	Overall length mm		
6BE11-07	175	15	1 / 200
6BE12-07	175	15	1 / 200
6BE16-07	180	15	1 / 200

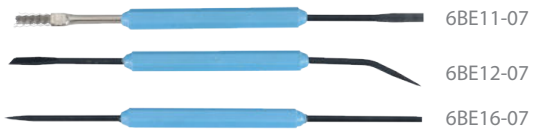






Straight Fine Point Tweezers

6AF11-125

- Stainless steel with straight fine point
- Used for soldering integrated circuit chip, installing or replacing components
- It's suitable for doing precise repairing work



KT NO.	Overall length mm		
6AF11-125	124	16	50 / 800

Reverse Action Tweezers

6AF21-165

- Stainless steel with tapered tips and flat points
- For holding small parts when soldering or spraying



KT NO.	Overall length mm		
6AF21-165	172	29	30 / 480

Mini Soldering Iron Stand

6BC100

- Lightweight and high temperature bakelite resistance
- Mini size, easy to take
- Used for holding solder iron

12 | 12 / 240



Soldering Iron Stand with Sponge

6BC200

- Suitable for most pencil type soldering irons
- Convenient for easy storage
- Sponge for tip cleaning
- Double spiral spring construction prevents the hot soldering iron from accidentally burning the surface of other objects when it is inserted into the stand

187 | 4 / 24



Punch Down Tool

6AH

- For setting wire into terminal blocks or cut off wire end after terminated
- Blade : 66 & 110/88 & Krone type

KT NO.	Type	Overall length inch	mm	g	
6AH11	110/88	6-3/4	170	140	20 / 80
6AH12	KRONE	6-3/4	170	140	20 / 80
6AH13	66	6-3/4	170	140	20 / 80
6AH14	66 &110/88	6-3/4	170	140	20 / 80

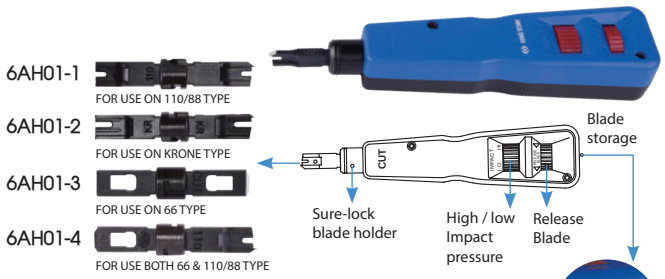

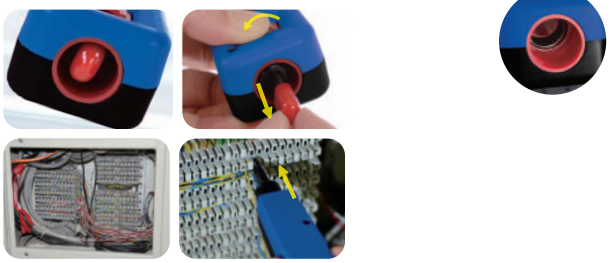

PVC Electrical Insulation Tape

6AG11-20



KT NO.	Width mm	g	
6AG11-20	18	52	1 / 250

Electronic Tool Set

- To repair electronic equipment....etc.

90217PQ



6BC23B
Soldering iron 220V/30W

90217PQ01



6BC23A
Soldering iron 220V/30W

90217PQ02



6BC23D
Soldering iron 220V/30W

90217PQ03



6BC23F
Soldering iron 110V/30W



17 PC.

Contents	Kg 1.26	1 / 8
1412	3 x 75, 5.5 x 100, 6.5 x 100	
1411	PH0 x 75, PH1 x 100, PH2 x 100	



Electrician Tool Box Set

97121PQ

- For electrician equipment

21 PC.



87407
Overall size :
445 x 240 x 206 mm

Contents	Kg 4.9	1	CUFT 0.79
1471	VDE PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150		
1472	VDE 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
6116-07A	VDE 7-1/2"		
6146-08A	VDE 8-1/4"		
6216-06A	VDE 6-1/2"		
6318-08A	VDE 8-1/4"		
6516-10A	VDE 10"		
6716-06A	VDE 6-1/4"		
6214-45	4-1/2"		
6334-05	5"		
6721-10			
6751-44			
6AB12-55			
7932-04			

Electrician Tool Bag Set

91333MQ

- For electrician equipment

Contents		6.02	1
⊕	1421	PH1 x 80, PH2 x 100	
⊖	1422	5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150	
⊕	1471	VDE PH2 x 100	
⊖	1472	VDE 6.5 x 150	
	6116-07A	VDE 7-1/2"	
	6216-06A	VDE 6-1/2"	
	6318-08A	VDE 8-1/4"	
	6716-06A	VDE 6-1/4"	
	20109MR	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10	
	20129SR	1/16, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 5/64	
	3611-08R	200mm	
	79093-05C	5M/16FT 19mm	
	7971-07	165mm	

33 PC.



87711C
Overall size :
550 x 285 x 370 mm / 39 inner pockets

91038MY01

- For electronic & electrician equipment…etc

Contents		3.13	1
⊕	1421	PH0 x 60, PH1 x 80, PH2 x 100	
⊖	1422	3 x 75, 5 x 75, 6.5 x 100	
	6207-05	6377-55	6AB12-55
	6BF11-17	6BD11	6313-06
	7976-65	6AF11-125	6732-09
	6BC24A 220V / 40W	87137	6BC200 6AG11-20
	6BE11-07	6BE12-07	6BE16-07
	9DM1361	1036ZQ	ST20219MY1
	87721B		

38 PC.



87721B
Overall size : 360 x 200 x 250 mm

Lit when in DC mode measurement

Lit when in AC mode measurement

Negative polarity indicator-lit when the polarity is negative

AUTO Auto range indicator

Lit when in continuity check

Lit when in diode check

D-H Date hold indication

Lit when the battery is low

MΩ KΩ Ω

Unit for resistance measurement

mV V Unit for voltage measurement

1.8.8.8 Numeral date display

hFE Lit when in transistor hFE check

μA mA A

Unit for current measurement

LCD DISPLAY

SELECT KEY

DATA HOLD KEY



INPUT TERMINAL 10A USEAGE ONLY

· The Max. protective fuse for μA、μA、mA、mA is 0.5A/250V

· The Max.protective fuse for 10A、10A is 15A/250V

POWER & FUNCTION SWITCH

AC voltage measurement

DC voltage measurement

AC/DC current measurement in micro-amperes

AC/DC current measurement in milli-amperes

10A AC/DC current measurement in 10 amperes

NPN Transistor in NPN hFE measurement

LED LED test

AC or DC measurement

OFF Turn off the power

PNP Transistor in PNP hFE measurement

Ω

Resistance measurement / Diode test / Continuity check

Digital Multimeter

9DM1361

- Date hold, auto range, auto power off selection, auto power off cancelation
- Unit & function indication, Maximum reading value 1999 digits. Negative polarity indicator (no indication is given for positive polarity)
- Low power consumption
- Fuse with : 500mA / 600V & 10A / 600V
- AAA battery x 2 PC. included
- CE approval IEC61010-1 (2010), CAT.II 600V, CAT.III 300V



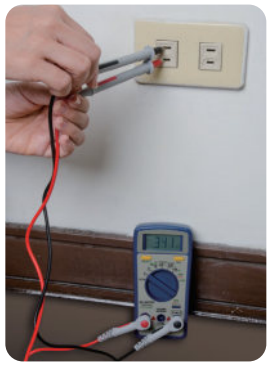

Specification	
DC Voltages (0.1mV ~ 1V)	200mV / 2V / 20V / 200V / 600V
AC Voltages (0.001V ~ 1V)	2V / 20V / 200V / 600V
DC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
AC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
Resistance (0.1Ω ~ 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
hFE(NPN, PNP)	Yes
LED check	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 2000 counts
Sampling rate	3 times / sec

KT NO.	Size (mm) L x W x H	g	
9DM1361	138 x 70 x 32	85	10 / 60

Digital Multimeter

9DM1381

- Pocket size with flip cover design
- Approx. 4300 counts LCD display
- Auto range, auto power off selection
- Low power consumption
- LR44 battery x 2 PC. included
- CE approval EN61010-1, CAT.II 600V, CAT.III 300V
- Attachable test leads, easy operation





Specification	
DC Voltages (0.1mV ~ 1V)	400mV / 4V / 40V / 400V / 600V
AC Voltages (0.001V ~ 1V)	4V / 40V / 400V / 600V
Resistance (0.1Ω ~ 0.01MΩ)	400Ω / 4kΩ / 40kΩ / 400kΩ / 4MΩ / 40MΩ
Continuity check	Yes
Diode test	Yes
Overload indicator	OL
Low battery indicator	Yes
Sampling rate	Approx. 2 times / sec

KT NO.	Size (mm) L x W x H	g	
9DM1381	117 x 76 x 18	121	20 / 80

Digital Clamp Meter

9DM2351

- Max clamp size : Ø 30mm
- Unit & function indication, maximum reading value 1999 digits
- Negative polarity indicator (no indication is given for positive polarity)
- Auto power off selection approx. 15 minutes
- Low power consumption
- AAA battery x 2 PC. included
- CE approval IEC 61010-1, IEC 61010-2-032
  CAT.III 600V Pollution Degree 2
- Attachable test leads, easy operation





Specification	
AC Ampere (0.1A - 1A)	200A / 600A
AC Voltages (0.001V - 1V)	2V / 20V / 200V / 600V
DC Voltages (0.1mV - 1V)	200mV / 2V / 20V / 200V / 600V
Resistance (0.1Ω - 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 1999 counts
Sampling rate	3 times / Sec.
Overload indicator	OL

KT NO.	Size (mm) L x W x H	g	
9DM2351	189 x 71 x 37	354	5 / 40





AC Non-contact Voltage Tester

6CB31

- Voltage ranges : 80 to 1000V AC.(50~60Hz)
- Application :
  AC voltage in outlets, lighting, circuit breakers, wires and cables etc..
- Adjustable sensitivity voltage detection
- Visible LED light voltage indicator in tip
  (Green light is high gear, red light is low gear)
- AAA battery x 2 PC. included
- Standard category :
  EN 61000-6-3 / EN 61000-6-1 CAT III



KT NO.	Overall size (mm) L x W x H	g	
6CB31	160 x 20 x 24	72	10 / 100

Measurement level

The input voltage should not exceed the maximum value.

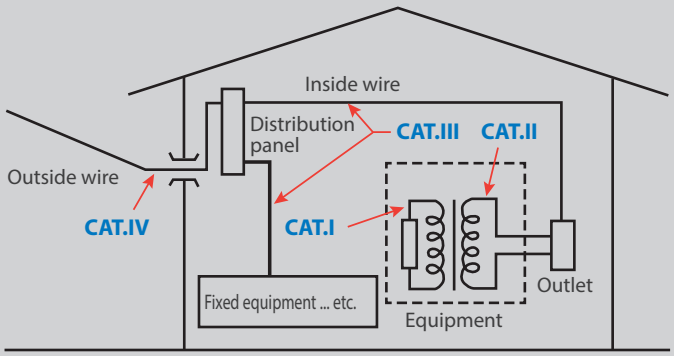

Measurement level	Description	Example
CAT.I	Measurement directly connected to the power supply circuit board	The secondary of the transformer measured
CAT.II	Measurement board directly connected to the low voltage devices	Equipment, portable devices
CAT.III	Equipment within the building	Distribution panels, circuit breakers
CAT.IV	Sources of all low voltage installations	Overhead lines, cable facilities

9 in 1 Multifunctional Wire Stripper

6CB41

- Non-contact voltage detection 80 - 1000V, 3 minutes auto power off
- Application: AC voltage in outlets, lighting, circuit breakers, wires and cables etc
- Illumination: COB LED
- Magnetic pads which can be useful for holding small components like nuts and bolts
- Screwdriver No. PH2 x1
- Battery: 3V (AAA 1.5V x2) Included
- Standard category: CAT IV 1000,
  EN 61010-1 : 2010/A1 : 2019, EN 62471 : 2008,
  EN 61326-1 : 2013, EN 61326-2-2 : 2013


• Magnetic


• Lock



• Cut



• Stripper(romex cable type NM-B)



• Stripper


• Stripper


• Volt tester


• Measurement


• Screwdriver (Use 65mm-70mm)



KT NO.	Wire stripper	Stripping romex cable	Stripping round cable Ø mm	Wire cutter Ø mm	g	
6CB41	mm^2-0.5, 0.8, 1.3, 2.0, 3.3, 5.0, 8.0 AWG-20, 18, 16, 14, 12, 10, 8	12~2	8~10	7	220	1 / 50

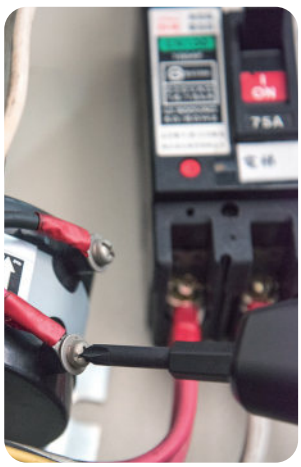





Infrared Thermometer

9DN12

- Not necessary to contact with the object
- IR point can be displayed clearly
- °C and °F interchangeable functions
- Selection of different materials
- Dark screen backlight test board functions
- 15 seconds automatically turn off the screen
- 9V battery x 1 PC. (included)

Technical data	
Temperature range	-30~550°C (-22~1022°F)
Operating temperature	0~50°C
Resolution	0.1°C / 0.1°F
Accuracy	±2.5% OR 3°C
Emissivity	Selectable (0.85 / 0.90 / 0.95)
Distance to spot ratio	12 :1
Auto power off	15 seconds
Laser pointer	Class 2 Laser < 1 mW

KT NO.	Overall Size (mm) L x W x H	g	
9DN12	193 x 47 x 126	313	5 / 20







Testing Screwdriver

6CB02

- Testing range : 100~250V
- CE approval
- Don't use the testing screwdriver as screwdriver
- Neon indicator



KT NO.	mm	mm	mm	mm	Testing range	g	
6CB02	3	0.6	65.5	140	100~250V	15	12 / 288

Digital Voltage Tester

6CB21

- Self-Diagnostic test
- Built-in LED flashlight
- LCD Display
- Protection IP64
- AAA 1.5V x 2 PC.
- Standard category :
  EN 61243-3 / IEC 61243-3
  EN 61010-1 / IEC 61010-1
  CAT.III 690V / CAT.IV 600V

KT NO.	Overall Size (mm) L x W x H	g	
6CB21	255 x 66 x 30	250	5 / 20

Specification	
DC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Polarity indication	Yes
AC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Phase rotation test	Yes
High voltage indication	≧ 50V
Frequency range	0-70Hz
Continuity test	0~550KΩ
Operation condition	-10~55°C










KING TONY
Distance ratio
12:1
-30~550°C
KING TONY
9DM1361
AUTO RANGE
KING TONY
9DM2352
AC/DC
CLAMP METER
HOLD
SEL./REL.
COM
CAT III
600V

WIRE & CABLE TOOLS



Electrician Scissors

6AB13-06

- High cutting performance by low cutting force



- 38mm² wire



Ergonomic design, handles made of high compressive strength and non-slip nylon fiber + TPV
Special handle design, also suitable for the left-hander

Blades made of AUS-8, serrated on the edge can prevent objects from slip away, soft cable, up to dia 38mm², insulation materials, electrical tape cable tie

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	g	
6AB13-06	6	150	26	2	38	114	12 / 72

6AB21-65

- Curved mouth cable cutter
- Safety blade locking system





KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity Ø mm	g	
6AB21-65	6-1/2	158	22	10	156	12 / 72

Multi-purpose Scissors

6AB12-55

- Stainless steel with serrated edges
- Grip material - PP + TPR



KT NO.	Overall length mm	(mm)	Cutting capacities (mm) Electric cable	Cardboard	Rubber	Leather	Rolled steel	Copper (soft)	Aluminum	g	
6AB12-55	145	55	10	10	10	10	0.5	0.5	0.5	94	12 / 72

6AB31

- Even mouth cable cutter
- Safety blade locking system



6AB31-75



6AB31-85

KT NO.	Overall length inch	Overall length mm	Cutting capacity mm	AWG	mm²	Cutting capacity Leather	Copper(soft)	Aluminum	g	
6AB31-75	7-1/2	185	52	16-12	1.5-4.0	2.0	0.5	0.5	160	12 / 72
6AB31-85	8-1/2	214	78	16-12	1.5-4.0	2.0	0.5	0.5	196	12 / 72

- Cut cable , cardboard , rubber , leather , rolled steel , copper (soft) , aluminum , carpet , branch and so on.

Cable Cutting Pliers

6141C

- Polished head
- For cutting copper and aluminum cables, single and multiple wire





KT NO.	Overall length inch	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG	g	
6141-06C	6	160	33	2	169	6 / 120
6141-08C	8-3/8	212	67	2 / 0	282	6 / 60

Cable Cutter

6AD

- Cable cutter for cutting copper and aluminum cable





- Can be use with : 67B3-55 439 / 6AC51 444

KT NO.	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG(MCM)	Kg	
6AD17-150	435	150	300	1.34	1 / 20
6AD23-400	595	400	800	1.84	1 / 10

Ratcheting Cable Cutter

6AD10-325

- Cut soft copper, aluminum and multiple conductor cable to 325mm² (600MCM)
- Cuts hard drawn copper to 200mm² (400MCM)





KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	g	
6AD10-325	255	325	600	613.2	10 / 30
6AD10-3P01	Spare cutting blade			58	1 / 100

6AD16-500

- Cut soft copper, aluminum and multiple conductor cable to 500mm² (1000MCM)





KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	Kg	
6AD16-500	400	500	1000	1.60	1 / 10

Electrician Knife

7932-04

- Electrician knife with wire stripper
- 1 blade with half-moon notch for stripping and vee for cutting



KT NO.	Blade length mm	Closed length mm	Overall length mm	g	
7932-04	85	110	196	75	10 / 180





7933-45

- Straight blade electrician knife



KT NO.	Blade length mm	Closed length mm	Overall length mm	g	
7933-45	85	120	205	111	10 / 180

Utility Cutter

7971-07

- Automatically reloading snap-off blades
- Ergonomic soft ABS TPR handle
- Stainless steel blade guide
- Blade lock knob
- 4-blade cartridge(18mm)

KT NO.	L mm	g	
7971-07	165	180	6 / 72



- 3 blades in storage







7978-07

- 3-blade cartridge with automatically reloading function
- Material : SK4 (HRC ≧ 62)
- 0.5mm thickness and 18mm width

KT NO.	L mm	g	
7978-07	175	131	12 / 144



- Quickly remove blade & automatically reload function





- 3 blades in storage



7978-07-S

Paper display stand size(mm) :
172 x 1360 x 222mm (2.75CUFT)



12 PC.

KT NO.	Contents		kg	
7978-07-S	 7978-07	x 12 PC.	1.58	1 / 12

Utility Cutter

7977-07

- Heavy duty 18mm wide cutting knife with snap off blades
- Exceptional cutting performance with SK4 blade (HRC ≧ 65)
- Provides sharper and more stable cutting with a high hardness cutting edge


7977-07P02
(18mm, 10 PC.)

KT NO.	L mm	N.W	G.W	CUFT		
7977-07	180	20	22	2.13	117	12 / 144
7977-07P02	-	10	12	1.06	9	200 / 2400



7977-07-S

Paper display stand size(mm) :
265 x 162 x 245 (0.37CUFT)

12 PC.

KT NO.	Contents			
7977-07-S	 7977-07	x 12 PC.	2.23	4



Folding Clasp Knife

7941-08

- Suitable for mechanics, outdoor and camping etc
- Blade fixator folded out
- Light and handy to use
- Stainless Blade with blacking coating
- With belt clip

KT NO.	L mm		
7941-08	210	166	8 / 48









Multi-purpose Wire Stripper

6751-44

- Wire stripper
- Wire cutter
- Cable stripper





Preparation blade

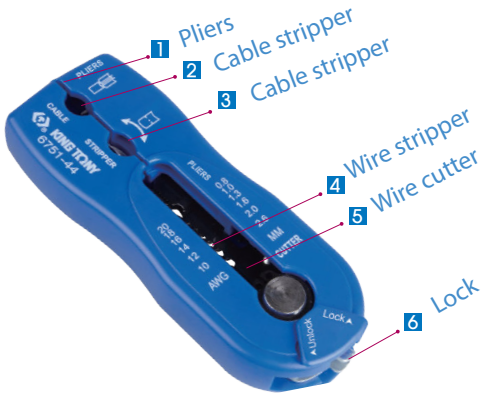

KT NO.	Wire stripper Ø mm	AWG	Cable stripper Ø mm	Wire cutter Ø mm		
6751-44	0.8-2.6	20-10	6-10	6	116	10 / 120

Wire Stripper

6762-08



• Insulated terminal crimping



• Wire stripper



• Wire cutter



KT NO.	Wire stripper mm²	AWG	Wire cutter Ø mm	Insulated terminal crimping mm²	AWG		
6762-08	0.2-6	24-10	6	0.5-6	22-10	271	15 / 60

67A1-07







KT NO.	Wire stripper mm²	AWG	Wire cutter Ø mm		
67A1-07	0.05-3.5	30-12	5	209	12 / 60

Wire Stripper Pliers

6761-07

- Aluminum body design for light weight
- Special design of strip length setting function for quickly operate
- SK5 knife







KT NO.	Wire stripper mm²	Overall length mm		
6761-07	0.9, 1.25, 2, 3.5, 5.5	178	271	10 / 60

Cable Stripper

6755-05

- UTP/STP, flat cable stripper & cutter
- Material : ABS





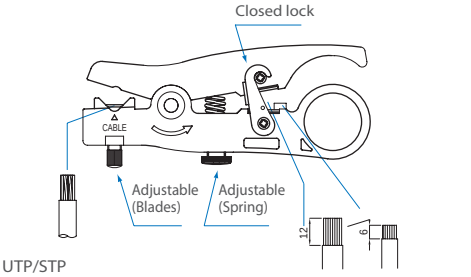

UTP/STP
Cable stripper
(Ø 2.6 ~ Ø 8.0)

Flat cable
stripper / cutter
RJ-45 (12 mm)
RJ-11/12 (6 mm)

UTP/STP cable stripper	(Ø 2.6 ~ Ø 8.0)
Flat cable stripper / cutter	RJ-45 (12 mm), RJ-11/12 (6 mm)

KT NO.	Overall length inch	mm	g	
6755-05	5	127	72	20 / 120

Coax. Cable Stripper

6756-05

- 2-Blades model
- Material : ABS









Stripper dimension "d"	6.4 mm 
Stripper distance 2-Blades model	RG-174/58/59/62/6 3C/4C/5C (Ø 2.6 ~ Ø 8.0)

KT NO.	Overall length inch	mm	g	
6756-05	5	127	68	20 / 120

Fiber Optic Stripper

67B1-06

- Three in one model performs all common fiber stripping functions
- Safety locking system for easy and steady stripping
- Ergonomic handle for comfort grip



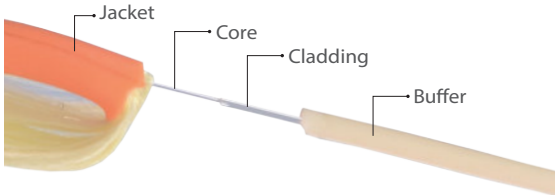



- To strip the 2.0-3.0 mm fiber jacketing



- 600-900 micron buffer layer stripping



- Strips the 250 micron cable down to the glass fiber without scratching or nicking glass fiber

KT NO.	Overall length inch	mm	Stripping range ◆mm	◆µm	◆µm	g	
67B1-06	6	150	2.0-3.0	600-900	250	130	10 / 100

Multi-stripper

67B2-05

KT NO.	Overall length inch	Overall length mm	g	pcs / box
67B2-05	4-3/4	120	69	15 / 90

Stripping capacity
• Round cables between : 8-13mm
• Wire cable : 0.5 1.0 1.5 2.5 4.0 6.0mm^2
• AWG : 20 18 16 14 12 10
• Coax.cable : RG-6 / RG-59

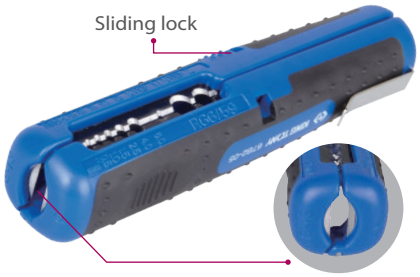

Cable Stripper

67B3-55

- Fast and safe stripping of round cable sheaths made of PVC or rubber from 6-45mm dia
- Adjustable knurled nut for max 6mm sheath

KT NO.	Cable stripper Ø mm	Overall length inch	Overall length mm	g	pcs / box
67B3-55	6-45	5-1/2	140	170	10 / 100



• Can be use with : 6AC51 444 / 6AD 434



• Adjustable cutting depth



• Push cover



• Simple rotating the tool body









• Remove the cable sheaths without damage of the inner conductors

Cable Tie Fasten Tool

67E2-08

- Fasten nylon ties, up to 9mm in width
- Long stroke for fast action
- Tails cut separately to desired length

KT NO.	L mm	Max. cutting width (mm)	g	pcs / box
67E2-08	191	9	310	5 / 40





■ Crimp die profiles

Symbol	
 	Phone plugs 6 pin
 	Modular plugs 8 pin
 	Insulated terminal connectors
 	Non-Insulated terminal connectors
 	Pin terminal, Insulated & Non-Insulated ferrules
 	Non-Insulated terminal, Lug connectors

Symbol	
 	CATV "F", BNC , COAX , and fiber optics connectors
	
	
	

Modular Crimping Tool

67F1-08

- For cutting / stripping / crimping
- 2 types of plugs in 1 tool
- Grip material - PP+TPR



• 6P



• 8P



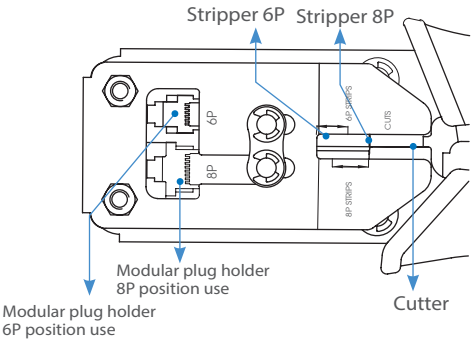

KT NO.	Overall length inch	Overall length mm	g	
67F1-08	8	203	370	10 / 40

Interchangeable Ratchet Crimping Tool Set

42107GX

- Quick interchangeable ratchet function & easy to use
- Crimping jaws with heat treatment
- Blow case size (mm) : 282 x 176 x 52 (0.09 cuft)

1.16 kg | 1 /10



7 PC.

Item No.	Replacement die set	Terminal size	Description	
6781P0A		AWG 12-10 / 16-14 / 22-18 / 0.5-1.0 / 1.5-2.5 / 4-6 mm²	Insulated Terminal	
6781P0B		AWG 1.5 / 2.5 / 8 / 10 mm²	Non-Insulated Terminal	
6781P0C		AWG 0.5-1 / 1.5 / 2.5 / 4-6 mm²	Open Barrel Terminal	
6781P0D		AWG 0.5 / 0.75 / 1 / 1.5 / 2.5 / 4 mm²	Insulated Core-end Terminal	
6781P0F		AWG 6 / 8 / 10 / 16 mm²	Insulated Huge Core-end Terminal	
6781P0H		AWG 0.5 / 2.5 / 8-6 / 8-10 / 14 / 22 mm²	Open Barrel & D-Sub, V.35 Connectors	
6781-85			Ratchet	

Ratchet Crimping Tool Set

67G0005

- Blow case size (mm) : 240 x 70 x 50 (0.07 cuft)

1 kg | 1 / 16



5 PC.



Item No.	Replacement die set	Terminal size	Description	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GJP01		AWG 6 / 8 / 10 6 / 10 / 16 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GKP01		AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	INTER-LOCKING & NON-INSULATED	
67GLP01		AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm²	NON-INSULATED TERMINAL	
67GHP01		AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	FOR INSULATED TERMINAL	

Ratchet Crimping Tool

67G

- For crimping RG type cable
- CATV "F" connectors
- Interchangeable die



KT NO.	Overall length inch	Overall length mm	g	
67G	8.7	222	480	1 / 30

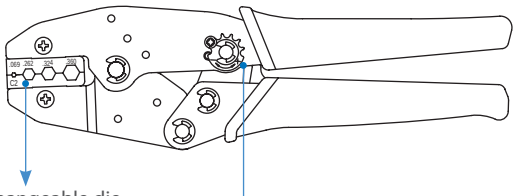





Item No.	Replacement die set	Terminal size	Description	
67G1-09	67G1P01	.068" .262" .324" .360" (1.72 6.65 8.23 9.14 mm)	CATV "F" Connectors RG59, 6	
67GB-09	67GBP01	.075" .100" .128" .429" (1.9 2.54 3.25 10.9 mm)	RG8, 9, 11, 174, 316 BELDEN 9913	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm^2	PIN TERMINAL INSUALTED OR NON-INSULATED FERRULES	
67GJ-09	67GJP01	AWG 6 / 8 / 10 6 / 10 / 16 mm^2	PIN TERMINAL INSUALTED OR NON-INSULATED FERRULES	
67GK-09	67GKP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	INTER-LOCKING & NON-INSULATED	
67GL-09	67GLP01	AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm^2	NON-INSULATED TERMINAL	
67GH-09	67GHP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	FOR INSULATED TERMINAL	
67GG-09	Unchangeable AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2		FOR INSULATED TERMINAL	







Crimping Tools

6721-10

- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Open barrel)
- Wire stripper



FUNCTION:



• Wire cutter



• Open barrel terminal crimping



• Non-Insulated terminal Crimping



• Bolt-cutter



• Insulated terminal Crimping



• Wire stripper

KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non insulated termind crimp	Open barrel terminal crimping	Wire stripper mm²	g	
6721-10	6	0.5~6	M2.6~5	0.5~6	1.5~6	0.75~6.0	294	50 / 50

6732-09

- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Ring)
- Wire stripper

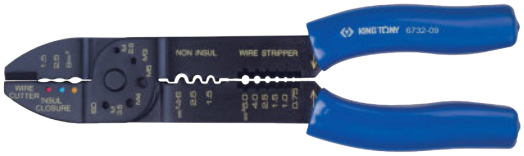

FUNCTION:



• Wire cutter



• Bolt-cutter



• Insulated terminal Crimping



• Wire stripper



• Non-insulated ring terminal crimping

KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non-insulated ring terminal crimping	Wire stripper mm²	g	
6732-09	6	1.5~6	M2.6~5	1.5~6	0.75~6.0	261	24 / 72

6741-06

- Wire cutter
- Wire stripper

FUNCTION:



• Wire cutter



• Wire stripper



• Peel the electric wire's shell



KT NO.	Wire cutter Ø mm²	Wire stripper mm²	g	
6741-06	6	0.5~5.5	103	10 / 100

Heavy Duty Crimping Tool

6AC51-26

▪ For cable lugs from 10mm^2-150mm^2 with non-ratchet screw adjustment





KT NO.	Overall length mm	kg	
6AC51-26	665	3.9	1 / 5

Crimping capacity

AWG	8	6	4	2	1/0	2/0	3/0	4/0	300MCM
JIS(mm^2)	8	14	22	38	60	70	80	100	150
DIN(mm^2)	10	16	25	35	50	70	95	120	150

6AC52-12

▪ Ratchet designed. For non-insulated terminals







KT NO.	Overall length inch	Overall length mm	g	
6AC52-12	12	300	520	6 / 24

Item No. \ AWG	16	14	10	8	6
JIS mm^2	1.25	2	5.5	8	14
DIN mm^2	1.5	2.5	6	10	16
6AC52-12	•	•	•	•	•




ELECTRONIC & ELECTRICAL
KING TONY
445

HAMMERS & STRIKING TOOLS




ϕ49 mm / 680 g / 24 OZ
KING TONY 7851-24
KING TONY 7811-12
3/4LB
7833-10

Hammer

Convert :
1g = 0.035 oz / 1g = 0.0022 lb

7811

- American style
- Forged and hardened steel
- Wood and metal wedge
- GGG-H86C

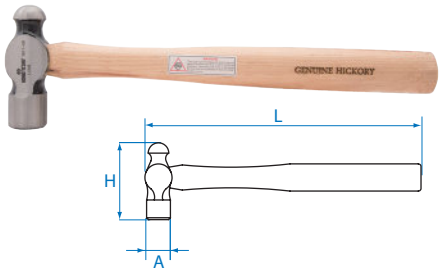

KT NO.	H.W g	A mm	H mm	L mm	g	
7811-08	245	25	80	300	391	6 / 60
7811-12	370	29	93	300	480	6 / 48
7811-16	485	32.5	103	353	651	6 / 36
7811-24	765	35.5	122	405	983	6 / 24
7811-32	925	40.5	125	405	1170	6 / 24
7811-40	1125	42.2	133	405	1344	6 / 12

7821

7821:

- German style
- Forged and hardened steel
- Wood and metal wedge
- DIN 1041

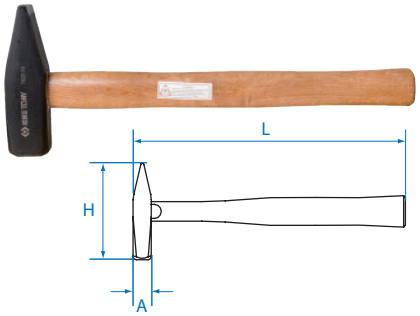

7823

7823:

- Engineer's hammer
- DIN1041

KT NO.	H.W g	A mm	H mm	L mm	g	
7821-30	371	23	103	300	395	12 / 48
7821-50	500	27	120.5	320	615	6 / 36
7821-80	800	33	130	350	990	6 / 24
7823-10	1000	36	135	360	1121	9 / 18
7823-15	1500	42	145	380	1666	6 / 12
7823-20	2000	47	155	400	2197	6 / 12

7822

- Riveting hammer
- NF E71-016

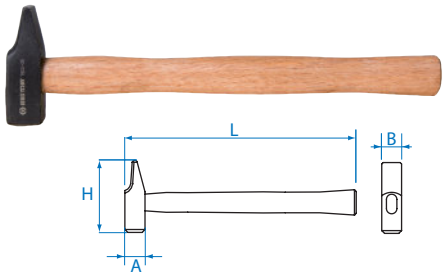

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7822-30	400	30	26	95	300	463	10 / 40
7822-40	800	40	35	115	320	977	8 / 16
7822-45	1250	45	40	124	355	1267	8 / 16
7822-50	1600	50	44	135	382	1856	6 / 12

7833

- Lump hammer
- DIN 6475

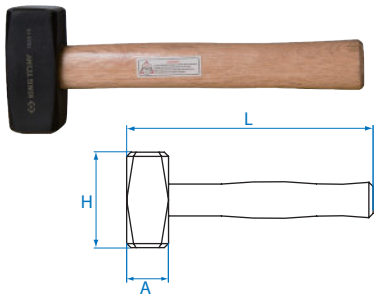

KT NO.	H.W g	A mm	H mm	L mm	g	
7833-10	1000	40	95	260	1066	7 / 14
7833-12	1250	43	100	260	1425	6 / 12
7833-15	1500	45	110	280	1642	6 / 12
7833-20	2000	50	120	300	2142	4 / 8

7834

- Sledge hammer
- Fiberglass handle

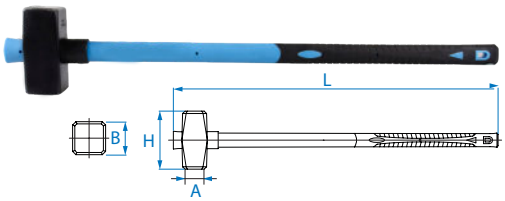

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7834-50	5000	66	66	160	895	5930	1 / 2

7852

- Rubber hammer
- Fiberglass handle

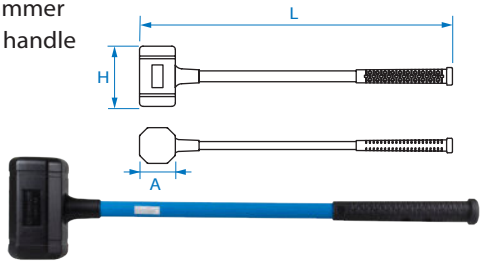

KT NO.	H.W g	A mm	H mm	L mm	g	
7852-23	1650	69.5	142	500	2062	4 / 8
7852-55	4500	104	198	910	5500	2 / 4

7861

- Fiberglass claw hammer

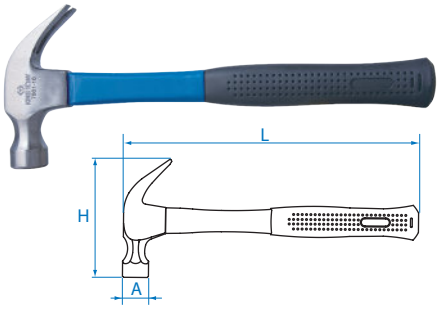

KT NO.	H.W g	A mm	H mm	L mm	g	
7861-08	225	24.8	106	275	374	10 / 40
7861-16	450	30.0	133	335	740	4 / 24
7861-20	565	31.0	144	340	830	4 / 24
7861-24	680	32.0	147	380	920	10 / 20

Hammer

CAUTION Please wear proper safety gear while working.

7848

- Rubber hammer
- Feature : used to lay basalt floors, tires and other materials which are vulnerable

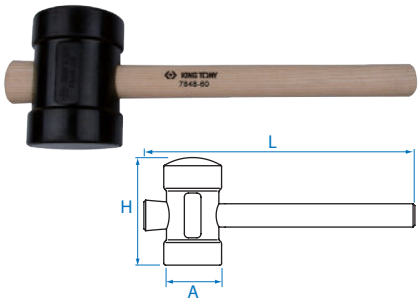

KT NO.	H.W g	A mm	H mm	L mm	g	
7848-60	523	64	119	330	628	6 / 12
7848-80	821	79	119	350	979	5 / 10

7851

- Dead blow hammer

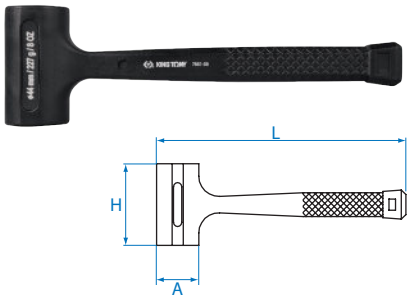

KT NO.	H.W g	A mm	H mm	L mm	g	
7851-08	227	44	81	272	572	6 / 24
7851-16	454	45	100	304	804	6 / 24
7851-24	680	49	100	322	942	6 / 24
7851-32	907	55	100	342	1059	6 / 24
7851-40	1134	58	110	342	1168	6 / 24
7851-48	1361	61	123	355	1321	6 / 12
7851-64	1814	68	136	368	1976	6 / 12

7842

- Soft face hammer
- Replaceable polyurethane face
- Helps minimize marring and surface damage

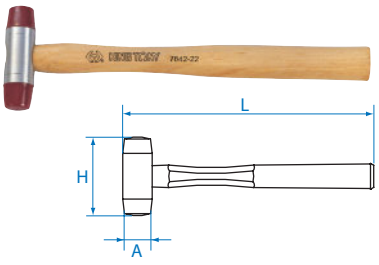

KT NO.	A mm	H mm	L mm	g	
7842-22	22	75	255	110	10 / 40
7842-28	28	85	295	165	10 / 40
7842-35	38	100	325	305	8 / 32
7842-45	45	112	335	420	8 / 32
7842-60	60	135	380	895	6 / 12

915

- Spare faces for item 7842





KT NO.	A mm	g	
91522H/S	22	11	10 / 160
91528H/S	28	22	10 / 100
91535H/S	38	38	6 / 120
91545H/S	45	70	6 / 36
91560H/S	60	137	6 / 24

Hammer Hook

91431

- Overall Size - W40 x D210 x H240 mm
- Weight - 411.6 g / Cuft - 0.072





Chisel & Punch

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

761 Center punch



KT NO.	Ø mm	L mm	g	
76103-04	3	100	33	12 / 336
76104-05	4	120	58	12 / 336
76105-06	5	150	129	12 / 144

763 Starter punch



KT NO.	Ø mm	L mm	g	
76301-05	1	120	57	12 / 336
76302-05	2	120	55	12 / 336
76303-05	3	120	57	12 / 336
76304-05	4	120	58	12 / 336
76305-05	5	120	59	12 / 336
76306-05	6	120	61	12 / 336
76307-05	7	120	101	12 / 240
76308-05	8	120	110	12 / 240
76309-06	9	150	141	12 / 144
76310-06	10	150	144	12 / 144

Chisel & Punch Set

CAUTION Please wear proper safety gear while working.

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

765 Cape chisel



KT NO.	A mm	L mm	g	
76505-05	5	130	66	12 / 240

762 Flat chisel



KT NO.	A mm	L mm	g	
76210-10	10	250	135	12 / 144
76213-04	13	100	52	12 / 336
76215-05	15	125	67	12 / 336
76217-06	17	150	140	12 / 144
76220-07	20	175	169	12 / 144
76223-08	23	200	295	12 / 72
76224-10	24	250	376	4 / 40
76226-12	26	300	649	4 / 32

764 Pin punch



KT NO.	Ø mm	L mm	g	
76402-45	2	115	31	10 / 640
76403-05	3	125	33	10 / 640
76403-06	3	150	39	10 / 250
76404-06	4	150	60	10 / 250
76405-65	5	165	68	10 / 280
76406-07	6	180	125	10 / 150
76408-08	8	200	162	10 / 120
76410-85	10	215	222	12 / 120
76412-09	12	230	349	10 / 80
76414-10	14	250	502	6 / 48

1005APR

5 PC.



Contents	Kg 0.32	8 / 48
76104-05	Ø 4 x 120	
76215-05	15 x 125	
76303-05	Ø 3 x 120	
76404-06	Ø 4 x 150	
76505-05	5 x 130	

1006APR

6 PC.



Contents	Kg 0.51	5 / 30
764	Ø 2 x 115, Ø 3 x 125 Ø 4 x 150, Ø 5 x 165 Ø 6 x 180, Ø 8 x 200	

Flat Chisel & Punch Set

1090PR1

- Flat chisel & punch set

KT NO.	Contents	Each Q'ty	Kg	Cuft
1090PR1	761 Ø 4 x 120, Ø 5 x 150 762 17 x 150, 20 x 175, 23 x 200, 24 x 250 mm 763 4 x 120, 8 x 120 mm 764 Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 10 x 65 767 150 , 200 mm	6	13.50	0.34'
8711B	600 x 240 x 60 mm	1	6.20	0.9'
8711B-1	600 x 232 x 230 mm	1	2.00	1.7'



90 PC.

Shelf size (mm) : 600 x 240 x 290

Punch Set

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk



► Pouch material : Tetoron



► Pouch material : Nylon



► Pouch material : Tetoron

KT NO.	PC.		Contents	Package	Kg	
1006PR	6	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50	Nylon	0.57	1 / 20
1006PRN	6			Tetoron		
1016PR	6	761	Ø4 x 120, Ø5 x 150	Nylon	0.84	1 / 20
		762	20 x 175, 23 x 200			
		764	Ø3 x 125, Ø5 x 165			
1009PR	9	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50, Ø10 x 65, Ø12 x 70, Ø14 x 75	Nylon	1.70	1 / 12
1009PRN	9			Tetoron		
1010PR	10	761	Ø 3 x 100, Ø 4 x 120, Ø 5 x 150	Nylon	0.88	1 / 24
		763	Ø 3 x 120, Ø 6 x 120, Ø 8 x 120			
		764	Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50			
1025PRN	5	762	13 x 100, 15 x 125, 17 x 150, 20 x 175, 23 x 200	Tetoron	0.79	1 / 20

Sheathed Chisel & Pin Punch

- Material – chrome molybdenum alloy steel
- Finishing - phosphate sunk
- Safe and comfortable grip

761-G Sheathed center punch



KT NO.	Ø mm	L mm	g	
76125-74G	2.5	185	111	12 / 144
76104-74G	4	185	113	12 / 144
76106-74G	6	185	175	12 / 144
76108-74G	8	185	168	12 / 120
76110-74G	10	185	117	12 / 120

762-G Sheathed flat chisel



KT NO.	A mm	L mm	g	
76218-75G	18	190	181	10 / 100
76219-75G	19	190	180	10 / 100
76220-84G	20	210	268	8 / 80
76222-84G	22	210	269	8 / 80

763-G Sheathed starter punch



KT NO.	Ø mm	L mm	g	
76302-74G	2	185	111	12 / 144
76303-74G	3	185	111	12 / 144
76304-74G	4	185	112	12 / 144
76305-74G	5	185	115	12 / 144
76306-74G	6	185	118	12 / 144
76308-74G	8	185	166	12 / 120

764-G Sheathed pin punch



KT NO.	Ø mm	L mm	g	
76402-55G	2	140	50	12 / 384
76403-06G	3	150	53	12 / 384
76404-07G	4	180	96	12 / 144
76405-08G	5	200	110	12 / 144
76406-84G	6	210	163	12 / 120
76407-84G	7	220	163	12 / 120
76408-88G	8	220	174	12 / 96
76409-88G	9	230	183	12 / 96
76410-09G	10	250	246	10 / 80
76412-10G	12	290	347	8 / 64
76414-11G	14	350	443	6 / 48
76416-12G	16	310	594	6 / 36
76410-14G	10	350	358	10 / 60
76412-14G	12	350	476	6 / 36
76414-14G	14	350	521	6 / 36
76416-14G	16	350	670	5 / 30

Sheathed Pin Punch Set



► Pouch material : Tetoron

KT NO.	PC.		Contents	Kg	
1014GPN	4	764-G	Ø 10 x 350, Ø 12 x 350, Ø 14 x 350, Ø 16 x 350	2.13	1 / 8
1006GPN	6		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220	0.80	1 / 8
1009GPN	9		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220, Ø 10 x 230, Ø 12 x 250, Ø 14 x 290	1.82	1 / 12

Automatic Center Punch

768

- Material : handle - brass, tip - S2
- Spring-loaded trigger design for useing without a hammer

KT NO.	Ø mm	L mm	g	
76804-05	1.3	130	75.0	30 / 120
76807-06	1.7	155	142	30 / 120



Flat Chisel & Set

767

- Ribbed type

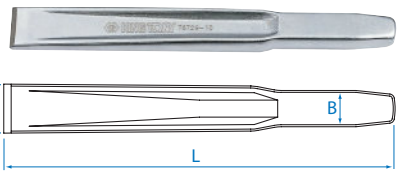

KT NO.	A mm	B mm	L mm	g	
76717-05	17	12.6	125	88	12 / 240
76721-06	20	16.0	150	147	12 / 144
76724-08	25	19.0	200	264	12 / 72
76729-10	29	22.3	250	454	8 / 48

11104PR10



4 PC.

Contents	Kg 1.0	1 / 20
	76717-05	17 x 125
	76721-06	20 x 150
	76724-08	25 x 200
	76729-10	29 x 250

11104PR



4 PC.

Contents	Kg 1.37	1 / 10
	76717-05	17 x 125
	76721-06	20 x 150
	76724-08	25 x 200
	76729-10	29 x 250
	87108	

87108

- Acrylic display stand



KT NO.	H mm	L mm	g	
87108	140	160	410	12

Marking Punch

CAUTION Please wear proper safety gear while working.

11409SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Invert number 6 to be number 9 (For 11409SQ)
- The letter A~Z with extra "&" (ampersand)included (For 11427SQ)

11427SQ



11409SQ 11427SQ

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11409SQ02	2.0	5/64"	9 PCS 0~9	6.35	61	0.18	1 / 120
11409SQ03	3.0	1/8"		6.35	61	0.18	1 / 120
11409SQ04	4.0	5/32"		6.35	59	0.18	1 / 120
11409SQ05	5.0	3/16"		8	61	0.28	1 / 80
11409SQ06	6.0	1/4"		9.53	61	0.43	1 / 60
11409SQ08	8.0	5/16"		12.7	71	0.78	1 / 30
11427SQ02	2.0	5/64"	27 PCS A~Z, &	6.35	61	0.52	1 / 50
11427SQ03	3.0	1/8"		6.35	61	0.52	1 / 50
11427SQ04	4.0	5/32"		6.35	59	0.52	1 / 50
11427SQ05	5.0	3/16"		8	61	0.82	1 / 30
11427SQ06	6.0	1/4"		9.53	61	1.25	1 / 20
11427SQ08	8.0	5/16"		12.7	71	2.33	1 / 10

Heavy Duty Marking Punch

11509SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Hardness reduced at striking end HRC40 to have longer life time
- Invert number 6 to be number 9 (For 11509SQ)
- The letter A~Z with extra "&" (ampersand)included (For 11527SQ)

11527SQ



11509SQ05 11527SQ05

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11509SQ05	5.0	3/16"	9 PCS 0~9	11	61	0.56	1 / 30
11527SQ05	5.0	3/16"	27 PCS A~Z, &	11	61	1.70	1 / 10



WORKSHOP TOOLS




ON
KING TONY
9881
5m
COMPACT MEASURING TAPE
KING TONY
7DM1160
mm
inch
HOLD
ON
ZERO
HSS #1
HSS #2
HSS #3
HSS #4

Gear Puller & Set

- Material - chrome vanadium alloy steel
- Finishing - chrome plated & phosphate sunk

7962

▪ Two-Jaw gear puller





KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	Kg	
7962-03	2	14	2	40~75	60	0.44	1 / 40
7962-04	4	17	2	50~100	95	0.78	1 / 20
7962-06	6	19	2	70~150	150	1.65	1 / 10
7962-08	10	23	2	95~200	235	3.50	1 / 5
7962-12	15	32	2	140~300	280	7.00	1 / 2

7963

▪ Three-Jaw gear puller





KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	Kg	
7963-03	3	14	3	40~75	60	0.55	1 / 40
7963-04	6	17	3	50~100	95	1.06	1 / 20
7963-06	9	19	3	70~150	150	2.25	1 / 10
7963-08	15	23	3	95~200	235	4.50	1 / 5
7963-12	22	32	3	140~300	280	11.00	1 / 2

7962B

▪ Two-Jaw gear puller
▪ Adjustable sliding arm for efficiency and safety
▪ Reversible jaws for internal & external options gear, axle, bearing, etc…

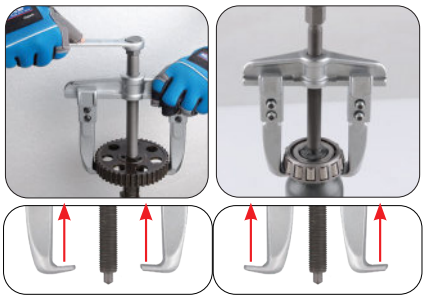

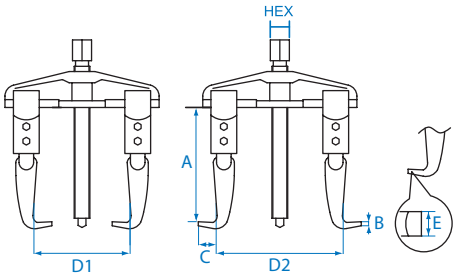



KT NO.	Capacity (tons)	Hex (mm)	Jaw (leg)	Reach A(mm)	B (mm)	C (mm)	Spread D1 (mm)	Spread D2(mm)	E (mm)	Kg	
7962B-35	3.0	17	2	100	3.8	14.5	90	60~125	21	1.05	1/12
7962B-05	5.0	17	2	100	3.8	14.5	130	60~160	21	1.15	1/12
7962B-06	5.0	22	2	150	4.6	23.0	150	85~200	30	2.98	1/6
7962B-08	7.5	22	2	150	4.6	23.0	190	105~230	30	3.41	1/6
7962B-10	7.5	27	2	210	7.0	30.0	240	130~300	35	7.11	1/3

7962B1PR

▪ Two-Jaw gear puller
▪ Adjustable sliding arm for efficiency and safety
▪ Reversible jaws for internal & external options gear, axle, bearing, etc…

5 PC.



Contents	Kg 18.20	1
7962B 3.5", 5", 6", 8", 10"		
87155		

Two Sets Pressure Screw Bearing Separator Puller Set

9BA21

- 2 Sets bearing separator & bolts
- Contents:

(1) Bearing Seperator
9BA21P02
Capacity 30mm ~ 50mm
Bolt 3/8" x 24UNF x L125mm

(2) Bearing Seperator
9BA21P01
Capacity 50mm ~ 75mm
Bolt 1/2" x 20UNF x L 135mm

(3) 4 PC. Main rod
9BA21P04
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P06
Hex bar 17mm 1/2" x L 127mm x 2 pcs

(4) 4 PC. Extension rod
9BA21P05
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P07
Hex bar 17mm 1/2" x L 127mm x 2 pcs

(5) 1 PC. Beam
9BA21P03
Central Bolt
9BA21P011

(6) 9BA21P011
Hex 18mm x 9/16" x L175mm

5.25 | 1 / 2

12 PC.



Pressure Screw Bearing Separator Puller Set

9BA22

- Includes bearing separator & bolts
- Contents:

(1) Bearing Seperator
9BA22P01
Capacity 75mm ~ 105mm
Bolt 5/8" x 18UNF x L 165mm

(2) 2 PC. Main rod
9BA22P02
Hex bar 19mm x M12 & 1/2" x L 255mm

(3) 2 PC. Extension rod
9BA22P04
Hex bar 19mm x M12 x L 255mm

(4) 1 PC. Beam

(5) 1 PC. Central bolt
9BA22P011
Hex 21mm x M18 x L292 mm

(6) 1 PC. Nut

8.95 | 1 / 2

8 PC.



Hydraulic Puller Set

9BA01

- Includes forged steel bearing separator and gear puller
- Operate up to 10 tons hydraulic pulling power
- Special separator design of the strong back puller allows the puller to be used even in the tightest spaces
- Suitable for industry, automotive and a gricultural machine

1 Set Separator Capacity 75mm ~ 105mm
1 PC. Beam
1 PC. 10T Hydraulic Ram
1 PC. Tripe Head
1 PC. Twin Head
1 PC. Ram Part
1 PC. Centre Adapter
1 PC. 1"x 2" Extension Rod
1 PC. 1"x 4" Extension Rod
2 PC. Main Rod Hex bar 19mm x M12 & 1/2" xL255mm
2 PC. Extension RodHex bar 19mm x M12 x L255mm
3 PC. 4" Leg
3 PC. 6" Leg
3 PC. 8" Leg

17.00 | 1 / 1



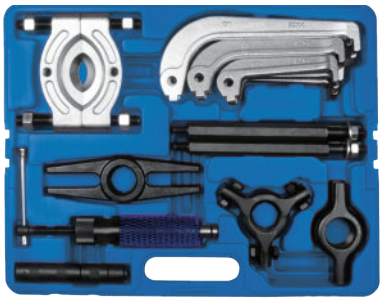

22 PC.

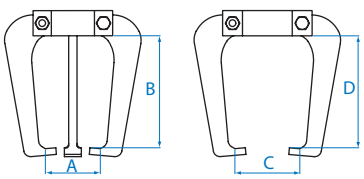

Size	Spread A (mm)	Reach B(mm)	Spread C(mm)	Reach D(mm)
4"	240	120	250	120
6"	190	170	310	170
8"	180	220	200	220



Hydraulic Mechanical Pullers

9BA

- Quick and safe removal particularly large and tight gears, bearings, etc…
- Two and three jaws type, use for different space

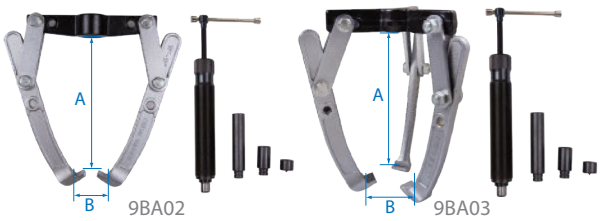

KT NO.	Capacity (Tons)	Jaws (leg)	Reach A(mm)	Spread B(mm)	kg	
9BA02	15T	2	320	500	11.30	1 / 1
9BA03	15T	3	320	500	16.50	1 / 1

Universal Bearing Puller Set

9BA31

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke M6 x1.0 and center screw Hex 12mm x160mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 105mm Ball ended threaded adapter
- 2 PC. 5.5mm / 2 PC. 6.0mm / 2 PC. 8.0mm

1.33 kg / 1 / 12



9BA32 1/2"

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke 3/8-16UNC and center screw Hex 14mm x175mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 100mm Ball ended threaded adapter
- 2 PC. 11.0mm / 2 PC. 12.5mm / 2 PC. 15.0mm

2.00 kg / 1 / 12



9BA33

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :



- 1 PC. Puller yoke M14 x2.0 and center screw Hex 21mm x280mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 170mm Ball ended threaded adapter :
- 2 PC. 15.0mm / 2 PC. 17.4mm
- 2 PC. 20.0mm / 2 PC. 25.2mm
- 2 PC. 30.0mm / 2 PC. 36.4mm

8.00 kg / 1 / 3



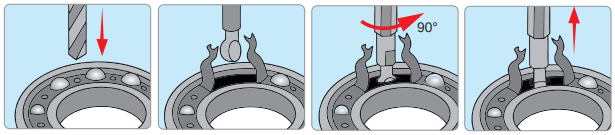

Slide Hammer Gear Puller Set

796401MR

Slide Hammer Puller Set

- For jobs involving pull and grip gears, bearings, outer races, grease retainers, oil seals, etc.
- 2.6 lbs(1.2 kgs) slide hammer
- 400 mm length T-handle puller
- 3-in-1 hammer puller, to handle inside pull such as bearing cups and outer races, as well as regular outside pull jobs

4.50 kg / 1/4



CONTENTS:

- 1 PC. 400 mm T handle shaft
- 1 PC. 2.6 lbs / 1.2 kgs hammer
- 1 PC. Adjustable nut
- 1SET Internal gear puller for Ø15-30mm(A)
- 1SET Internal gear puller for Ø30-80mm(B)
- 1SET External gear puller for Ø15-80mm(C)

Items		D (mm)	Capacity
Internal gear puller		6	Ø 15-30mm
Internal gear puller		10.5	Ø 30-80mm
External gear puller		10.5	Ø 15-80mm







Riveter & Set

21-20-101

- Stainless steel riveter nozzles
- Drop-forged aluminum body



Ø 2.4~4.8mm

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	1 / 12
21-20-101	10-1/4	260	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	588	12 / 24

21-20-07MR

Blow case size (mm) :
276 x 160 x 46(0.122 cuft)



121 PC.

Contents	Kg 1.06	1 / 16	Each Q'ty
4 x 8 mm	4 x 10 mm		20
4 x 8 mm	4 x 10 mm		
4.8 x 8 mm	4.8 x 10 mm		
21-20-101			1

21-20-102

- 4 changeable sizes
- Stainless steel riveter
- The driver can be used in 90° and 180°







KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	1 / 12
21-20-102	11	278	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	778	6 / 24

Riveter

79711

- Stainless steel riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivets

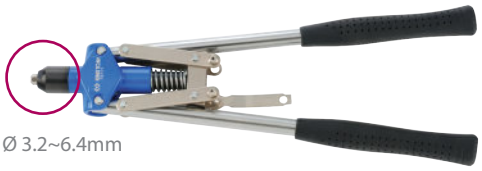

Ø 3.2~6.4mm

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	1 / 12
79711	18	460	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	1480	1 / 12

Expander Riveter

79721

- Expander framework design to press riveter
- 4 PC. Interchangeable nozzles
- Heavy duty riveter for stainless or aluminum rivets



L / min



L / max

KT NO.	L mm(min)	L mm(max)	Capacity inch	Capacity mm	kg	1 / 10
79721	315	870	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	2.00	1 / 10

Blind Nut Riveter

21-30-09MR

- Designed for fastening object to thin metal
- 4 PC. interchangeable mandrels (M4, M5, M6, M8)
- 80 PC. iron nut rivet



85 PC.

KT NO.	L inch	L mm	Capacity	kg	1 / 12
21-30-09MR	10-1/2	265	M4 x 0.7 M5 x 0.8 M6 x 1.0 M8 x 1.25	1.32	1 / 12

Nut Riveter

79731

- Stainless steel nut riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivet nuts

KT NO.	L inch	L mm	Capacity	kg	
79731	18	472	M5 M6 M8 M10	1.86	1 / 12

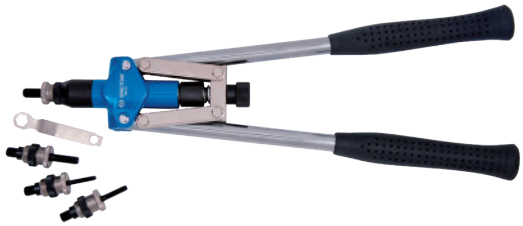

Measuring Tape

- Auto-Lock measuring tape
- Two retrieval buttons
- Nylon coating 3-rivet blade
- Ergonomic & shockproof ABS+TPE case
- Specially red marked each 10cm scale
- EU Class II accuracy standard approval

79093

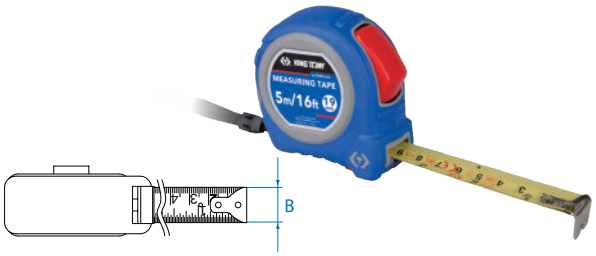

KT NO.	L M / FT	B mm	g	
79093-02M	2M	16	110	16 / 64
79093-03M	3M	16	137	16 / 64
79093-05M	5M	19	210	14 / 56
79093-05M1	5M	25	260	12 / 48
79093-08M	8M	25	420	12 / 48
79093-03C	3M/10FT	16	137	16 / 64
79093-05C	5M/16FT	19	210	14 / 56
79093-08C	8M/26FT	25	420	12 / 48

79094

- Magnetic hook



KT NO.	L M / FT	B mm	g	
79094-02M	2M	16	110	16 / 64
79094-03M	3M	16	137	16 / 64
79094-05M	5M	19	210	14 / 56
79094-08M	8M	25	420	12 / 48
79094-03C	3M/10FT	16	137	16 / 64
79094-05C	5M/16FT	19	210	15 / 60
79094-05C1	5M/16FT	25	260	12 / 48
79094-08C	8M/26FT	25	420	12 / 48

79095-05M

79094-05M 16%

- Magnetic hook





KT NO.	L M / FT	B mm	g	
79095-05M	5M	19	180	12 / 120

79095-05M-S

12 PC.



Contents		kg	
79095-05M	x 12 PC.	1.90	1 / 10

Paper Display Stand

87118

- Capacity : 12 PC.
- For all measuring tape (79093 / 79094 <02M,03M,05M>series)
- Paper display stand size(mm) : 309 x 237 x 189 (0.489 CUFT)



Full Color Laser Distance 60M

7DM1160

- Colorful LCD display for easily reading
- Functions : Single measure, continuous measure, area, volume, height, stake-out
- Six flexible ways for height measurement
- Universal 8 length units with auto-converting
- 360° inclination sensor for determining the horizontal and vertical distance
- 2 selectable measurement reference points : Front and rear
- Automatic orientation display
- CE Approval IEC 60825-1: 2014, EN 61326-1: 2013

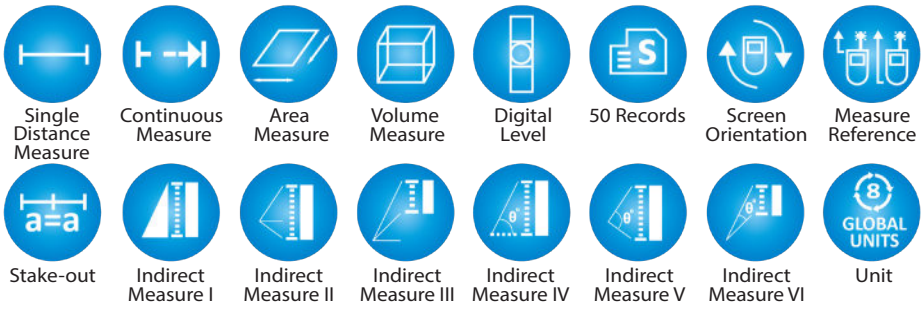

Technical data	
Display	Color LCD
Measuring Range	0.05 m ~ 60 m
Resolution	0.001 m
Accuracy	±1.5 mm
Laser Type	650 nm, Class II, < 1 mw
Unit(Selectable)	m, ft, in, 0'0"1/32, 1/32in, 1/16in, 1/8in, 10/33
Battery Life	Up to 6,000 measures
Operation Temperature	-5° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Memory	50 set
IP code	54
Automatic Power-Off	Laser-120 seconds Device-180 seconds
Battery	AAA x 2 PC. Included

KT NO.	Size (mm) L x W x H	g	
7DM1160	105 x 48 x 21	200	1 / 40





- Color LCD

Overview for device :

- A - LCD
- B - Single Measure
- C - Addition
- D - Subtraction
- E - Clear / Power
- F - Functions Included Single Measure, Continuous Measure, Area, Volume, Six Indirectly Height Measurements, Stake-out, Level, Unit and Setting
- G - Reference
- H - Receiving Lens
- I - Laser Emitted Window

Measuring

79062

- Adjustable square measuring with angle spirit level 305mm
- Sliding combination of square, spirit level, height gauge and steel rule
- 90° and 45° level allow try-square and metre-square work
- Metal scriber pin in the end
- Metric and imperial marking at both sides
- Precision cast zinc alloy and stainless blade
- For woodwork





KT NO.	L mm	L inch	g	
79062-12	305	12	312	12 / 72

Stainless Ruler

79063

- Stainless steel deeply etched for easy reading
- Dual scale : metric & imperial marking (mm/inch)

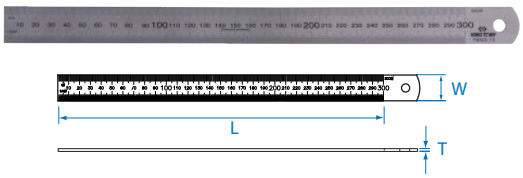

KT NO.	L mm	L inch	W mm	T mm	g	
79063-06	150	6	13	0.6	12	10 / 500
79063-12	300	12	30	0.8	65	10 / 300
79063-20	500	20	30	0.8	105	10 / 250
79063-40	1000	40	30	0.8	360	10 / 100

Calipers

77131

- Vernier calipers parallax free
- Parallax free bevel scales for easy and accurate measurement
- 4 way measurement capability for outside, inside, depth and step measurement
- The caliperis made of hardened stainless steel

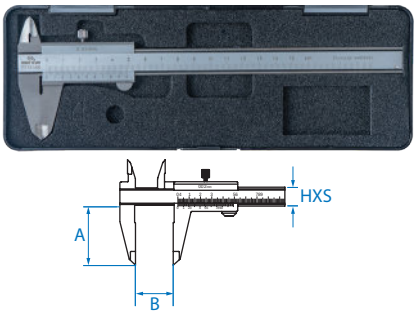

KT NO.	A mm	B max mm	Vernier mm	H x S mm	g	
77131-06	40	150	0.02	16 x 3	320	1 / 50
77131-08	50	200	0.02	20 x 4	450	1 / 50

77141

- Digital calipers
- Digital display slide calipers with thumb roller
- Large clear LCD on/off, metric/imperial, zero switches
- Hold function allows quick and efficient inspection record
- Made of hardened stainless steel

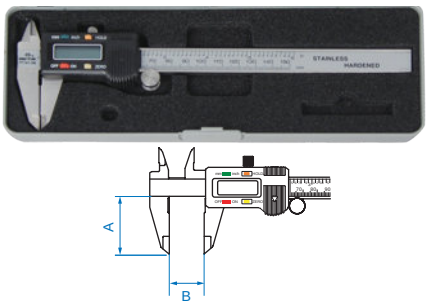

KT NO.	A mm	B max mm	B max inch	Resolution mm	Resolution inch	g	
77141-06	40	150	6	0.01	0.001	320	1 / 20
77141-08	50	200	8	0.01	0.001	485	1 / 50

Metric Feeler Gauge

- Material: blade made of spring steel

77340-20

- 20 blades metric feeler gauge

CONTENTS :

- 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77340-20	20	10 x 100	105	50 / 200

77335-25

- 25 blades metric feeler gauge

CONTENTS :

- 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77335-25	25	13 x 85	105	50 / 200

77328-26

- 26 blades inch feeler gauge

CONTENTS :

- 0.0015", 0.002", 0.0025", 0.003",
- 0.004", 0.005", 0.006", 0.007",
- 0.008", 0.009", 0.010", 0.011",
- 0.012", 0.013", 0.014", 0.015", 0.016", 0.017", 0.018", 0.019", 0.020", 0.021", 0.022", 0.023", 0.024", 0.025"
- 0.038, 0.051, 0.063, 0.076, 0.102, 0.127, 0.152, 0.178, 0.203, 0.229, 0.254, 0.279, 0.305, 0.330, 0.356, 0.381, 0.406, 0.432, 0.457, 0.483, 0.508, 0.533, 0.559, 0.584, 0.610, 0.635 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77328-26	26	12.7 x 76	91	14 / 168

Roller Chain Detacher

3214

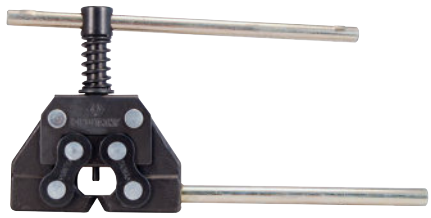

KT NO.	For chain size ANSI NO.	g	
3214-35	35~50	310	1 / 60
3214-60	60~100	691	1 / 20

Revolving Punch Pliers

74A00

- To punch holes into leather, textiles and soft material
- Revolving steel head has unique waste collection facility





KT NO.	Punch size Ø mm	Overall length mm	g	
74A00	2, 2.5, 3, 3.5, 4, 4.5	230	366	10 / 60

Retractable Tool Lanyard

79A21-30

79A22-30

- Retractable tool lanyard
- 3 kgs maximum tool weight
- Nylon tether with steel spring inside to absorb the shock of a dropped tool
- Increases safety and productivity
- Ergonomically designed length



79A21-30



79A22-30





KT NO.	Capacity mm	Hook	g	
79A21-30	800~1300	2 lock snaps	106	12 / 144
79A22-30	800~1300	fixed loop	89	12 / 144

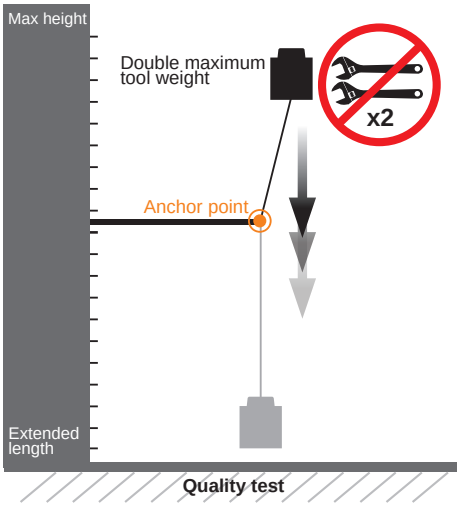

- The retractable tool lanyards are developed according to KING TONY standard. The steel lanyards are tested by double maximum weight and dropped from height. Product quality is approved.

Round Magnetic Tool Holder

CAUTION Please wear proper safety gear while working.

9TE11

- Stainless steel tray resists corrosion
- Can be used horizontally, vertically, and upside down
- Convenient for collecting small parts and tools





KT NO.	Size mm	g	
9TE11	Ø 150	433	1 / 30

PU Working Gloves

CAUTION WARNING: KEEP AWAY FROM FIRE

9TH31-XL

9TH31-2L

- Strap design for easy adjustments
- Comfortable and breathable fabric material



KT NO.	Size	Width mm	Overall Length mm	g	
9TH31-XL	XL	107	235	70	100
9TH31-2L	2L	112	240	70	100

Anti-vibration Protective Gloves

9TH21XL

- Protection from repetitive impact and vibration of pneumatic tools
- Magnet in back of glove for storing metal parts and fasteners

g 110 100





KT NO.	Size	Width mm	Overall Length mm	g	
9TH21XL	XL	112	235	110	100

360° Cast Steel Bench Vise & Display Rack

9TZ11

- Cast steel body and slide ideal for heavy duty applications
- Ductile cast iron screw pitched acme thread ensures long life and positives action
- Serrated jaws design provides good grip
- 360° swivel base allows operator to approach any direction



• Applicable for round shape objects



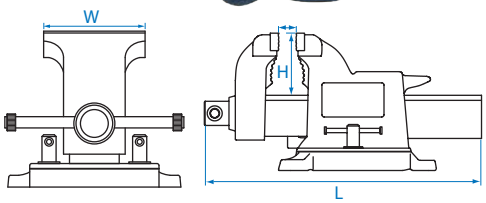

KT NO.	mm	W inch	W mm	H mm	L mm	Kg	
9TZ11-04	146	4"	104	57	310	7.50	1
9TZ11-05	166	5"	130	67	365	11.00	1
9TZ11-06	200	6"	155	76	422	14.50	1
9TZ11-08	225	8"	200	89	492	18.00	1
9TZ11-10	250	10"	250	102	572	25.60	1
9TZ11-12	300	12"	305	127	655	33.00	1



Screw Extractor Set

11205SQ

- A quick and easy way to remove broken screw, pipe, bolt and stud

100 25 / 100

5 PC.

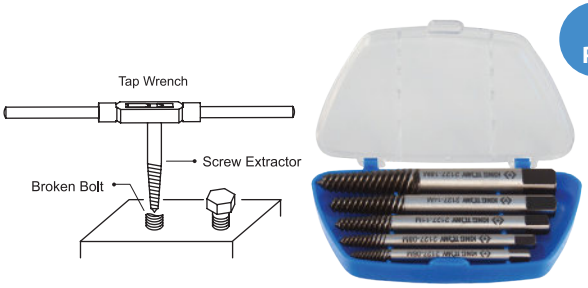

KT NO.	Capacity mm	Capacity inch	L mm
2127-06M	M3~M6	1/8~1/4	51.5
2127-08M	M6~M8	1/4~5/16	58.0
2127-11M	M8~M11	5/16~7/16	66.0
2127-14M	M11~M14	7/16~9/16	73.5
2127-18M	M14~M18	9/16~3/4	81.0

11208SQ

- Quick and easy to remove broken screw, pipe, bolt and stud

829 6 / 24

8 PC.



KT NO.	Capacity mm	Capacity inch	L mm
2127A-06M	M3~M6	1/8~1/4	51.5
2127A-08M	M6~M8	1/4~5/16	58.0
2127A-11M	M8~M11	5/16~7/16	66.0
2127A-14M	M11~M14	7/16~9/16	73.5
2127A-18M	M14~M18	9/16~3/4	81.0
2127A-24M	M18~M24	3/4~1	91.0
2127A-33M	M24~M33	1~1-3/8	106.0
2127A-50M	M33~M50	1-3/8~2	112.0

Screw Extractor and Drill-Bit Set

11310SQ

- Material : Drill-Bit(HSS), screw extractor(GCr15)

10 PC.

Contents

Kg 0.4 1 / 40

	ø2.5, ø3, ø4.5, ø6, ø8	
	#1	M3 - M6 1/8" - 1/4"
	#2	M6 - M8 1/4" - 5/16"
	#3	M8 - M11 5/16" - 7/16"
	#4	M11 - M14 7/16" - 9/16"
	#5	M14 - M18 9/16" - 3/4"



Screw Extractor & Drill Set

11225SQ

- Easy to remove 5~14 mm broken screws
- 15 PC. HSS drill bit & center guide
- 10 PC. extractor pin & nut

0.79 | 1 / 20

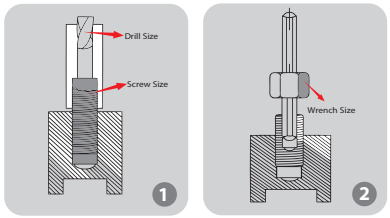



25 PC.

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)



- Use the guide to drill a pilot hole in the center of broken screw



- Put on extractor nut turning out broken screw with wrench

Nut Splitter Set

9TD062

- For removing stubborn nuts or over tightened bolts without damaging the bolt thread
- Suitable for nuts to a tensile class 6
- Do not overtighten to prevent damage to the threads under the nut

0.61 | 12 / 36

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19



2 PC.

9TD064

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)

1.89 | 1 / 12

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD601	5/16"~1/2"	9~12	12
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19
9TD604	7/8"~1-1/8"	22~27	21





4 PC.

1/2" DR. Damaged Nuts Remover Socket & Set

CAUTION Can't be used with pneumatic wrench

9TD403 1/2"

- Made of top quality SNCM alloy steel, provide good wear resistance and durability
- Ideal for the removal of rounded, damaged or corroded nuts, bolts, oil drain plugs, marine nuts and bolts, exhaust manifold nuts, pipe nozzele, and studs
- No need for pounding, chisels or torches





KT NO.	D1 mm	D2 mm	ℓ mm	L mm	g	
9TD403-10M	16.0	22	8	50	76	10 / 180
9TD403-12M	18.0	22	11	50	78	10 / 180
9TD403-13M	20.0	22	11	50	85	10 / 180
9TD403-14M	21.0	22	11	50	88	10 / 180
9TD403-17M	24.5	25	15	50	113	10 / 180
9TD403-19M	27.0	27	15	50	124	8 / 80
9TD403-21M	29.4	27	16	50	139	8 / 80
9TD403-22M	30.5	27	17	50	140	8 / 80
9TD403-23M	31.8	27	17	50	119	8 / 80
9TD403-24M	33.0	27	17	50	143	8 / 80
9TD403-27M	36.0	27	18	50	145	8 / 80

Roller Stud Extractor Socket & Set

9TD401 1/2"

- For tightening or loosening studs









KT NO.	mm	D1 mm	D2 mm	L mm	g	
9TD401-06M	6	24.5	21	60	131	10 / 180
9TD401-08M	8	24.5	21	60	128	10 / 180
9TD401-10M	10	27.5	21	69.5	180	12 / 120
9TD401-12M	12	27.5	21	69.5	179	12 / 120

9TD014MR 1/2"

- 4 stud drivers for sizes M6, M8, M10 and M12

Kg 0.83 / 1 / 30

Blow case size (mm) :
210 x 111 x 49 (0.04CUFT)





4 PC.

9TD 1/2"



9TD034MR 4 PC.



9TD035MR 5 PC.



9TD036MR 6 PC.









KT NO.	Contents			Kg	
9TD034MR	9TD403	21, 22, 23 27	8740705	0.58	4/36
9TD035MR		12, 13, 14, 17, 19		0.52	
9TD036MR		10, 12, 13 14, 17, 19	8740706	0.60	

Stud Remover Tool

9TD404-0619M

- Stud range: 6-19mm (1/4" - 3/4")
- Allows for easy removal of studs .Turn extractor with a ratchet, wrench or socket to engage the cam and stud, then pull out stud

Kg 0.64 / 1 / 24



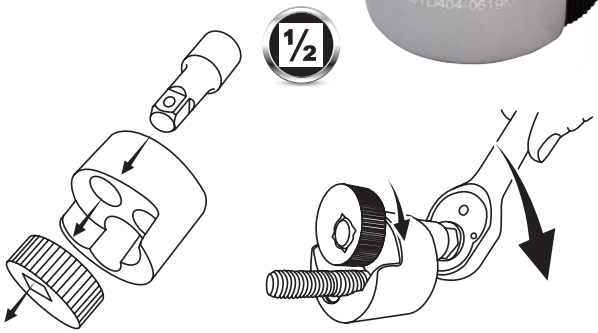

Aviation Tin Snips

74010~74060

- Special drop forged CRMO with induction hardened edges 62HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.2mm cold-rolled steel (18GA) low carbon steel
- Non-slip color code grips for superior control
- 74040 Notching bulldog style with higher cutting ability
- 74060 Extra-long compound action style compare to tin snips

- Special laborsaving design
- High tensile strength
- High torsional strength spring
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)



74010
74020
74030
74040
74060

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74010	248	35	Red	1.50	1.20	0.80	0.70	375	6 / 48
74020	248	35	Green	1.50	1.20	0.80	0.70	375	6 / 48
74030	250	38	Yellow	1.50	1.20	0.80	0.70	380	6 / 48
74040	230	25	Yellow	2.00	1.60	1.20	1.20	370	6 / 36
74060	290	75	Orange	1.10	0.94	0.70	0.53	450	6 / 36

Figure Tin Snips

74250~74270

- Special drop forged CRMO with induction hardened edges 63HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.5mm cold-rolled steel (16GA) low carbon steel
- Non-slip color code grips for superior control

- Special laborsaving design
- High tensile strength provided
- High torsional strength spring designed
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)



74250
74260
74270

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74250	260	35	Orange	1.80	1.50	1.00	0.90	480	6 / 36
74260	260	35	Blue	1.80	1.50	1.00	0.90	480	6 / 36
74270	260	35	Yellow	1.80	1.50	1.00	0.90	480	6 / 36

Straight Pattern Snips

74410~74416

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts straight flat face guides tool along straight line
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip



74410 ~ 74416

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled Steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74410	254	51	0.94	0.78	0.60	0.45	480	6 / 36
74412	305	70	1.15	0.91	0.70	0.63	650	6 / 24
74414	356	76	1.41	1.20	1.00	0.70	780	6 / 24
74416	415	63	2.00	1.60	1.20	1.00	1700	3 / 12

Curved Tin Snips

74512

- Drop forged of finest quality steel induction hardened edges 60HRC
- Double curved, hollow ground blades reduce friction for easier cutting
- British Gilbow type
- Cushion handle for comfort and better grip

74514



74512 / 74514

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74512	305	60	1.15	0.91	0.70	0.63	670	6 / 24
74514	356	65	1.40	1.20	1.00	0.70	920	6 / 24

Duckbill Pattern Snips

74613

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts moderately tight curves left, right or straight in light stock
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip



KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74613	330	72	1.20	0.84	0.61	0.61	720	6 / 24

Saw

7911-12

- Sliding metal bow
- Lightweight, resistant to oxidization and oil
- Two blade positions 45° and 90° including flush cut
- Ergonomic handle with hand stop
- Handle material : Zinc frame, soft grip TPR handle



KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7911-12	300	400	637	6 / 36

Saw

7921-12

- Sliding metal bow
- Handle material : ABS+TPR
- Lightweight & anti-slippery
- Four blade positions 45°, 90°, 135°, 180° including flush cut
- Spare blades can be stored



KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7921-12	300	510	555	12 / 24

File

7510G

- Flat file



KT NO.	Size mm		L mm		mm	mm	g		
75101-08G	8	Bastard cut	200	4.8	20.0	188	2 / 40		
75101-10G	10		250	5.7	23.6	292	2 / 40		
75102-08G	8	Second cut	200	4.8	20.0	190	2 / 40		
75102-10G	10		250	5.7	23.6	293	2 / 40		

7520G

- Half round file



KT NO.	Size mm		L mm		mm	mm	g		
75201-08G	8	Bastard cut	200	6.7	19.9	190	2 / 40		
75201-10G	10		250	7.0	23.5	292	2 / 40		
75202-08G	8	Second cut	200	6.7	19.9	184	2 / 40		
75202-10G	10		250	7.0	23.5	291	2 / 40		

7530G

- Round file



KT NO.	Size mm		L mm	mm	g		
75302-08G	8	Second cut	200	7.2	127	2 / 40	
75302-10G	10		250	9.2	172	2 / 40	

7540G

- Triangle file



KT NO.	Size mm		L mm	mm	g		
75402-08G	8	Second cut	200	13.0	175	2 / 40	
75402-10G	10		250	14.9	284	2 / 40	

7550G

- Square file



KT NO.	Size mm		L mm	mm	g		
75501-08G	8	Bastard cut	200	7.5	130	2 / 40	
75501-10G	10		250	9.5	210	2 / 40	
75502-08G	8	Second cut	200	7.5	128	2 / 40	
75502-10G	10		250	9.5	205	2 / 40	

File Set

1005GQ

1015GQ

- Bastard cut
- Designed for steel, cast iron, brass, and hard plastics
- Pouch material : Nylon



5 PC.

1005GQ / 1015GQ

KT NO.	Contents	L inch	Kg		
1005GQ (for 8")	75102-08G, 75402-08G, 75202-08G, 75502-08G, 75302-08G	8"	0.9	1 / 20	
1015GQ (for 10")	75102-10G, 75402-10G, 75202-10G, 75502-10G, 75302-10G	10"	1.4	1 / 8	

Needle File Set

- Pouch material : PVC

1036ZQ

- Perfect for filing off sharp edges, reshaping cuts or reaming drilled holes
- #60 grit diamond coating surface



6 PC.

Contents			L mm	g	
75135-06	75435-06				
75235-06	75535-06		160	95	10 / 120
75335-06	75035-06				

Tapered Reamer

7E61001

- For deburring and sizing the diameter of holes 1/8" to 3/8"
- Suitable for metal, wood or plastic

g 70 | 24 / 96

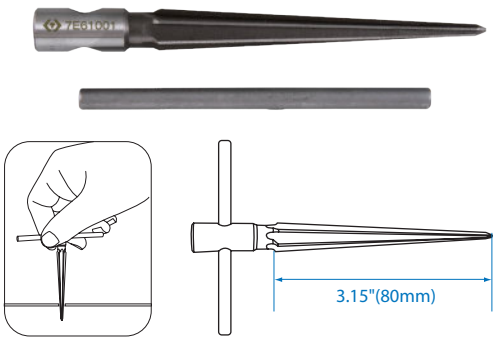

Threaded Coil-Insert Repair Set

11311MQ

- Thread tap for most common metric size : M5, M6, M8 and M10
- Used for repairing and restoring damaged threads
- Suitable for machine, engine and other automotive repair applications



119 PC.

Metal case size (mm) : 350 x 216 x 40

Contents — Kg 2.78 | 1 / 5

	Screw-Coil:	
	M5x0.8x1.5D(L:7.5mm)	25 PC.
	M6x1.0x1.5D(L:9mm)	25 PC.
	M8x1.25x1.5D(L:12mm)	25 PC.
	M10x1.5x1.5D(L:15mm)	25 PC.
	Tap:	
	M5x0.8	1 PC.
	M6x1.0	1 PC.
	M8x1.25	1 PC.
	M10x1.5	1 PC.
	Tang Puncher:	
	M5x0.8	1 PC.
	M6x1.0	1 PC.
	M8x1.25	1 PC.
	M10x1.5	1 PC.
	Drill:	
	5.2mm	1 PC.
	6.3mm	1 PC.
	8.3mm	1 PC.
	10.4mm	1 PC.
	Main Tool:	
	M5x0.8	1 PC.
	M6x1.0	1 PC.
	M8x1.25	1 PC.
	M10x1.5	1 PC.

3571-08	3/8"drive sliding T-handle
3764-55G	3/8"drive mini reversible ratchet
39123012M	3/8" tap holder

Tap Holder

3912M

- Used with reversible ratchet and T-handle
- Chuck mechanism hold compatible tap drills
- Used for metal working screw thread









KT NO.	Drive	S(mm) min.	S(mm) max.	D1 mm	D2 mm	L mm	g	
39123010M	3/8"	2.0	6.0	23.0	34	53.0	221	4 / 64
39123012M	3/8"	4.0	9.0	23.0	34	53.0	223	4 / 64
39124012M	1/2"	6.0	12.0	25.3	38	52.4	265	4 / 64

Drill-Bit Set

11325SQ

- Material : HSS

25 PC.



Contents		1.23 kg	1 / 20
Drill - Bit		1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13	

Tap and Drill-Bit Set

11328SQ

- Material : Drill-Bit(HSS), Tap(GCr15)

28 PC.



Contents		1.05 kg	1 / 20
Drill - Bit		2.5, 3.3, 4.2, 5, 6.8, 8.5, 10.2	
Tap		M3x3, M4x3, M5x3, M6x3, M8x3, M10x3, M12x3	

Tap & Die Set

12916MQ1

- Material : SK5 alloy steel
- 1 PC.Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. Die stock 25mm(1")
- Tap : M3~M12
- Die : M3~M12



16 PC.

Contents		0.78	1 / 20
12939MQ-A	M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75	12939MQ-A01	25mm (1")
12939MQ-A		12939MQ-A02	M3~M12 (1/8"~1/2")

12939MQ1

- Material : SK5 alloy steel
- 1 PC. Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. "T" Type tap wrench(M3-M6, 1/8"~1/4")
- 1 PC. Die stock 25mm(1")
- 1 PC. Screw driver
- 12939MQ1-
  1 PC. Screw pitch gauge (0.5-28)
  Tap : M3~M12 / Die: M3~M12
- 12939SQ1-
  1 PC. Screw pitch gauge(12-40)
  Tap : 1/8"~1/2" / Die : 1/8"~1/2"



12939SQ1

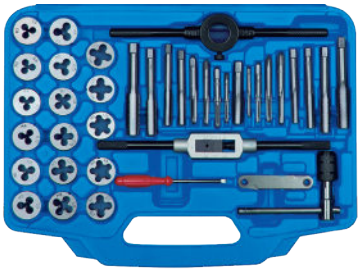

39 PC.

KT NO.	Contents		1.4	1 / 10
12939MQ1	12939MQ-A	**12939MQ-A06** / M3x0.5, **12939MQ-A07** / M3x0.6, **12939MQ-A08** / M4x0.7, **12939MQ-A09** / M4x0.75, **12939MQ-A10** / M5x0.8, **12939MQ-A11** / M5x0.9, **12939MQ-A12** / M6x0.75, **12939MQ-A13** / M6x1.0, **12939MQ-A14** / M7x0.75, **12939MQ-A15** / M7x1.0, **12939MQ-A16** / M8x1.0, **12939MQ-A17** / M8x1.25, **12939MQ-A18** / M10x1.25, **12939MQ-A19** / M10x1.5, **12939MQ-A20** / M12x1.5, **12939MQ-A21** / M12x1.75, **12939MQ-A22** / 1/8NPT27	12939MQ-A01	25mm (1")
	12939MQ-A	**12939MQ-A23** / M3x0.5, **12939MQ-A24** / M3x0.6, **12939MQ-A25** / M4x0.7, **12939MQ-A26** / M4x0.75, **12939MQ-A27** / M5x0.8, **12939MQ-A28** / M5x0.9, **12939MQ-A29** / M6x0.75, **12939MQ-A30** / M6x1.0, **12939MQ-A31** / M7x0.75, **12939MQ-A32** / M7x1.0, **12939MQ-A33** / M8x1.0, **12939MQ-A34** / M8x1.25, **12939MQ-A35** / M10x1.25, **12939MQ-A36** / M10x1.5, **12939MQ-A37** / M12x1.5, **12939MQ-A38** / M12x1.75, **12939MQ-A39** / 1/8NPT27	12939MQ-A02	M3~M12 (1/8"~1/2")
	12939MQ-A03	0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1.0, 1.25, 1.5, 1.75, 27, 28	12939MQ-A04	M3~M6 (1/8"~1/4")
12939SQ1	12939SQ-A 12939SQ-A	4NS36, 6NC32, 8NC32, 10NC24, 10NF32, 12NC24, 1/4NC20, 1/4NF28, 5/16NC18, 5/16NF24, 3/8NC16, 3/8NF24, 7/16NC14, 7/16NF20, 1/2NC13, 1/2NF20, 1/8NPT27	12939MQ-A05	
	12939SQ-A03	12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40		

PROFESSIONAL MULTI-USE WIPES



One sheet is for all!

Lemon oil formula- Fresh & moisturizing

Effectively cleans and protects hands from all types of dirt without using toxic solvents

Get rid of grease, oil, tar, paint, dirt, silicon, adhesives and more
Effectively reduce 99.99% of bacteria



- ✓ Non REACH SVHC candidate list, Non CA Prop 65 list of chemicals
- ✓ Verified by SGS - the world's leading inspection, verification, testing and certification company

Water saving

Eco-friendly

Time saving

Super absorbent

Soft

336 sheets



ZD101-336C

100 sheets



ZD101-100C

Take care of the environment
Does not contain toxic solvents

KT NO.	Size (mm)	Sheets	Kg	
ZD101-100C	203 x 203	100	1.08	1 / 8
ZD101-336C	241 x 203	336	4.08	1 / 4



LIGHTING




KING TONY
9TA45

3W COB + 5 LED Lamp

9TA27

- 3W COB + 5 LEDs (top)
- Brightness : 300 Lumen (lm), white light color, kelvin : 7200K
- Materials : ABS + PS
- IP20 waterproof and dustproof, IK07 vandalproof
- 180° magnetic swivel base + 360° functional hook
- Rechargeable battery : 3.7V - 2600mAh Li-ion
- Accessory : Micro USB charging cable
- 4 hours continuous light, charging time : 4.5 hours





Battery status indicator light



USB charger port



180° swivel base



Top light with 5 LED



KT NO.	Applicable area	L mm	g	
9TA27A	Europe	220	236	1 / 24
9TA27B	America & Asia	220	236	1 / 24
9TA27D	Australia & New Zealand	220	236	1 / 24

Contents		
3W COB + 5 LED rechargeable work lamp		x 1 PC.
USB charger		x 1 PC.
Micro USB cable		x 1 PC.



6W COB +1W SMD Slim Inspection Lamp

9TA261

- Brightness - Worklight : 600/250 Lumen (lm), Top light : 120 lumen (lm), white light color, kelvin : 6500K
- IP54 waterproof and dustproof, IK07 vandalproof
- Materials : ABS plastic + rubber housing + PC lens + aluminium slim housing
- 120° Angle rotation & magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion
- Switch modes : Top light – Worklight low-Worklight high-Off
- Accessory : Micro USB cable and charger
- 3 hours continuous for high worklight and 6 hours for low worklight
- Charging time : 4 hours






KT NO.		Applicable area	L mm	g	
9TA261A		Europe	340	300	1 / 12
9TA261B		America & Asia	340	300	1 / 12
9TA261D		Australia & New Zealand	340	300	1 / 12

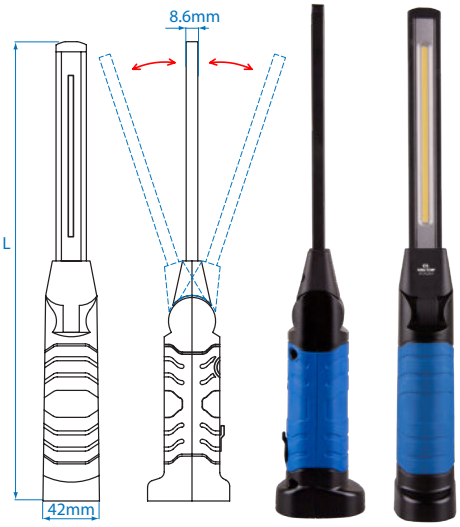

Contents

COB LED lamp	x 1 PC.
USB charger	x 1 PC.
Micro USB cable	x 1 PC.

Foldable Pocket Slim Lamp

9TA263

- 2W COB + 1.5W COB + 1W SMD (Top)
- White light color, kelvin : 6000K~7000K
- IP54 waterproof and dustproof, IK07 vandalproof
- Switch Mode :
  Top light - 80 Lumen(lm) / 3 hours
  Main light low/ high - 100 / 200 Lumen(lm) - 4 / 2 hours
  Side light -180 Lumen(lm) / 2.2 hours
- Material : PA + Aluminium
- Strong magnetic base + 180° swivel head
- Rechargeable battery : 3.7V - 700mAh Li-ion battery
- Accessory :1m Micro USB charging cable
- One led indicator - Red : Charging, Green : Full Charged
- Charging time : 2.5 hours


• Top SMD


• 180° Swivel head


• Side COB


• Strong magnetic base

KT NO.	L mm	g	
9TA263	164	80.8	1 / 48



Contents

Foldable pocket slim lamp	x 1 PC.
Micro USB cable	x 1 PC.

2W + 5W Foldable Lamp

P9TA0212A

- 2W COB + 1W LED
- White light color, kelvin : 6500K
- Switch Model : Top light – 30 Lumen (lm) / 4 hours Main light low / high – 100 / 200 Lumen (lm) – 3 / 1.5 hours
- Material : ABS & PC
- 180°swiveling rotating + 360° rotating head , magnetic clip and base
- Rechargeable battery : 3.7V 800mAh Li-ion
- Accessory : Type – C USB charging cable
- LED battery status & charging indicator
- Charging time : 1.5 hours



RoHS



9TA265

+

- 5W COB + 1W LED + 1W UV
- White light color, kelvin : 6500K
- Switch Model :
  Top light – 30 Lumen (lm) / 11 hours
  Main light low / high – 250 / 500 Lumen (lm) – 3 / 1.5 hours UV light
- Material : TPR & PC
- 180°swiveling rotating + 360° rotating head + hidden hook + strong magnetic base
- Rechargeable battery : 3.7V 2200mAh Li-ion
- Accessory : Type – C USB charging cable
- LED battery status & charging indicator
- Mode indicator icon
- USB output 5V1A as a mobile power bank
- Charging time : 3 hours



RoHS



9TA266



• Top SMD



• Magnetic clip and base



• 360° rotating head



• Type - C USB port



• 360° rotating head



• UV light



• Mode indicator icon



• I / O USB port (Type-C)

KT NO.	Applicable area	g	
P9TA0212A	Europe	410	1 / 24
P9TA0212D	Australia & New Zealand	410	1 / 24

Contents

2W Foldable lamp (9TA265)	x 1 PC.
5W Foldable lamp (9TA266)	x 1 PC.
Type - C USB cable	x 1 PC.
USB charger	x 1 PC.

Inductive Headlight + Rechargeable LED Pen Light

P9TA5002

- 1.5W COB
- White light color, kelvin : 6500K
- Switch Model :
- Low light – 100 Lumen (lm) / 4 hours
- Main light – 200 Lumen (lm) / 2 hours
- Sense Mode : 200 Lumen (lm) / 2 hours
- Press power button 3 seconds to switch on the sense mode;
- Press power button 3 times to turn off the sense mode
- Material : High impact ABS + TPE housing + PC lens
- 10CM smart motion sensor, 40° adjustable angle base
- Rechargeable battery : 3.7V 600mAh Li-ion
- Accessory : 1m micro USB charging cable
- LED battery charging indicator
- Charging time : 2.5 hours

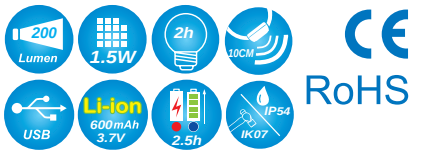



9TA521

+

- 3.5W-7 SMD + 1W SMD (Top)
- White light color, kelvin: 6500K
- Switch Model:
- Top light: 80 Lumen (lm) / 4 hours
- Main light: 120 Lumen (lm) / 2.5 hours
- Material: ABS housing + Rubberized painting + PC lens
- Strong magnet on the clip
- Rechargeable battery: 3.7V 750mAh Li-ion
- Led charging indicator: Red -Charging, Green –Fulled
- Charging time: 2 hours

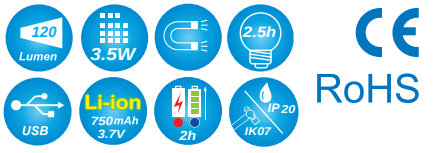



9TA281









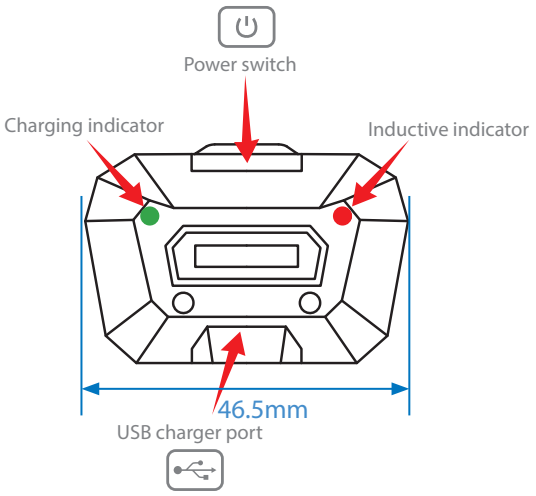

KT NO.	g	
P9TA5002	338	1 / 16

Contents

Mini Inductive headlight (9TA521)		x 1 PC.
Headband	KING TONY	x 1 PC.
Led Pen light (9TA281)		x 1 PC.
Micro USB cable		x 1 PC.

Flexible LED Slim Light

9TA251

- 5W COB + 3W SMD (Top)
- White light color, kelvin : 6000K~6500K
- IP54 waterproof and dustproof, IK07 vandalproof
- Switch Mode :
  Top light -120 Lumen(lm) / 9 hours
  Main light - Stepless Dimmer Switch :
  Min ~ Max - 50 ~ 500 Lumen(lm) / 16 ~ 2 hours
- Material : PA + TPE housing
- Flexible Gooseneck + 90° hiding hook + Strong magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory : 1m Micro USB charging cable and 5V 1A USB charger
- Three leds battery indicator
- Charging time : 4 hours



• Top SMD



• USB charger port + battery indicator



• Strong magnetic + 90° Hook



• Stepless Dimmer Switch



KT NO.	Applicable area	L mm	g	
9TA251A	Europe	475	322	1 / 12
9TA251B	America & Asia	475	322	1 / 12
9TA251D	Australia & New Zealand	475	322	1 / 12

Contents

Flexible slim lamp		x 1 PC.
USB charger		x 1 PC.
Micro USB cable		x 1 PC.

10W COB LED Adjustable Lamp

9TA33

- 10W COB LED
- White color, kelvin : 6500K
- Two steps adjustable light
- Brightness : 1000 / 400 Lumen (lm)
- Operating time : 2.2 / 5.5 hours
- Material : ABS + PC
- IP20 waterproof and dustproof, IK07 vandalproof
- 170° magnetic swivel base + 360° body swivel knot + two 360° functional hooks
- Rechargeable battery : 7.4V - 2600mAh Li-ion
- Accessory : Type-C USB fast charging cable
- Charging time : 4.5 hours



• 170° swivel base



• Two steps adjustable light



• Magnetic swivel base



• body swivel knot



KT NO.	Applicable area	L mm	g	
9TA33A	Europe	500	487	1 / 12
9TA33B	America & Asia	500	487	1 / 12
9TA33D	Australia & New Zealand	500	487	1 / 12

Contents

10W COB LED adjustable lamp		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.

30W Wired COB LED Floodlight

9TA42

- 30W COB LED floodlight with portable handle
- Brightness : 3000 Lumen (lm), white light color, kelvin : 6000~7000K
- Pass IP54 test
- Slim profile with lockable adjustment and 180° swivel base
- Option to wall mount or tripod stand at work sites
- Accessory : AC adapter cable 1.8M



• Swivel base

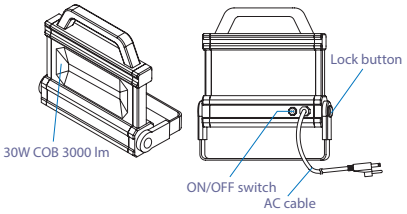



KT NO.	Applicable area	L x H x W mm	g	
9TA42A	Europe	238 x 270 x 46	1239	1 / 6
9TA42B	America & Asia	238 x 270 x 46	1239	1 / 6
9TA42D	Australia & New Zealand	238 x 270 x 46	1239	1 / 6

Dual - Light Pocket Lamp

9TA44W

- 8W COB LED + 3W SMD
- White light color, kelvin : 6500K
- IP65 waterproof and dustproof, IK07 vandalproof
- Switch Mode :
  Spotlight - 250 Lumen (lm) / 4.5 hours
  Low light -160 Lumen (lm) / 10 hours
  Mid light - 400 Lumen (lm) / 4.5 hours
  Hight light - 800 Lumen (lm) / 2.5 hours
- 180° flexible handle + super strong magnet on the handle
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory : Type-C USB fast charging cable
- 3 LED battery status indicators
- Charging time : 4 hours by USB cable, 6-7 hours by wireless charging base(not included, the charging time depends on the changing power of the wireless charging base)

RoHS



• LED battery status indicators



• 180° flexible direction



• Super strong magnet on the handle



• Easy to carry





• Wireless charging design

KT NO.	L mm	g	
9TA44W	97 x 83 x 39	218	1 / 24

Contents		
Dual - light pocket lamp		x 1 PC.
Type-C USB cable		x 1 PC.

45W Twin Head SMD Floodlight

9TA45

- 45W 120 PC. SMD LED
- White light color, kelvin : 5700K
- Switch Mode :
  Work light 100% – 4500 Lumen (lm) / 2 hours
  Work light 75% – 3000 Lumen (lm) / 3 hours
  Work light 50% – 1500 Lumen (lm) / 6 hours
  Work light 25% – 750 Lumen (lm) / 12 hours
- 90 ° vertical rotation & 180 ° horizontal rotation for angle of lighting
- Rechargeable battery : Replaceable 14.8V 5200 mAh Li-ion battery pack
- Accessory : 100-240V to 20V 1.1A charger
- 5 LED battery status indicator & USB 5V 2A output
- Charging time : 4.5 hours
- Material : PA + ABS + PC


• 180 ° horizontal rotation


• 90 ° vertical rotation


• Replaceable battery


• Power bank in case of emergency


• Anti-slip handle


• Option to fixation

KT NO.	Applicable area	L x W x H mm	g	pcs/ctn
9TA45A	Europe	288 x 176 x 131	2140	1 / 4



Contents

45W Twin Head SMD Floodlight		x 1 PC.
AC charger		x 1 PC.
Battery pack		x 1 PC.

40W COB Bluetooth Speaker Floodlight

9TA46

- 40W COB LED
- White light color, kelvin : 6500K
- Switch Mode :
  Eco mode – 400 Lumen (lm) / 20 hours
  Full power mode – 4000 Lumen (lm) / 2 hours
  Music mode – 5~8 hours
- 140° vertical rotation + hiding hook on the bottom
- High performance integrated 10W Bluetooth speaker
- Rechargeable battery : 11.1V 5200 mAh Li-ion
- Accessory : 100-240V to 15V 1.5A charger
- 5 LED battery status indicator & USB 5V 2A out put
- 1 LED Bluetooth indicator
- Quick charging time : 3.5 hours
- Material : TPE + PA + aluminum + PC


• AC Charger
• USB out put (Power bank)


• Bluetooth on & battery indicator


• Anti-slip handle


• Option to fixation


• Hiding Hook


• 140 ° vertical rotation

KT NO.	Applicable area	L x W x H mm	g	pcs/ctn
9TA46A	Europe	210 x 210 x 100	1450	1 / 4



Bluetooth **4.0** 10M

Contents

40W COB Bluetooth Speaker Floodlight		x 1 PC.
AC charger		x 1 PC.

Adjustable Tripod for Floodlight

87162

- Can hold one light or 2 lights (with T-Bar)
- Durable heavy duty steel tripod body
- Three section tube diameter : 25mm / 32mm / 38mm
- Adjustable tripod height from 700mm to 1500mm
- Portable, easy to fold and great for transportation
- It is recommended to use with 9TA42 / 9TA44 / 9TA45 / 9TA46 (This product dose not contain lamps, please buy separately)







KT NO.	Tube Diameter (mm)	Loading Weight (kg)	Folded Length (mm)	Max height (mm)	g	
87162	38	3.0	700	1500	650	1 / 6

Detachable Underhood Light Shelf

87163

- Two movable base fit all kinds of magnetic lights
- 360° horizontal rotating base for different lighting angle
- Three section length adjustment fit variety of occasions
- Durable heavy duty aluminum body + PA
- Anti-sliding clasp handle
- It is recommended to use with 9TA44 (This product dose not contain lamps, please buy separately)



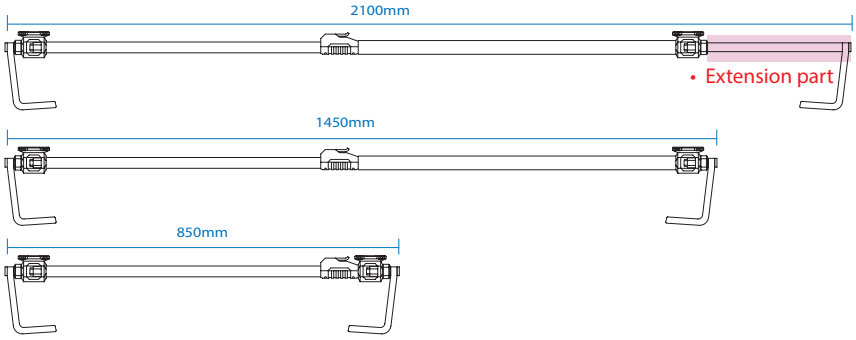







• Three section length adjustment fit variety of occasions



• 360° horizontal rotating base for different lighting angle

KT NO.	Width (mm)	Height (mm)	Folding length (mm)	Extendable length (mm)	g	
87163	110	180	850	2100	1300	1 / 6



3W COB LED Inductive Headlight

9TA52

- Brightness : 100 / 280 Lumen (lm), white light color, kelvin : 6500K
- 2 hours continuous for high worklight / 5.5 hours for low worklight
- IP65 waterproof and dustproof
- Materials : High impact ABS + TPE housing + PC lens & non-skid grip belt
- Feature : 10cm Smart motion sensor
- Rechargeable battery : 3.7V - 1500mAh Li-po
- LED battery charging indicator
- Charging time : 2.5 hours
- Accessory : Micro USB cable + AC 100-240V charger



RoHS



• Two step adjustable light



• 60° Adjustable lighting



• Inductive indicator ON



• Inductive light switch

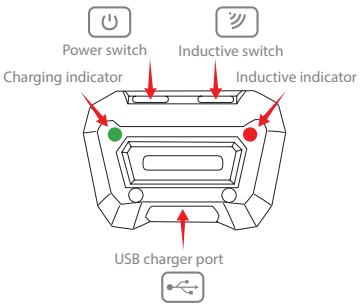



KT NO.	Applicable area	L mm	g	
9TA52A	Europe	65	110	1 / 40
9TA52B	America & Asia	65	110	1 / 40
9TA52D	Australia & New Zealand	65	110	1 / 40

Contents		
COB LED lamp		x 1 PC.
Headband		x 1 PC.
USB charger		x 1 PC.
Micro USB cable		x 1 PC.

LED Pocket Torch

79815

- 3W High performance LED adjustable focus pocket torch
- Brightness : 120 Lumen(lm)
- Strobe warning lights for maximize visibility
- Aluminum alloy body, safety lanyard included
- Operates using 3 x AAA batteries (not included)
- 6.5 hours (normal) lighting





KT NO.	L x Ø mm	g	
79815	128 x 28	95	1 / 100

1.5W COB +1 LED Lamp

9TA28

- 1.5W COB + 1W LED
- 180° magnetic swivel base + 270° magnetic swivel clip
- Rechargeable battery : 3.7V - 800mAh Li-ion
- Accessory : Micro USB charging cable
- Overcharge/Discharge protection
- Materials : ABS+PC
- 2 hours continuous light, charging time : 2 hours
- Brightness : 145 Lumen (lm), white light color, kelvin : 7200K



• 180° swivel clip





• magnetic base



• USB charger port



• Top light with 1 LED

• Magnetic swivel clip



KT NO.	L mm	g	
9TA28	180	160	12 / 48

Contents		
1.5W COB + 1 LED rechargeable work lamp		x 1 PC.
Micro USB cable		x 1 PC.

Rechargeable LED Pen Light

9TA281

- 3.5W -7 SMD + 1W SMD (Top)
- White light color, kelvin : 6500K
- IP20 waterproof and dustproof, IK07 vandalproof
- Switch Model :
  Top light : 80 Lumen (lm) / 4 hours
  Main light : 120 Lumen (lm) / 2.5 hours
- Material : ABS housing + Rubberized painting + PC lens
- Strong magnet on the clip
- Rechargeable battery : 3.7V 750mAh Li-ion
- Led charging indicator : Red -Charging, Green –Fulled
- Charging time : 2 hours







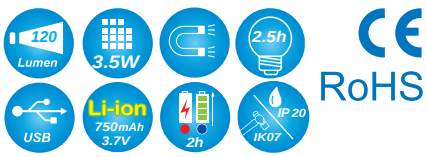

RoHS



KT NO.	L mm	g	
9TA281	170	58	1 / 48

Contents		
LED pen light		x 1 PC.
Micro USB cable		x 1 PC.



LED Pen Light & Set

79831

- Pen light with 6 PC. SMD(surface-mount devices) LED
- Brightness : 135 Lumen(lm)
- ABS body 360 degree rotation
- PE lampshade : avoid nebulization
- Operates using 3 x AAA batteries (not included)



KT NO.	L x W x H mm	g	
79831	165 x 25 x 30	58	10 / 120

79832

- Pen light with 1 PC. 5W COB(chip on board)
- Brightness : 230 Lumen(lm)
- ABS body 360 degree rotation
- PE lampshade : avoid nebulization
- Operates using 3 x AAA batteries (not included)
- Waterproof grade : IP 54











KT NO.	L x W x H mm	g	
79832	165 x 25 x 30	58	10 / 120

LED Telescopic Torch

79833

- 3 LEDs, white light color
- Magnetic torch with 360° flexible head
- Extends up from 170mm to 560mm
- 4 x LR44 batteries included









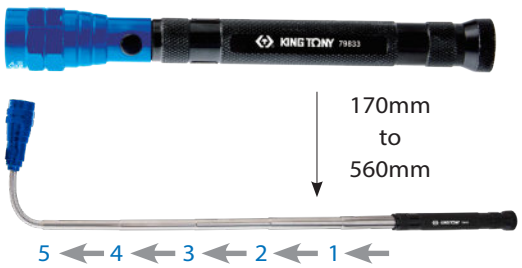

KT NO.	L x Ø mm	g	
79833	170 x 22	95	1 / 50



AUTOMOTIVE TOOLS




PNEUMATIC BRAKE BLEEDER
11mm W Check valve
8mm W Check valve
7mm
9mm
KING TONY

Tool Trolley Contents

286 PC.

Contents No. 934-010MRVD — 28.8 CUFT 2.97

- Special tool set for Automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passanger car



9-3544MRV #9 P.76 | 9-4537MRV #9 P.77



9-4147PRV #10 P.83 | 9-4401MPV #10 P.83 | 9-2565MRV #7 P.74, 9-4129PRV #7 P.74

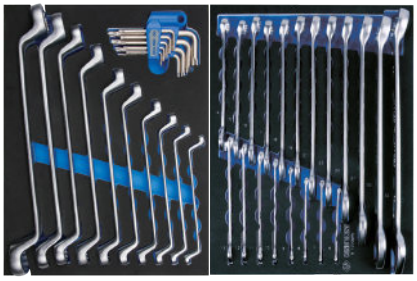

9-90119MRV #9 P.79 | 9-1220MRV #9 P.78

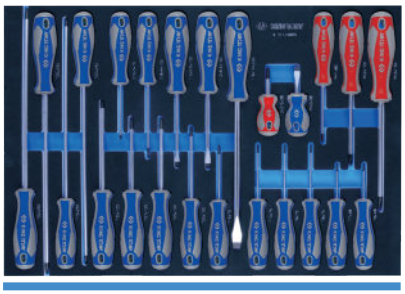

9-31124MRV #6 P.73



9-40104GPV #10 P.83 | 9-40113GPV #10 P.83 | 9-90135MRV #10 P.83 | 9-90118PRV #10 P.84

Tool Trolley Set

286 PC.

7 drawers, 92.8 kg, CUFT 15.21	934-010MRV (87434-7B P.33)	934-010MRV-G (87434-7B-G P.33)	934-010MRV-B (87434-7B-B P.33)
7 drawers, 98.8 kg, CUFT 15.21	9634-010MRV (87634-7B P.39)	9634-010MRV-G (87634-7B-G P.39)	9634-010MRV-B (87634-7B-B P.39)
7 drawers, 103.8 kg, CUFT 15.67	9934F-010MRV (87934-7BF P.41)	9934F-010MRV-G (87934-7BF-G P.41)	9934F-010MRV-B (87934-7BF-B P.41)

ALFA ROMEO

Diesel Engine Setting & Locking Set



9AT2006E

- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engine
- Use to set and lock engine timing

D | BELT | 6 PC.

1360 | 1 / 10

MODEL:	145 (98-01), 146 (98-01), 147 (01-09) 156 (97-08), 159 (05-09), 166 (98-08) GT (04-09), Brera (05-09), Spider (06-09) Crosswagon (04-08)
ENGINE CODE:	**1.9JTD 8v.** 323.02, 371.01, 182B9.000, 937A2.000 937A3.000, 939A1.000, 939A2.000, 939A7.000 **1.9JTD 16v.** 192A5.000, 192B1.000, 937A4.000 937A5.000, 939A2.000, 939A8.000 **2.4JTD 10v.** 325.01, 342.02, 362.02, 839A6.000 841C.000 **2.4JTD 20v.** 841G.000, 841H.000, 841M.000 939A3.000, 939A9.000





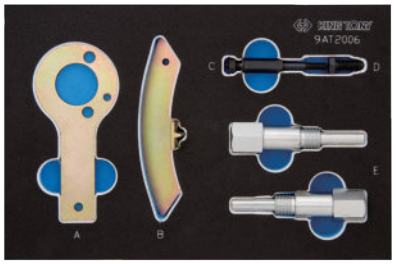

CONTENTS :
- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)

BMW

Petrol Engine Twin Camshaft Setting & Locking Set



9AT1018E

- The set includes camshaft / carrier bracket remover & installer tools
- Suitable for BMW petrol 1.8 and 2.0 N42 / N46 (chain) engine

P | CHAIN | 18 PC.

4400 | 1 / 3

MODEL:	**118i.** E87 (04-08) **120i.** E87 (04-08) **316i.** E46 (01-05) **316ti. Compact** E46 (01-05) **318i.** E46 (01-07) **318ti. Compact** E46 (01-05) **318i.** E90 (05-08) **X3.** 2.0i E83 (05-08) **Z4.** 2.0i E85 (04-08) **520i.** E60 (04-08) **320i.** E90 (05-08)
ENGINE CODE:	**N42 / N46** B18, B18A, B20, B20A, B20B





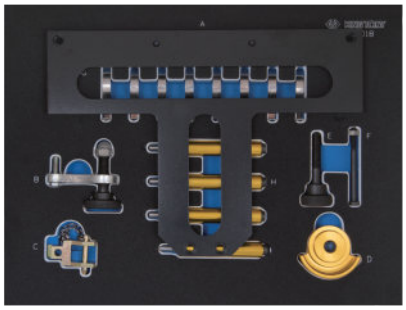

CONTENTS :
- A&H&I - camshaft/carrier bracket
- Mounting fixture
- B - inlet camshaft securing tool (rear)
- C&F - torsion spring remover/installer
- D&E - inlet camshaft securing tool (front)
- G - intermediate lever clamp set (8 PC.)

BMW

Petrol Engine Twin VANOS Service Set



9AT1009E

- The set includes compressed air connector, twin VANOS setting tool and sprocket / chain assembly fixture, timing adjustment plate, pre-load tools
- Suitable for setting / locking popular BMW petrol engine
- Use to adjust engine timing and set / lock engine application

P | CHAIN | 9 PC.

5966 | 1 / 3

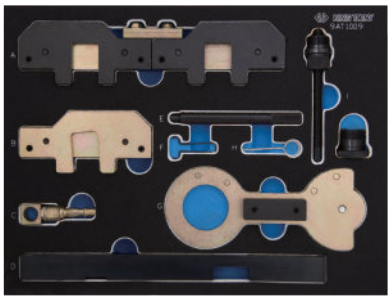

CONTENTS :
- A - camshaft setting plate
- B - timing adjustment plate
- C - compressed air connector
- D - sprocket / chain assembly fixture
- E - flywheel locking pin
- F - tensioner pin (M50)
- G - twin VANOS setting tool
- H - tensioner pin (M52)
- I - tensioner tool

MODEL:

318is. E36 (92-99)
318ti Compact E36 (94-01)
320i. E36 / E46 (92-07)
323i. E36 / E46 (95-01)
325i. E36 / (92-07)
328i. E36 / E46 (95-01)
330i. E46 (00-07)
520i. E39 / E60 (96-05)
523i. E39 (96-00)
525i. E39 / E60 (00-05)
528i. E39 (96-00)
530i. E39 / E60 (00-05)
728i. E38 (94-02)
730i. E65 (02-05)
Z3. (E36) 1.9-3.0 (96-03)
Z4. (E85) 2.2-3.0 (03-06)
X3. (E83) 3.0 (03-06)
X5. (E53) 3.0 (99-07)

ENGINE CODE:

M42 / M44 / M50 / M52
no VANOS (VVT)
18 4S 1, 19 4S 1, 20 6S 2(Early),
25 6S 2(Early)
M50 / M52
Single VANOS (VVT) variants
20 6S 2(Later)
20 6S 3
25 6S 2(Later)
M52(TU) / M54 / M56
Twin VANOS (VVT) variants
20 6S 4
22 6S 1
25 6S 4

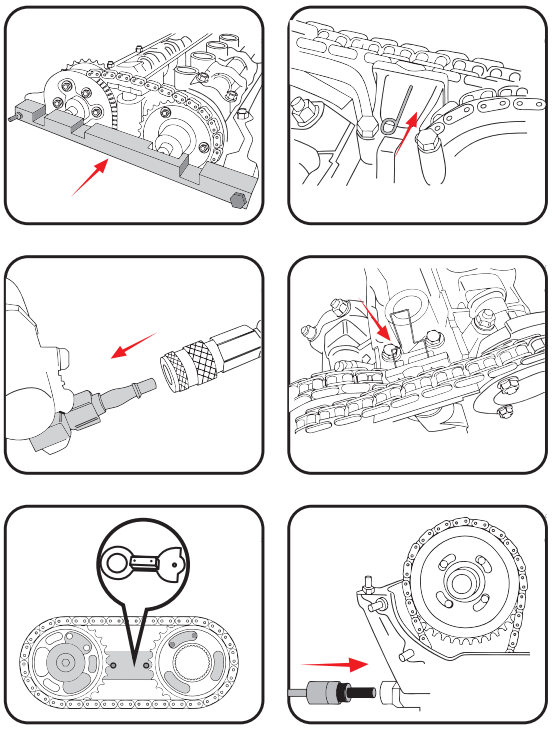

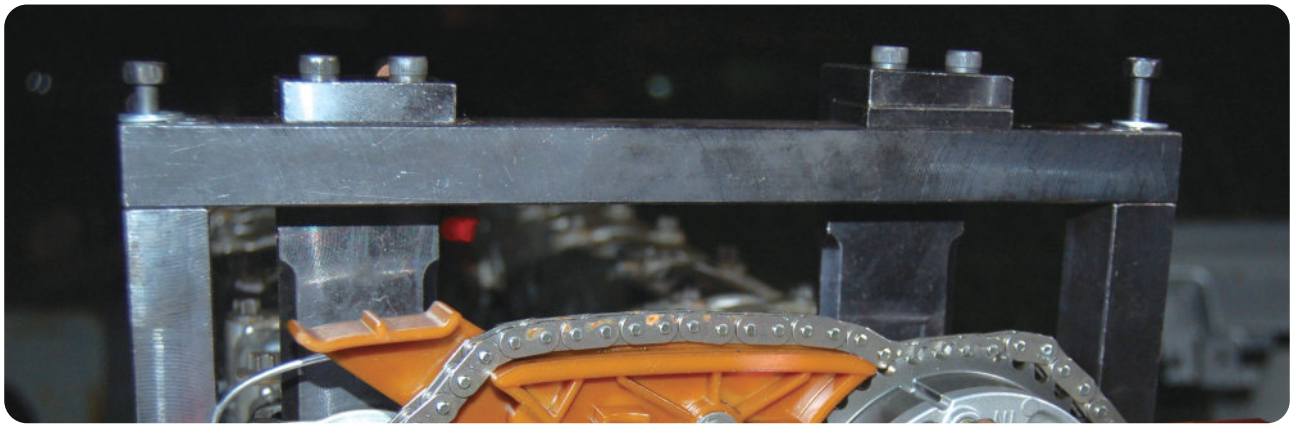

BMW

Petrol Engine Twin Camshaft Setting & Locking Set



9AT1102E

- The set includes camshaft locking plate and flywheel locking pin
- Suitable for M40 engines (also used on the M43 chain driven engine)
- Use to lock the camshaft and crankshaft TDC position to keep their timing relationship while replacing timing belt or carry out other timing belt service

P | CHAIN | 2 PC.

1901 g | 1 / 10

MODEL:	**316i** E36 / E46 (93-04) **316i Compact** E36 / E46 (98-01) **318i** E36 / E46 (93-01) **518i** E34 (94-96) **Z3** 1.8 / 1.9 E36 (96-03)
ENGINE CODE:	**M43** 16 4E 2, 16 4E 3 18 4E 2, 19 4E1







CONTENTS :
- A - camshaft locking plate
- B - flywheel locking pin

BMW

Petrol Engine 1.8 To 3.0 Twin Cams Setting & Locking Set



9AT1106E

- The set includes camshaft setting plate, timing adjustment plate, pre-load tool, flywheel locking pin and tensioner pin
- Suitable for setting / locking popular BMW petrol engine
- Suggestion:
  Use with 9AT1-A02 wrench while using this kit on SINGLE VANOS system (on inlet camshaft)
  Use with 9AT1303 while using this set on TWIN VANOS system

P | CHAIN | 6 PC.

3781 g | 1 / 5

MODEL:	**318is.** E36 (92-99) **318ti Compact** E36 (94-01) **320i.** E36 / E46 (92-07) **323i.** E36 / E46 (95-01) **325i.** E36 / E46 (92-07) **328i.** E36 / E46 (95-01) **330i.** E46 (00-07) **520i.** E39 / E60 (96-05) **523i.** E39 (96-00)	**525i.** E39 / E60 (00-05) **528i.** E39 (96-00) **530i.** E39 / E60 (00-05) **728i.** E38 (94-02) **730i.** E65 (02-05) **Z3.** (E36) 1.9-3.0 (96-03) **Z4.** (E85) 2.2-3.0 (03-06) **X3.** (E83) 3.0 (03-06) **X5.** (E53) 3.0 (99-07)
ENGINE CODE:	**M42 / M44 / M50 / M52 no VANOS (VVT)** 18 4S 1, 19 4S 1, 20 6S 2(Early), 25 6S 2(Early). **M50 / M52 Single VANOS (VVT) variants** 20 6S 2(Later), 20 6S 3, 25 6S 2(Later), 25 6S 3, 28 6S 1 **M52(TU) / M54 / M56 Twin VANOS (VVT) variants** 20 6S 4, 22 6S 1, 25 6S 4, 25 6S 5, 28 6S 2, 30 6S 3	

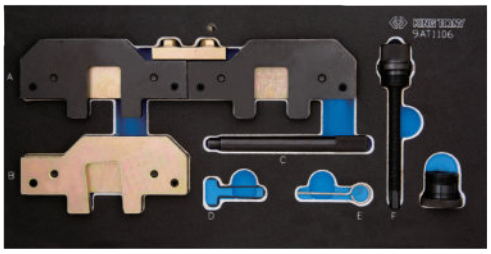

CONTENTS :
- A - camshaft setting plate
- B - timing adjustment plate
- C - flywheel locking pin
- D - tensioner pin (M50)
- E - tensioner pin (M52)
- F - tensioner tool









BMW

Petrol Engine Timing Setting & Locking Set



9AT1206E

- The set includes VANOS alignment plate, camshaft setting tools, flywheel locking pin and timing chain tensioner pre-load tool
- Suitable for 1.6 BMW, 4 cylinder twin camshaft 16v and chain driven petrol engines with VANOS
- Use to check and adjust engine timing

P | CHAIN | 6 PC.

2657 | 1 / 5

MODEL:	**116i.** E81 E87 (03-09) **316i.** E46 / E90 (01-08) **316Ci.** E46 (01-06) **316ti.** E46 (01-05)
ENGINE CODE:	**N40 / N45 / N45T** B16, B16A, B16AC





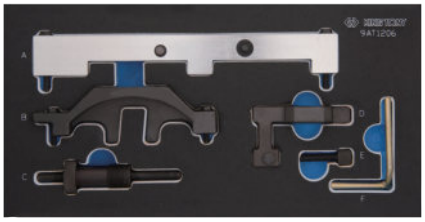

CONTENTS :

- A - VANOS alignment plate
- B - camshaft setting plate (inlet)
- C - timing chain tensioner pre-load tool
- D - camshaft setting plate (exhaust)
- E - camshaft setting plate securing screw
- F - flywheel locking pin

BMW

Diesel Engine 2.5TDS Timing Set



9AT2106E

- The set includes camshaft setting plate, tensioner lever, tensioner retaining pin, flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engine
- Use to retain and support the sprocket and timing chains in correct position when the pump is removed

D | CHAIN | 6 PC.

2480 | 1 / 5

MODEL:	**1.7 2.5td / tds (Chain)** **318tds.** E36(94-00) **325td / tds.** E36(91-99) **525td / tds.** E34(90-00) **725tds.** E38(95-02)
ENGINE CODE:	**1.7 2.5td / tds (Chain)** M41 / M51





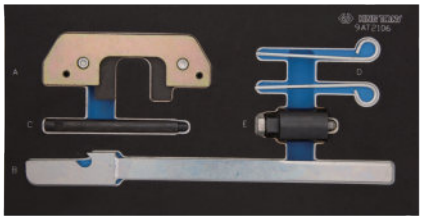

CONTENTS :

- A - camshaft setting plate
- B - tensioner lever
- C - flywheel locking pin
- D - tensioner retaining pin
- E - pump remove & sprocket retainer (2 part)

BMW/ MINI

Petrol Engine Setting & Locking Set – BMW/PSA

9AT1010E

- The set includes camshaft setting tool, crankshaft locking pin & chain tensioner tool
- Suitable for BMW Mini and PSA Peugeot Citroën 1.4/1.6 16v valvetronic direct injection engines
- Use to lock and adjust engine timing

P CHAIN 10 PC.

BMW Mini Cooper N12/N14 2384 1 / 5

MODEL:	**Clubman**(07-14) **Countryman**(14-16) **Paceman**(14-16) **Roadster**(12-12)
ENGINE CODE:	**N12 1.4/1.6(Valvetronic)** B14, B14AB, B16A **N14 1.6(Direct Injection)** B16A, B16CD/TD, B16TD, B16CD





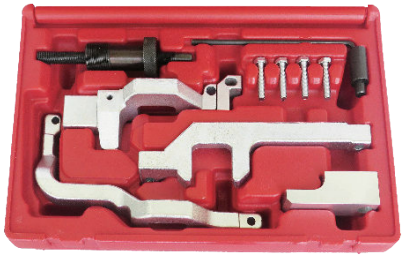

CONTENTS :
- A – camshaft setting tool (inlet)
- B – camshaft setting tool (exhaust)
- C – camshaft setting tool
- D – camshaft setting clamp
- E – crankshaft locking pin
- F – chain tensioner tool
- G – M10 screw*4

BMW/ MINI

Petrol Engine Timing Set



9AT1108E

- Use for BMW & Mini 1.6 litre chain drive petrol engine
- Includes the cam & crankshaft locking tools and chain pre-tension setting tools for TDC position
- Suitable for BMW (N13) & Mini (N18) engines

P CHAIN 8 PC.

2527 1 / 10

MODEL:	**BMW 1 Series** 114i F20(2012-15), 116i F20 (2012-15), 118i F20 (2011-15) **BMW 3 Series** 316i F30 (2012-15) **MINI** Cooper S (R56/57) (2010-15) Coupe Cooper S (R58) (2012-15) Roadster (R59) (2012-15) Countryman (R60) (2012-16) Paceman (R61) (2013-16) Clubman (R55) (2011-14)
ENGINE CODE:	**N13** B16A **N18** B16/M0, B16A, B16A/M0, B16A/MO, B16C, B16C/TO, B16M0

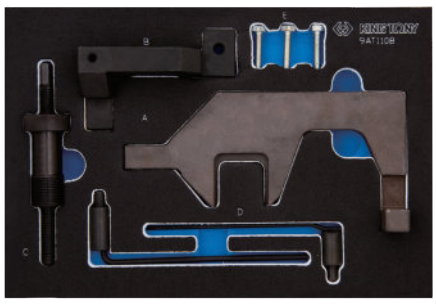

CONTENTS :
- A – camshaft locking tool
- B – camshaft locking tool
- C – chain tensioner tool
- D – crankshaft locking pin

BMW

Diesel Engine Timing Locking Set



9AT2107E

- The set includes camshaft alignment tool, flywheel locking tool, crankshaft pulley turning tool, and also high pressure pump sprocket removal tool
- Suitable for BMW N47 / N47S / N57 2.0 and 3.0 twin camshaft diesel chain drive engine
- Use to set & lock the camshaft and crankshaft when adjusting valve timing on engine correctly

D | CHAIN | 8 PC.

1730 | 1 / 10

MODEL:	**1 Series** 116d/118d/120d/123d E81/82/87/88 (07-12) **3 Series** 316d/318d/320d/325d/330d/330xd E90/91/92/93 (07-12) **5 Series** 520d E60/61 (07-10) 525d/530d/535d F10/11 (10-12) 530d GT/535d GT F07 (09-12) **7 Series** 730d/730Ld/740d/740d xDrive F01/02/04 (08-12) **X Series** X1 sDrive 18d/20d E84 (09-12) X1 xDrive 18d/20d/23d E84 (09-12) X3 20d E83 (07-10) X3 xDrive 1.8d/30d E83 (08-12) X5 30d/xDrive 40d E70 (10-12) X6 xDrive 30d/40d E71/72 (10-12)
ENGINE CODE:	**N47 / N47S** D20A D20B D20T0 D20O0 D20UO **N57** D30U0 D30O0 D30O1 D30T0



CONTENTS :
- A – camshaft Alignment Tool
- B – flywheel Locking Tool
- C – crankshaft Turning Tool
- D/F – high pressure pump sprocket removal tool
- E – tensioner Locking Pin

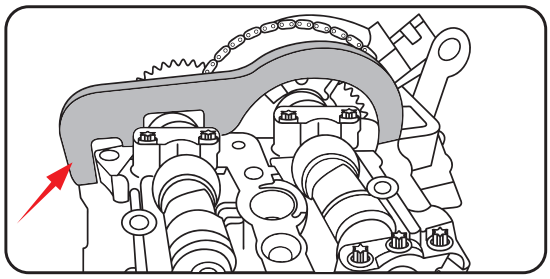





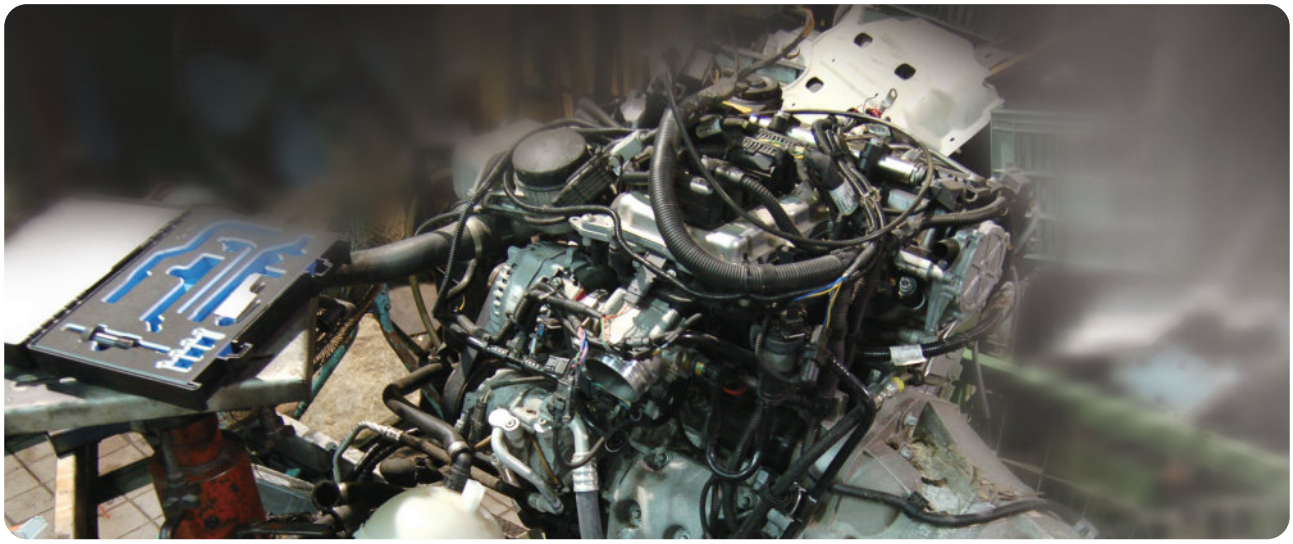

BMW

Petrol Engine Timing Set



9AT1706E

- Use for BMW 2.0 litre chain drive petrol engine
- Includes the VANOS setting tools, camshaft locking tools and chain pre-tension setting tools for TDC position
- Suitable for BMW N20 & N26 engines

P | CHAIN | 8 PC.

4287 | 1 / 3

MODEL:	**BMW 1 Series** 125i F20/21(2012-14) **BMW 3 Series** 320i/xDrive F30/31 (2012-14), 328i F30/31 (2012-14), 328i/xDrive F30/31 (2012-14) **BMW 5 Series** 520i F10/11 (2010-14), 528i F10/11 (2013-14), 528i/xDrive F10/11 (2011-14) **X1** sDrive18i/20i E84 (2011-14), xDrive20i/28i E84 (2011-14) **X3** xDrive20i/28i F25 (2011-14) **Z4** sDrive18i E89 (2013-14), sDrive20i/28i E89 (2011-14)
ENGINE CODE:	N20 B20A, N20 B20B/U0, N20 B20O0, N26 B20





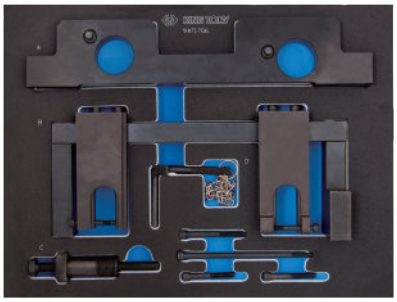

CONTENTS :
- A - VANOS alignments plate
- B - camshaft locking tool
- C - chain tensioner tool
- D - flywheel locking pin

MERCEDES-BENZ

Petrol Engine Timing Set



9AT1606E

- Use for 1.8 litre M271 chain drive petrol engine
- Includes chain tensioner adjust tools and cam pulley bit socket to hold the chain in place
- Suitable for Mercedes- Benz M271

P | CHAIN | 6 PC.

3452 | 1 / 3

MODEL	ENGINE CODE
C-class 176 (2002-15) **C-class Coupe** (2011-15) **CLC** (2008-12) **CLK** (2002-09) **E-class** (2002-13) **E-class** Coupe / Cabriolet (2004-13) **SLK** (2004-15)	271.820, 271.860, 271.861 271.921, 271.940, 271.941 271.942, 271.943, 271.944 271.946, 271.948, 271.950 271.952, 271.954, 271.955 271.956, 271.957, 271.958
Sprinter (2007-15)	271.951

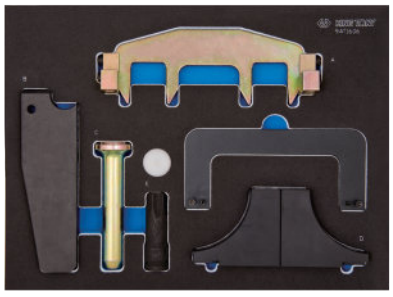

CONTENTS :
- A – camshaft locking tool
- B – cam chain tensioner rail wedge tool
- C – cam chain tensioner drift
- D – cam chain retaining bridge
- E – camshaft pulley bit socket (T100)

BMW

Petrol Engine VANOS Engagement Wrench

9AT1-A02

- For BMW twin camshaft engines with single VANOS unit mounted on inlet camshaft

298 g | 12 / 48

MODEL:	**318is.** E36 (92-99), **318ti Compact** E36 (94-01) **320i.** E36 / E46 (92-07), **323i.** E36 / E46 (95-01) **325i.** E36 / E46 (92-07), **328i.** E36 / E46 (95-01) **330i.** E46 (00-07), **520i.** E39 / E60 (96-05) **523i.** E39 (96-00), **525i.** E39 / E60 (00-05) **528i.** E39 (96-00), **530i.** E39 / E60 (00-05) **728i.** E38 (94-02), **730i.** E65 (02-05) **Z3.** (E36) 1.9-3.0 (96-03) **Z4.** (E85) 2.2-3.0 (03-06) **X3.** (E83) 3.0 (03-06), **X5.** (E53) 3.0 (99-07)
ENGINE CODE:	**M50 / M52 Single VANOS (VVT) variants** 20 6S 2(Later), 20 6S 3 , 25 6S 2(Later) 25 6S 3, 28 6S 1





BMW

Diesel Engine Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 g | 6 / 36

MODEL:	**318d / Compact**(E46) **320d / td Compact**(E46) **330d**(E46), **535d**(E60 / E61), **730d**(E38) **X5 3.0d**(E53), **530d**(E39 / E60 / E61) **525d**(E39 / E60 / E61)
ENGINE CODE:	**M47 / M57** **1 Series** E87, 3 Series E46 / E90 **5 Series** E39 / E60, 6 Series E63 **7 Series** E38 / E65, X3 E83 and E53 / E70





CHEVROLET

Petrol Engine Tension Adjustment Wrench Set (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engines

695 g | 6 / 24

MODEL:	**9AT1202-B(41mm)** **Kalos** (04-08), **Aveo** (06-08), **Espero / Aranos** (95-97), **Nexia** (95-97) **Lanos** (97-03), **Nubira / Lacetti** (97-09) **Cruze** (2009)
ENGINE CODE:	1.4 A13DM A14MS F14S3 1.4 16v. F14D3, 1.5 G15MF 1.5 16v. A15DM A15SMS A15MF 1.6 16v. A16DM A16DMS F16D3 LXT







CONTENTS :

- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

BMW

Petrol Engine Timing Alignment Set



9AT1112E

- The set includes camshaft locking tool, VANOS alignment plate, flywheel locking pin
- Suitable for BMW 2.5/3.0 liters chain drive six cylinder, twin cams 16v petrol engines
- Use to lock camshaft in TDC position when setting or adjusting engines timing

P | CHAIN | 12 PC.

5900 | 1 / 3

MODEL:	**128i.** E82 (07-08) **130i.** E81/87 (05-08) **135iS.** E82 (07-08) **323i.** E90/91/92/93 (04-08) **325i/xi.** E90/91/92/93 (04-08) **328i/xi.** E90/91/92/93 (04-08) **330i/xi.** E90/91/92/93 (04-08) **335i/xi.** E90/91/92/93 (05-08) **523i/Li.** E60/61 (04-08) **525i/Li/xi.** E60/61 (04-08) **528i/xi.** E60/61 (06-08) **530i/Li/xi.** E60/61 (05-08) **535i/xi.** E60/61 (06-08) **630i.** E63/64 (04-08) **730i/Li.** E65/66 (04-08) **X3** 2.5/3.0 E83 (06-08) **X5** 3.0 E70 (06-08) **Z4** 2.5/3.0 E85/86 (05-08)
ENGINE CODE:	**N51 / N52 /N52K** (Valvetronic) **N53 / N54** (Direct Injection)





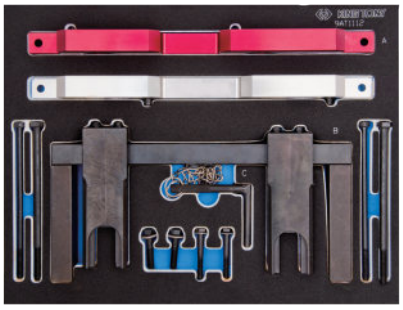

CONTENTS :
- A - VANOS alignment plate (Red for N53/N54, Silver for N51/N52/N52K)
- B - camshaft locking tool
- C - flywheel locking pin

BMW

Diesel Engine 2.0 / 3.0 Timing Set



9AT2007E

- The set includes camshaft setting plate, tensioner retaining pin set and flywheel locking pin
- Suitable for BMW 2.0 and 3.0 liters common rail diesel engines in BMW 3, 5 & 7 Series, X5, Land Rover Freelander, Range Rover, Rover 75, Vauxhall / Opel
- Use to check and adjust the timing position of camshaft and TDC position of crankshaft

D | CHAIN | 7 PC.

1753 | 1 / 10

MODEL:	**118d** E87 (03-07), 120d E87 (03-07) **318d** / td E46 / E90 / 91(00-08) **320d** / td E46 / E90 / 91(97-08) **325d** E90 / 91 / 92 / 93 (06-09) **330d / xd / cd** E46 / E90 / 91 / 92 / 93 (98-08) **335d** E90 / 91 / 92 (06-09) **520d** E39 / E60 / 61 (99-09) **525d / xd** E39 / E60 / 61 (99-09) **530d / xd** E39 / E60 / 61 (98-09) **535d** E60 / 61 (04-09), 635d E63 / 64 (04-09) **730d / Ld** E38 / E65 / 66 (98-08) **X3 2.0d** E83 (03-07), X3 3.0d / sd E83 (03-09) **X5 3.0d** E53 / E70 (00-09)
ENGINE CODE:	**M47 / M57/ M47TU / M57TU / M47T2 / M57T2** 20 4D 1, 20 4D 4, 25 6D 1, 25 6D 2 30 6D 1, 30 6D 2, 30 6D 3, 30 6D 4 30 6D 5





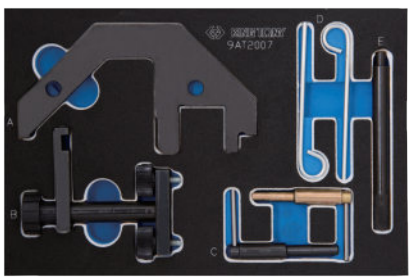

CONTENTS :
- A – camshaft setting plate
- B – camshaft plate locking tool
- C – TDC timing pin
- D – tensioner retaining pin set (pair)
- E – flywheel locking pin

PSA PEUGEOT CITROËN

Petrol Engine Setting & Locking Set – BMW/PSA

9AT1010E

- The set includes camshaft setting tool, crankshaft locking pin & chain tensioner tool
- Suitable for BMW Mini and PSA Peugeot Citroën 1.4/1.6 16v valvetronic direct injection engines
- Use to lock and adjust engine timing



2384 1 / 5

MODEL:	**Citroen** C4(08-11) C4 Picasso(08-13) **Peugeot** 207(06-11) 207CC(07-14) 308(07-14) 3008(09-12) 5008(09-11)
ENGINE CODE:	**Citroen** 8FR(EP3) 5FS(EP6) **Peugeot** EP3(8FS) EP6(5FW) EP6DT(5FX) 8FS(EP3) EP6DTS(5FY)

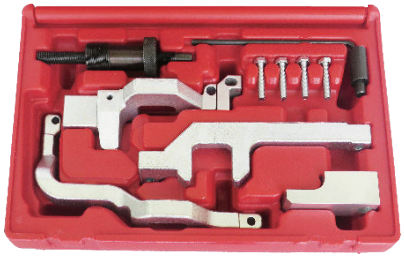



CONTENTS :

- A – camshaft setting tool (inlet)
- B – camshaft setting tool (exhaust)
- C – camshaft setting tool
- D – camshaft setting clamp
- E – crankshaft locking pin
- F – chain tensioner tool
- G – M10 screw*4

PSA PEUGEOT CITROËN

Petrol Engine Timing Set



9AT1021E

- The set includes special flywheel tools and cam/ crankshaft timing pin
- Use to replace timing belt engines of: 1.0 / 1.1 / 1.4 / 1.6 / 1.6VTS / 1.8 16v / 2.0 / 2.0 16V / 2.2
- Include PSA "EW coded" twin-cam 16v engine and HPi versions
- Suitable for PSA Peugeot / Citroen engines



2164 1 / 10

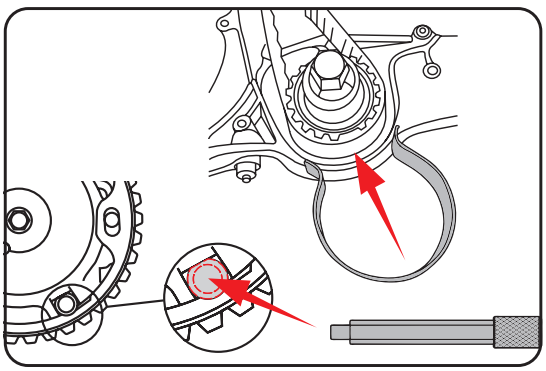



CONTENTS :

- A – timing belt retaining tool
- B – tensioner adjusting tool
- C – flywheel locking tool
- D – flywheel holding tool
- E – flywheel plate locking tool
- F – flywheel locking tool
- G – flywheel locking tool
- H – tensioner locking tool
- I – tensioner locking tool
- J – timing pin

PSA PEUGEOT CITROËN

Diesel Engine Timing Set



9AT2026E

- The set includes special flywheel tools and cam/ crankshaft timing pin
- Use to replace timing belt engines of: 1.4HDi / 1.5D / 1.6HDi / 1.9D / 2.0HDi / 2.0DHDi 16V / 2.2HDi / 2.5D Turbo
- Suitable for PSA Peugeot / Citroen engines

3180 1 / 3

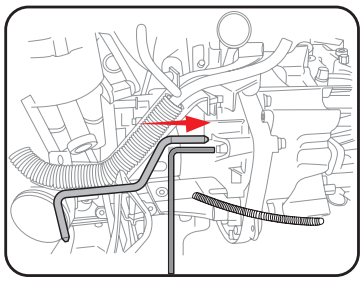

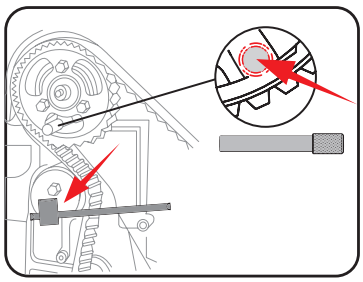



CONTENTS :

- A – flywheel pulley puller
- B – flywheel locking tool
- C – tensioner tool
- D – M8 x 80mm screw
- E – flywheel locking pin
- F – flywheel locking tool
- G – flywheel locking tool
- H – flywheel timing tool
- I – tensioner tool
- J – timing pin
- K – timing belt retaining tool
- L – tensioner locking pin
- M – special locking tool

PSA PEUGEOT CITROËN

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 12 / 120

MODEL:	**2.8D/Tdi/Hdi** Relay / Jumper (01-06) Boxer (00-06)
ENGINE	8140.43 8140.43S 8140.63

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing





64 25 / 100

MODEL:	**Petrol 1.0 to 2.0 TU / XU (Belt)** XU 1.6 to 2.0 **Diesel 1.50 to 2 .50 TUD / XUD (Belt)** XU1.6 to 2.0 XD1.8D to 1.9D

FIAT

Petrol Engine Setting & Locking Set



9AT1002E

- The set includes camshaft setting tool and tensioner retaining pin
- Suitable for Vauxhall / Opel & Fiat engines
- Use to lock the camshafts on the correct timing position

P | CHAIN | 2 PC.

1510 | 1 / 10

MODEL:	**Petrol 2.2 16v. Twin Cams(Chain)** Croma (05-09)
ENGINE CODE:	**Petrol 2.2 16v. Twin Cams(Chain)** 194A1.000

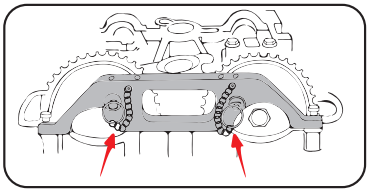

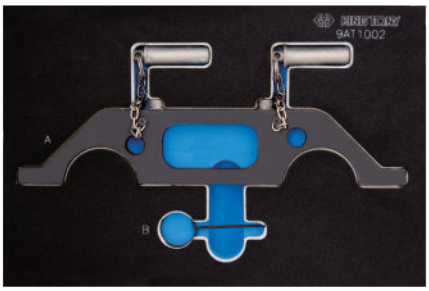

CONTENTS :
- A - camshaft setting tool
- B - tensioner retaining pin

FIAT

Diesel Engine Setting & Locking Tool Set



9AT2006E

- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engines
- Use to set and lock engines timing

D | BELT | 6 PC.

1360 | 1 / 10

MODEL:	**Diesel** **1.6JTD / 1.9JTD / 2.0JTD / 2.4JTD Multijet(Belt)** Punto (99-06), Grande Punto (05-09) Idea (04-08), Brava/Bravo (98-02) Linea (07-09), New Bravo (07-09) Marea/Weekend (99-03), Stilo (01-06) Croma (05-09), Multipla (99-07) Doblo/Cargo (02-09), Palio Weekend (02-06) Sedici (06-09), Strada Pick-Up (03-06)
ENGINE CODE:	**1.6JTD 16v.** 198A2.000, 198A3.000, 198A6.000 350A2.000 **1.9JTD 8v.** 182B4.000, 182B9.000, 186A6.000 186A8.000, 186A9.000, 188A2.000 188A7.000, 188B2.000, 192A1.000 192A3.000, 192A8.000 **1.9JTD 8v.** 192A9.000, 192B4.000, 192B5.000 199A5.000, 939A1.000, 939A5.000 939A7.000, 223A7.000 **1.9JTD 16v.** 192A5.000, 937A5.000, 939A2.000 939A8.000 **2.0JTD 16v.** 198A5.000 **2.4JTD 10v.** 185A6.000 **2.4JTD 20v.** 939A3.000

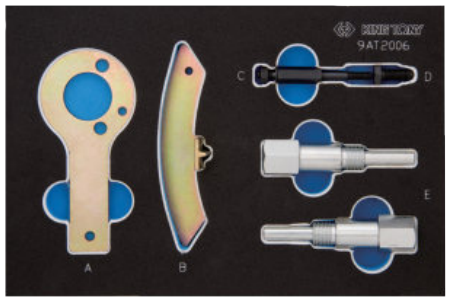

CONTENTS :
- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)

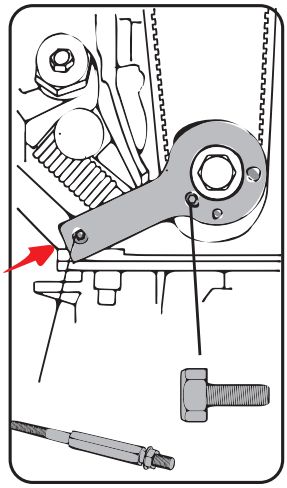





FIAT

Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt





51 20 / 100

MODEL:	**Stilo** (01-08), **Brava** / Bravo (95-02) **Marea / Weekend** (96-03), **Multipla** (99-09) **Doblo / Cargo** (02-06)
ENGINE CODE:	178B3.000, 182A4.000 182A6.000, 182B6.000

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 12 / 120

MODEL:	**2.5D / 2.5DT / 2.8D / 2.8JTD** Croma (93-97) Ducato (87-06) Talento (87-02)
ENGINE	8140.21, 8140.27, 8140.47R 8140.43, 8140.43S, 8140.63 8144.67

Petrol Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing





64 25 / 100

MODEL:	**Petrol 1.6 16v. Twin Cams (Belt)** Stilo

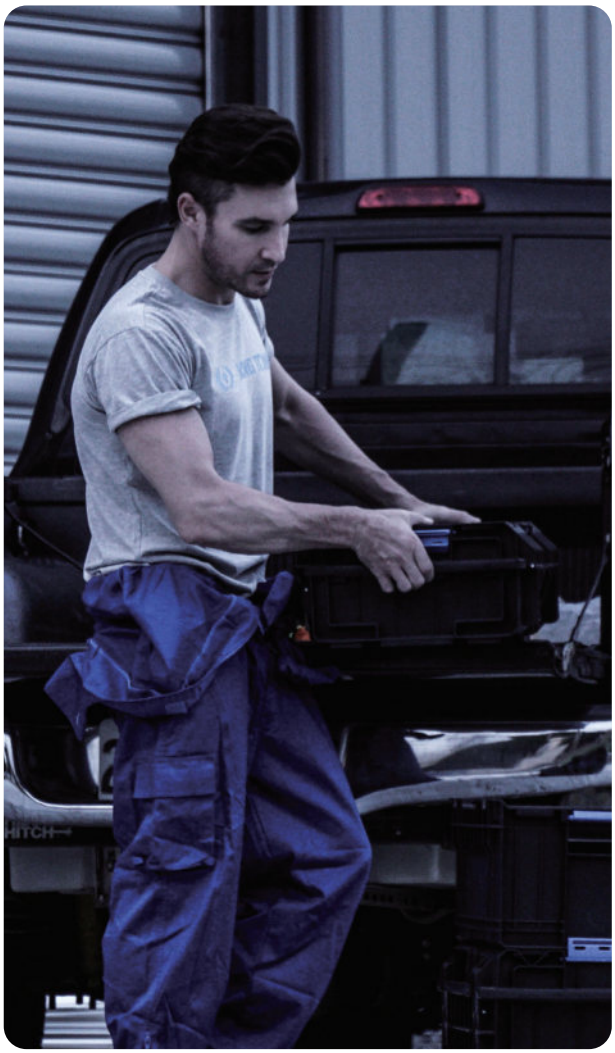

FORD

EcoBoost 1.0 Timing Set



9AT1026E

- Engine Timing Tool Kit suitable for 1.0 petrol EcoBoost and 1.0 SCTi EcoBoost FORD engines.
- Contains tools vital for setting and locking the engine and for setting the position of the variable cam timing units.

16 PC. | P | CHAIN

4.4 kg | 1 / 4

MODEL:	**Fiesta** (2013-2016), **EcoSport** (2013-2015), **B-Max** (2013-2016), **C-Max** (2012-2016), **Transit Courier** (2012-2016), **Transit Connect** (2013-2016), **Focus** (2012-2016), **Grand Tourneo Connect** (2013-2015), **Grand C-Max** (2012-2016), **Mondeo** (2015-2016), **Tourneo Connect** (2013-2015)
ENGINE :	M1CA, M1CB, M1DA, M1DD, M1JA, M1JC, M1JE, M1JH, M2DA, M2DB, M2DC, M2GA, P4JC, P4JD, SFCA, SFCB, SFDB, SFJA, SFJB, SFJC, SFJD, P4JA, P4JB, XMJA, XMJB, M1JA



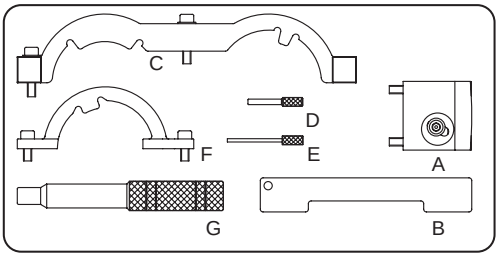

CONTENTS:

- A - Inlet Camshaft Adjusting Tool
- B - Camshaft Locking Plate
- C - Camshaft Sensor Locating Tool
- D - Chain Tensioner Locking Pin 4.0mm
- E - Chain Tensioner Locking Pin 2.5mm
- F - Camshaft Sensor Locating Tool
- G - Crankshaft Locking Pin

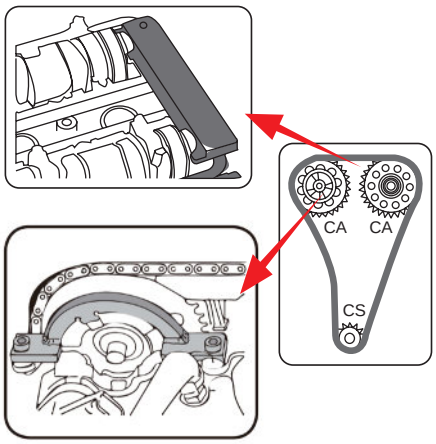

FORD

Petrol Engine Twin Camshaft & Diesel Engine Timing Tool Set



9AT1406E

- The set includes VCT setting plate, camshaft setting plate, crankshaft TDC location pin, tensioner locking pin and flywheel locking tools
- Suitable for 16v. Duratec petrol engine of FORD 1.6 Ti-VCT twin camshaft
- Use to adjust VCT timing on inlet and exhaust camshaft during timing belt replacement

D | P | BELT | 7 PC.

1640 g | 1 / 10

MODEL:	**Focus C-Max** (03-08) **Focus** (04-08) **Mondeo** (07-08)
ENGINE CODE:	HXDA







CONTENTS :

- A&E - flywheel locking tool
- B - camshaft setting plate
- C - crankshaft TDC location pin
- D - tensioner locking pin
- F - VCT setting plate
- G-crankshaft pulley alignment tool

Diesel Engine Timing and Injection Pump Setting & Locking Set



9AT2011E

- The set includes sprocket retaining plate, flywheel & tensioner locking pins
- Suitable for chain drive diesel engine of Ford
- Use to install/remove injection pump & set/lock engine timing

1473 | 1 / 10

MODEL:	Diesel 2.0 / 2.2 / 2.4 TDdi / TDci DURATORQ(CHAIN)
ENGINE CODE:	**2.0Ddi** ABFA, D3FA, F3FA **2.0 TDdi** D5BA, D6BA **2.0 TDci** FMBA, FMBB **2.2 TDci** QJBA~D **2.4 Ddi** D2FA, F4FA **2.4 TDci** FXFA, H9FA, JXFA, PHFA

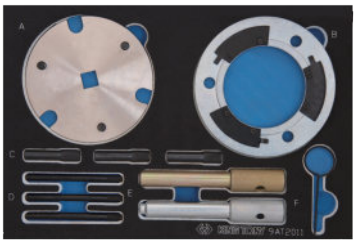

CONTENTS :

- A – access Cover Removal Plate
- B – sprocket Retaining Plate
- C – location Pins (3 PC.)
- D – locking Pins (3 PC.)
- E – flywheel Locking Pins (2 PC.)
- F – tensioner Locking Pin

FORD

Diesel Engine Setting/Locking Tool (Belt Drive)

9AT2-C01

- The set includes crankshaft (oval / round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4 / 1.9 / 2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine

408 | 10 / 40

MODEL:	**Galaxy** 1.9
ENGINE CODE:	ASZ / ANU







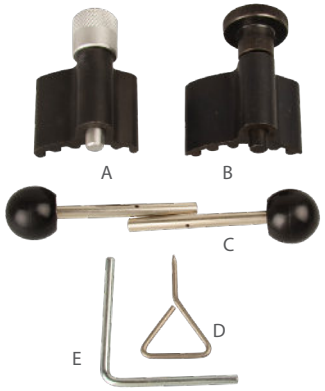

CONTENTS :

- A - Crankshaft Locking Tool (Silver / Oval)
- B - Crankshaft Locking Tool (Black / Round)
- C - Camshaft Locking Pins (2 pcs)
- D - Tensioner Pulley Locking Pin
- E - Auxiliary Belt Tensioner Locking Pin

Petrol Engine Timing Set – Ford 2.0 Ecoboost



9AT1105E

- The set includes cam & crankshaft alignment tool and tensioner locking pin
- Suitable for Ford fitted with SCTi Ecoboost / Ti-VCT 2.0lt direct injection engines
- Camshaft tool use for vehicles manufactured **May 2011** and **after May 2011**

1745 | 1 / 10

MODEL:	**Galaxy**(2010-), **Mondeo**(2010-) **S Max**(2010-), **Focus**(2011-)
ENGINE CODE:	**Galaxy 2.0** TNWA, TNWB, TPWA **Mondeo 2.0** TNBA, TPBA **S Max 2.0** TNWA, TNWB, TPWA **Focus 2.0** MGDA, XQDA





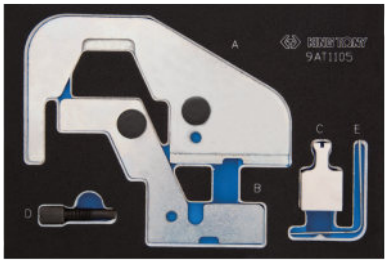

CONTENTS :

- A – camshaft alignment plate
- B – camshaft alignment plate
- C – crankshaft locking tool
- D – crankshaft timing pin
- E – tensioner locking pin

FORD

Petrol & Diesel Engine Flywheel Holding Set

9AT3-E01

- Lock crankshaft in timed position by locating into flywheel
- Suitable for counter-holding crankshaft when releasing or tightening crankshaft pulley bolt





373 g | 36 / 36

MODEL:	**1.8 TDi / TDdi / TDCi Petrol Engines(Belt)** Fiesta / Courier, Tourneo Connect, Focus C-Max, Mondeo, S-Max, Galaxy, Transit Connect **2.0TDCi Diesel Engines (Belt)** Focus / C-Max, S-Max, Galaxy **1.6Ti-VCT Petrol Engines(Belt)** Focus, Mondeo, Focus C-Max
ENGINE CODE:	**1.8 TDi / TDdi / TDCi Petrol Engines(Belt)** RTN, RTQ, RTP, BHDB, BHPA, C9DA, C9DB C9DC, F9DA, F9DB, FFBA, FFDA, FFWA HPCA, HPCB, P7PA, P9PA, QYBA, QYWA R2PA, R3PA, RWPA, KKDA **2.0TDCi Diesel Engines (Belt)** AZWA, G6DA, G6DB, G6DC, QXWA **1.6Ti-VCT Petrol Engines(Belt)** HXDA

IVECO

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen/Peugeot, Vauxhall/Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 g | 12 / 120

MODEL:	**2.5D/2.8D** Daily (91-06) Turbo Daily (94-00)
ENGINE CODE:	8140.07, 8140.27S, 8140.47 8140.47R, 8140.67F, 8140.97 8140.23, 8140.43C, 8140.43S

LANCIA

Diesel Engine Setting & Locking Set

9AT2006E



- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engine
- Use to set and lock engines timing

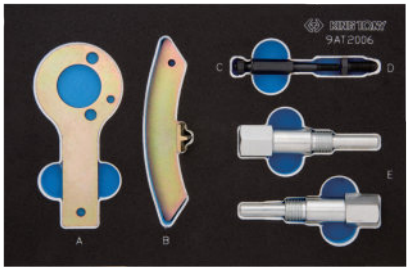

CONTENTS :

- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)





1360 g | 1 / 10

MODEL:	**2.0JTD / 2.2JTD(Belt)** Lybra (99-07) Musa (04-09) Kappa (98-02) Thesis (02-07)
ENGINE CODE:	**1.9JTD 8v.** 323.02, 371.01, 188B2.000, 937A2.000 **2.4JTD 10v.** 838A8.000, 839A5.000, 839A6.000 **2.4JTD 20v.** 841C.000, 841D.000, 841G.000, 841H.000

LANCIA

Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt

51 g | 20 / 100

MODEL:	**Delta** (96-99) **Lybra** (99-06)
ENGINE CODE:	182A4.000 182A6.000





LAND ROVER

Diesel Engine 2.0 / 3.0 Timing Set



9AT2007E

- The set includes camshaft setting plate, tensioner retaining pin set and flywheel locking pin
- Suitable for BMW 2.0 and 3.0 liters common rail diesel engines in BMW 3, 5 & 7 Series, X5, Land Rover Freelander, Range Rover, Rover 75, Vauxhall / Opel
- Use to check and adjust the timing position of camshaft and TDC position of crankshaft

1753 g | 1 / 10

MODEL:	**Diesel (Chain)** Freelander (00-06) Td4 (2.0d) Range Rover (02-06) Td6 (3.0d)
ENGINE CODE:	**Diesel (Chain)** 204D3 / Td4 (2.0 M47:BMW) 306D1 / Td6 (3.0 M27:BMW)





CONTENTS :
- A – camshaft setting plate
- B – camshaft plate locking tool
- C – TDC timing pin
- D – tensioner retaining pin set (pair)
- E – flywheel locking pin

Diesel Engine 2.5TDS Timing Set



9AT2106E

- The set includes camshaft setting plate, tensioner lever, tensioner retaining pin, flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engines
- Use to retain and support the sprocket and timing chains in position when the pump is removed

2480 g | 1 / 5

MODEL:	**2.5D Turbo (Chain)** Range Rover (94-02)
ENGINE CODE:	256T M51





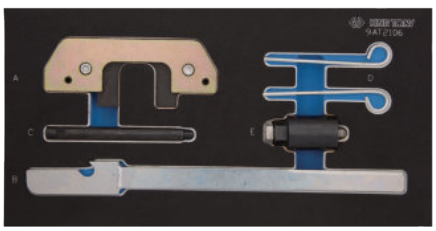

CONTENTS :
- A – camshaft setting plate
- B – tensioner lever
- C – flywheel locking pin
- D – tensioner retaining pin
- E – pump remove & sprocket retainer (2 part)

LAND ROVER

Diesel Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 | 6 / 36

MODEL:	**Freelander** (00-06) **Td4** (2.0d) **Range Rover** (02-06) **Td6** (3.0d)
ENGINE CODE:	204D3 / Td4 (2.0 M47:BMW) 306D1 / Td6 (3.0 M57 : BMW)





RENAULT

Diesel Engine Setting & Locking Set



9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel





2376 | 1 / 5

MODEL:	**Megane II** (07-09) **Scenic / Grand Scenic** (08-09) **Laguna II** (01-05) **Vel Satis** (05-09) **Espace / Grand Espace** (08-09) **Koleos** (08-09) **Trafi c** (07-09)
ENGINE CODE:	**2,0 dCi M9R** 700, 721, 722, 724, 740, 742, 746, 760 761, 780, 802, 803, 805, 830, 832, 833

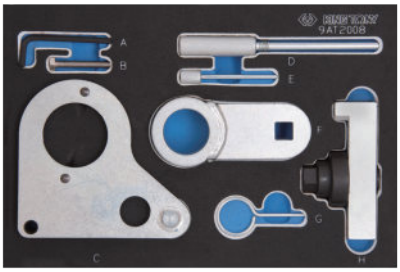

CONTENTS :

- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

RENAULT

Petrol Engine Timing Locking Set-2.0 16V IDE - F5R

9AT1-A03

- The set includes crankshaft timing pin and camshaft setting plate, to aid timing belt replacement
- Suitable for Renault 2.0 IDE twin cam petrol engines found in Laguna and Megane vehicles

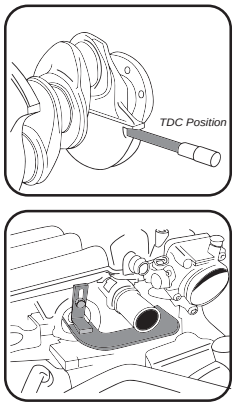



511 | 10 / 30

MODEL:	**Megane** (99-03) **Laguna II** (01-05)
ENGINE CODE:	F5R700, 701, 740

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 | 12 / 120

MODEL:	**2.5D / 2.5D Turbo / 2.8dTi / 2.8dCi** Trafic (98-00) Master (98-07)
ENGINE CODE:	**S8U** 720, 722, 730, 731, 742, 748 750, 752, 770, 772, 780, 782 **S9U** 700, 702, 704, 714, 740 **S9W** 206, 208, 212, 700, 702

Petrol & Diesel Engine Timing Set(dCi Engines)

9AT3-A03

- The set includes camshaft / crankshaft locking pin and TDC timing pin
- Used for timing belt replacement
- Suitable for Renault 1.5 and 1.9 dCi diesel and petrol engine

CONTENTS :
- A - crankshaft Locking Pin
- B - TDC Timing Pin
- C - camshaft/Crankshaft Locking Pin





RENAULT (Belt) | 220 | 10 / 100

MODEL:	**Diesel** Clio 1.5 dCi (01-08) Clio 1.9 DTi (99-03) Espace 1.9 TDi (97-02) Kangoo 1.5 dCi (04-08) Kangoo 1.9 DTi (99-03) Laguna 1.9 DTi (97-03) Megane II 1.5 dCi (02-05) Megane 1.9 D / TD / TDi (95-03) Scenic II 1.5 dCi (02-05) Scenic 1.9 TD (95-99) **Petrol** Clio 1.8 (92-01) Espace 2.0 (92-01) Laguna 1.8 (92-01) Megane, 2.0 (96-99) R19 1.8 (92-01) F3R Scenic 2.0 (96-99)
ENGINE CODE:	**Diesel** K9K F8Q F9Q **Petrol** F3P F3R

RENAULT

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing
- Suitable for petrol and diesel engine



64 | 25 / 100

MODEL:	**Petrol 1.2 to 2.2 (Belt)** F3R, F7R, F7P, F3P, E7J F8M and F8Q (early) **Diesel 1.50 to 2.50 TUD / XUD (Belt)** F3R, F7R, F7P, F3P, E7J, F8M and F8Q (early)





NISSAN

Diesel Engine Setting & Locking Tool Set



9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel







2376 | 1 / 5

MODEL:	Primastar (08-09) Qashqai (08-09) X-Trail (07-08)
ENGINE CODE:	**M9R** 780, 830, 832, 833



CONTENTS :

- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

ROVER

Diesel Engine 2.0 / 3.0 Timing Set



9AT2007E

- The set includes camshaft setting plate, tensioner retaining pin set and flywheel locking pin
- Suitable for BMW 2.0 and 3.0 liters common rail diesel engines in BMW 3, 5 & 7 Series, X5, Land Rover Freelander, Range Rover, Rover 75, Vauxhall / Opel
- Use to check and adjust the timing position of camshaft and TDC position of crankshaft

D | CHAIN | 7 PC.

1753 g | 1 / 10

MODEL:	**Diesel (chain)** **Rover** 75 (99-05) **MG** MG ZT (01-05)
ENGINE CODE:	**Diesel (chain)** M47R (BMW)



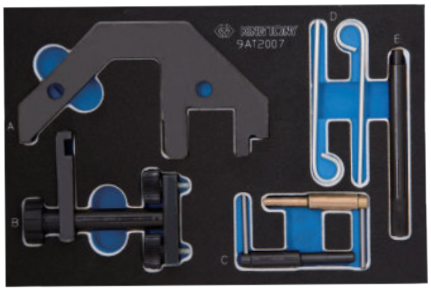

CONTENTS :
- A - camshaft setting plate
- B - camshaft plate locking tool
- C - TDC timing pin
- D - tensioner retaining pin set (pair)
- E - flywheel locking pin

SAAB

Diesel Engine Setting & locking Set



9AT2005E

- The set includes crankshaft locking tool, camshaft setting tools(pair) and a tensioner locking pin
- Suitable for Saab, Vauxhall / Opel engine
- Use to set and lock engines timing

D | BELT | 5 PC.

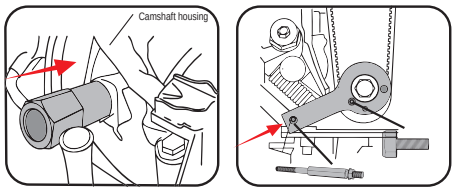

1295 g | 1 / 10

MODEL:	**Diesel 2.2D TiD** 9-3 (98-04), 9-5 (02-06)
ENGINE CODE:	**Diesel 2.2D TiD** Z19DT / Z19DTH

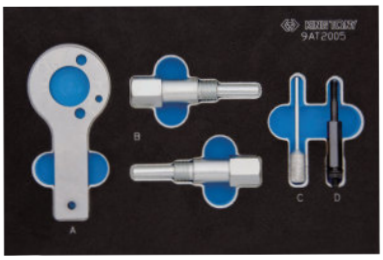

CONTENTS :
- A&D - crankshaft locking tools
- B - camshaft setting tool (pair)
- C - tensioner locking pin

SUZUKI

Diesel Engine Setting & Locking Set

9AT2004E

- The set includes flywheel locking pin, camshaft setting tools, tensioner locking pin
- Use to retain timing position only. DO NOT use them to hold camshafts in position while releasing or tightening the sprocket bolts



1101 1 / 10

MODEL:	**Diesel 1.3 DDiS (Belt)** Swift (04-09) Ignis (03-09) Wagon R+ (03-08)
ENGINE CODE:	**Diesel 1.3 DDiS (Belt)** Z13DT







CONTENTS :

- A– camshaft setting tool set (pair)
- B– flywheel locking pin
- C– tensioner retaining pin



VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Twin Camshaft Setting & Locking Set - VAG 1.4 / 1.6 FSi (Chain)

9AT1103E

- The set includes camshaft setting plate, TDC position tool (with DTI) and tensioner locking pin
- 9AT1103 'B' TDC positioning tool has to use with 9AT3-F01(not included in this set)

P | CHAIN | 3 PC.

1456 | 1 / 10

MODEL:	**Audi** A3 (03-07) **Volkswagen** Polo (02-08), Golf V (03-08), Golf Plus (05-08) Jetta (06-08), Passat (05-08), Touran (03-07) **Skoda** Octavia II (04-08)
ENGINE CODE:	**1.4 FSI** AXU, BKG, BLN **1.6 FSI** BAG, BLF, BLP, BTS





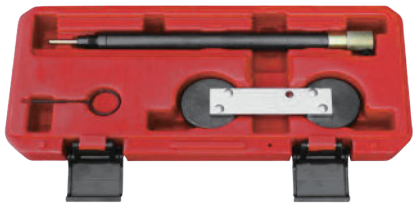

CONTENTS :
- A - camshaft setting plate
- B - TDC position tool (with DTI)
- C - tensioner locking pin

VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Setting & Locking Set



9AT1104E

- The set includes a camshaft setting tool set (pair), camshaft setting tool and a flywheel locking pin
- Suitable for VW Group 1.2 engine range
- Use to adjust valve timing

P | CHAIN | 4 PC.

1291 | 1 / 10

MODEL:	**Seat** Ibiza / Cordoba (02-08) **Skoda** Fabia (02-07) **Volkswagen** Polo (02-07), Fox (05-08), Eos (06-08)
ENGINE CODE:	**Petrol 1.2 6v (chain)** AWY, BMD **Petrol 1.2 6v (chain)** AZQ, BME





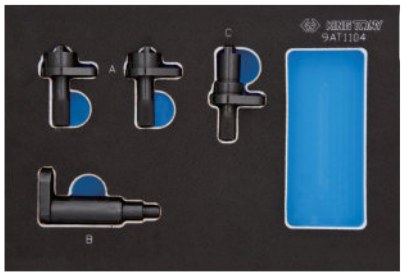

CONTENTS :
- A - camshaft setting tool set (pair)
- B - flywheel locking pin
- C - camshaft setting tool

VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Diesel Engine Setting & Locking Set - Pumpe Düse

9AT2012E

- The set includes crankshaft & camshaft locking tool, tensioner setting & adjusting tools
- Suitable for belt drive Pumpe Düse diesel engines of VW group vehicles and Ford (Galaxy)
- Use to set & lock engine to make sure timing is in the correct position during timing belt replacement
- Suggestion :
  Check the engine is hydraulic or mechanical tensioner first. (Some of 1.2 1.4 1.9 engines were changed from hydraulic to mechanical.)

1845 1 / 10

MODEL:	**Audi** A2 (01-06), A3 (01-09), A4 (99-09) A5 (08-09), A6 (98-08), TT (08-09) Q5 (08-09) **Skoda** Fabia (00-07), Fabia II (07-09) Octavia (00-09), Octavia II (04-09) Superb (02-08), Roomster (07-09) **Volkswagen** Lupo(99-05), Polo(99-07), Fox(05-08) Jetta (05-09), Passat (98-09), Beetle (00-09) Touran (03-09), Sharan (99-09) Caddy (03-09), Golf /Bora(98-08) Golf Plus (05-09), Transporter (03-09) **Seat** Arosa (99-05), Altea XL(04-09) Leon (00-09), Toledo (04-09) Alhambra (99-09), Ibiza / Cordoba)(02-09) **Ford** Galaxy (99-06)
ENGINE CODE:	**1.2TDi PD** ANZ, AYZ **1.4TDi PD** AMF, ATL, BAY, BHC, BMS, BNM, BNV, BWB **1.9TDi PD** AJM, AMG, ANU, ARL, ASZ, ATD, ATJ, AUY, AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRR,BRS, BRU, BSU, BSW, BTB, BUK, BVK, BXE, BXF **2.0TDi PD** AZV, BDJ, BDK, BGW, BHW, BKD, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BUZ, BVE, BVF, BVG, BVH, BWV **1.9TDi PD (Ford)** ANZ, ASZ, AUY



CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner adjuster (1.2, 1.4 & 1.9)
- E - tensioner adjuster (later 1.9 & 2.0)
- F - tensioner adjust tool (hexagon)
- G - tensioner locking tool
- H - tensioner locking pin (mechanical)
- I - tensioner locking tool (hydraulic)
- J - tensioner setting tool (hydraulic)
- K - auxiliary belt tensioner locking pin

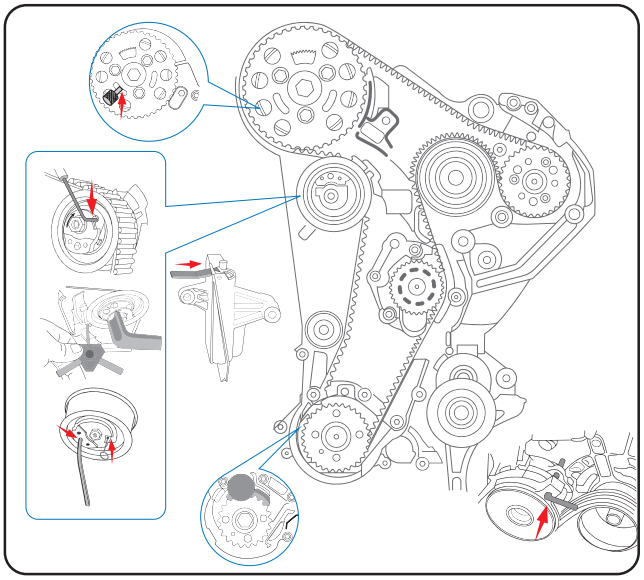

VW/AUDI

VW Audi TIMING TOOL Set VAG 1.6/2.0 TDI CR



9AT2010E

- This set designs to fit the newest common rail diesel engine which is significantly different from the older PD engine.
- The CR engines combines belt and the gear drive by using a toothed belt to transfer the drive from the crankshaft to one of the cam shafts, then using gears to transfer the drive from one cam to the other.

D | CHAIN | 10 PC.

Kg 2.7 | 1 / 4

MODEL:	**Audi** A3, A4, A5, A6, Q5 **Volkswagen** Golf, Tiguan, Passat, Eos
ENGINE :	**1.2 TDi** ANY, AYZ **1.4 TDi** AMF, ATL, BAY, BHC, BNM, BNV **1.9 TDi** AJM, AMG, ANJ, ARL, ARX, ASZ, ATD, ATJ, AUY,AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRU, BSU, BSV, BSW, BTB, BVK, BXE, BXF **2.0 TDi** AZV, BKD, BDJ, BDK, BGW, BHW, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BSS, BUY, BUZ, BVE,BVF, BVG, BVH, BVW

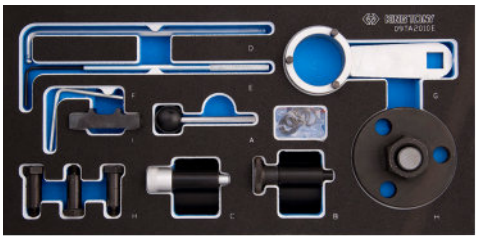

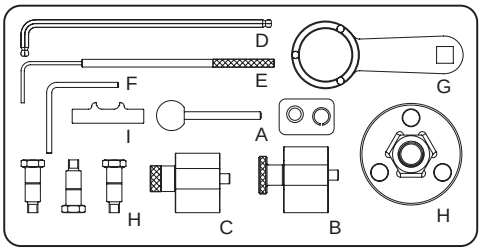

CONTENTS::

- A - Injection pump/ camshaft alignment pin
- B - Crankshaft pulley locking tool(Bored)
- C - Crankshaft pulley locking tool(Non-bored)
- D - Tensioner pulley adjustment tool(2.4mm Hex Key)
- E - Tensioner pulley locking tool
- F - auxiliary tensioner locking tool(3.9mm)
- G - Sprocket holding tool
- H - Cam sprocket hub puller
- I - Oil Pump /Balancer Shaft Alignment Tool

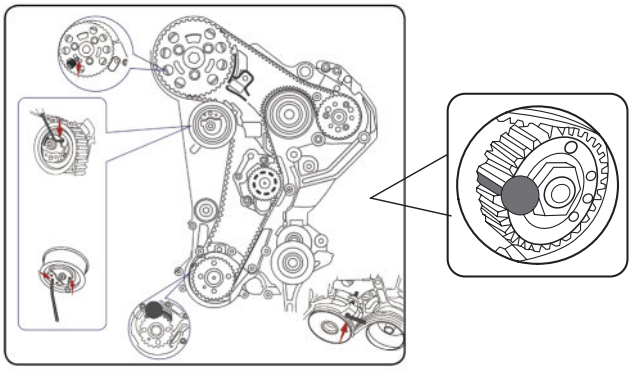

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT

Petrol Engine Camshaft Sprocket Holding Tool

9AT1-A01

- For locking the camshaft pulleys when changing the toothed belt
- Engine repairs on 16-valve 1.4/1.6L FSi twin cams injection engine

P | BELT

g 340 | 6 / 36

MODEL:	**Audi** A2 (00-06) **Seat** Arosa (99-05), Ibiza / Cordoba (99-08) Leon (99-05), Toledo (99-05), Inca (00-04) **Skoda** Fabia (99-07), Octavia (00-08) **Volkswagen** Lupo (98-05), Polo (98-07), Golf / Bora (97-08), Beetle (01-08) Caddy (99-08)
ENGINE CODE:	AFK, AHW, AJV, AKQ, APE, AQQ, AUA, AUB, AXP, ARC, ATN, AUS, AVY, AZD , ARR, BBY, BBZ, BCA, BKY, BAD, BCB







Petrol Engine Chain Tensioner Retainer

9AT1-A04

- Use to hold the chain tensioner in position when removing or installing timing chain
- Suitable for a variety of VAG chain drive engines

46 | 12 / 192

MODEL:	A3, A4, A6, A8, S3, S4, TT, etc
ENGINE CODE:	**Audi** AHA, AMB, AMU, APB, ART, ATC, ATQ, AWM, AWN, AWP, BBD, BCY, BEA, BEL, BFM **VW** AHA, APH, ATQ, AUG, AWM, AWP, AWV, BKF, BNU

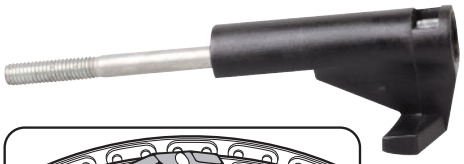

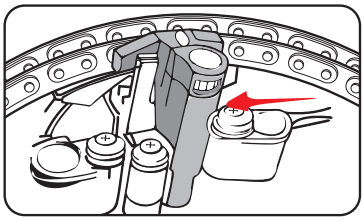

Diesel Engine Setting/Locking Tool (Belt Drive)

9AT2-C01

- The set includes crankshaft (oval/round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4/1.9/2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine

408 | 10 / 40

MODEL:	**Audi** A2 1.4 (02-06), A3 1.9/2.0 (02-08), A4 1.2 (02-05), A4 1.9/2.0 (02-05), A6 1.9 (20-05) **VW** Beetle 1.9 (02-08), Bora 1.9 (02-08), Fox 1.4 (02-08), Golf 1.9 (02-08), Lupo 1.4 (02-08) Polo 1.4/1.9 (02-08), Sharan 1.9 (20-08), Jetta 2.0 (03-), Passat 2.0 (03-), Touran 2.0 (03-) **Seat** Altea 1.9 (05-08), Leon 1.9/2.0 (05-08), Toledo 1.9 (05-08) **Skoda** Octavia II 2.0 (03-06), Fabia 1.4 (03-06)
ENGINE CODE:	**Audi** AMF, ASZ, ATD, AVB, AVF, AWX, AXR, AZV, BHC, BKC, BKD, BKE, BLB, BMN, BNA, BPW, BRB, BRC, BRD, BRE, BRF, BUY, BVA, BVF, BVG **VW** AJM, AMF, ANU, ARL, ASZ, ATD, AUY, AVB, AVF, AWX, AXR, BAY, BMS, BNM, BNZ, BWB **Seat** BJB, BKC, BLS, BMM, BXE **Skoda** AMF, AZV, BKD







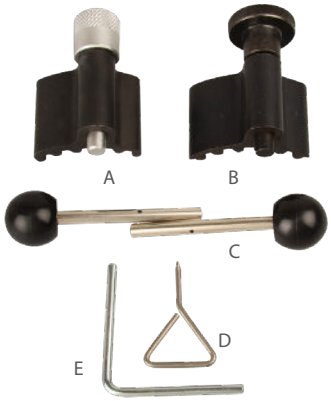

CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner pulley locking pin
- E - auxiliary belt tensioner locking Pin

VAUXHALL/OPEL

Petrol Engine Setting & Locking Set



9AT1002E

- The set includes camshaft setting tool and tensioner retaining pin
- Suitable for Vauxhall / Opel & Fiat engine
- Use to lock the camshafts on the correct timing position

1510 | 1 / 10

MODEL:	**Petrol 2.2 16v. Twin Cams(Chain)** Astra-G (00-06) Astra-H (06-09) Speedster / VX220 (00-06) Vectra-B+C (00-08) Signum (03-08) Zafira-A+B (00-09)
ENGINE CODE:	Z22SE, Z22YH

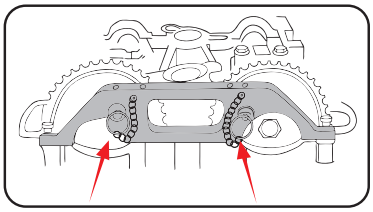

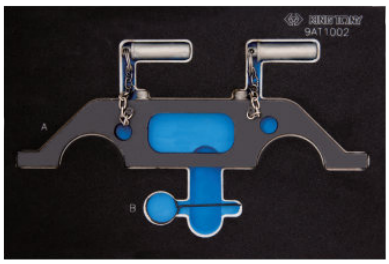

CONTENTS :

- A - camshaft setting tool
- B - tensioner retaining pin

VAUXHALL/OPEL

Petrol Turbo Engine Timing Set



9AT1007E

- The setting & locking set covers a wide range of Vauxhall/Opel and Chevrolet petrol engine.
- Include the necessary tool for setting and locking the camshaft and crankshaft for locking the timing chain tensioner.

7 PC. | P | CHAIN

2.4 | 1 / 4

MODEL:	**Cadillac :** ELR (2014). **Chevrolet :** Aveo (2011-2015), Cruze (2011-2015), Volt (2012-2014),Trax (2013-2015), Orlando (2011-2015). **Holden:** Volt (2012-2014). **Vauxhall / Opel:** Agila (2000-2003), Agila-B (2008-2010), Adam (2012-2015),Ampera (2011-2015), Corsa-C (2000-2014), Corsa-D (2006-2014), Insignia (2011-2015), Meriva-B (2010-2015), Mokka (2012-2015),Zafira-C Tourer (2012-2015), Cascada (2013-2015),Astra-J (2009-2015).
ENGINE :	**1.0 / 1.0 Ecoflex** A10XEP **1.2 / 1.2 Ecoflex** A12XEL, A12XER, LWD/A12XEL, L2Q/A12XEL, LWD/B12XEL **1.4 / 1.4 Ecoflex** A14XER, LUJ/A14NET, LDD/A14XEL, LDD/A14XER, LDD/A14XEL, A14XEL, L2Z/A14XEL, LDD/B14XEJ, LDD/B14XEL, LDD/B14XER, LUJ/B14NEH, LUJ/B14NEL, LUJ/B14NET, LDD, LUU, LUH/A14NEL **1.4 Turbo** LUJ/A14NEL, LUJ/A14NET, LUJ/B14NET **1.6** LDE/A16XER, LDE/B16XER

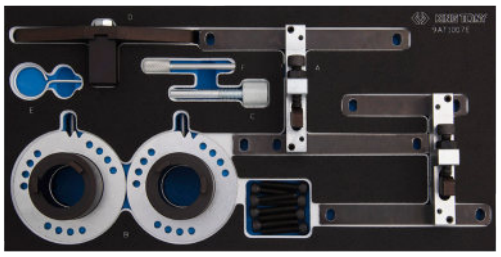

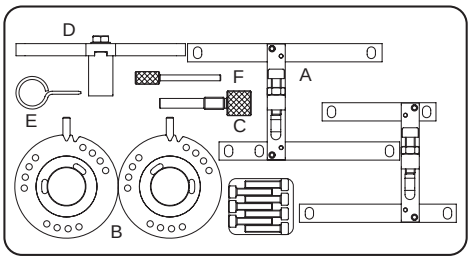



CONTENTS:

- A - Camshaft Locking Tool Set
- B - Camshaft VVT Adjustment Tool Set
- C - Crankshaft Setting Pin
- D - Flywheel Locking Tool
- E - Tensioner Locking Pin
- F - Crankshaft Pulley Positioning Pin

- Remove the starter motor and fit component D in the starter aperture so that its tooth locks the flywheel

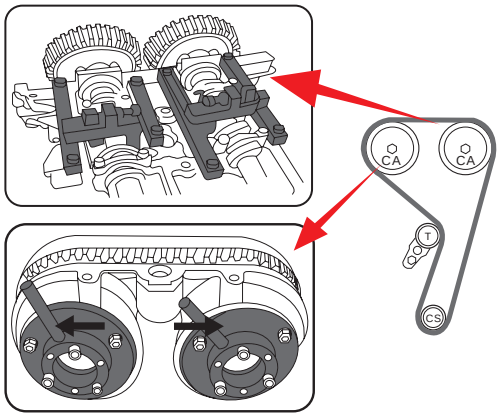

VAUXHALL/OPEL

Petrol & Diesel Engine Tensioner Adjustement Wrench (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engine

P | D | CHAIN | 2 PC.

695 | 6 / 24

MODEL:	**9AT1202 - A(46MM)** **Petrol / 1.8 and 2.0 S.O.H.C** Astra F, Calibra, Frontera C18NZ, C20NE **Diesel / 1.6D and 1.7D** Astra, Cavalier, Vectra 16DA, 17D **9AT1202 - B(41MM)** **Petrol / 1.2 / 1.4 / 1.6 S.O.H.C** Corsa B / C , Combo, Astra-F, Vectra-B C12NE, X12SZ, C14NZ, X14NZ, C14SE X14SZ, X16SZ, X16SZR, Z16SE





CONTENTS :

- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set

9AT2004E

- The set includes flywheel locking pin, camshaft setting tools, tensioner locking pin
- Use to retain timing position only. DO NOT use them to hold camshafts in position while releasing or tightening the sprocket bolt



1101 1 / 10

MODEL:	**Diesel 1.3D CDTi (Chain)** Agila (03-08), Agila-B (08-09) Corsa / Combo-C (03-09), Corsa-D (08-09) Tigra-B(04-09), Meriva (04-09) Astra-H (05-09)
ENGINE CODE:	**Diesel 1.3D CDTi (Chain)** Z13DT, Z13DTH, Z13DTJ



CONTENTS :
- A - camshaft setting tool set (pair)
- B - flywheel locking pin
- C - tensioner retaining pin

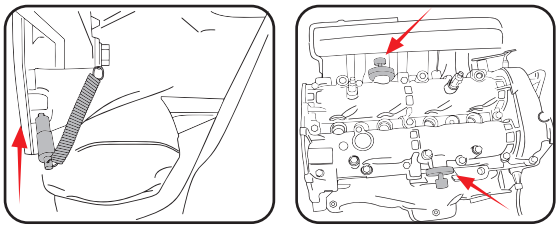

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set



9AT2005E

- The set includes crankshaft locking tool, camshaft setting tools(pair) and a tensioner locking pin
- Suitable for Saab, Vauxhall / Opel engine
- Use to set and lock engines timing



1295 1 / 10

MODEL:	**Diesel 1.9D CDTi / 2.0D CDTi(Belt)** Astra-H (04-09), Vectra-C(04-08) Signum (04-08), Zafira-B (05-09) Insignia (08-09)
ENGINE CODE:	**Diesel 1.9D CDTi / 2.0D CDTi(Belt)** **1.9CDTi** Z19DT, Z19DTH, Z19DTJ, Z19DTL **2.0CDTi** A20DT, LBS, A20DT, LBX, A20DT, LBY A20DT, LCD





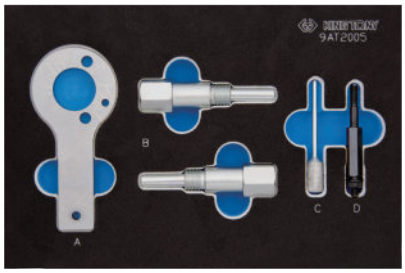

CONTENTS :
- A&D - crankshaft locking tools
- B - camshaft setting tool (pair)
- C - tensioner locking pin

VAUXHALL/OPEL

Diesel Engine 2.0 / 3.0 Timing Set



9AT2007E

- The set includes camshaft setting plate, tensioner retaining pin set and flywheel locking pin
- Suitable for BMW 2.0 and 3.0 liters common rail diesel engines in BMW 3, 5 & 7 Series, X5, Land Rover Freelander, Range Rover, Rover 75, Vauxhall / Opel
- Use to check and adjust the timing position of camshaft and TDC position of crankshaft

D | CHAIN | 7 PC.

1753 g | 1 / 10

MODEL:	**Diesel (Chain)** Omega-B(01-03)
ENGINE CODE:	**Diesel (Chain)** Y25DT





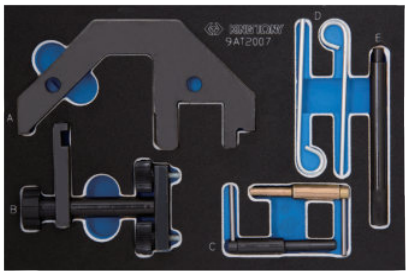

CONTENTS :

- A – camshaft setting plate
- B – camshaft plate locking tool
- C – tdc timing pin
- D – tensioner retaining pin set (pair)
- E – flywheel locking pin

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set



9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel

D | CHAIN | 8 PC.

2376 g | 1 / 5

MODEL:	**Vivaro** (07-08)
ENGINE CODE:	**M9R** 780/782/784





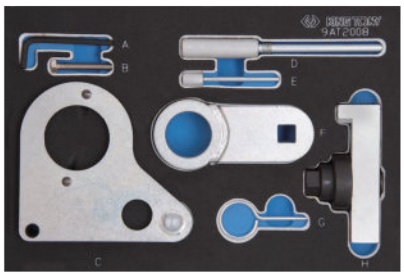

CONTENTS :

- A&H – camshaft gear alignment tool
- B&C – camshaft setting plate
- D – crankshaft locking pin
- E – auxiliary belt tensioner locking pin
- F – crankshaft pulley holding tool
- G - chain tensioner locking pin

VAUXHALL/OPEL

Diesel Engine 2.5TDS Timing Set



9AT2106E

- The set includes camshaft setting plate , tensioner lever , tensioner retaining pin , flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engines
- Use to retain and support the sprocket and timing chain in position when the pump is removed



2480 1 / 5

MODEL:	**Omega-B** (94-01)
ENGINE CODE:	**2.5D Turbo (Chain)** X25DT





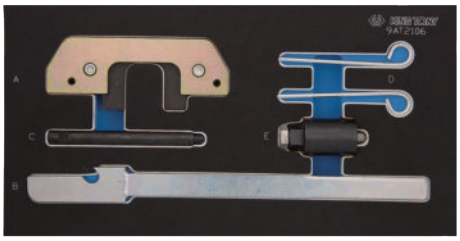

CONTENTS :
- A – camshaft setting plate
- B – tensioner lever
- C – flywheel locking pin
- D – tensioner retaining pin
- E – pump remove & sprocket retainer (2 part)

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel



112 12 / 120

MODEL:	**2.5D / 2.8D** Arena (97-01) Movano (98-03)
ENGINE CODE:	**S8U** 770, 772 **S9W** 700, 702



CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

Diesel Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines



528 6 /36

MODEL:	**Omega - B** (01-03)
ENGINE CODE:	Y25DT





VAUXHALL/OPEL

Petrol Engine Flywheel Holding & Locking Tool

9AT2-E01

- Use to remove the crankshaft pulley while replacing the timing belt
- Put into the teeth firstly, fix steadily on the housing according to manufacturer's guidelines

39 g | 20 / 100

MODEL:	**Astra** (86-91) **Astra-F + G** (91-98) **Ascona-C / Cavalier** (86-88) **Vectra A** (89-95)
ENGINE CODE:	16DA, 17D, 17DR, 17DTL





UNIVERSAL

Camshaft & Injection Pump Sprocket Holding Tool

9AT3-A01

- Use to counter hold camshaft or injection pump sprocket to release the retaining bolt
- For universal diesel and petrol engine

912 g | 6 / 24







UNIVERSAL

Universal Camshaft Pulley Holding Wrench

9AT3-A02

- Use to hold camshaft pulley while loosening and tightening cam sprockets center bolt
- Designed with 4 pair groove pins 7, 10, 14, 16mm
- Adjustable swivel jaw both side application for most engine
- Capacity : 40 ~ 140mm (1-1/2" ~ 8-5/8")
- For universal engine, especially O.H.C. overhead cam engines cars

1000 g | 1 / 6







9 PC.

UNIVERSAL
Camshaft Sprocket Puller

9AT3-A04

- Use to hold and remove the camshaft sprocket without damaging the sprocket
- Use with 3/8" square drive tool or 19mm wrench
- Suitable for most sprockets from Ø60 to Ø100 mm





KT NO.	Capacity mm	g	
9AT3-A04	60~100	1437	1 / 12

UNIVERSAL
Belt Tensioner Lock Pin Set

9AT3-B01

- Designed for retaining tensioner plunger in fixed position while replacing timing belt
- Suitable for common vehicle and engine

g 17 | 20 / 100





CONTENTS :
- 0.79mm / .0310"
- 1.21mm / .0476"
- 1.41mm / .0560"
- 1.51mm / .0594"
- 1.71mm / .0670"
- 1.92mm / .0760"

UNIVERSAL
Dial Test Indicator

9AT3-F01

- Use to measure and accurately find the piston TDC position
- This tool has to use with TDC Indicator 9AT3-F02
- It can be used for mechanical circularity, flatness.....etc

g 63 | 1 / 100





UNIVERSAL
TDC Indicator

9AT3-F02

- Use to measure if the cylinder piston is at TDC position
- This tool has to use with Dial Test Indicator 9AT3-F01

g 292 | 1 / 30



VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Timing Set



9AT1306E

- The set includes camshaft setting plate, camshaft sprocket adjusting tool, tensioner adjusting tool, tensioner locking pin and crankshaft locking pin
- Suitable for Audi VAG 3.0 V6 petrol engine
- Use to replace timing belt and carry out timing tensioner applications

P | BELT | 6 PC.

3668 | 1 / 5

MODEL:	**Audi** A4 (01-08), A6 (01-08), A8 (03-08) Cabrio (03-08)
ENGINE CODE:	ASN, AVK, BBJ



CONTENTS :
- A - camshaft setting plate (pair)
- B - crankshaft locking pin
- C - camshaft sprocket adjusting tool
- D - tensioner adjusting tool
- E - tensioner locking pin





VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Setting & Locking Set



9AT1506E

- The set includes dial & TDC indicator and camshaft setting tool
- Suitable for 1.2T / 1.4T FSi and 1.4 / 1.6 FSi engines
- Use to check and adjust engine timing

P | CHAIN | 6 PC.

1856 | 1 / 10

MODEL:	**Audi** A1(10-12), A3(03-12) **Seat** Altea/Altea XL(08-12), Ibiza/Cordoba(08-12) Leon(07-12), Toledo(07-09) **Skoda** Fabia II(07-12), Octavia II(04-12) Roomster(06-12), Superb II(09-12) Yeti(09-12) **VW** Caddy/ Caddy Maxi(10-12), Eos(06-12) Golf(03-12), Golf Plus(03-12), Jetta(06-12) Passat(05-11), Polo(02-12), Scirocco(08-12) Tiguan(07-12), Touran(03-12)
ENGINE CODE:	**1.2T FSi** CBZA, CBZB, CBZC **1.4T FSi** BLG, BMY, BWK, CAVA, CAVB, CAVC, CAVD CAVE, CAVF, CAXA, CAXC, CDGA, CSMA **1.4 FSi** AXU, BKG, BLN **1.6 FSi** BAG, BLF, BLP, BTS



CONTENTS :
- A – camshaft setting plate
- B – TDC indicator
- C – camshaft setting tool
- D – crankshaft locking pin
- E – dial test indicator
- F – tensioner locking pin





Hose Clamp	KT Item	Suitable Car Brand
    Hose Clamp	 9AA11  9AA13  9AA16  9AA21  9AA31  9AA32	Universal VW(Intake), VW, Audi, Opel, Honda, Ford
 Hose Clamp	 9AA17	VW, Audi, Seat, Skoda, Lamborghini
 CLIC Clamp  CLIC-E Clamp  CLIC-R Clamp  CLIC-GR Clamp	 9AA15  9AA25	VW, Audi, Citroen/Peugeot, Fiat, Mercedes-Benz, Opel, Renault, Ford, Volvo
 Screw Clamp  Worm Drive Clamp	 1453-05 / 1453-06 / 1453-07 1453-08 / 1453-10	Universal

Straight Hose Clamp Pliers

9AA11

- Use to remove and install spring clamp
- Swivel V-shaped jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford







KT NO.	Ø mm	L inch	L mm	g	
9AA11	55	8-21/32	220	220	12 / 72

Flat Band Hose Clamp Pliers

9AA16

- Use to remove and install spring clamp
- Swivel concave jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford







KT NO.	Ø mm	L inch	L mm	g	
9AA16	60	8-21/32	220	213	12 / 72

Wire Hose Clamp Pliers

9AA13

- Use to remove and install wire clamp
- Swivel jaws
- Suitable for universal cars, especially Corbin heater hose







KT NO.	Ø mm	L inch	L mm	g	
9AA13	51	8-21/32	220	238	12 / 72

Curved Hose Clamp Pliers

9AA21

- Use to remove and install spring clamp
- 45° swivel concave jaw with greater access in confined spaces
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford







KT NO.	Ø mm	L inch	L mm	g	
9AA21	53	8-21/32	220	224	12 / 48

Flexible Hose Clamp Pliers

9AA31

9AA32

- Use to remove and install spring clamp
- Flexible flat jaw with greater access in confined spaces
- Suitable for universal cars





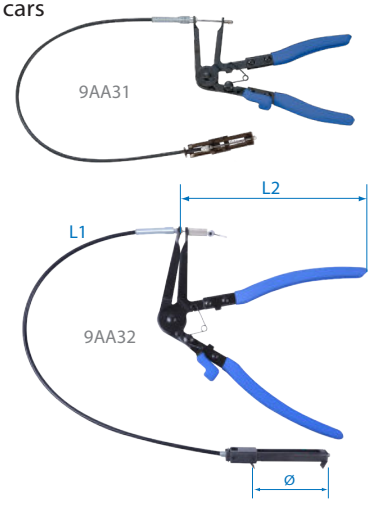

KT NO.	Ø mm	L 1 inch	L 1 mm	L 2 inch	L 2 mm	g	
9AA31	53	25	630	9	225	528	12 / 36
9AA32	77	27-1/4	700	12	310	756	6 / 24

CLIC Hose Clamp Pliers

9AA15

- Use to remove and install CLIC and CLIC-R clamp
- Special-designed jaws
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz







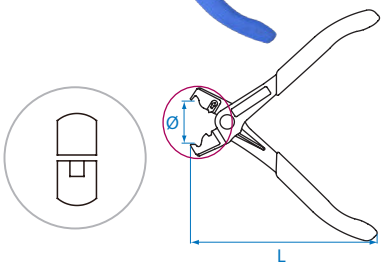

KT NO.	Ø mm	L inch	L mm	g	
9AA15	36	5-19/32	142	223	12 / 72

Fuel Line Hose Clamp Pliers

9AA17

- Use to remove and install fuel line clamp
- Special pick jaws
- Suitable for VW, Audi, SEAT, Skoda









KT NO.	Ø mm	L inch	L mm	g	
9AA17	27	6-3/4	171	188	12 / 60

360° CLIC Hose Clamp Pliers

9AA25

- Use to remove and install CLIC and CLIC-R clamp
- 360° swivel angle
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz











KT NO.	Ø mm	L inch	L mm	g	
9AA25	32	7	175	224	12 / 72

Fuel Line Pliers

9AB11

- Improved type can also use for fuel lines with plastic snap-together connectors
- Use for VW, Audi, Fiat, GM, Opel/Vauxhall, Mercedes-Benz



KT NO.	L inch	L mm	g	
9AB11	9	228	312	12 / 72

9AB12

- For removal and replacement of the connections on the in-line fuel filter
- Use for VW, PSA , Fiat, Opel



KT NO.	L inch	L mm	g	
9AB12	6	150	87	12 / 144



Piston Ring Compressor

9AC

- The square adjustment key wrench forces the rings into the grooves and the clutch prevents it from expanding

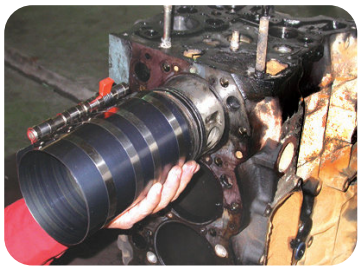



KT NO.	H inch	H mm	Ø Capacity inch	Ø Capacity mm	g	
9AC125-32	3-1/4	80	2-1/4~5	57~125	260	20 / 60
9AC125-40	4	100	2-1/4~5	57~125	280	20 / 60
9AC175-32	3-1/4	80	3-1/2~7	90~175	300	20 / 60
9AC175-40	4	100	3-1/2~7	90~175	320	20 / 60
9AC175-66	6-3/4	165	3-1/2~7	90~175	530	20 / 40

Valve Stem Seal Pliers

9AD11

- For removing valve stem seals in multi-valves engine
- Jaw longitudinal toothed - avoids slipping down
- For deeply leveled valve stem seals

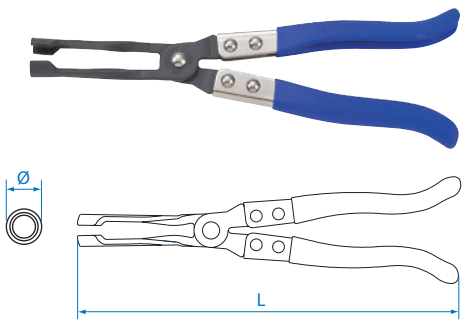

KT NO.	L inch	L mm	Ø mm	g	
9AD11	11	275	9.5	400	12 / 48

Swivel Oil Filter Wrench

9AE31

- Professional swivel PVC dipped handle
- Easy to bend in different positions for reaching into narrow spaces





KT NO.	Ø Capacity mm	g	
9AE31-73	60~73	275	6 / 36
9AE31-85	73~85	283	6 / 36
9AE31-95	85~95	300	6 / 36
9AE31-111	95~111	307	6 / 36
9AE31-121	110~121	309	6 / 36
9AE31-134	120~134	322	6 / 36

Band Type Oil Filter Wrench

9AE32

- Adjustable metal band
- Suitable for filters between Ø65mm to Ø155mm





KT NO.	Ø Capacity mm	g	
9AE32-110	65~110	246	25 / 50
9AE32-155	110~155	252	25 / 50

9AE33-110-S





6 PC.

KT NO.	Contents	Kg 2.70	1 / 2
9AE33-110-S		9AE33-110	

Quick Grip Oil Filter Wrench Set

9AE33

- Quick-adjustable tightening design
- Band type allows for narrow space
- Non-slip reaction teeth provides better grip



- The design offers a stronger clamping force





KT NO.	Ø Capacity mm	g	
9AE33-110	65~110	305	1 / 25
9AE33-155	110~155	311	1 / 25



Strap Wrench

3203

- Strap wrench for oil filter





KT NO.	Capacity mm	Overall length inch	Overall length mm	g	
3203	Ø 60~140	8-3/4	223	242	50
320300	strap			46	80
3203A0	Ø 60~260	8-3/4	223	300	45
320301	strap			73	80

320670

- Aluminum alloy handle and strong polyester strap for tight grip
- Suitable for oil filter or any polished pipe







- Serrated makes grip tight

KT NO.	Overall Length inch	Overall Length mm	Capacity mm	g	
320670	12	295	Ø 60~180	344	25 / 50
320600	Polyester strap			35	25 / 50

320760

- Strap wrench for oil filter
- Use with 1/2" square drive tool





KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
320760	11	280	Ø 60~160	256	12 / 72

Chain Wrench

3204

- Chain wrench for oil filter





KT NO.	Capacity mm	Overall length inch	Overall length mm	g	
3204	Ø 60~140	8-3/4	225	359	50

Chain Wrench

3205

- Heavy duty oil filter chain wrench, specially for auto, truck and agricultural equipment
- Flexible in confined space
- Suitable for all types of oil filters





- Adjust to appropriate size of the oil filter.



Swiveling



- Release the chain to reinstate it.

KT NO.	Capacity mm	Chain length mm	g	
320540	Ø 60~105	350	742	6 / 24
320560	Ø 60~160	520	880	6 / 24

Cup Type Oil Filter Wrench

9AE1 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum



KT NO.		g	
9AE1-6414	64mm(2-1/2)-14 flutes TOYOTA 4 Cylinder (1800CC.2000CC) ,ALLION, AURIS, COROLLA AXIO, ISIS, IST, COROLLA RUMION, COROLLA FIELDER, NOAH, PREMIO, PRIUS, VOXY, WISH, etc…	164	12 / 72

9AE0 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum



KT NO.		g	
9AE0-6414	64mm -14 flutes TOYOTA.NISSAN	103	1 / 100
9AE0-7414	74mm -14flutes AUDI. VW. OPEL. BMW. AUSTIN. 2003+FORD	128	1 / 100

9AE6 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters





KT NO.		g	
9AE6-6514A	65mm(2-9/16")- 14 flutes Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	112	12 / 72
9AE6-7414	74mm(2-29/32")-14 flutes Audi, Volkswagen, BMW, Citroën, Peugeot, Ford, Fiat, Lancia, Mazda, Mercedes-Benz, Nissan, Vauxhall, Opel, Porsche, Renault, Suzuki, Toyota, etc...	153	12 / 72
9AE6-8414	84 mm(3-3/10")-14 flutes Mercedes Benz V6/V8 CDi models, etc…	194	12 / 72

Cup Type Oil Filter Wrench Set

9AE2002 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters





2 PC.

KT NO.	Applicable models	g	
9AE2-6514	65mm(2-9/16")- 14 flutes Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	282	1 / 40
9AE2-6567	65 & 67mm(2-9/16" & 2-21/32")–14 flutes Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…		

Cup Type Oil Filter Wrench Set

9AE2004 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

4 PC.



KT NO.		571	1 / 20
9AE2-6606	66 mm(2-19/32")-6 flutes Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo, Rapid, Twingo), etc…		
9AE2-7608	76mm(3")-8 flutes Fiat (z.B. Marea), Lancia (z.B. Delta), etc…		
9AE2-7614	76mm(3")-14 flutes Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes-Benz, BMW, Audi (I.B.A3TD) Opel, etc…		
9AE2-9315	93mm(3-21/32")-15 flutes Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo, Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc…		

9AE6002 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

2 PC.



KT NO.	Applicable models	282	1 / 40
9AE6-6514	65mm(2-9/16")- 14 flutes Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…		
9AE6-6567	65 & 67mm(2-9/16" & 2-21/32")–14 flutes Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…		



Cup Type Oil Filter Wrench Set

9AE2016 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- 1 PC. 1/2"(F)x3/8"(M) adapter
- 1 PC. 3 legs oil filter wrench(63-102mm)







16 PC.

KT NO. 4.00 1 / 5

KT NO.	
9AE2-6606	66mm(2-19/32")-6 flutes Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....
9AE2-7476	74 & 76mm(2-29/32" & 3")-15 flutes Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....
9AE2-7608	76mm(3")-8 flutes Fiat(z.B. Marea), Lancia(z.B. Delta), etc....
9AE2-7612	76mm(3")-12 flutes Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace III.), etc....
9AE2-7614	76mm(3")-14 flutes Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....
9AE2-8616	86mm(3-3/8")-16 flutes Volvo(S40, S60, S70, S80) etc....
9AE2-8618	86mm(3-3/8")-18 flutes VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..
9AE2-9210	92mm(3-40/64")-10 flutes Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....
9AE2-9315	93mm(3-21/32")-15 flutes Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....
9AE2-9345	93mm(3-21/32")-45 flutes VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....
9AE2-9618	96mm(3-3/4")-18 flutes Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..
9AE2-10615	106mm(4-11/64")-15 flutes Fiat(Ducato 2.5D. Td), etc....
9AE2-10815	108mm(4-8/32")-15 flutes Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....
9AE2-10818	108mm(4-8/32")-18 flutes Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....
9AE423	3 legged oil Filter Tool 63-102mm(2-1/2" to 4")
9AE221	1/2" drive adaptor 1/2" F x 3/8" M

Cup Type Oil Filter Wrench Set

9AE6030 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters
- Suitable for 3/8" or 1/2" drive tool







30 PC.

KT NO. 6.67 1 / 3

9AE6-6514	65mm(2-9/16")- 14 flutes Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…
9AE6-6567	65 & 67mm(2-9/16" & 2-21/32")–14 flutes Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…
9AE6-6606	66 mm(2-19/32")-6 flutes Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo. Rapid. Twingo), etc…
9AE6-6814	68mm(2-11/16")-14 flutes Fits Hastings, Mazda, Ford Escort, Capri, Subaru, Fran, PH6607 (Those Fram Filters Made in Korea), Motorcraft, FL816, etc…
9AE6-7314	73mm(2-7/8")-14 flutes Fits Toyota/Lexus, etc…
9AE6-7415	74mm(2-29/32")-15 flutes MF, Audi (#056-115-561g), GM. Rover, Chrysler, etc…
9AE6-7476	74 & 76mm(2-29/32" & 3")-15 flutes Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc…
9AE6-7577	75 & 77mm(2-15/16" & 3-1/32")-15 flutes Fits VW, Audi, Casite, GM/AC, Hastings, Wix, NAPA, Ford, Isuzu, Mercedes, Opel, etc…
9AE6-7608	76mm(3")-8 flutes Fiat (z.B. Marea), Lancia (z.B. Delta), etc…
9AE6-7612	76mm(3")-12 flutes Fiat (z.B. Ducato, Scudo, Ulysee), Renault, (Megane, Laguna, Espace III), etc…
9AE6-7614	76mm(3")-14 flutes Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes, Benz, BMW, Audi (I.B.A3TD) Opel, etc…
9AE6-7630	76mm(3")-30 flutes Fits Motorcraft only-FL400A, Ford, etc…
9AE6-7815	78mm(3-2/32")-15 flutes Nissan (#15028H8991), Ford, Toyota, Honda (Accord), etc…
9AE6-8015	80mm(3-9/64")-15 flutes Fits Opel, Hastings, Fram, Purolator, Nissan, Honda, Motorcraft, Mazda, Isuzu, Subaru filters.
9AE6-8082	80 & 82mm(3-9/64" & 3-7/32")-15 flutes Fits Wix Filters. Branded for:Mazda,Subaru,Toyota,Honda,Acura,Nissan,NAPA.Etc…
9AE6-8616	86mm(3-3/8")-16 flutes Volvo (S40, S60, S70, S80), etc…
9AE6-8618	86mm(3-3/8")-18 flutes VW. Golf. (MKIII. TDi, Passat TDi), Audi A6 TDi, Renault (Clio, Rapid1.9D, Laguna, Safrane, Espace 2.1D), Citroen, Peugeot, Renault, etc…
9AE6-9015	90mm(3-17/32")-15 flutes Fits Honda (Accord). Mitsubishi. Mopar. Isuzu, etc...
9AE6-9210	92mm(3-40/64")-10 flutes Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda, Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia (Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc…
9AE6-9315	93mm(3-21/32")-15flutes Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo. Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc…
9AE6-9336	93mm(3-21/32")-36 flutes Fits Ford, Motorcraft only-FL1A, (FLA1B, FL300, FL820 Ford), etc…
9AE6-9345	93mm(3-21/32")-45 flutes VW-Audi, (TDi 2.4, 2.6, 2.8L), etc…
9AE6-9515	95mm(3-6/8")-15 flutes Toyota (#15600-41010) Alfa Romeo, GM, Ford, Chrysler.
9AE6-9618	96mm(3-3/4")-18 flutes Audi (A4.A6, TDi), VW (Passat 97 TDi), Renault (Laguna 2.2D, Safrane2.2D. Espace2.2D.R19 2.2D. Rapid. Megane, 1.9/2.1D.TDi), etc…
9AE6-10015	100mm(3-15/16")-15 flutes Fits Fram, Motorcraft, Wix, Isuzu, Mitsubishi, etc…
9AE6-10615	106mm(4-11/64")-15 flutes Fiat (Ducato 2.5D.Td), etc…
9AE6-10815	108mm(4-8/32")-15 flutes Volvo (C70.S70.V70.TDi.TD) (850 TDi. Turbo Diesel)
9AE6-10818	108mm(4-8/32")-18 flutes Renault (Espace, Laguna, Master, Safrane, Traffic 2.4 , 2.5, 2.8D. TD), etc…
9AE433	3 legged oil Filter Tool 65-120mm (2-9/16" to 4"-23/32")
9AE221	Adaptor 3/8"or 1/2"Drive Tool

Oil Filter Socket Set

9AE8006 3/8"

- 3/8" square drive
- The set includes sizes 24, 27, 30, 32, 36 and 38mm
- 6 PC. oil filter sockets designed for removal of oil filter canisters and covers
- Withstands up to 115.2 N·m(85 ft·lb)

6 PC.







KT NO. 1.11 12 / 24

9AE8-24	Audi BMW: 5 / 7 Series (N62) V8 engines from 2004 onward Cadillac: ATS 36
9AE8-27	BMW, Ford, Fiat, GM, Renault, VAG, PSA Mercedes-Benz: A-CLASS Nissan: 1.5 / 1.9 / 2.2 / 2.5 dCi engines
9AE8-30	Audi, Skoda, Seat, VW
9AE8-32	GM, VAG BMW: 335D, X5 35d(09~10), X5 xDrive 35d(11~13) Opel / Vauxhall: Astra-G, Corsa-B, Zafira
9AE8-36	Audi: A3 2.0(04~08), A4 2.0(04~08) BMW: M52, M54, M60, M62, M70 & M73 engines Ford: Mondeo 2.0D 16V Dura Torq engines, Transit 2.5 & 2.0 diesel engines Jaguar: 2.2D engines Mercedes-Benz: 116MB engine Vito CDi Mini: R56 Opel / Vauxhall: Omega DL 16V, Vectra 2.0, Zafira VAG: VAG 1.9 SDi (ASY), Golf GTI 2.0, Passat 2.0, VR6 Volvo
9AE8-38	BMW, Volvo Opel / Vauxhall: Vectra 2 liter diesel engines

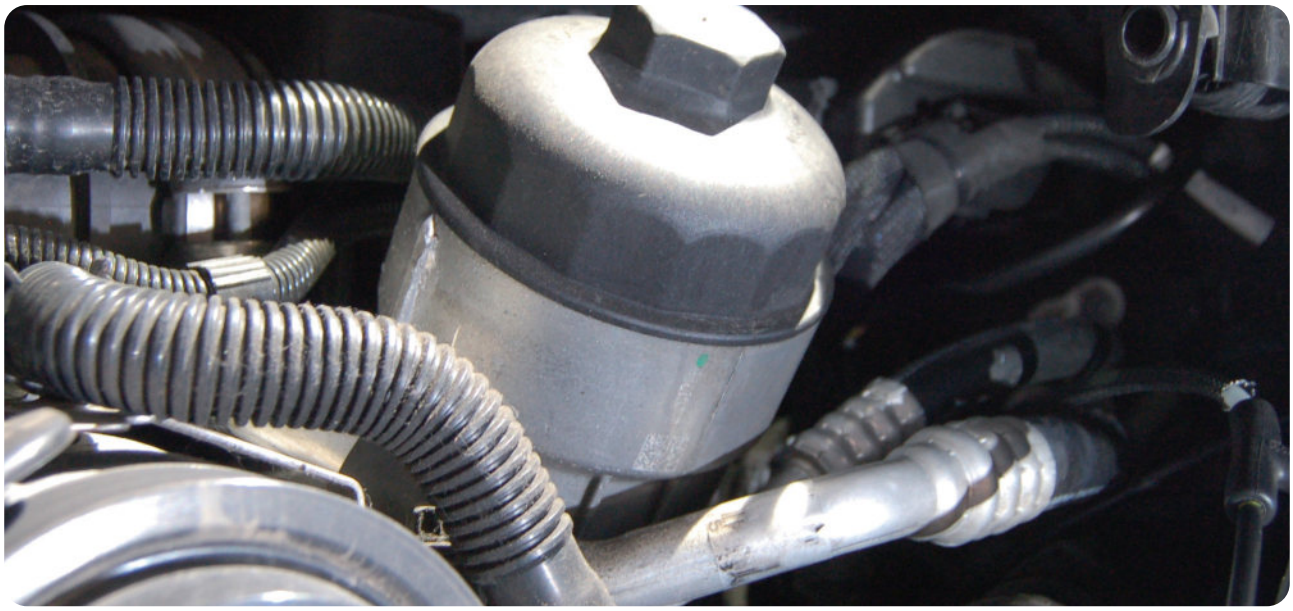

Three-Legs Oil Filter Wrench

9AE42

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4" (63-102mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE42	1/2	3/8	2-1/4~4	63~102	395	12 / 48
9AE221	1/2	3/8	-	-	39	-
9AE423	-	3/8	2-1/2~4	63~102	356	12 / 48
9AE433	-	3/8	2-9/16~4-23/32	65~120	502	12 / 36

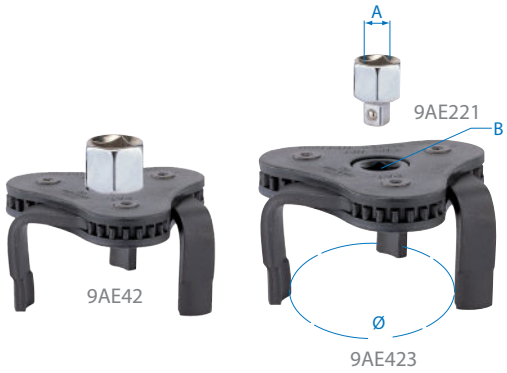

9AE43

- The claw-type filter is available for removing all oil filters from 3" to 4-3/4" (75-120mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Heavy duty design
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE43	1/2	3/8	3~4-3/4	75~120	604	1 / 36



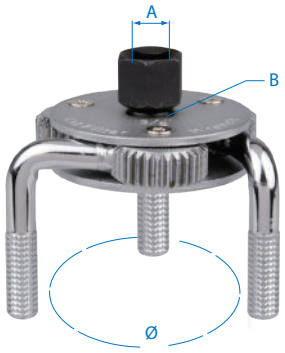

Two Jaws Oil Filter Wrench

9AE52

- The two jaws oil flter wrench is capable of remoring all kinds of oil flter
- Suitable for using with 1/2" square drive tool
- Lost wax coating with electro-black oxide finish for protection against rust
- Specially teeth designed steel jaws





KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE52	1/2	2-3/8~3-1/8	60~80	470	1 / 16
new 9AE52-110	1/2	3-1/8~4-5/16	80~110	985	1 / 12





9AE53

- The claw-type filter is available for removing all oil filters from 3-1/8" to 4-1/2" (80-115mm) in diameter
- Suitable for using with 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust

KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE53-115	1/2	3-1/8~4-1/2	80~115	667	6 / 24





Adjustable Oil Filter Pliers

9AE71

- Adjustable sizes from 60 to 140mm
- Serrated jaws

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE71-90	9	230	60-90	357	12 / 72
9AE71-115	10	260	85-115	400	12 / 60
9AE71-140	14-1/2	365	100-140	897	1 / 20





Locking Grip Oil Filter Pliers

9AE72

- Lock and grip oil filters or any irregular shaped object for quick tightening or removal
- Use for adjusting and fastening at any angle

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE72	10	254	53-118	458	12 / 48





Hose Pinch & Set

9AF11

- Adjustable edges ensure no damage to hose
- For hoses from Ø15 mm up to Ø60 mm
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses





KT NO.	L inch	L mm	Ø Capacity mm	g	
9AF11-15	6-1/8	155	15	44	12 / 48
9AF11-30	7-9/32	185	30	76	12 / 48
9AF11-60	10	253	60	125	12 / 48



9AF113

- Adjustable edges ensure no damage to hose
- For hoses from Ø15 mm up to Ø60 mm
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses

245 g 12 / 48



Fuel Gauge & Pump Sender Collar Wrench

9AG11

- Use for removing and fitting fuel gauge sender collars to avoid damage
- 3 jaws to ensure high torque and no risk to damage plastic collar
- Use with 19mm wrench or socket
- Suitable for most collars from 89 to 170mm









KT NO.	Ø mm	kg	
9AG11	89~170	1.05	1 / 12

Adjustable Fuel Tank Lid Remover

9AG13

- Use for removing and fitting fuel gauge sender collars to avoid damage
- Special jaws design, no risk to damage plastic collar
- Use with 3/8" DR.
- Suitable for collars from 122 ~ 199mm

560 g | 1 / 24


BMW


BENZ


VW . AUDI
BENZ . BMW



Diesel Injector Extractor Tool

9AN021

- Use to remove injectors without dismantling the engine
- Suitable for Bosch injectors in Mercedes-Benz CDI engines 2.1 L and 2.2 L
- Application : Benz for Vito, Sprinter, Viano, C class, E class, CLC, CLK

2 kg | 1 / 6



6 in 1 Fly Wheel Puller

9XAH1

- This tool is designed to offer 6 different sizes for the Flywheel wheel rings on motorcycles
- Sizes include: M20 x 1.5R / M14 x 1.5R / M16 x 1.5R / M18 x1.5R /| M24 x 1.0R / M27 x 1.0L

730 g | 1 / 24





Valve Spring Compressor Set

9AH31

- Use for compress of motorcycle or small engines valve spring
- Adapter size: 16, 19, 23, 25, 30mm
- Capacity: 130mm
- Throat depth: 100mm

1.31 1 / 12

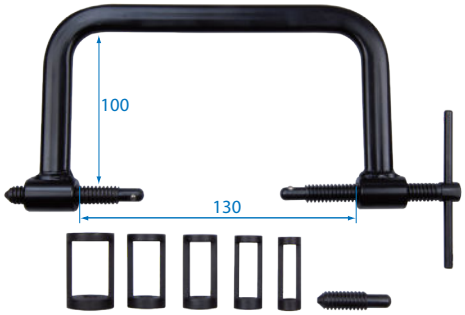

9AH12

- Complete service tool set for OHV & OHC petrol or diesel engines on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Saturn, Lexus, Hyundai, Infiniti, Porsche, Volvo, VW

3.75 1 / 5



10 PC.

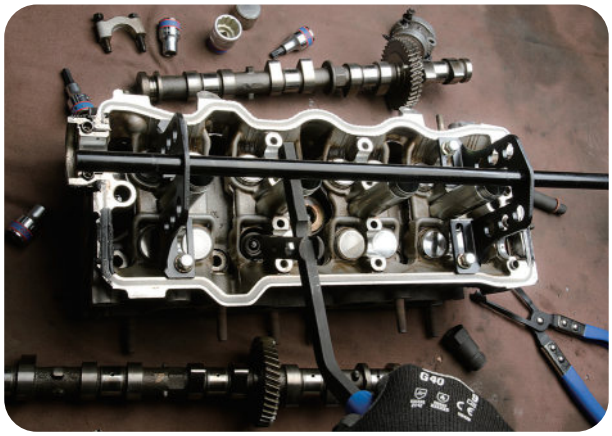

Valve Spring Compressor Set

9AH025

- Suitable for large engines & diesel engines
- Capacity: 35~140mm
- Unique direct action compressor lever gives improved visibility & ease of using in areas of difficult access
- Dual size in 25 and 30mm adapter

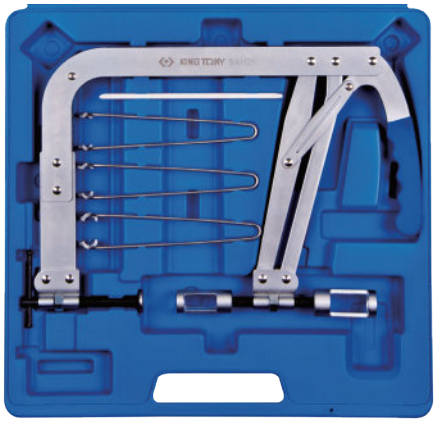

5 PC.



KT NO.	A mm	B mm	L mm		
9AH025	35~140	280	390	5	1 / 5





Valve Lappers

9AH0311

- For hand lapping valves

100 12 / 108

2 PC.



KT NO.	Diameter Cups Size	
9AH0311	1-1/8" (29mm) 5/8" (16mm)	1-3/8" (35mm) 13/16"(21mm)

Heavy Duty Air Valve Lapper Set

9AH0321

- Design for operating in tough environments
- Adjustable speed regulator for precise control during operation
- Complete with rubber caps of 20, 30, 35, 45mm





5 PC.

KT NO.	Free Speed R.P.M	Pistone Stroke inch	Pistone Stroke mm	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Average Air Consumption CFM	Average Air Consumption L/min	kg	
9AH0321	5600	1.1	29	9.0	228	1/4	3/8	2.5	71	1.82	1 / 10

Oscillating Valve Lapping Tool

9AH0331

- Facilitates the easy insertion of valves
- Automatic change in direction
- Use with fine grinding paste
- Two different suction cups: 22mm / 28mm
- Working speed(Max):1000rpm

287 g / 10 / 40





Universal Clutch Aligner Set

9AK11

- Designed to make alignment and assembly of clutch
- Specially designed for those vehicles equipped with late-model front wheel drives without pilot bearing in flywheel





3 PC.

CONTENTS :



- 9AK11P03 Ø 23 ~ 27mm
- 9AK11P02 Ø 19 ~ 23mm
- 9AK11P01 Ø 15.5 ~ 20mm

KT NO.	Ø mm	kg	
9AK11	15.5~27	0.60	1 / 20

Oxygen Sensor Socket

9AJ3122

3/8"

- For installing and removing oxygen sensors
- Offset design for confined areas







KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ3122	22	34	38	8	34	178	1 / 100

9AJ4322

1/2"

- For oxygen sensors
- Featuring a slot for the connecting lead







KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ4322	22	32	30	30	85	294	5 / 60

Oxygen Sensor Socket Set

9AJ017

3/8"+1/2"

- 7 PC. special sockets for removing oxygen sensors
- Suitable for most vehicles : Volkswagen, BMW, PSA, Mercedes-Benz, Ford, etc…

kg 2.33 / 1 / 10





7 PC.



KT NO.	Part.	Size	mm
9AJ4229		1/2"	29
9AJ3322		3/8"	22
9AJ4227		1/2"	27
9AJ3222		3/8"	22
9AJ3127		3/8"	27
9AJ4122		1/2"	22
9AJ3122A		3/8"	22

Self Adjusting Clutch Alignment Setting Tool Set

9AK21

- Prevent damage to system and to keep adapter ring in right position
- Necessary for pre-tensioning self adjusting clutches before removal or installation, avoiding clutch deformation
- Prevents plate distortion
- Suitable for most SAC(Self Adjusting Clutches 3 and 4 holes) equipped on vehicles of FIAT GROUP, VW, AUDI, BMW, Mercedes-Benz, VOLVO, OPEL, RENAULT etc

10.75 | 1 / 2

38 PC.







Pulley Removing Wrench

9AL

- To lock the pulley during removing or assembling any type of pulley retaining bolt

KT NO.	L inch	L mm	Ø mm		
9AL11	14-3/8	365	40~140	540	12 / 36
9AL12	14-3/8	365	40~140	540	12 / 36

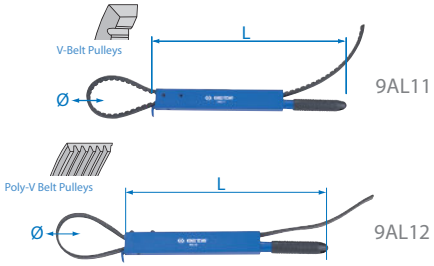





• Compressors



• Water pump pulley



• Alternator pump pulley



• Oil filter removal & assembly

Universal Cooling Pump and Refiller Tool Set

CAUTION

DO NOT open the radiator cap on a hot engine

9AM01

- For testing leakage in radiator system
- Vacuum leakage testing and bubble-free refilling
- Special pick hooks to speed up replacement of pipes
- Quick-release coupling on each connections
- Rubber cones with functional diameter 17~40mm

7 PC.

KT NO.	Type			
9AM010	Japan		3.40	1 / 5
9AM011	USA		3.40	1 / 5
9AM012	Europe		3.40	1 / 5







Piston Ring Pliers

9AP

- For removing and mounting piston rings
- Nickel plated

KT NO.	L inch	L mm	Ø Capacity mm	g	pc/box
9AP100	8-11/32	212	50~100	323	12 / 48
9AP120	8-15/16	227	80~120	354	12 / 48
9AP160	9-61/64	253	110~160	458	12 / 48

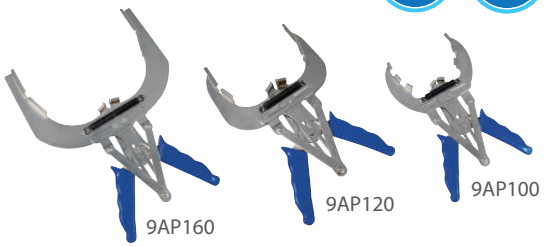

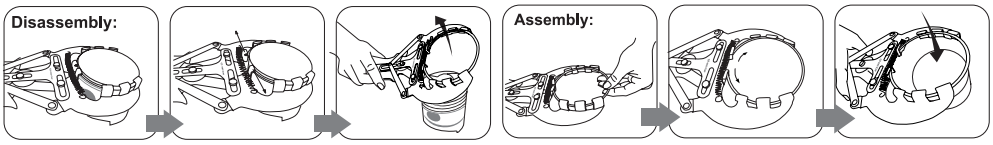

Drain Plug Removal Tool

9AR21 3/8"

- Use for removing and installing of the plastic oil drain plug on the latest VAG vehicle
- 3/8" DR and HEX 17 mm
- For VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug

g 20 pc/box 12 / 288





Plastic Drain Plug

9AR29-S

- Suitable for VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug
- Use with removal tool 9AR21
- OEM numbers 06L 103801

g 13 pc/box 1 / 144







Oil Drain Plug Key Set

9AR11

- Suitable for sump plugs on engine, gearbox and back axle
- Contents :
  Hex key socket : H8, H9, H10, H12, H13, H14, H17 mm
  Square socket : 5/16", 3/8", 7, 8, 10, 11, 12, 13, 14 mm
  Torx socket : T45
  Triangular socket : 10mm
  Spline (TAMPER) socket : M16
  Square drive socket : 10mm
  3/8" drive sliding T-handle

kg 1.70 pc/box 1 / 10



21 PC.

Diesel Injector Puller Set

9AS11

- The set contains M8, M12, M14, M17 adaptor
- Suitable for various vehicles with Bosch and Lucas type diesel injectors
- Remove stubborn diesel injectors easily and quickly
- New M17 adaptor for GM Vauxhall / Opel injectors X20DTH / Y20DTH series engines

kg 1.11 pc/box 1 / 20







Why spark plugs need torque tightening ?

1. Modern engines cylinder heads are made of aluminium alloy
2. A correct factory-set gaps can provide best performance

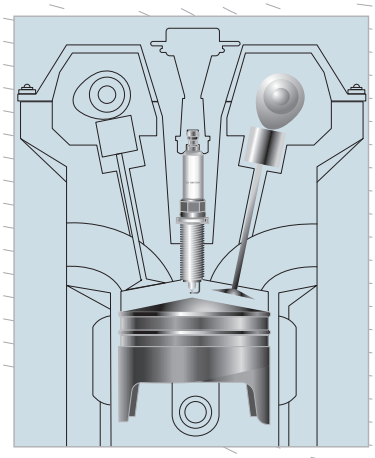

Cylinder head material	 Thread diameter (mm)				
	M8	M10	M12	M14	M18
Cast iron	-	10~15 N·m	15~25 N·m	25~35 N·m	35~45 N·m
Aluminium	8~10 N·m	10~12 N·m	15~20 N·m	25~30 N·m	35~40 N·m

Suggested torque for spark plugs with gasket, always follow factory owner's manual

3/8" Spark Plug Sockets

3/8"	Size (inch)	Size (mm)	Type		Socket L(mm)			
					63	70	90	250
	9 / 16	14	6 pt	Rubber	36B514			
			12 pt	Rubber	36B014		36C014	36D014
			12 pt	Metal clip	367014			
	5 / 8	16	6 pt	Rubber		363516		
			12 pt	Rubber		363016		
			6 pt	Magnet		366516		
			12 pt	Magnet		366016		
	23 / 32	18	12 pt	Rubber	36B018			
			6 pt	Metal clip	367518			
			12 pt	Metal clip	367018			
	13 / 16	20.8	6 pt	Rubber		363521		
			12 pt	Rubber		363021		
			6 pt	Magnet		366521		
			12 pt	Magnet		366021		

1/2" Spark Plug Sockets

1/2"	Size (inch)	Size (mm)	Type		Socket L(mm)
					70
	9 / 16	14	6 pt	Rubber	463514RC
			12 pt	Rubber	463014RC
	5 / 8	16	6 pt	Rubber	463516RC
			12 pt	Rubber	463016RC
			6 pt	Magnet	466516C
			12 pt	Magnet	466016
	23 / 32	18	6 pt	Magnet	
	13 / 16	20.8	6 pt	Rubber	463521RC
			12 pt	Rubber	463021RC
			6 pt	Magnet	466521C
			12 pt	Magnet	466021

Torque Wrench & Accessory



KT NO.	Gear Teeth	Square Drive	Torque Range in·lb / ft·lb	Incr.	Torque Range N·m	Incr.
34362-1CG	24	3/8"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m
34362-2CG	32	3/8"	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m

KT NO.	Gear Teeth	Square Drive	Torque Range N·m	Incr.
34362-2DG	32	3/8"	20~100 N·m	0.5 N·m
34362-3DG	32	3/8"	10~60 N·m	0.5 N·m



KT NO.	Square Drive	Torque Range N·m	Torque Range ft·lb	Total Length kgf·m
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m



KT NO.	Spec.
3814	3/8"F x 1/2"M

Spark Plug Rethreader Set

11305SQ

- Spark plug rethreader set is used for rethreading damaged spark plug threads in aluminum cylinder heads



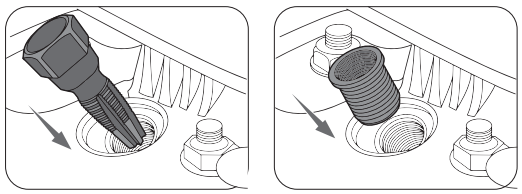

KT NO.	Size mm	Type inch	g	
11305SQ	14	3/8, 7/16, 1/2, 3/4	13	12 / 72

Double Size "L" Handle

1586

- Material : Chrome vanadium alloy steel
- For oil plug





KT NO.	Overall length inch	Overall length mm	Size inch	Size mm	g	
1586-09	9	230	5/16 x 3/8	8 x 10	320	6 / 48

1596

- Material : Chrome vanadium alloy steel
- For oil plug

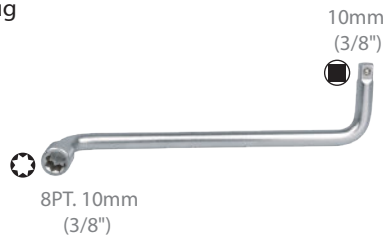

KT NO.	Overall length inch	Overall length mm	Size inch	Size mm	g	
1596-09	9	230	3/8	10	290	6 / 48

Ribe Socket M10S

9AW4911

1/2"

- 6 points
- Use for replacing and removing idler pulley center screw on TOYOTA ALTIS
- 1/2" DR. socket ribe M10S for TOYOTA

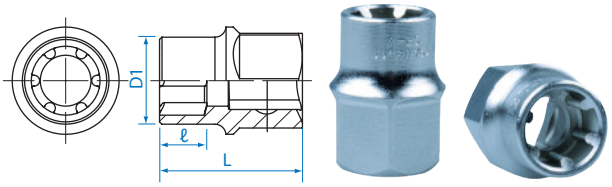

KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4911	M10S	19	10	33.8	16	10 / 200

Ribe Socket M12S

9AW4901

1/2"

- 6 points
- Use for replacing and removing engine head screw and flywheel center screw on NISSAN models
- 1/2" DR. socket ribe M12S for NISSAN

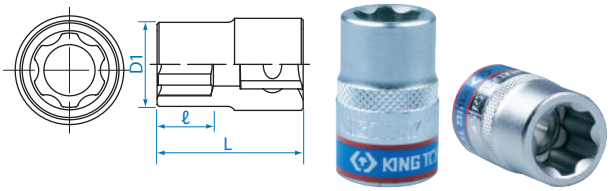

KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4901	M12S	22	14	38	15	10 / 200

Bearing Race and Seal Driver Set

9BA11

- Quick and easy to insert bearing race
- Collars fit most standard wheel bearing sizes
- Helps reduce damage to both race and axle housing
- 9 collar sizes:
  (1)1.574"/40mm (2)1.732"/44mm
  (3)1.968"/50mm (4)2.322"/59mm
  (5)2.480"/63mm (6)2.559"/65mm
  (7)2.834"/72mm (8)2.992"/76mm
  (9)3.189"/81mm

Kg 1.8 / 1 / 10





10 PC.



Universal Bearing Ring Puller

9BA41

- Three jaws with the thin edge provide an equal grip tension to avoid any slide or tilt
- Suitable for all kind of bearing and sleeves diameter 10 to 125mm
- Applicable : For universal vehicles



- Adjustable slide knob for quick control locking

KT NO.	Ø Capacity mm	Kg	
9BA41	10~125mm	3.6	1 / 4

Hose Clamp	KT Item	Suitable Car Brand
 CV Boot Clamp	9BB11 	
 Ear Clamp	9BB12 	VW, Audi, BMW, Ford, GM, Opel, Nissan, Mercedes- Benz, Mazda, Honda, Chrysler, Citroen, Seat
	9BB13 	
 CV Boot Clamp	9BB31 	Universal

Ear Hose Clamp Pliers

9BB11

- Use to remove and install ear clamp
- Special hook jaw easy to hold clamp in position
- Suitable for CV joint boot, vacuum lines, and cooling system







KT NO.	L inch	L mm	A max mm	g	
9BB11	10	260	22.5	364	12 / 48

CV Boot Clamp Pliers

9BB12

- Use to remove and install stainless CV boot clamp
- Can be used with 1/2" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler







KT NO.	L inch	L mm	A max mm	g	
9BB12	9-1/2	235	12	512.4	6 / 36

CV Boot Clamp Pliers with Socket

9BB13

- Used to remove and install stainless CV boot clamp
- Can be used with 3/8" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler


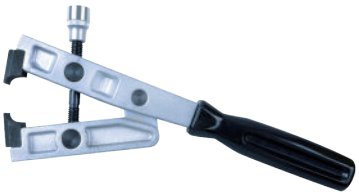




KT NO.	L inch	L mm	A max mm	g	
9BB13	11	278	45	888	6 / 24

CV Boot Clamp Installer

9BB31

- Used to cut and install clamp with built-in cutting arm
- Includes locking device and ratchet function
- Suitable for general vehicle types


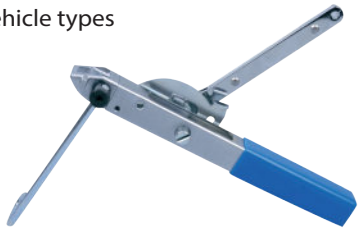


Lock



Cut



KT NO.	L inch	L mm	g	
9BB31	6-1/2	124	347	12 / 36

CV Joint Assembly Removal Tool

9BB42

- Separates the CV Joint from the axle without removing the drive shaft
- Reduces the risk of damaging the transmission, or the CV joint
- Multiple hole pattern allows adjustment to different depths
- Suitable for most vehicles equipped with Constant Velocity U-joints

kg 1.77 / 1 / 10


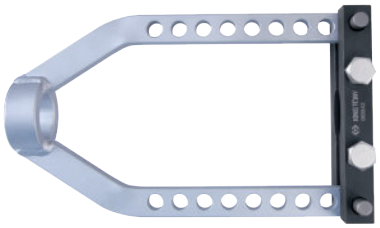

Exhaust Pipe Hanger

9BP11

- Used to remove rubber holders from exhaust brackets
- Suitable for general vehicle types


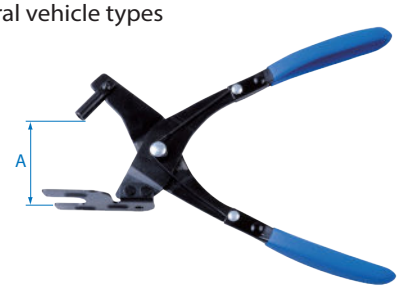

KT NO.	L inch	L mm	A max mm	g	
9BP11	10	250	60	339	12 / 36

Exhaust Clamp Pliers

9BP21

- Used to remove and install exhaust clamps
- Include spring and locking mechanism
- Suitable for Citroen/Peugeot, Renault and prizing open types of exhaust clamps






KT NO.	L inch	L mm	A max mm	g	
9BP21	12	300	60	496	12 / 36

Handbrake Cable Pliers

9BC11

- For hand brake cable removal and replacing
- Suitable for Audi, BMW, Citroen, Nissan, Peugeot, Seat, Renault, Rover, etc





KT NO.	L inch	L mm	A max mm	B mm	g	
9BC11	9	230	60	5	198	12 / 48

Disc Brake Piston Separator

9BC21

- Heavy duty drop forged construction
- Fits in brake caliper to push back pistons for new brake pads installation





KT NO.	Max capacity inch	Max capacity mm	g	
9BC21	2-7/8	75	1130	1 / 20

Drum Brake Spring Pliers

9BC121

9BC122

- Designed to remove and replace brake retaining spring on drum brakes





9BC121





9BC122

KT NO.	L inch	L mm	g	
9BC121	8-1/2	215	230	12 / 72
9BC122	12-1/2	320	426	12 / 36

HGV Drum Brake Spring Pliers

9BC124

- Designed to remove and replace brake retaining spring on drum brakes
- Extra strong version for HGV air or hydraulic drum brakes





KT NO.	L inch	L mm	g	
9BC124	20-5/8	525	1250	3 / 6

Universal Disc Brake Wind-Back Tool Set

9BC22

- Magnetic socket adapter
- Including 9 adapters for brake assemblage
- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for VW, Audi, Ford, Nissan, Alfa romeo, Rover, Saab, Subaru, Toyota, Jaguar, and most of the general motors

kg 2.87 1 / 6

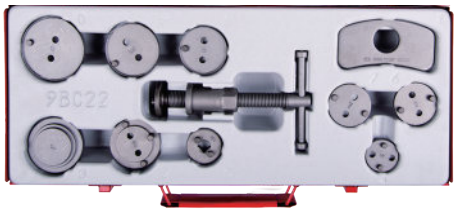

11 PC.

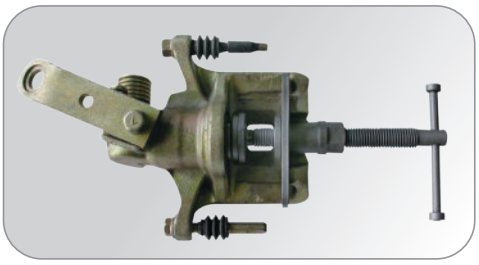

Universal Disc Brake Wind-Back Tool Set

9BC23

- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Jaguar, Citroen, Peugeot, Renault, Lauxhall, Lancia, Alfa romeo, Fiat, Nissan, Honda, Subaru, Toyota, Mitsubishi
- Contents:
  21 PC. Adapters for brake assemblage
  3 PC. Backing pads
  2 PC. Rotating caliper with 3/8" DR. (right/left side threaded)
  2 PC. Hex key: 7, 8mm
  2 PC. Pin punch : Ø 5.5, 6mm
  1 PC. 3/8" DR. x 12mm hex key socket

4.87 | 1 / 4

31 PC.

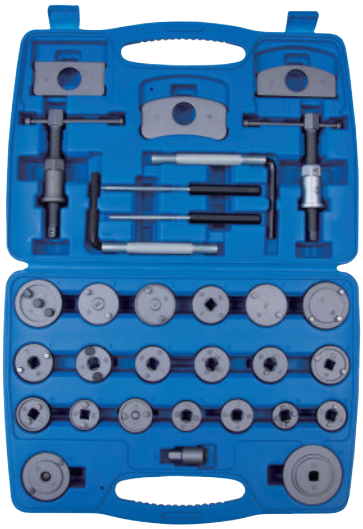









Brake Caliper Piston Tool

9BC24A

- For rotating pistons back into caliper to provide clearance for new pads
- Fast and easy to use, prevents damage to the piston and boot
- Fits most European and Japanese vehicles



3 PC.

KT NO.	Capacity A(mm)	Capacity B(mm)	g	
9BC24A	22	33	700	5 / 30

Pneumatic Disc Brake Wind-back Tool Set

9BC25

- Air operated ram applies pressure to caliper piston, while the handle is rotated by hand
- Easy to use- works on standard workshop air supply
- Reversible- works on both RH and LH applications
- Can be used on wind back and push back piston
- Supplied with adaptor, which covers a wide range of popular vehicles
- Full range of additional specialist adaptors available
- Suitable for Mercedes-Benz, BMW, Audi, VW, Opel, Volvo, Jaguar, Citroen, Fiat, Peugeot, Alfa romeo, Saab, Lancia, Toyota, Honda, Nissan, Mitsubishi, Isuzu, Mazda, Subaru, GM, Ford, Rover

3.20 | 1 / 5

18 PC.









Universal Disc Brake Wind-Back Tool Set

9BC26

- Prevents damage to the piston and boot
- For rotating pistons back into caliper to provide clearance for new pads
- Suitable for FORD, ROVER, HONDA, Mercedes-Benz, TOYOTA, VW, AUDI, NISSAN, BMW, MAZDA, MITSUBISHI

1.38 1 / 12

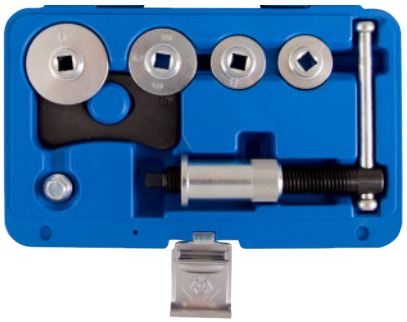

7 PC.

Brake Bleeder Valve Collection Bottle

CAUTION

Always keep the tool clean after using

9BC32

- It contains a brake oil check valve, a silicone hose, and a universal rubber adapter that is compatible with most vechicles
- Complete with a metal hanging hook
- Capacity : 1000 ml

420 1 / 12







Universal Sleeve Removal and Installation Set

9BD101

- Can easily extract and draw in bearings, bushes, seals with this comprehensive tools
- Reduces the possibility of damaging the bearing/ suspension housings
- Tool doesn't designed to be used with the impact wrench

18.0 1 / 1

26 PC.



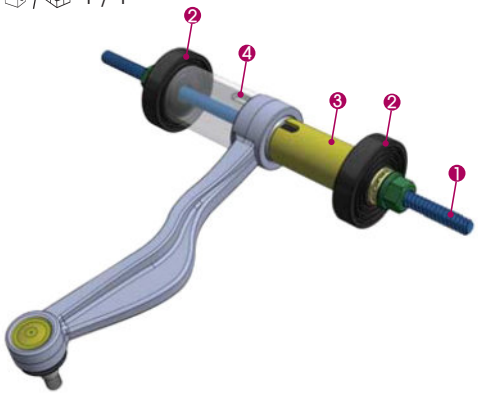

No.	
1	M10 x P1.5 spindle and two fixing nuts with bearing
1	M12 x P2.0 spindle and two fixing nuts with bearing
1	M14 x P2.0 spindle and two fixing nuts with bearing
1	M16 x P2.5 spindle and two fixing nuts with bearing
2	Step discs with A and B sides (2 pcs)
3	Golden sockets (11 pcs) marked with A
4	Silver socket (9 pcs) marked with B

Socket sizes OD x ID mm	
A	44 x 34 mm, 46 x 36 mm, 54 x 44 mm, 56 x 46 mm, 58 x 48 mm 66 x 56 mm, 68 x 58 mm, 70 x 60 mm, 78 x 68 mm, 80 x 70 mm 82 x 72 mm
B	48 x 38 mm, 50 x 40 mm, 52 x 42 mm, 60 x 50 mm, 62 x 52 mm 64 x 54 mm, 72 x 62 mm, 74 x 64 mm, 76 x 66 mm

Ball Joint Extractor

9BE11

- Drop forged steel body







KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm		
9BE11	160	50	12	19	19	25	1080	1 / 12

9BE21

- Special design 2 stage operation, suits most cars and light trucks ball joints in steering & suspension
- Suitable for most European and Japanese vehicles







KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm		
9BE21	160	50	12	20	22	32	1270	1 / 12

9BE4

- For quick and easy separation of ball joint pivots of pitman arms, steering tie rods, ball joints, etc
- Suitable for general trucks and vehicles
- For better safety operation & avoid damage







KT NO.	A mm	B mm	C mm	D mm		
9BE41	36	40	18	17	364	1 / 36
9BE42	46	48	23	17	558	1 / 36
9BE43	62	62	29	19	925	1 / 12
9BE44	64	76	40	24	1658	1 / 12
9BE45	77	100	46	24	1858	1 / 12

Impact Ball Joint Separator

9HBE4 3/4"

- Use for quick separation of ball joint for heavy goods vehicle
- Extra deep design for tight space
- Use with impact tools





Heavy Goods Vehicle Ball Joint Separator

Size (mm)	Application
30	BMW (E39), Benz(W203/W210/W211/W220/ W221), Mitsubishi Delica, Canter, Toyota Dyna etc…
39	"4 tons and European truck: Scania, Benz, MAN 414 drag link and Hino etc..."
47	"8.8 tons~10.5 tons truck: Hino, Isuzu, Nissan, UD,Fuso etc..."
58	Scania etc…
62	"15 tons~35 tons: Hino, Isuzu, Nissan, Fuso truck and bus etc…"
67	MAN(FE410A) etc…



KT NO.	A mm	B mm		
9HBE4-30	30	95	2320	1 / 6
9HBE4-39	39	95	2320	1 / 6
9HBE4-47	47	95	2320	1 / 6





KT NO.	A mm	B mm		
9HBE4-58	58	120	4200	1 / 6
9HBE4-62	62	120	4200	1 / 6
9HBE4-67	67	120	4200	1 / 6

Hydraulic HGV Ball Joint Separator & Set

9HBE81

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Strengthen fork and lever for greater force to be applied

3 PC.

7.00 1 / 2



capacity	
Jaw opening	70mm
Jaw width	36mm





9HBE083

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Interchangeable jaws width : 30 / 34 / 40mm

5 PC.

8.50 1 / 2







Jaw Opening size :
30, 34, 40 mm



Track Rod End Remover & Installer

9BE52

- Removes and replaces the axial joint
- Hex part on the end of tool : works with 27 mm wrench or 1/2" DR. ratchet





KT NO.	L inch	L mm	Ø Capacity mm		
9BE52	15-3/4	400	35~45	2140	1 / 10

Multi-Purpose Inner Tie Rod Tool

9BE62 | 9BE63 1/2"

- Use for replace inner tie rod ends without removing the rack and pinion
- Internal serrated design to make grip tight
- Use with ratchets and extensions by 1/2" DR.
- Suitable for most vehicles & trucks







KT NO.	L inch	L mm	Ø Capacity mm		
9BE62	3-1/4	81.50	33~42	370	24
9BE63	3-7/16	87.56	42~50	422	24

Universal Adjustable Wheel Bearing Lock Nut Wrench

9HBN01 3/4"

- For disassemble and assemble vario nut and cap
- Extra slim design suitable to reach narrow space for special nut
- Use with 3/4" DR. tools and suggest to lock by torque wrench
- Application for 6PT, 8PT and round nut
- Adjustable open jaw 50~150mm

Contents:
3 pairs round adapter for round nut : 6mm, 8mm ,10mm
3 pairs square adapter for round nut : 1/4", 5/16", 3/8"

3.68 1 / 5

13 PC.

3/4" DR.

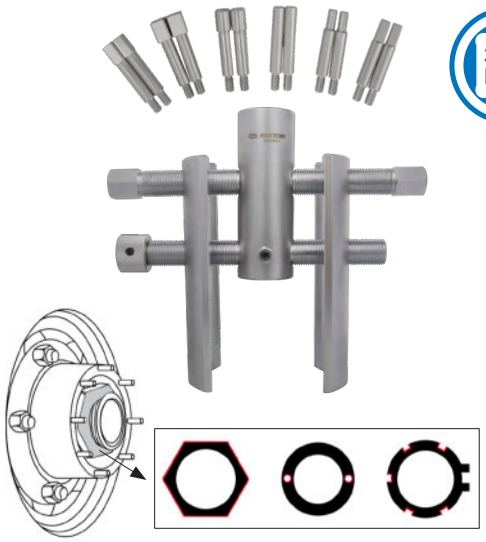

Drop Forged Coil Spring Compressor Set

9BF11 9BF21

- Drop forged SCM435 jaws & leaded screws
- Both 21mm 6-point sockets and 1/2" wrench are available
- Suitable for limited space under wheel arch

6 PC.



9BF11



9BF21





KT NO.	L mm		mm		
9BF11	85 / 370	1/2"	21	2.40	1 / 6
9BF21	85 / 270	1/2"	21	3.36	1 / 6

Coil Spring Compressor Set

9BF31

- Developed for "Macpherson" suspensions, using a range of 3 sets interchangeable monobloc forks
- Spring specification / use :
  A : Ø80~115mm
  B : Ø110~150mm
  C : Ø140~195mm
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Nissan, Honda, Mitsubishi, Subaru, Toyota

8 PC.









KT NO.	L mm	Capacity mm		
9BF31	460	40~300	15.00	1 / 1

Steering Wheel Puller Set

9BG11

- Easy to remove and install steering wheel for cars and trucks
- 2 sets 17mm hex head puller with pointed and flat cups
- 4 sets side bolts
- Small plate Dia. :
  1"~3-11/16" 25~95mm
- Large plate Dia. :
  1-1/8"~5" 28~125mm
- Side bolts size :
  3 PC. 5/16" UNC x 3-1/2" lon g puller bolts
  3 PC. 5/16" UNF x 3" long puller bolts
  3 PC. 3/8" UNC x 3" long puller bolts
  3 PC. 3/8" UNF x 3" long puller bolts

4.10 1 / 6





18 PC.

Multi-Steering Knuckle Spreader Tool Set

9BJ11

- Used to spread the steering knuckle to enable the removal and fitting of shock absorbers without the risk of damaging the aluminum or cast iron knuckle
- The tool is adjustable and suitable for steering knuckles with either a centralized slot or a non centralized slot
- Wide range of vehicle applications
- Designed for twin ball joints as fitted to Audi and VW control arms
- Suitable for strut clamping bores on Audi, VW, BMW, Ford, Peugeot, Citroen, Renault, Seat, Skoda

1.05 kg | 1 / 12

15 PC.

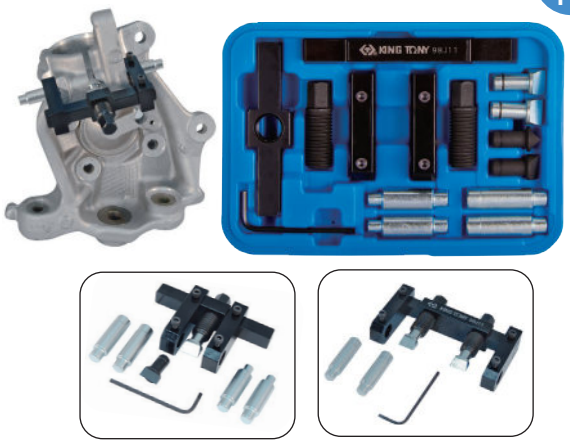

Wheel Balancing Weight Tool

9BK11

- Ideal for fitting and removing wheel balance weights

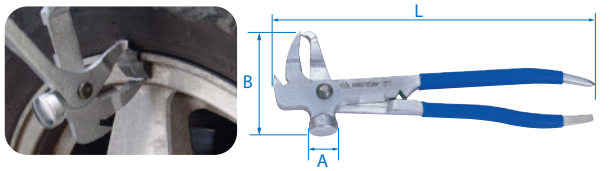

KT NO.	L inch	L mm	A mm	B mm	g	
9BK11	10	250	22	86	420	10 / 50

Tire Valve Installer

9BK31

9BK32

- Use for replacement and fitting tire valves
- Composite body prevents damage onto alloy wheel
- 180 degree pivoting head
- 310mm plastic handle



9BK31

118 g | 12 / 144



9BK32

353 g | 6 / 48



- For removal & installing valve cores

Tire Lever

9BK41

9BK43

- Straight pattern with profiled shank





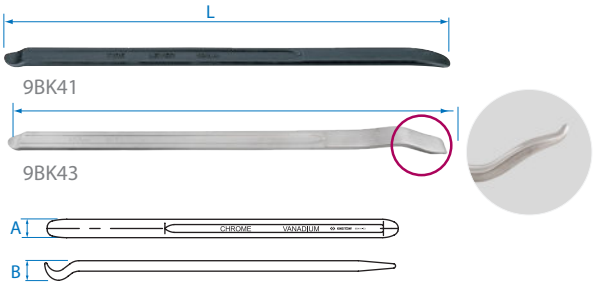

KT NO.	L inch	L mm	A mm	B mm	g	
9BK41-20	8	200	21.6	11	104	10 / 50
9BK41-28	11	280	22.7	13.5	239	10 / 50
9BK41-38	15	380	24.5	13.5	358	10 / 50
9BK41-53	21	530	28	12	930	10 / 20
9BK41-65	25	650	30	15	1075	10 / 20
9BK43-65	25	650	30	15	1100	10 / 20

Tire Lever

9BK41-73

- To install and remove the tire from wheel rim
- Precision forged with greater leverage design
- Special design for 17" to 22.5" tire

KT NO.	L inch	L mm	A (mm)	B (mm)	g	pcs / box
9BK41-73	28-3/4	730	22	64.4	1618	1 / 10

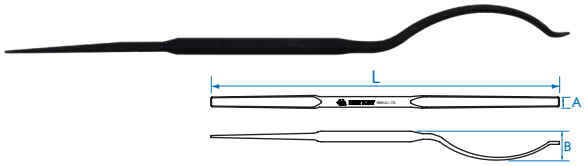

Tire Valve Core Torque Tool / Installer Torque Screwdriver

34102-040M new

- Preset torque setting in order to remove & install valve cores correctly
- Prevent overloaded torque to cause damage on valves sensor cores
- Preset torque is 0.45 N·m (4.0 lbf·in)
- Ergonomics design with PP handle

62 g / 20 / 100



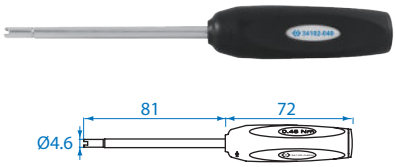

Digital Tire Gauge

9BM120

- Tyre pressure gauge specification :
  Unit range :
  0-100 psi / 0~7.0 bar / 0~7.0 Kgf-cm² / 0~700 kpa
  Display resolution :
  0.1 psi / 0.01 bar / 0.01 Kgf-cm² / 0.01 kpa
- Tread depth gauge specification :
  Unit range : 0-22mm / .8"(Gauge : mm / inch)
  Display resolution : 0.01mm / .001"
  Accuracy : ± 1%

KT NO.	A mm	B mm	L mm	g	pcs / box
9BM120	53	38	101	53	12 / 96









Digital Tire Tread Depth Gauge

9BM811

- Digital large LED LCD screen display
- Material : ABS Plastic, stainless steel needle
- One-touch switch between Metric / Inch system interchange
- Zero setting at any position
- Mini size, hand-held and portable
- Unit range : 0-25.4mm / 0-1"
- Display resolution : 0.01mm / .0005"

KT NO.	ØD mm	A mm	B mm	L mm	g	pcs / box
9BM811	1.5	60	9	116	39.6	25 / 100





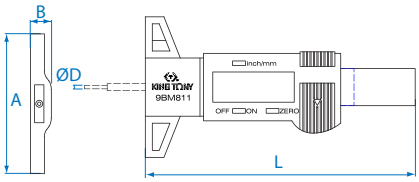

Tire Air Bead Seater

9HBL

- Capacity : 5 Gallon
- Used for seating tires for cars, trucks, ATVs, tractors
- Air gauge for easy and accurate air volume readings
- Can be used for tire sizes up to 24.5"

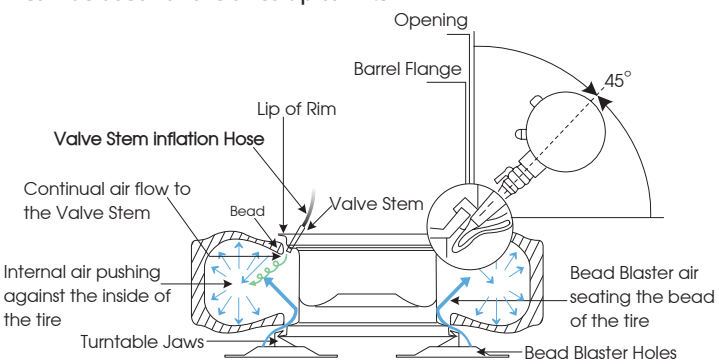

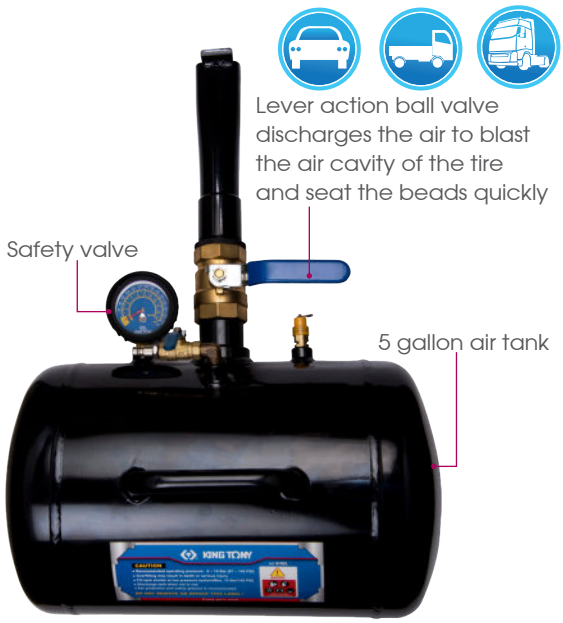

KT NO.	Type	Capacity	Max. pressure	kg	
9HBL11-05	America	5 gallon (20 L)	145 PSI (10 bar)	11.0	1
9HBL12-05	Europe				

3-In-1 Inflator

9BM

- Diaphragm pressure gauge
- Accuracy : ANSI B40.100 ± 3% ~ ± 2% ~ ± 3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control position inflate / deflate leve
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure range : 0-160 PSI (9BM21) / 0-220 PSI (9BM22)
- Built in hang-up hook allows easy storage



9BM2110
9BM2111
9BM2210
9BM2211



9BM2210A
9BM2211A

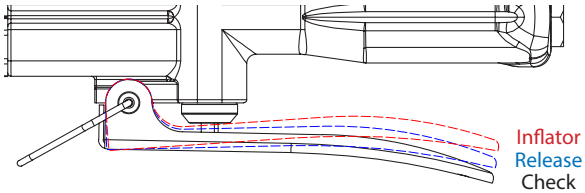





9BM2-01



9BM2-02

KT NO.	Pressure range (Psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"-19 BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"-18 NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4" BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4" NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4" BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4" NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-

Wheel Lock Screw Socket Set

9BW0120 VW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most VW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #521,#522,#523,#524,#525,#526,#527,#528,#529,#530,#531,#532,#533,#534,#535,#536,#537,#538,#539,#540

2.9 | 1 / 5

20 PC.





9BW0220 BMW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most BMW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #041,#042,#043,#044,#045,#046,#047,#048,#049,#050,#051,#052,#053,#054,#055,#056,#057,#058,#059,#060

1.94 | 1 / 5

20 PC.





9BW0123 VW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most VW models
- Chrome molybdenum, alloy steel chrome plated
- Contents :
  #51/6PT, #52/7PT, #53/8PT, #54/9PT, #55/10PT, #56/11PT, #57/18PT, #58/13PT, #59/14PT, #60/15PT, #61/16P, #62/17PTT, #ABC0/10PT, ABC1/11PT, ABC2/13PT, ABC3/14PT, ABC4/15PT, ABC5/16PT, #ABC6/17PT, ABC7/19PTABC8/20PT, ABC9/21PT, #494517M (1/2"DR. x 17mm)

1.57 | 1 / 10

23 PC.





9BW0221 BMW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most BMW models
- Chrome molybdenum, alloy steel chrome plated
- Contents :
  #30/13PT, #31/15PT, #32/16PT, #33/17PT, #34/18PT, #35/19PT, #36/20PT, #37/21PT, #38/22PT, #40/23PT, #13/16PT, #12/14PT, #11/15PT, #16/10PT, #15/11PT, #14/12PT, #19/8PT, #18/13PT, #17/7PT, #20/9PT, #494517M (1/2"DR. x 17mm)

1.48 | 1 / 10

21 PC.





Locking Nuts & Bolt

WSB01

- Long Bolt



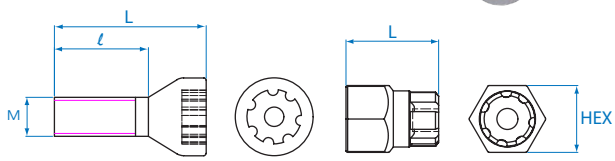

KT NO.		HEX	Thread M	ℓ mm	L mm
WSB012802-5		-	M12 x 1.5	28	47
		13/16	-	-	29
WSB013006-5		-	M14 x 1.5	30	49
		13/16	-	-	29

WSN04

- Long Lock Nut



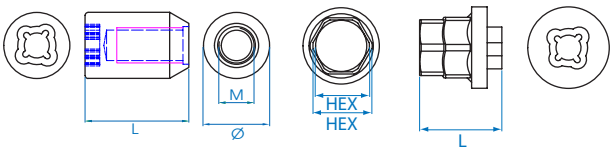

KT NO.		HEX	Ø	Thread M	L mm
WSN043601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN043602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSN14

- Lock Nut



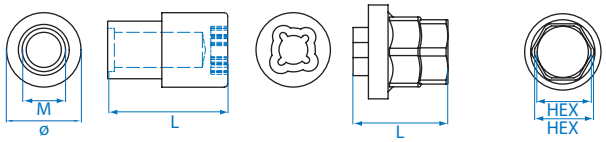

KT NO.		HEX	Ø	Thread M	L mm
WSN143601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN143602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSB02

- Cone Seat Bolt Lock



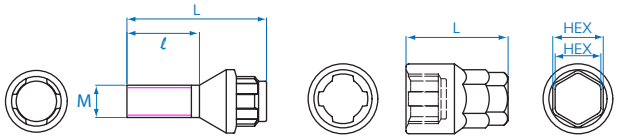

KT NO.		HEX	Thread M	ℓ mm	L mm
WSB022701-5		-	M12 x 1.25	27.5	52.5
		17 x 3/4	-	-	38

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

Impact Socket for Hybrid Wheel Bolts Mercedes-Benz

9BW4501 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Hybrid wheel bolts on e.g. MERCEDES-BENZ C-Class type 204, 204X E-Class type 211, 212, 207 SLK type 172 M-Class type 164, 166 S-Class type 221, 222 CL-Class type 216

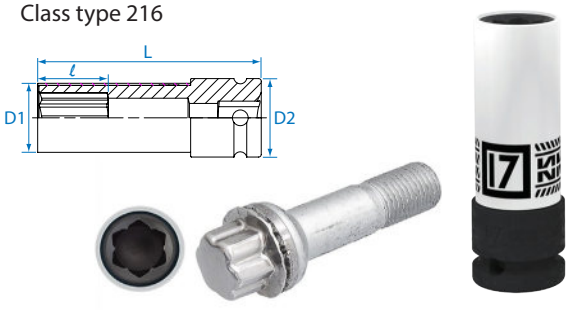

KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm		
9BW4501	17	26.4	30	26	85.5	229	5 / 60

Impact Socket for Special Profile Wheel Bolts

9BW4502 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Wheel nuts with special profile 21 mm on HYUNDAI i30, Tucson and KIA

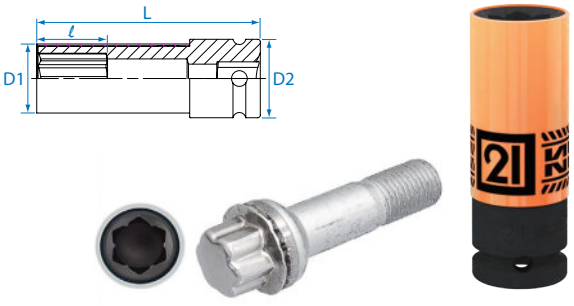

KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm		
9BW4502	21	28.5	30	26	85.5	252	5 / 60

10 Point Socket 20MM

9BW4801 — 1/2"

- 1/2" DR.
- 10 points
- Use for replacing and removing retaining screw on rear trailing arm on HONDA CR-V

KT NO.	mm	D1 mm	ℓ mm	L mm		
9BW4801	20	25	15	38	88.0	10 / 160

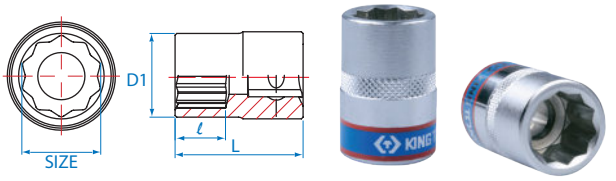

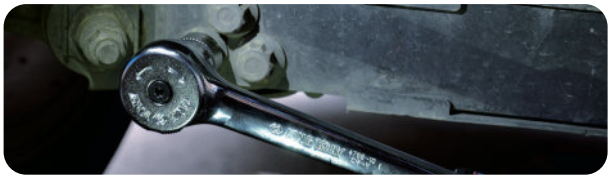



Stud/Hub Cleaning Tool & Set

9BK72

KT NO.	L inch	mm	g	
9BK72-12	7/16	12	25.2	100
9BK72-13	1/2	13	25.4	100
9BK72-14	9/16	14	25	100
9BK72-16	5/8	16	25.6	100
9BK72-22	7/8	22	33.6	100
9BK72-28	1-1/18	28	38	100



9BK73

KT NO.	mm	g	
9BK73-14	14	13.2	100
9BK73-22	22	13.8	100
9BK711	150	101.8	100



9BK7008

- For cleaning corrosion from studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents	g 545	10
9BK72		12, 13, 14, 16, 22, 28	
7704-50		1/2"	
9BK711		1/2"	



9BK7009

- For cleaning corrosion from hubs and studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents	g 480	10
9BK72		14, 22	
9BK73		14 x 2, 22 x 2	
7704-50		1/2"	
9BK711		1/2"	



Lubrication-Grease Gun

9BU11

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU11T



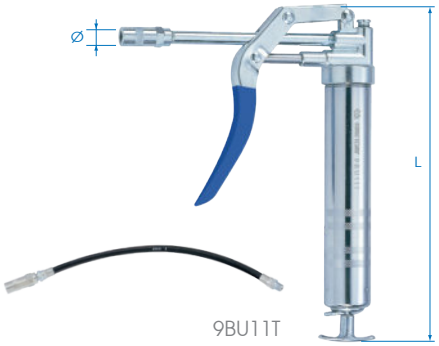



KT NO.	L inch	L mm	Ø Screw thread	Working pressure PSI	Working pressure bar	Burst pressure PSI	Burst pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU111	10-5/8	267	1/8 x 28 PT	2900	200	4000	275	120	3	0.61	1 / 30
9BU112	10-5/8	267	M10 x 1.0P	2900	200	4000	275	120	3	0.61	1 / 30
9BU111T	10-5/8	267	1/8 x 28 PT	2900	200	4000	275	120	3	0.68	1 / 30
9BU112T	10-5/8	267	M10 x 1.0P	2900	200	4000	275	120	3	0.68	1 / 30

9BU111/ 9BU111T For general market except North America, Germany, South Africa, Egypt
9BU112/ 9BU112T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun with 12" Tube

9BU143T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU153T



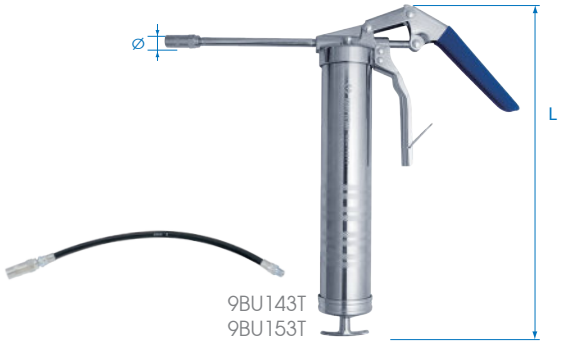

KT NO.	L inch	L mm	Ø Screw thread	Working pressure PSI	Working pressure bar	Burst pressure PSI	Burst pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU1432T	14-1/2	368	M10 x 1.0P	4500	310	7000	483	400	14	1.36	1 / 12
9BU1531T	14-1/2	368	1/8 x 28 PT	4500	310	7000	483	500	16	1.58	1 / 12
9BU1532T	14-1/2	368	M10 x 1.0P	4500	310	7000	483	500	16	1.58	1 / 12

9BU1531T For general market except North America, Germany, South Africa, Egypt
9BU1432T / 9BU1532T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun

9BU2

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



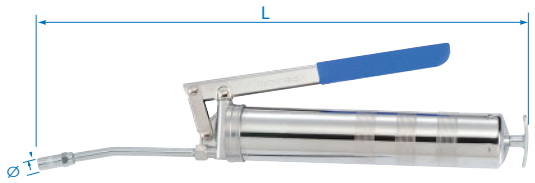

KT NO.	L inch	L mm	Ø Screw thread	Working pressure PSI	Working pressure bar	Burst pressure PSI	Burst pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241	14	360	1/8 x 28 PT	4500	310	10000	700	400	14	1.18	1 / 16
9BU242	14	360	M10 x 1.0P	4500	310	10000	700	400	14	1.18	1 / 16
9BU251	14.2	365	1/8 x 28 PT	4500	310	10000	700	500	16	1.52	1 / 16
9BU252	14.2	365	M10 x 1.0P	4500	310	10000	700	500	16	1.52	1 / 16

9BU241 / 9BU251 For general market except North America, Germany, South Africa, Egypt
9BU242 / 9BU252 For Germany, South Africa, Egyp t, etc.

Lubrication-Grease Gun with 12" Tube

9BU2T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU8109
9BU8209
9BU8112
9BU8212



KT NO.	L inch	L mm	Ø Screw thread	Working pressure PSI	Working pressure bar	Burst pressure PSI	Burst pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241T	14	360	1/8 x 28 PT	4500	310	10000	700	400	14	1.24	1 / 16
9BU242T	14	360	M10 x 1.0P	4500	310	10000	700	400	14	1.24	1 / 16
9BU251T	14.2	365	1/8 x 28 PT	4500	310	10000	700	500	16	1.63	1 / 16
9BU252T	14.2	365	M10 x 1.0P	4500	310	10000	700	500	16	1.63	1 / 16
9BU8109	9	229	1/8 x 28 PT								
9BU8209	9	229	M10 x 1.0P								
9BU8112	12	305	1/8 x 28 PT								
9BU8212	12	305	M10 x 1.0P								

9BU241T / 9BU251T For general market except North America, Germany, South Africa, Egypt
9BU242T / 9BU252T For Germany, South Africa, Egypt, etc.

Portable Bearing Packer

9BU41

- Quick and easy way to pack bearings with less mess
- Suitable for bearing diameter up to 90 mm
- Press the cap until old grease forced out and replaced by fresh grease

505.2 | 1 / 36





Oil Suction Gun

9BT2

- Designed for all purpose, quickly draining and filling oil and other fluids for clutches, agricultural, and industrial chemical, additives, transmission on differentials, brake master cylinders, oil filters or other type of sumps or sampling engine oil
- Features 11" flexible plastic hose

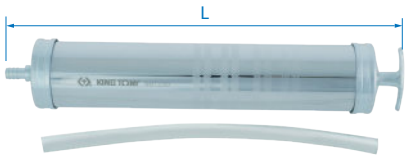

KT NO.	L inch	L mm	Capacity c.c.	Capacity oz		
9BT250	13.4	340	500	16	770	1 / 20
9BT2100	17.3	440	1000	32	1238	1 / 20

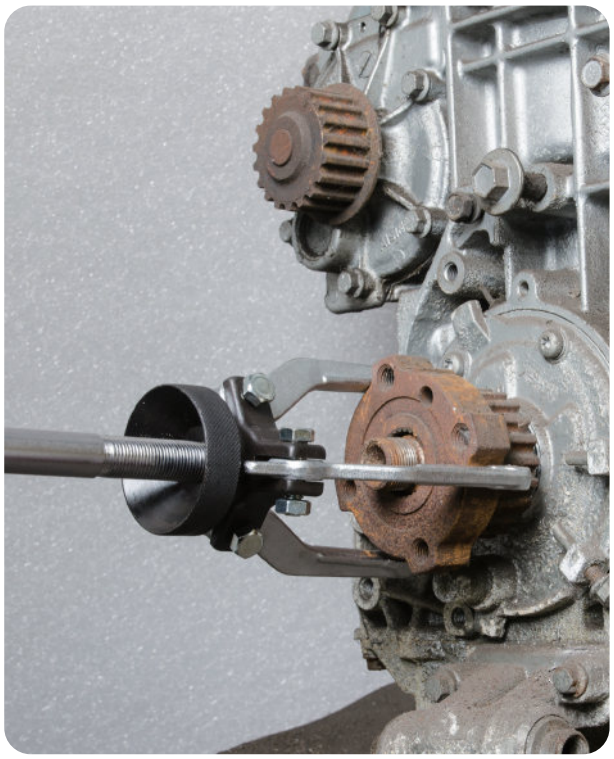

Slide Hammer Puller Set

9BQ01

- 5 lbs / 2.2 kgs slide hammer with 500 mm shaft make more powerful
- Three types to use : internal/external puller, plate puller, dent puller
- Use for remove vehicle Hub, rear axle, bearing or repair dent, etc.

7.5 | 1/2



17 PC.

CONTENTS:

- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller
- 1 PC. Hub puller
- 1 PC. Hook
- 1 PC. Locking pliers puller
- 1 PC. Dent puller
- 1 PC. Central bolt
- - Hex 19mm x 5/8" x 18UNF x L140mm
- 1 PC. Twin head
- 1 PC. Tripe head
- 1 PC. Adjustable nut
- 3 PC. 3.5" leg
- 3 set nut & bolt



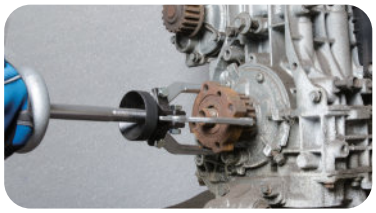

Axle Puller With Slide Hammer

9BQ11

- 5 lbs / 2.2 kgs slide hammer
- 500 mm T handle shaft

4 | 1 / 4

3 PC.



CONTENTS:

- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller

Auto Body Repair Tool

CAUTION Please wear proper safety gear while working.

9CF110

- Bumping hammer
- Flat face

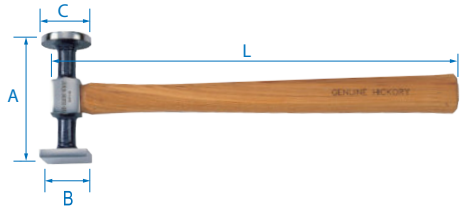

KT NO.	A mm	B mm	C mm	L mm		
9CF110	98.5	38	40	325	440	6 / 36

9CF120

- Light shrinking hammer - smooth
- Flat face + milled square face

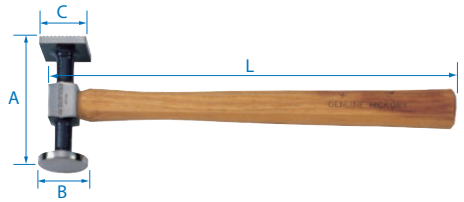

KT NO.	A mm	B mm	C mm	L mm		
9CF120	98	40	38	325	467	6 / 36

9CF130

- Straight pick & finishing hammer



KT NO.	A mm	B mm	L mm		
9CF130	138	40	325	467	6 / 36

9CF131

- Curved pein & finishing hammer

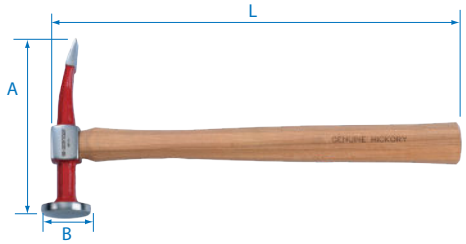

KT NO.	A mm	B mm	L mm		
9CF131	140	40	325	467	6 / 36

9CF132

- Stright pein & finishing hammer





KT NO.	A mm	B mm	L mm		
9CF132	141	40	325	460	6 / 36

9CF210

- Utility dolly



KT NO.	A mm	B mm	L mm		
9CF210	69	64	42.3	1380	6 / 12



Auto Body Repair Tool & Set

CAUTION Please wear proper safety gear while working.

9CF220

- Curved dolly



KT NO.	A mm	B mm	L mm	kg	
9CF220	58.6	45	133	1630	6 / 12

9CF230

- Heel dolly



KT NO.	A mm	B mm	L mm	g	
9CF230	60	30	79.3	1130	6 / 12

9CF240

- Toe dolly



KT NO.	A mm	B mm	L mm	g	
9CF240	58.5	29.1	121	1400	6 / 12

9CF241

- Thin toe dolly



KT NO.	A mm	B mm	L mm	g	
9CF241	55	24	118	960	6 / 12

9CF-107 / 9CF-207 / 9CF-307

- All drop forged medium(SAE/AISI 1045,1055) carbon steel
- Hammers are hardened and tempered, including 3 hardwood handled hammers and 4 dollies

7 PC.



9CF-107



9CF-207



9CF-307

KT NO.	Contents			kg	
9CF-107	 9CF130	 9CF240	 9CF110  9CF120  9CF220  9CF230  9CF210	7.50	1 / 2
9CF-207	 9CF131	 9CF241		7.10	
9CF-307	 9CF132			7.10	

Pneumatic Dent Puller

9CH212

- With 3 LB (1.36 kgs) sliding hammer
- With brass valve and 1/4" air plug
- With 13" length inlet hose
- With 2 PC. pads (120mm , 150mm)
- Air exhaust from the handle
- Working pressure 90 PSI

3.5 | 1/4





Bodywork File & Set

9CM01

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- Lightweight aluminium body
- 1 PC. file included



9CM11



9CM209



KT NO.	Version	Teeth inch	Length mm	g	
9CM01	rough	8	355	1580	1 / 20

9CM2

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- For 9CM11



KT NO.	Version	Teeth inch	Length mm	g	
9CM209	rough	8	355	330	1 / 50
9CM212	fine	12	355	330	1 / 50

Slide Hammer Bodywork Puller Set

9CH01

- 6 lbs / 2.7 kgs slide hammer with 540 mm shaft make more powerful
- Variety attachment adaptor suitable for different situation
- Use for vehicle body panel and chassis or other metal distortion etc.

8.50 | 1/2



CONTENTS:

- 1 PC. 540 mm handle shaft
- 1 PC. 6 lbs / 2.7 kgs hammer
- 1 PC. Large curve hook
- 1 PC. Small curve hook
- 1 PC. Large 90° hook
- 1 PC. Small 90° hook
- 1 PC. Flat squashed attachment
- 1 PC. Straight attachment
- 1 PC. Double attachment
- 1 PC. Tapping screw
- 1 PC. Hook attachment with chain







Putty Knife

9CJ1112 1-1/4"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1112	1-1/4	32	8-1/2	218	60.0	24 / 144

9CJ1120 2"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1120	2	50	8-1/2	218	70.0	24 / 144

Putty Knife

9CJ1130 — 3"



KT NO.	A inch	A mm	L inch	L mm		
9CJ1130	3	76	8-1/2	218	82	24 / 144

Bolstered Scraper

9CJ2120 — 2"



KT NO.	A inch	A mm	L inch	L mm		
9CJ2120	2	50	8-1/2	218	140	24 / 144

Stainless Steel Putty Knife Set

9CJ013



3 PC.

Contents — 0.20 — 10 / 40



9CJ1112 | 9CJ1120 | 9CJ1130

Stainless Steel Bolstered Scraper Set

9CJ023



3 PC.

Contents — 0.40 — 10 / 40



9CJ2112 | 9CJ2212 | 9CJ2120

Bolstered Scraper

9CJ2112 — 1-1/4"



KT NO.	A inch	A mm	L inch	L mm		
9CJ2112	1-1/4	32	8-1/2	218	120	24 / 144

9CJ2212 — 1-1/4"



KT NO.	A inch	A mm	L inch	L mm		
9CJ2212	1-1/4	32	8-1/2	218	120	24 / 144

Pinch Weld Scraper

9CJ3104 — 1/2"



KT NO.	A inch	A mm	L inch	L mm		
9CJ3104	1/2	12	6-1/2	168	75	24 / 144

9CJ3105 — 5/8"



KT NO.	A inch	A mm	L inch	L mm		
9CJ3105	5/8	15	8-1/2	218	108	24 / 144

Pinch Weld Scraper

9CJ3106 3/4"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ3106	3/4	19	6-1/2	168	75	24 / 144

Multi Purpose Single Edge Razor Scraper

9CJ61-40

- Ideal for scraping labels and decals
- Comfortable TPR handle for maximum grip
- Accepts all standard single edge razor blades



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ61-40	1-1/2	40	9	235	145	6 / 72

Stainless Steel Pinch Weld Scraper Set

9CJ033



3 PC.

Contents

0.30 | 10 / 40



9CJ3104 9CJ3105 9CJ3106

Mini Panel Removal Set

9CI016

- Easy to remove small trim items and panels with slim profile
- Made from impact resistant high quality nylon
- Applicable: Air vents, door panels, door locks, dash trim, internal fittings, etc.

0.30 | 12 / 48

6 PC.





Long Nose Clamp

9CD14

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 32mm
- 3 Ton straight pulling capacity

1.83 | 1 / 10

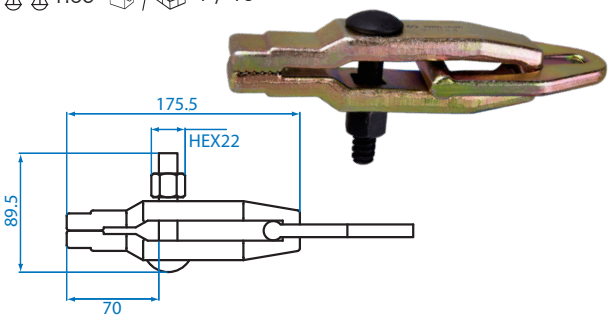

Large Pull Clamp With Top Pull

9CD21

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 37mm
- Two-way pull operation
- Dual self-tightening serrated jaws for a positive grip
- Capacity : 3 ton (straight way), 2 ton (cross way)

2.45 | 1 / 6

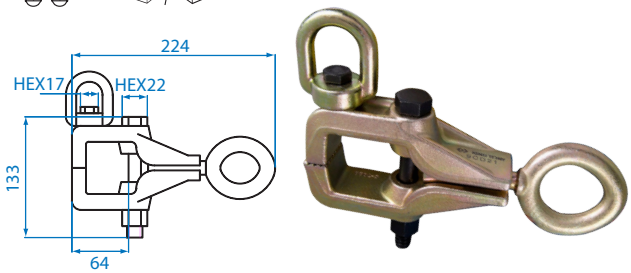

Small Pull Clamp With Top Pull

9CD31

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 44mm
- 44mm wide mouth with teeth
- With top pull and 360 degree self tightening pull ring
- Dual self-tightening serrated jaws for a positive grip
- Ideal for work in tight areas
- Capacity : 5 ton (straight way), 2 ton (cross way)

2.38 / 1 / 6

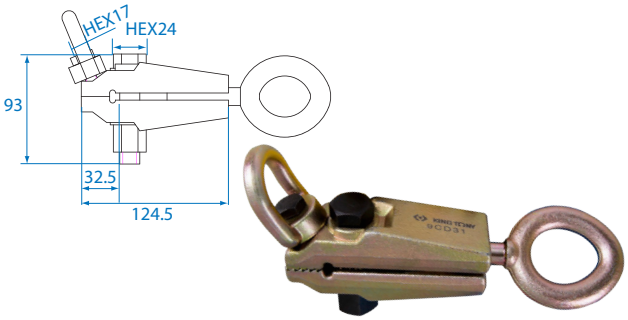

Windscreen Remove Tool Set

9CW01

- Use for removing glued of vehicle windows
- Use A with C to pierce the wire through the adhesive beads
- Use the cutting wire with B to remove adhesive beads



CONTENTS :

- A - Wire feeder tool
- B - Wire pull handle - pair
- C - Triangle cutting wire - 22 meters





KT NO.	Wire L m	T Handle L mm	g	
9CW01	22	330	456	8 / 32

Double Suction Pad Holder

9CW21

- Lifting up to 65 kg in horizontal position
- Adjustable handle designed for curved surface
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal, etc.





KT NO.	Ø mm	Load capacity kg	g	
9CW21	120	65	805	4 / 8

Single Suction Pad Holder

9CW22

- Lifting up to 40 kg in horizontal position
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal…





KT NO.	Ø mm	Load capacity kg	g	
9CW22	120	40	351	6 / 48

Alternator Tool & Set

- Specialized in removing & installing freewheel pulleys on alternator
- Ideal for dismantling and assembling the free wheel pulley while changing the alternator or pulley
- The pulley shaft is held in place with the bit on 1/2" DR. socket whilst the nut is undone using the 33 teeth union nut with 19mm spanner
- Suitable generator brand: Bosch, Valeo, Magetic Marelli, Denso, etc.
- It's also interchangeable and comprehensive components to work on VW, Audi, Citroen/ Peugeot, Mercedes, Renault, BMW, Flat, Ford, Toyota, etc.

9DA103 — 1/2"

- M10 spline



KT NO.	Size	Overall length mm	g	
9DA103	M10	113	151	10 / 120

9DA104 — 1/2"

- T50 Star



KT NO.	Size	Overall length mm	g	
9DA104	T50	113	151	10 / 120

Alternator Tool & Set

9DA022

- Specialized in removing & installing freewheel pulleys on alternator
- Suitable generator brand : Bosch, Valeo, Magetic Marelli, Denso, etc.
- It's also interchangeable and comprehensive components to work on VW, Audi, Citroen/Peugeot, Mercedes, Renault, BMW, Fiat, Ford, Toyota, etc.

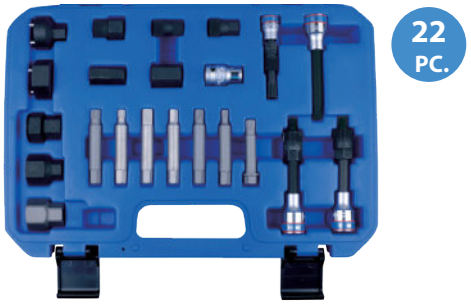

CONTENTS:

- 3 PC. Combined bit socket –
- 3/8" DR. x M10 x 90mmL / 1/2" DR. x T50 x 113mmL / 1/2" DR. x M10 x 113mmL
- 1 PC. Spline bit socket 1/2" DR. x M10 x 110mmL
- 3 PC. 33 teeth socket –15mm HEX x19mm / 15mm Hex x17.5mm / 22mm Hex
- 2 PC. Hex nut –22mm x 30mmL (Ø12.0mm) / 17mm x 35mmL (Ø14.7mm)
- 1 PC. - 35mm Round x 17mm hex (four pin)
- 1 PC. - 38mm Hex adaptor (three pin)
- 1 PC. - 28.6mm Round x H28 x H22 x 32mmL
- 2 PC. - Hexagon head nut –28H x H19 x 35mmL / 28H x H21 x 36mmL
- 1 PC. - M10 x H12 bit 64mmL
- 6 PC. - 10mm shank head bits 75mmL –T40 / T50 / M8 / M10 / H8 / H10
- 1 PC. - 1/2" DR. Bit holder





Kg 2.57 | 1 / 5

Spark Plug Boot Pliers

9DB201

- Remove spark plug cables safely and prevent cable damage
- Pliers' handles and jaws are coated with a heavy-duty plastic for sure grip



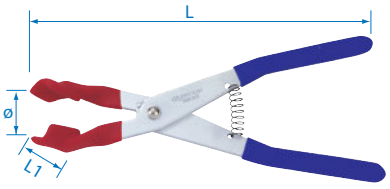

KT NO.	L mm	Ø mm	L1 mm	g	
9DB201	260	14~18	20	266	12 / 48

Automotive Voltage Tester

9DC23

- Insulated alligator clip with 150 cm cable
- 2 LEDs indicate positive(+)/negative(-) polarity
- Test voltage 3~48V
- For application of D.C. circuits only
- Two testing methods as illustration



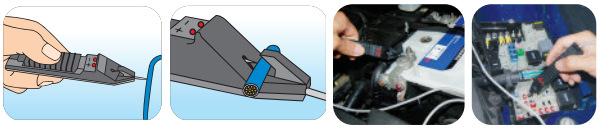

KT NO.	L mm	Test range	g	
9DC23	150	3~48V	52	10 / 100

Circuit Tester

9DC22

- Bronze body housing
- Cover cap for contact needle
- Bulb of 24V/3W interchangeable
- For 6/12/24V DC systems
- For application of D.C. circuits only







KT NO.	L mm	Test range	g	
9DC22	107	6~24V	50	20 / 200

Digital Display Circuit Tester

9DC242

- For 6/12/24V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Bigger heavy duty insulated alligator ground clip
- 3M long retractable cable
- LCD display easy to read digital voltage display
- Powered from the power source being measured, no batteries required
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board





Specification	
Measured valtage	5~28V
Testing current	<10mA
Operating temp	-10~50° C
Operating humidity	<80%

KT NO.	Test range	g	
9DC242	6, 12, 24	225	10 / 60



Positive (+) polarity



Negative (-) polarity

Circuit Tester with Nixie Display

9DC243

- For 12/24/48V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Test by car battery or negative ground conversion
- 3M long retractable cable
- 1M extension cable
- Powered from the power source being measured, no batteries required
- Nixie display easy to read digital voltage display
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board



(-) polarity (+) polarity (-) polarity < 0.3V > 62V





Specification	
Measured valtage	0.3~60V
Testing current	<10mA
Operating temp	0~50° C
Operating humidity	≦ 80%

KT NO.	Test range	g	
9DC243	12, 24, 48	277	10 / 60



Positive (+) polarity



Negative (-) polarity

Battery Tester

9DD21

- Test battery hydrometer quickly
- Use to check battery condition and charge state
- Detects hot or cold overcharge accurately
- For 6 / 12 / 24 volt system

85 | 10 / 100





Mechanic's Stethoscope

9DH11

- Ears covered with plastic, effective to separate from outside noise
- 210mm extension probe can expand the space while operating or using in narrow space
- Quickly to find and detect the abnormal noise with the probe
- Use for detecting various vehicles parts or machine equipment

147 | 12 / 72





Digital Glow Plug Tester

9DM1A1

- Suitable for steel and ceramic glow plugs
- LCD Display
- Short circuit protection & reverse charging protection
- Auto power off : 110 seconds
- 9V batteryx1 (included)
- CE approval





KT NO.	Glow plug(V)	Size(mm) L x W x H		
9DM1A1	3.5-4.4-5-7-8.5 10-11-24	135 x 78 x 33	356	1 / 40



Gasoline Engine Injection Pressure Tester Kit

9DP1101

- Used to identify and diagnose low fuel pressure
- Shockproof gauge with dual reading of 0~120 PSI and 0~8 bar
- Various kit of adapters for most injection systems of European, Japanese and American vehicles, includes Bosch CIS, GM TBI and MFI system





81 PC.

5.0 kg | 1 / 4

No.	Dedcription	No.	Dedcription
1	1 PC. (0-120 psi/0-8bar)	20	1 PC. Adapter (M14 male-female)
2	1 PC. Connector Hose	21	1 PC. Adapter (M10 male-M12 male)
3	1 PC. Connector Hose	22	1 PC. Adapter (M10 female-M12 male)
4	1 PC. Connector Hose	23	1 PC. Adapter (M8 female-M12 male)
5	1 PC. Connector Hose	24	2 PC. Adapter (M8 male-M12 male)
6	1 PC. Connector Hose	25	1 PC. Adapter (M14 male-M12 male)
7	1 PC. Connector Hose	26	1 PC. Adapter (M16 male-M12 male)
8	1 PC. Connector Hose	27	1 PC. Adapter (Banjo bolt M12)
9	2 PC. Connector Tube (5/8"-18 male nut)	28	1 PC. Adapter (Banjo bolt M12)
10	2 PC. Connector Tube (5/8"-18 invert flare nut)	29	1 PC. Adapter (Banjo bolt M10)
11	2 PC. Adapter (M16 female~5/8")	30	1 PC. Adapter (Banjo bolt M8)
12	2 PC. Adapter (M14 female~3/8")	31	1 PC. Adapter (Banjo bolt M6)
13	2 PC. Adapter (M16 female~3/8")	32	1 PC. Adapter
14	2 PC. Adapter (M14 female~3/8")	33	1 PC. Adapter (M8 male-M12 male)
15	2 PC. Adapter (M16 ar-10mm)	34	1 PC. Adapter (M16 female-M12 male)
16	1 PC. Adapter	35	1 PC. Adapter (M14 female-M12 male)
17	1 PC. Manifold Adapter	36	1 PC. Gauge Hook
18	1 PC. Manifold Adapter	37	1 PC. Repair Pack
19	1 PC. Adapter (90 degrees)		

Gasoline Compression Tester Kit

9DP130

- Suitable for petrol engines on lawn mowers, motorbikes, cars, trucks and so on.
- Quickly diagnose problems with pistons, rings, and valves
- Gauge has dual color scale with 0-300 PSI, 0-20 Kpa
- Easy pressure release button on side of tester
- Brass corrosion resistant fittings

8 PC.



9DP1301

3 PC.



9DP1302

KT NO.	Max Pressure		
9DP1301	300PSI / 20Kpa	1206	1 / 10
9DP1302	300PSI / 20Kpa	1100	1 / 10

Diesel Engine Compression Tester Kit

9DP2301

- Suitable for testing cars and light commercial vehicles with direct or indirect injection on diesel engine
- Gauge reading range from 0-1000 PSI (0-70 bar)
- Includes a pressure gauge, various connect adapter and replacement seal & washer





11 PC.

2.58 kg | 1 / 6

No.	Dedcription	No.	Dedcription
A	1 PC. 2-1/2" gauge with 420mm hose	H	1 PC. Glow plug adapter (114mm*M10*1.25)
B	1 PC. Glow plug adapter (73.5mm*M10*1.25)	I	1 PC. Glow plug adapter (119mm*M10*1.0)
C	1 PC. Glow plug adapter (54mm*M12*1.25)	J	1 PC. Dummy injector (75mm*M20*1.5)
D	1 PC. Glow plug adapter (72mm*M14*1.25)	K	1 Set Seal & washer
E	1 PC. Dummy injector (114mm)	L	1 PC. 90° Elbow
F	1 PC. Dummy injector (64mm*M24*2.0)	M	1 PC. Clamp plate
G	1 PC. Stanadyne dummy (112mm)		

Oil Pressure Tester Kit

9DP3201

- Suitable for testing engine oil pressure and transmission pressure
- Applicable to both gasoline and diesel engines, also suitable for passenger cars and light trucks
- Gauge reading range from 0-150 PSI (0-10 bar)
- Provided with an oil filter clamp for piercing through oil filter canister when oil pressure switch is hard to access

2.10 kg | 1 / 5

Adapter

Black (Imperial threads)	Silver (Metric threads)
1/2" x 20 UNF	M10 x P1.0
3/8" x 20 UNF	M12 x P1.5
1/4" x 18 NPTF	M14 x P1.5
1/8" x 27 UPT	M16 x P1.5
R 1/8" DIN	M18 x P1.5

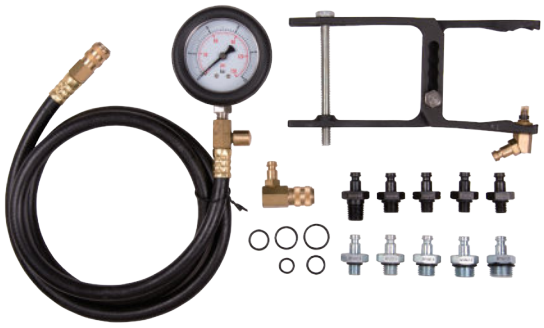

13 PC.

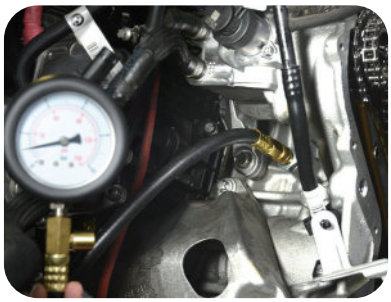





Universal Terminal Release Tool Set

9DT11

- Suitable for most of the vehicles, VW Group, BMW, Opel, Renault, Ford, Daimlerchrysler, Fiat, Toyota and Saab
- Use to loose contacts easily or carry out other applications in the field of car electricity

A	9DT11-1	ABS 4.0mm round terminal
B	9DT11-2	3.5mm round terminal
C	9DT11-3	1.5mm round terminal
D	9DT11-4	Maxi power timer
E	9DT11-5	Pit pod / Faston 6.3mm
F	9DT11-6	JPT / SPT
G	9DT11-7	Micro timer ii
H	9DT11-8	Standard tool
I	9DT11-9	Standard 2.72mm
J	9DT11-10	Standard 1.48mm
K	9DT11-11	Standard 1.89mm
L	9DT11-12	Micro standard

850 g | 1 / 10





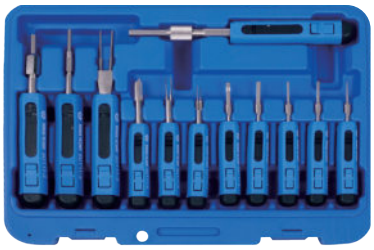

12 PC.

Safety Goggles

9CK-101

- Soft PVC frame & lens high impact clear polycarbonate
- Anti-dust and anti-impact vents

KT NO.	L1 inch	L1 mm	L2 inch	L2 mm	g	
9CK-101	2-7/8	74	6	153	70	20 / 200



Steel Wire Brush

9CZ101

- Material : wood handle / steel wire
- Wire brush with three rows



KT NO.	H mm	L1 mm	L2 mm	g	
9CZ101	22	258	105	65	24 / 144

Pressure Oil Can

9TB225

9TB500

- Material: Plastic body (9TB225)
- Material: Metal body (9TB500)





9TB225 9TB500

KT NO.	Capacity c.c.	g	
9TB225	225	103	1 / 160
9TB500	500	302	10 / 60

Flexible A/C Detective Light

9TQ31



KT NO.	L1 mm	L2 mm	L3 mm	g	
9TQ31	34	400	140	107	1 / 5

Refillable Pressure Sprayer

CAUTION Always wear eye protection while using this tool

9TBA650

- Suitable for lubrication, cleaning brake systems, removing dust and being anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and areas which are difficult to reach
- Aluminum canister
- Do not use with strong chemical or corrosive fluid





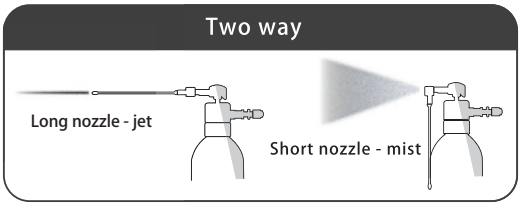

KT NO.	L inch	L mm	capacity	g	
9TBA650	11	287	650 cc	290	1 / 12

spare nozzle #9TBA650BTK

Clip Removal Pliers

9TC101

- For removal of door inner-linings and other trim items held in place by plastic rivets





KT NO.	L inch	L mm	g	
9TC101	9	230	241	12 / 48

Pry Bar & Set

- Grip material - PP+TPR
- Chrome vanadium alloy steel

9TK1

- Packaged in plastic tray
- Pry bars are for prying and levering
- Sturdy blade minimizing lever spring effect
- It's hardened and tempered for maximum durability



KT NO.	L mm	g	
9TK108	204	110	6 / 72
9TK112	312	286	6 / 48
9TK118	458	514	6 / 48
9TK124	608	655	6 /36

9TK014



4 PC.

Contents 1.87 kg 5 / 10



9TK108, 9TK112, 9TK118, 9TK124

Jumbo Pry Bar & Set

9TK2

- For heavy-duty application
- Includes straight, 90, 45, 30 degree tip for variety situation to use
- Extra long pry bar makes more powerful for prying and levering

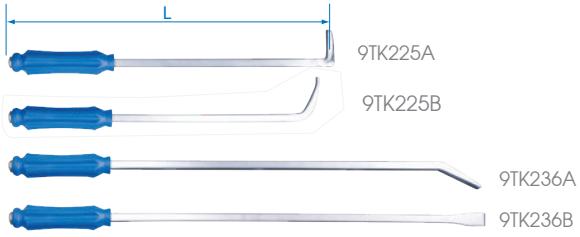

KT NO.	L inch	L mm	Type	g	
9TK225A	25	625	90°	1620	1 / 6
9TK225B	25	625	45°	1510	1 / 6
9TK236A	36	920	30°	2070	1 / 12
9TK236B	36	920	Straight	2060	1 / 12

9TK024

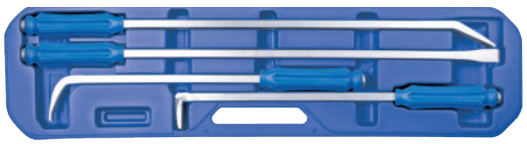

4 PC.

Contents 9.34 kg 1 / 2



9TK225A
9TK225B
9TK236A
9TK236B

Rolling Head Pry Bar & Set

- Material - chrome vanadium alloy steel
- Finishing - Black phosphate with polished head



9TK3

- With a long tapered end for alignments and a rolling head for prying

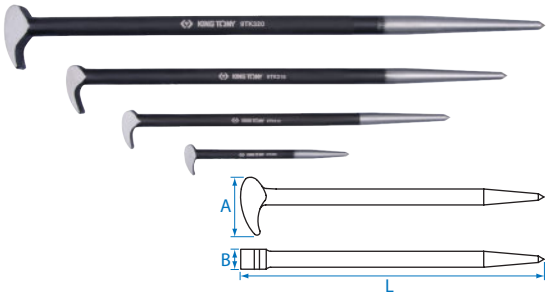

KT NO.	L inch	L mm	A mm	B mm	g	
9TK306	6	151	29.0	10.0	75	10 / 200
9TK312	12	305	36.5	12.3	252	2 / 40
9TK316	16	405	45.6	14.5	501	2 / 20
9TK320	20	504	60.2	18.0	952	2 / 20

9TK034



4 PC.

Contents 1.73 kg 1 / 8



9TK306
9TK312
9TK316
9TK320

Door Upholstery Remover

- Grip material - PP+TPR
- Chrome vanadium alloy steel

48280180

43280212

- Special tool to remove the lining and clip of the car



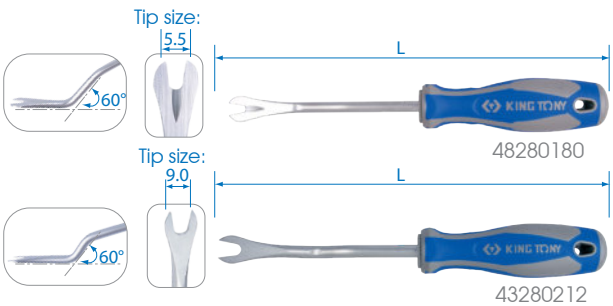

KT NO.	Tip mm	L mm	Type	g	
48280180	5.5	210	60°	90	12 / 144
43280212	9	240	60°	134	12 / 144

Hook & Pick Set

43250115Y

- 10" Bent-pick

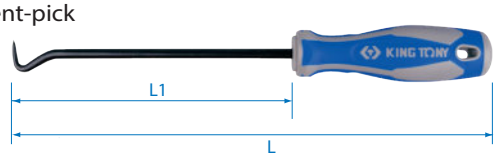

KT NO.	L mm	L1 mm	g	
43250115Y	260	150	94	12 / 144

43260115Y

- 10" Hook-pick

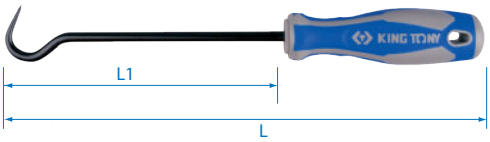

KT NO.	L mm	L1 mm	g	
43260115Y	260	150	96	12 / 144

43270115Y

- 10" 90°-pick



KT NO.	L mm	L1 mm	g	
43270115Y	260	150	94	12 / 144

43290115Y

- 10" Straight-pick

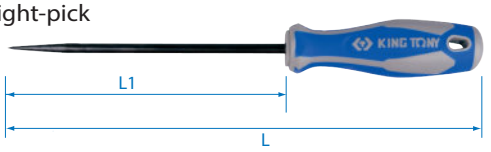

KT NO.	L mm	L1 mm	g	
43290115Y	260	150	91	12 / 144

9-30904AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers



4 PC.





Contents	kg 0.43		1 / 10
43250115Y		43270115Y	
43260115Y		43290115Y	

43240115Y

- Wide scraper
- Use for removing old gaskets more easily and quickly



KT NO.	L mm	L1 mm	g	
43240115Y	260	150	149	12 / 144

30914AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers



4 PC.

Contents	g 62.8		6 / 72
43350175Y		43360175Y	
43370175Y		43390175Y	

Hook & Pick Set

9-30909AY

Tray category #8 (375 x 187mm)

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly

9 PC.

Contents	kg 0.69	1 / 12
43250115Y	43350175Y	
43260115Y	43360175Y	
43270115Y	43370175Y	
43290115Y	43390175Y	
43240115Y		



Radiator Hose Removal Tools

- Grip material - PP+TPR
- Chrome vanadium alloy steel

432A0113

- 9-1/2" Lightening type removal tools
- 9-1/2" U type removal tools

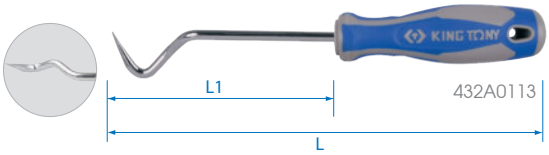

KT NO.	L mm	L1 mm	g	/
432A0113	240	130	93	12 / 96

432A0213

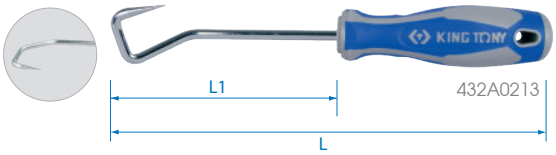

KT NO.	L mm	L1 mm	g	/
432A0213	240	130	101	12 / 96

Magnetic Flexible Handle

- Grip material - PP+TPR

2121

- Enhanced flexible conduit for perfect shaping
- More powerful magnetic force

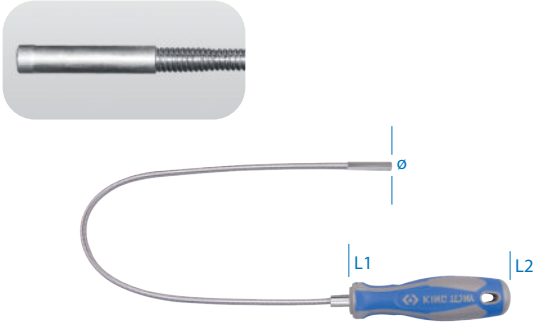

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	/
2121-12	12"	Ø 7 x 305	415	0.5	100	1 / 100
2121-18	18"	Ø 7 x 457	567	0.5	120	1 / 80

2121A

- Powerful magnet retrieves metal objects up to 3kg
- Slide cap prevents retrieving foreign objects
- Enhanced flexible conduit for perfect shaping
- Grip Material-PP+TPR
- Chrome vanadium alloy steel

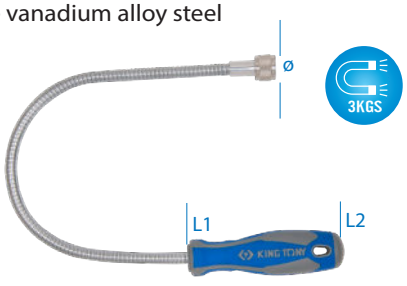





KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	/
2121A-15	15"	Ø18 x 381	491	3	250	1 / 25
2121A-18	18"	Ø18 x 457	567	3	270	1 / 25

Magnetic Pick-Up Tool

2124

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Comfortable pushing strength

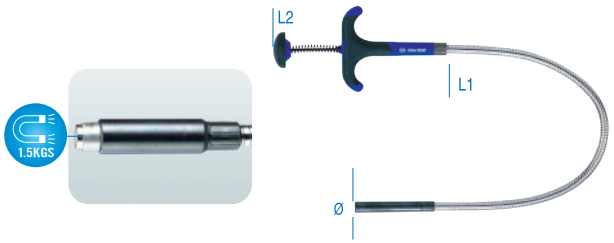

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)		
2124-18	18"	Ø13.5 x 450	610	1.5	181	1 / 36

Magnetic Claw Pick-Up Tool

2126A-18 new

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- Maximum claw width 1-1/4"
- Comfortable pushing strength





KT NO.	Size	Dia x length(mm) L1	L2			
2126A-18	18"	Ø15 x 440	600	1-1/4"	258	1 / 36

3 in 1 Pick-Up Tool

2129-24

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Hook type claw
- Clamp light
- Comfortable pushing strength
- Lithium cell : LR521 x 3

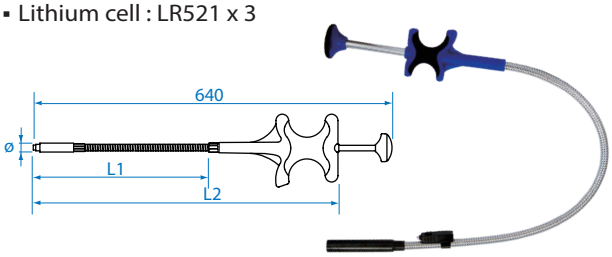

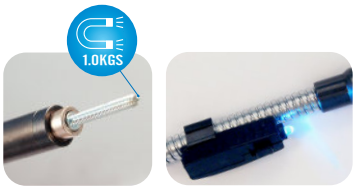

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)			
2129-24	24"	Ø13 x 470	570	0.4	1-1/4"	280	12 / 48

Telescoping Magnetic Pick-Up Bar

2128-26

- Pen style for carring conveniently



KT NO.	Extendable Length mm	Magnetic Power		
2128-26	130~640	3.5LBS/1.6KGS	45.6	50 / 200

Multi-Function Telescoping Bar

9TQ21

87 50 / 100



Magnetic Pick-Up Bar



Magnetic power : 1.3 lbs / 0.6 kgs
Extendable length : 635 mm

38 mm Diameter Inspection Mirror



To inspect hidden or narrow areas
Double ball joint links swivel mirror for viewing to 360°

Scriber



To mark lines on workpieces
To clean the water-spurting hole of the windscreen wiper

3 in 1 Flexible Inspection Bar

9TQ02

203 12 / 72



Magnetic Pick-Up Bar



Magnetic power : 3.5 lbs / 1.6 kgs
Length : 450 mm

Blub



Size:2.2 V , 0.25 A
Operates On 2 AA Batteries
(Not Included)

Inspection Mirror

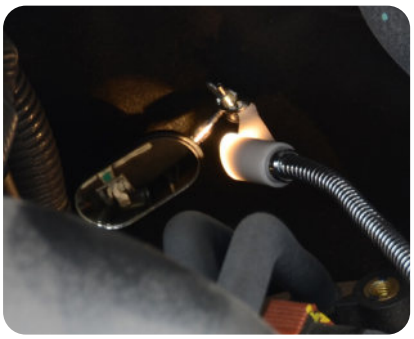

50 x 25 mm playground shape
To inspect hidden or narrow areas
Double ball joint links swivel mirror

10-1/2" Internal-External Heavy Duty Circlip Pliers Set

45115PP

- Internal & External circlip pliers 10-1/2" 265 mmL, maximum spread 45 mm
- Interchangeable tips 0°, 15°, 45°, 90°
- Internal ring 65~140 mm, External ring 65~120 mm
- Interchangeable tips 2.75 mm and 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

Contents

 68GS-11	1 PC. Internal straight circlip pliers
 68RS-11	1 PC. External straight circlip pliers
 68GR-01	1 Set. 15° Internal interchangeable (Ø3mm, Black)
 68GQ-01	1 Set. 45° Internal interchangeable (Ø3mm, Black)
 68GB-01	1 Set. 90° Internal interchangeable (Ø3mm, Black)
 68RR-01	1 Set. 15° External interchangeable (Ø2.75mm, Silver)
 68RQ-01	1 Set. 45° External interchangeable (Ø2.75mm, Silver)
 68RB-01	1 Set. 90° External interchangeable (Ø2.75mm, Silver)
 68ZZ-01	1 Set - Screws (6 PC. M5x0.8)

External Use



Internal Use





15 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ømm	Ømm	kg	
45115PP	10-1/2	267	2	50	-	-	1.30	1 / 10
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

16" Internal-External Heavy Duty Circlip Pliers Set

45211PP

- Internal & External circlip pliers 16" 400 mmL, maximum spread 85 mm
- Interchangeable tips 0°, 45°, 90°
- Internal ring 78-155 mm, External ring 88~165 mm
- Interchangeable tips 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

Contents

 68GS-16	1 PC. Internal straight circlip pliers
 68RS-16	1 PC. External straight circlip pliers
 68GQ-02	2 Set. 45° Internal interchangeable
 68GB-02	2 Set. 90° Internal interchangeable
 68ZZ-02	1 Set - Screws (6 PC. M6x1.0)

External Use



Internal Use





11 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ømm	Ømm	kg	
45211PP	16	406	3-1/4	85	-	-	3.32	1 / 6
68GS-16	16	406	3-1/4	85	78~155	3	0.93	1 / 25
68RS-16	16	406	3-1/4	85	88~165	3	0.97	1 / 25

Kneeling Mat

9TG11

- Kneeling mat makes working more comfortable during repairing wheels, brakes and exhausts
- Make the chemicals and oil resistant
- Easily clean surface
- Light and small, easy to carry and available to hang it





KT NO.	L mm	A mm	B mm	g	
9TG11	455	214	30	126	1 / 18

LED Folding Mat

9TG21

- Folding mechanics mat for mechanics sit / kneel and lie on it
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Folds for easy storage
- Make the chemicals and oil resistant

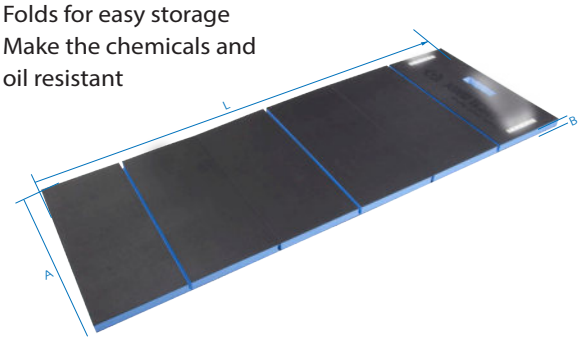





KT NO.	L mm	A mm	B mm	g	
9TG21	1150	420	24	992	1 / 10

LED Kneeling Mat

9TG12

- Kneeling mat with work lights for under car repair or useful as a head protector
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Make the chemicals and oil resistant







KT NO.	L mm	A mm	B mm	g	
9TG12	460	270	30	320	1 / 25

Plastic Car Creeper

87C23-B

- Designed for 2 side storage trays, for easily picking up for small parts or tools
- Vinyl-covered foam pad brings more comfortable while working
- 280 lb. weight capacity
- 1-1/4" ground clearance



KT NO.	Size mm	g	
87C23-B	1010 x 475 x 130 (40")	5000	1

Steel Creeper

87C24-B

87C25-B

- Designed with comfortable sponge cushion
- 300 lbs capacity
- 6 PC. durable swivel casters
- Long size Vinyl-covered foam pad brings more comfortable while working
- All steel construction frame makes it more strong and durable



87C24-B



87C25-B

KT NO.	Size mm		
87C24-B	920 x 425 x 95 (36")	5600	1
87C25-B	1020 x 425 x 110 (40")	7400	1

Wing Protector

9TP11

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area



KT NO.	Size mm		
9TP11	1050 x 650	649	1 / 8

Wing Protector

9TP12

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area



KT NO.	Size mm		
9TP12	1050 x 650	649	1 / 8

9TP22

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Suction cup attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area
- 3 suction cups attached





- Suction cup can be strongly adsorbed on the aluminum alloy material

KT NO.	Size mm		
9TP22	1050 x 650	650	1 / 8



Oil Drain Pan

9TT11-18

- This 18 litre Oil Drain Pan includes easy grip, large carrying handles and integral spout for pouring waste oil or fluids into a recycling container. The anti-splash lip prevents spillage. Ideal for draining antifreeze or oil. (Not suitable for spray gun cleaner)





CONTENTS :

- 18 litre capacity
- Anti-splash lip
- Integral spout
- Ideal for draining antifreeze or oil
- Meets PAHS regulations



KT NO.	L mm	W mm	H mm	g	
9TT11-18	681	570	130	920	15

Wheel Axle Oil Drain

9TT21-03

- When the professional technician reaches for an oil drainer pan it has to be light yet strong, a convenient size for the task in hand and easily cleaned
- The wheel Axle Oil Drain is designed for HGVs, features a 3 litre capacity and is fits snugly into the dish of the wheel to catch the waste oil as it is drained from the axle. It is also stable on the workshop floor and easy to handle





CONTENTS :

- Wheel axle oil drain pan with pouring lip
- Manufactured from PE plastic
- 3 litre capacity

KT NO.	L mm	W mm	H mm	g	
9TT21-03	316	246	156	390	20

Drum Drain Basin

9TT31-20

- Plastic basin installed on drum for receiving waste oil
- Intended to be installed at a standard barrel, the drain lid marries with the barrel inlet allowing simple and efficient draining of waste oil from filters etc
- Features ribbed drainage channels and a filter gate to catch foreign objects





KT NO.	ø mm	H mm	g	
9TT31-20	600	155	1700	5

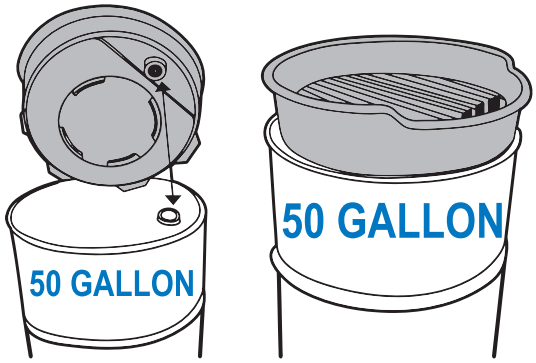

Pneumatic Brake Bleeder

9TV12-02

- Air operated, handle trigger and noise-reduction design, easy and quick to use
- Replace the old brake fluid without leakage
- With 1m silicon hose and universal rubber adapter







KT NO.	Type	Max. Capacity	Working pressure (PSI)	Temperature range	Air inlet	g	
9TV12-020	European	2 L	40~170	-19°C~60°C	1/4"	1050	1 / 12
9TV12-021	American	2 L	40~170	-19°C~60°C	1/4"	1050	1 / 12

10L Pneumatic Oil(ATF) & Liquid Dispenser

9TV13

- Use to extract, transfer and dispense fluid quickly, safety and cleanly
- Non-spark, one man in same step can operate
- Provide with the safety valve, pre-setting 43 PSI (3 Bar), the exceed pressure will be relief automatically
- Provide with the pressure gauge, can be read & control the pressure in the tank more easily
- Provide 2 way control valve for dispensing more safety
- 8 PC. one touch transportation adapter









KT NO.	Max. Capacity	Working pressure (PSI)	Temperature range	Air inlet	g	
9TV13-100	10 L	90	-19°C~140°C	1/4"	4750	1

Manual Fluid Extractor

9TV21-09

- Capacity : 9 litre
- Use for extracting all types of engines oil, transmission fluid and lubricants of cars, marine, stationary, motorbikes engines etc.







- Silicon hose x 1.2 m
- Nylon hose x 1.1 m
- Nylon hose x 1.0 m

KT NO.	Max. Capacity	Temperature range	g	
9TV21-09	9 L	-19°C~90°C	4750	1 / 2

Pneumatic Grease Pump 20L

9TU11

- The barrel body is made of high-grade steel plate. It can contain 5 gallons(20L) of barrel packed grease from all nations around the world
- Suitable for all sorts of machinery, vehicles, airplanes, ships, etc. The efficient instrument for infusing grease powerfully for lubrication & maintenance purpose
- Pump of separate type: utilize the principle of liquid getting pumped & driven by air compressor to draw in liquid. There are two independent & separate cycle systems of pump out there, which prevents air- compressor-exhaust moisture from getting to the grease inside the barrel and deteriorating its quality



KT NO.	Air Input Pressure (bar)	Air Input Pressure (PSI)	Pressure Ratio	Grease Output Pressure (bar)	Grease Output Pressure (PSI)	Deliver Rate (cc/sec)	N.W.	G.W.	kg	CUFT
9TU11-20	4-9	60-130	45 :1	180-405	2700-5850	30	17	20.5	21.0	6.4

Hand Grease Pump 20L

9TU21

- 20L tank for 5 gallons grease oil
- Suitable for #00,#0,#1,#2 grease oil
- Included 1.8m length hose & pistol sprayer
- 1/4" High pressure 10,000 psi W.P oilfield hose
- Portable equipment with single pull handle
- Suitable for all sorts of machineries, vehicles, airplanes, ships, etc.





KT NO.	Transmission rate	Hose Length	N.W.	G.W.	CUFT
9TU21-20	4 cc/stroke	1.8 m	8.2 Kg	9.4 Kg	2.2

Oil Transfer Bucket Pump 20L

9TW21

- Lever pump 20 L tank for oil
- Suitable for diesel fuel, lubricating oils up to SAE 90 and Non-corrosive fluids
- Included 1.8m length hose & sprayer
- Portable equipment with single pull handle





KT NO.	Deliver Rate	Hose Length	Outlet tube	N.W.	G.W.	CUFT
9TW21-20	65 cc/stroke	1.8m	3/8"	7.8 Kg	8.5Kg	2.2


ST
STARTER

Socket Set

ST2346MR 1/4"

Blow case size (mm) :
254 x 147 x 46 (0.16 cuft)



46 PC.



2766DK

Contents		1.06	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2033	T8, T10, T15, T20, T25, T30, T40		
2035	H3, H4, H5, H6, H7, H8		
2031	PH1, PH2, PH3		
2032	4, 5.5, 7		
2038	PZ1, PZ2, PZ3		
1115-14	H1.27, H1.5, H2, H2.5		

2766-55G 2791 2222-02 2222-04

2571-45 2312-06 2179DF

Socket Set

ST4028MR

ST4528MR

ST4028SR 1/2"

ST4528SR 1/2"

Blow case size (mm) :
387 x 223 x 58 (0.18 cuft)



ST4028MR/ST4528MR



ST4028SR/ST4528SR

24 PC.



4766DK

KT NO.		Contents		4.10	1 / 4
ST4028MR	4330MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463021HC		
ST4028SR	4330SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"			
ST4528MR	4335MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463521HC		
ST4528SR	4335SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"			

4766-10G 4251-05RH 4251-10RH

4572-12H 4791RH

Socket & Wrench Set

SC7083MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)



SC7583MR 1/4"+1/2"



83 PC.

5.65 1 / 4

KT NO.	Contents
SC7083MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 4330MRC 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 463016RC 463021HC
SC7583MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 4335MRC 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 463516HC 463521HC

1060 8, 10, 11, 12, 13, 14, 17, 19
2031 PH1, PH2
2032 4, 5.5, 6.5
2033 T8, T10, T15, T20, T25, T27, T30
2035 H3, H4, H5, H6
2038 PZ1, PZ2
1836P PH3, PH4
1836S 8 x 1.2, 10 x 1.6, 12 x 2.0
1836T T40, T45, T50, T55

1836H H8, H10, H12, H14
1836Z PZ3, PZ4
2766-55G
4766-10G
4251-05RH
2222-02
2222-04
79831
4222-10
2312-06
7702-25
3824
2571-45H
2179DF
414810S
2791
4791RH

Socket & Wrench Set

SC7396MR 1/4"+1/2"

Metal case size (mm) :
422 x 275 x 85 (0.35cuft)



96 PC.

Contents

5.5 1 / 4

	2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
	2235M	6, 8, 10, 12, 13, 14
	4335MRC	10, 12, 13, 14, 15, 16, 17, 18, 19, 22, 23, 27, 32
	4535M	15, 16, 17, 19, 24
	1060	8, 10, 12, 13, 14, 15, 16, 17, 18, 19
	1836H	H8, H10, H12, H14
	1836T	T50, T55, T60
	1025S	3.0, 4.0, 5.0, 6.0
	1025P	PH1, PH2 x 2, PH3
	1025Z	PZ1, PZ2 x 2, PZ3
	1025T	T10, T15, T20, T25, T27, T30, T40
	1025H	H3, H4, H5, H6
	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025R	RB2
	753-63	
	7702-25	
	2766-55G	4766-10G
	2571-45H	2179DF
	4222-10	2222-02 2141
	2791	4791RH 3824 414810S

Socket & Wrench Set

SC7096MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

SC7596MR 1/4"+1/2"

96 PC.



KT NO. | Contents | 6.22 | 1 / 4

SC7096MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230MC — 14, 15, 17, 19, 22
- 4330MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021HC

SC7596MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235MC — 14, 15, 17, 19, 22
- 4335MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516HC
- 463521HC

Common

- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5

- 2766-55G
- 4766-10G
- 2179DF
- 4222-10
- 2222-02 2222-04
- 4251-05RH
- 2571-45H
- 2791 4791RH
- 414810S
- 3824
- 7702-25
- 2745

Socket & Wrench Set

SC7010MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

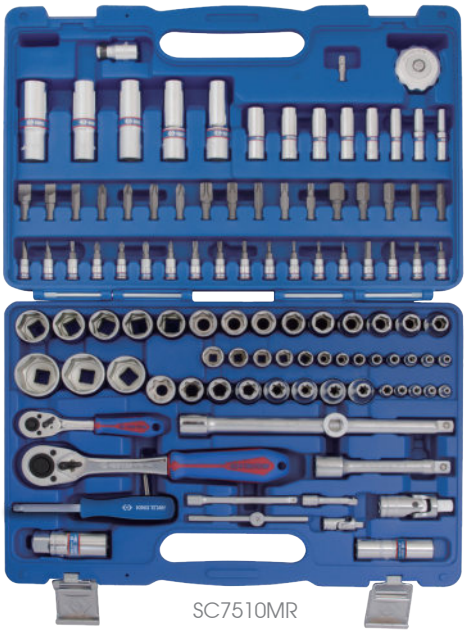

SC7510MR 1/4"+1/2"

110 PC.

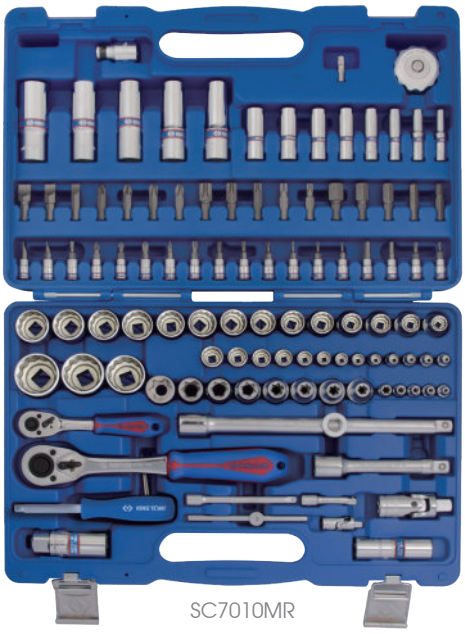

KT NO. Contents 6.90 1 / 4

SC7010MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230MC — 14, 15, 17, 19, 22
- 4330MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021HC

SC7510MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235MC — 14, 15, 17, 19, 22
- 4335MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516HC
- 463521HC

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E11, E12, E14, E16, E18, E20, E24
- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55, T60
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5

- 2766-55G
- 4766-10G
- 2179DF
- 4222-10
- 2571-45H
- 2222-02
- 2222-04
- 4251-05RH
- 2791
- 4791RH
- 3824
- 414810S
- 7702-25
- 2745

Socket & Wrench Set

SC9043MR

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)



SC9543MR 1/4"+3/8"+1/2"



143 PC.

KT NO. | Contents | 13.7 kg | 1 / 2

SC9043MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10
- 4330MRC — 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32
- 463016RC
- 463021HC
- 2375M — E4, E5, E6, E7, E8
- 3330M — 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22
- 4375MC — E10, E12, E14, E16, E20
- 1025P — PH0, PH1, PH2, PH3
- 1025S — 4, 5.5, 7
- 1025U — T10H, T15H, T20H, T25H, T27H, T30H, T40H
- 1025H — H2, H3, H4, H5, H6, H7, H8, H10
- 1025Z — PZ0, PZ1, PZ2, PZ3
- 1421 — PH2 x 38, PH1 x 80
- 1461 — PH2 x 100
- 1422 — 6.5 x 38, 5.5 x 75
- 1462 — 6.5 x 150
- 1060 — 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
- 1930 — 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19
- 1145MR — H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
- 2222-02, 2222-04, 2222-06
- 3221-03, 3221-06
- 4251-03R
- 4222-10
- 2312-06
- 2179DF
- 3781-11F
- 4452-18FR
- 2141
- 4581-10
- 79831
- 6111-07
- 2766-55G
- 4766-10G
- 6011-10R
- 79093-03M
- 3824
- 3812
- 2791, 3792, 4791RH
- 7821-30

SC9543MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10
- 4335MRC — 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32
- 463516HC
- 463521HC
- 2375M — E4, E5, E6, E7, E8
- 3330M — 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22
- 4375MC — E10, E12, E14, E16, E20
- 1025P — PH0, PH1, PH2, PH3
- 1025S — 4, 5.5, 7
- 1025U — T10H, T15H, T20H, T25H, T27H, T30H, T40H
- 1025H — H2, H3, H4, H5, H6, H7, H8, H10
- 1025Z — PZ0, PZ1, PZ2, PZ3
- 1421 — PH2 x 38, PH1 x 80
- 1461 — PH2 x 100
- 1422 — 6.5 x 38, 5.5 x 75
- 1462 — 6.5 x 150
- 1060 — 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
- 1930 — 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19
- 1145MR — H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
- 2222-02, 2222-04, 2222-06
- 3221-03, 3221-06
- 4251-03R
- 4222-10
- 2312-06
- 2179DF
- 3781-11F
- 4452-18FR
- 2141
- 4581-10
- 79831
- 6111-07
- 2766-55G
- 4766-10G
- 6011-10R
- 79093-03M
- 3824
- 3812
- 2791, 3792, 4791RH
- 7821-30

Ball Hex Key

ST1120MR

- Extra long arm with ball point type
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
ST112012MR	H12	57	262	283	8 / 48
ST112014MR	H14	70	294	441	8 / 48
ST112017MR	H17	80	337	740	4 / 32
ST112019MR	H19	89	379	1044	4 / 16

ST1145MR

- Standard arm type
- Hex head
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
ST114512MR	H12	57	137	166	10 / 120
ST114514MR	H14	70	154	261	6 / 72
ST114517MR	H17	80	177	439	4 / 48
ST114519MR	H19	89	199	619	4 / 32

Hex Key Set

ST20219MR



9 PC.

Spec.	Contents	g	
Standard arm	ST1145MR	300	6 / 48

H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

ST20213MR



13 PC.

Spec.	Contents	g	
Standard arm hex-head key	ST1145MR	1880	2 / 8

H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19

ST20219MY



9 PC.

Spec.	Contents	g	
Standard arm	ST1145MY	300	6 / 48

H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

ST20209MR



9 PC.

Spec.	Contents	g	
Extra long arm	ST1125MR	480	8 / 48

H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

ST20207MY



7 PC.

Spec.	Contents	g	
Extra long arm	ST1125MY	540	8 / 48

H3, H4, H5, H6, H7, H8, H10

ST20208MY



8 PC.

Spec.	Contents	g	
Extra long arm	ST1125MY	480	8 / 48

H2, H2.5, H3, H4, H5, H6, H8, H10

Hex Key Set

ST20109MR



9 PC.

Spec.	Contents	0.48 kg / 8 / 48
Extra long arm / ball	ST1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

ST20419PR



9 PC.

Spec.	Contents	470 g / 8 / 48
Extra long arm / Tamper resistant	ST1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H

ST20203MR



13 PC.

Spec.	Contents	330 g / 1 / 4
Extra long arm / ball	ST1120MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19

ST20203SR



13 PC.

Spec.	Contents	330 g / 1 / 4
Extra long arm / ball	ST1120SR	5/64, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 1/2, 9/16, 5/8, 3/4

Tool Trolley

ST87432-5B

ST87434-7B

5 Drawer & 7 Drawer Tool Trolley

- Heavy duty ball bearing slides
- 5"x1-1/4" casters with locking break
- One piece wall constructed and powder coating
- Central locking system
- Oil can holder / optional side pull handle bar
- 2mm anti-slipping rubber top mat
- Overall size : W670 x D460 x H812 mm

ST87432-5B 52 kg
ST87434-7B 60 kg
CUFT 12.64



ST87432-5B



ST87434-7B

TOOL DIAMOND BLOCKS

SET A

TS00108

01 HAND SOCKET



02 RATCHET



03 COMBINATION WRENCH



04 PHILLIPS SCREWDRIVER



05 PORTABLE TOOL BOX



06 SHELF TROLLEY



07 WORKBENCH



08 MEASURING TAPE





WARNING:
CHOKING HAZARD
SMALL PARTS, NOT FOR CHILDREN UNDER 3 YEARS



KING TONY
Enjoy your work

TOOL DIAMOND BLOCKS

SET B

TS00208

01 Impact Socket



02 Impact Wrench



03 Combination Pliers



04 Slotted Screwdriver



05 Ratchet Tubing Cutter



06 Tool Trolley



07 LED Lamp



08 Tool Box





WARNING:
CHOKING HAZARD
SMALL PARTS, NOT FOR CHILDREN UNDER 3 YEARS



Promotional Merchandise



Leather Male Wallet
ZS104
Size : 11.5 x 9 cm



Briefcase (Leather)
ZS107
Size : 40 x 35 x 8 cm



Mouse Pad
ZS306
Size : 18 x 18 x 0.3 cm



Coaster
ZS514
Size : 9.9 x 9.9 cm



Ball-Bearing Pen
ZS402



Ball-Bearing Pen
ZS405



Ruler 30 cm
ZS408



A4 L Shape Clear File
ZS409
Size : 310 x 220mm



A4 Clear File
ZS410
Size : 310 x 495 x 17mm



Mat
ZS411
Size : 530 x 367 x 2mm



Notepaper
ZS517
Size : 7.5 x 7.5 cm



Work Clothing Overall	Waist. (inch)	Hip (inch)
ZS109 - L	34"	48"
ZS109 - XL	36"	50"
ZS109 - 2L	38"	52"
ZS109 - 3L	41"	54"



Work Clothing Overall	Waist. (inch)	Hip (inch)
ZS112 - L	36"	44"
ZS112 - XL	40"	48"
ZS112 - 2L	44"	52"
ZS112 - 3L	48"	56"



Windbreaker Jacket Overall	Chest girth (cm)
ZS141 - S	44"
ZS141 - M	46"
ZS141 - L	48"
ZS141 - XL	50"
ZS141 - 2L	52"
ZS141 - 3L	54"



T-shirt Overall	Shoulder width (cm)
ZS146 - S	51
ZS146 - M	53
ZS146 - L	56
ZS146 - XL	61
ZS146 - 2L	64



Polo Shirt Overall	Shoulder width (inch)	Chest girth (inch)
ZS111 - M	17"	41"
ZS111 - L	18"	43"
ZS111 - XL	19"	45"
ZS111 - 2L	20"	47"
ZS111 - 3L	21"	49"

Polo Shirt Overall	Shoulder width (inch)	Chest girth (inch)
ZS111A - S	14"	36"
ZS111A - M	15"	37"
ZS111A - L	16"	39"
ZS111A - XL	17"	41"
ZS111A - 2L	18"	42"
ZS111A - 3L	19"	44"



Leather Belt (Male)
ZS108



Work Hat
ZS110



ZS142W
ZS142G
ZS142B

T-shirt Overall	Shoulder width (inch)	Chest girth (inch)
S	16"	38"
M	17"	40"
L	18"	42"
XL	18-1/2"	44"
2L	19"	46"
3L	19.5"	48"



Bath Towel
ZS153A



Golf Umbrella
ZS116
Size : 68 x 8K



Personal Cooler Bag
ZS120-S



Stainless Grilling & Barbecue Utensils
ZS572



Opener
ZS539



Handbag
ZS119
Size : 36 x 38 x 10 cm



Paper Cup
ZS511



Mug
ZS605



Mini Pocket Tools
ZS540



Key Ring
ZS522



Key Ring
ZS524



Key Ring
ZS533

Promotional Merchandise



Small Flag
ADFLAG
Size : 25.4 x 16 cm

Big Flag
ADFLAG1
Size : 930 x 1430 mm



Outdoor Flag
ADFLAG2
Size : 210 x 60 cm

Canvas Strip
Size : 300 x 80 cm



ADCV-01



ADCV-02



Sticker
ADSTK-C1
Size : ø - 250 mm



Sticker
ADSTK-H2
Size : ø - 250 mm

Sticker
ADSTK31KT
Size : 66 x 16 cm

Sticker
ADSTK21KT 99 x 45 cm
ADSTK22KT 50.6 x 22.6 cm
ADSTK23KT 26.4 x 4.2 cm

ZS115

- Quick and easy to set up
- Tent roof made of high quality 600D fabric
- Waterproof and UV resistant
- Full structure made of robust steel
- Adjustable height, max to 3400 mm
- Includes practical carrier bag





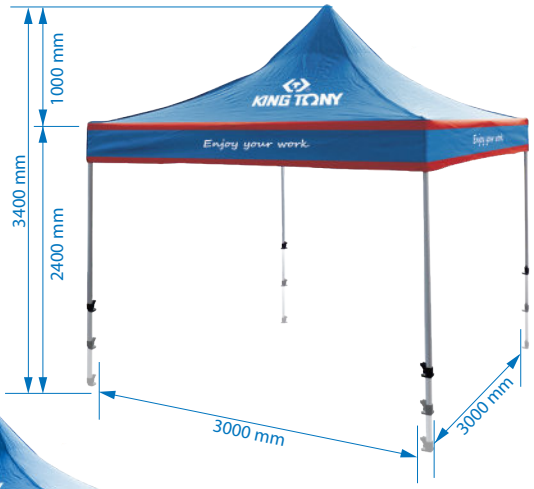



• Full truss structure



• Hanging capacity up to 70 kgs



• Foot pad comes with stake hole



• 3 section of height adjustment



ZS115-1 x 3

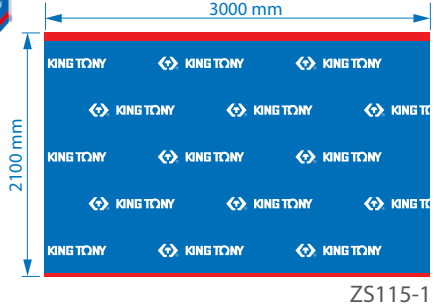

ZS115-1

KT NO.	Spec.	Height (mm)	kg	
ZS115	3000 x 3000 mm (not included ZS115-1)	3400	22	1 / 1
ZS115-1	2100 x 3000 mm Side curtain	-	0.9	1 / 15

Tool Display









Side Panel for Display Stand
ADVT-02
Size : 900 x 220 mm

Magnetic Base
91422





Display Stand
87306A
Overall Size -
W 1000 x D 500 x H 2200 mm
Attachment-
1 PC. lamp case
2 PC. shelve
6 PC. steel plate with hole
40 PC. Black hooks
(170 x Ø3.6mm)
Weight - 57 Kg / Cuft - 5.9

Optional:



Display Hook

87301- 494A	4" x Ø 4 mm
87301- 496A	6" x Ø 5.2 mm
87301- 498A	8" x Ø 5.2 mm
87301- 499A	9" x Ø 8 mm



Display Stand
87306-36-B
Overall Size -
W 968 x D 250 x H 200 mm
Weight - 6.3 Kg / Cuft - 0.53



Double-sided Display Stand
87307A
Overall Size -
W 1000 x D 960 x 2200 mm
Attachment-
2 PC. Lamp case(1 LED , 2 spotlights)
4 PC. Shelve
12 PC. Steel plate with hole
40 PC. Hooks
Weight - 70.3 Kg / Cuft - 11.75





Display Board
87203
Wall hanging type 30 PC. hook included
Overall Size -
W 725 x D 14 x H 900 mm
Weight - 11.50 Kg / Cuft - 0.328



Display Stand
87301-36(White)
Overall Size -
W 902 x D 268 x H 143 mm
Weight - 6.5 Kg / Cuft - 0.62

A4 size paper :
297 x 210mm



87154-01



87154





6 kgs max.
loading capacity

Tools Display Stand
87154 / 87154-01
Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.2 Kg / Cuft 1.35

A4 size paper :
297 x 210mm



Impact Wrench
Display Stand
87156A
Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.9Kg / Cuft 0.31

Contents



87156



87154-01



SY-210M x3



SY-20A x6



SY-10A x3

87154-01



87156

Tool Display

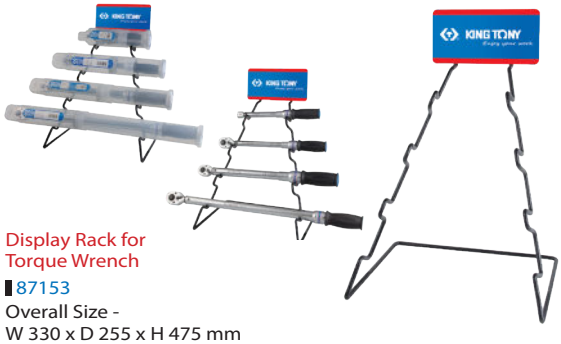

Display Rack for Torque Wrench
87153
Overall Size -
W 330 x D 255 x H 475 mm
Weight - 1.23 Kg / Cuft - 1.41





Display Stand
87152
Overall Size -W400 x D230 x H470 mm
Weight - 1.20 Kg / Cuft - 1.53



Steel Rack Hook
91432
Idea for hanging display & presenting tool set
230mm maximum depth
5kg maximum tool weight
(heavier & longer items, you can put 2 PC. to hold)



Hammer Hook
91431 P.449
Overall Size -
W 40 x D 210 x H 240 mm
Weight - 411.6 g / Cuft - 0.072



Hook for Torque Extension Bar
9TE41 P.230
Total Length - 311mm
Weight - 196.4 g
Groove capacity: 22 mm





Hangers
Individual Pack
Housing material - PP
Lock pin is optional





Display Shelf for L-wrench
87125
Overall Size -
W 220 x D 260 x H 5 mm
Weight 135g / Cuft 1.10
Reference :
2020H0MR P.394



Screwdriver Shelf
87105 / 87107 / 87110 / 87111
87105-W 595 x D 240 x H 210 mm
Weight - 3.40 Kg Cuft - 1.97
87107-W 383 x D 136 x H 130 mm
Weight - 0.86 Kg
87110-W 420 x D 240 x H 210 mm
Weight - 2.50 Kg Cuft - 1.5
87111-W 655 x D 240 x H 210 mm
Weight - 3.80 Kg Cuft - 2.2
Reference:
87105 (31416MR P.368)
(31516MR P.368)
87107 (31419MR P.421)
87110 (31512MR P.368)
87111 (31519MR P.368)



Screwdriver Shelf
87104 P.369
Overall Size -
W 325 x D 205 x H 270 mm
Weight - 1.20 Kg Cuft - 0.3



Display Stand for Measuring Tape
87118 P.460
Capacity : 12 PC.
For all measuring tape
(79093 / 79094 Series)
Size : 309 x 237 x 189 mm



Display Stand for L-wrench Set
87119 P.396
Capacity : 12 sets
For Allen, Spline, Ball, torx with hole
Size : 393 x 154 x 345 mm



Paper Display Stand for Socket Set
87140
Size : 468 x 446 x 250 mm



Bit Display Box
87352 P.375
Overall Size -
W 318 x D 235 x H 183 mm
Weight - 1.30 Kg
Cuft - 0.4



Metal Holder
8711B
Overall Size -
W 600 x D 240 x H 60 mm
Weight - 6.20 Kg
Cuft - 0.9
Reference :
1090PR1 P.450

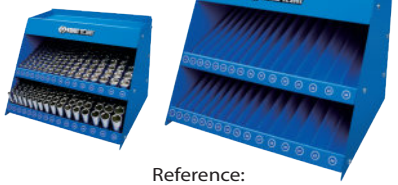

Socket Shelf
87102 / 87103
Width can be adjustable to display multiple socket series
Single serial socket size tab attached
Overall Size -
W 415 x D 336 x H 320 mm
Weight - 6.85 Kg(87102) /
6.37 kg(87103) Cuft - 0.67

Reference:

3568MR	P.166
4072MR / 4572MR	P.168
4072SR / 4572SR	P.168
4066MR / 4566MR	P.170
4066SR	P.170
4472MP/4472SP	P.224
4466MP/4466SP	P.226



Metal Holder for Flat Chisel
87108 P.452



Impact Wrench Hook
91451-01A(1/4"-19 BSPT)
91451-01B(1/4"-18 NPT)
91451-01F(1/4"-19 BSPT)
Reference : P.275



Impact Wrench Display Stand
871061A(1/4"-19 BSPT)
871061B(1/4"-18 NPT)
871061F(1/4"-19 BSPT)
Reference : P.275
Applied for 3/8"&1/2" DR. air tools

Sign List

Internal hexagon	External hexagon	Bi - hexagon	Spline head	Spline head - tamper resistant	Internal torx	External torx	External torx - tamper resistant	Double square
torx plus- tamper resistant	torx plus	Ribe bit socket	Phillips head	Slotted head	Pozidriv	PlusMinus	Internal square	External square
External square	Ribe socket 12 mm	Ribe socket 10 mm	Axial lock nut	Square	Crowfoot	Hook wrench	External KM locknut	Internal KM locknut
Speical profile for wheel nut	Claw Pickup	Internal square	Hexagon	Pentagon	Ball hex	Flat face - roung	Flat face - square	Milled square face
Internal circlip	External circlip	Thin serrated	Coarse serrated	Smooth	With opening spring	Round jaws	Half-round jaws	Flat & point jaws
Soft wire	Medium hard wire	Hard wire	Piano wire	Europe	America & Asia	Australia & New Zealand	English	Australia
Changeable blade	Guide rollers	Cutter wheel	Outside diameter (O.D.)	Wall thickness	Inside diameter (I.D.)	(mm) Capacity of open jaw	Diameter	
Center cut	With bevel	With small bevel	With very small bevel	Without bevel				
Max. torque	Air inlet	Free speed	Air pressure	Std. bolt size	Air hose	Anvil type	Avg. air consumption	Sound
Vibration level	Litre capacity	Q'ty / Carton	Q'ty / Box	Q'ty / Bag	Q'ty / Blister card	(g)(kg) Weight		
Light weight	1000V	ESD	ISO	CE certificate	VDE certificate	G.S. approval	TUV certificate	



HGV	Commercial Vehicles	Small commercial vehicles	Passenger cars	Buses	Construction vehicles	Agricultural machinery	Motorcycles	Engine series
Agricultural machinery-tiller	Chassis	Steel construction	Assembly line	Factory	Diesel engine	Petrol engine	Timing belt	Timing chain
Strobe	IP Protection	Adjustable lighting	Lumen	Lighting for hours	Watt	Adjustment button	Thickness	Magnetic
USB cable	USB charger	Cable length	Charging time	DC charger	AC charger	Li-ion battery	Battery	IK07/ IP20
10 cm range								





It all fits together

■ DIN screwdrivers

Slotted screws

Size	2x0.4	2.5x0.4	3x0.5	3.5x0.6	4x0.8	5.5x1	6.5x1.2	8x1.2	10x1.6
Metric screws									
Flat head M — ISO 2009		1.6	2	2.5	3	3.5	4 5		
M — DIN 963		1.6	2	2.5	3 3.5	4	5		
Oval head M — ISO 2010		1.6	2	2.5	3	3.5	4 5		
M — DIN 964		1.6	2	2.5	3 3.5	4	5		
Cheese head M — ISO 1207						3.5	4	5	6
M — DIN 84		1.6 1.8	2	2.5		4	4	5	6
Pan head M — ISO 1580		1.6	2	2.5	3	3.5	4	5	6
M — DIN 85					3	3.5	4 5		6
M — DIN 920		2.5	3/3.5	4	5	6	8		10
M — DIN 921		1.6	2	2.5	3 3.5	4		5	6
Set M — ISO 4766 7435 — DIN 551 417	2.5 3	3.5	4		5 6		8		
M — ISO 4735 — DIN 427	2.5 3	3.5	4		5 6		8		14
Self tapping screws									
Flat head B — ISO 1482			2.2		2.9	3.5	4.2 4.8		
B — DIN 7972			2.2		2.9	3.5 3.9	4.2 4.8		
Oval head B — ISO 1483			2.2		2.9	3.5	4.2 4.8		
B — DIN 7973			2.2		2.9	3.5 3.9	4.2	4.8	6.3
Pan head B — ISO 1481			2.2		2.9	3.5		4.2 4.8	5.5 6.3
B — DIN 7971				2.9	2.9	3.5		4.2 4.8	5.5 6.3

Phillips + Pozidriv

Size	00	0	1	2	3	4
Metric screws						
Flat head M — ISO 7046 — DIN 965		1.6 2	2.5 3	3.5 5	6	8 10
Oval head M — ISO 7047 — DIN 966		1.6 2	2.5 3	3.5 5	6	8 10
Pan head M — ISO 7045 — DIN 7985		1.6 1.8	2.5 3	3.5 5	6	8 10
Self tapping screws						
Flat head B — ISO 7049 — DIN 7981			2.2 2.9	3.5 4.8	5.5 6.3	
Oval head B — ISO 7050 — DIN 7982			2.2 2.9	3.5 4.8	5.5 6.3	
Pan head B — ISO 7051 — DIN 7983			2.2 2.9	3.5 4.8	5.5 6.3	
ANSI screws		0-1	2-4	5-10	12-16	18-...

■ How to find the correct screwdriver

	Slotted	Phillips	Pozidriv	Torx	Torx	Square	Hex	Nut
Classic Screwdriver	1412	1411						
SoftFinish Screwdriver	1422	1421	1428	1423	1427	1424		
Classic Screwdriver (Heavy Duty)	1482	1481						
SoftFinish Screwdriver (heavy Duty)	1462	1461						
Nutspinner								1450 5450 1453
SoftFinish Electric	1472	1471	1478					
Precision Screwdriver	1432	1431		1433				
Exchangeable ratchet Screwdriver	32809	32809		32809				
Two-way screwdriver	2411 1317 2431	2411 1317 2431	1317	1317 2433			1317	32810
Torque Screwdriver							3411	

Internal Torx			For torx head screw										
			T5	T6	T7	T8	T9	T10	T15	T20	T25	T27	T30	T40
mm			1.42	1.70	1.99	2.31	2.50	2.74	3.27	3.86	4.43	4.99	5.52	6.65
Metric screws														
Cheese head M	ISO 4762	DIN 912	*	2	*	2.5		3		4	5	**	6	
Flat head M	ISO 4760	DIN 963 965	*	*	*	2.5		3	3.5	4	5	**	6	8
Oval head M	ISO 7047 2010	DIN 964 966	*	2	*	2.5		3	3.5	4	5	**	6	
Cheese head M		DIN 7984 6912	*	*	*	2.5		3		4	5	**	6	
Oval head M	ISO 7045	DIN 7985	*	2	*	2.5		3	3.5	4	5	**	6	
Flat head M	ISO 10642	DIN 7991	*	*	*	2.5		3		4	5	6	**	8
Self tapping screws														
Pan head B	ISO 7049	DIN 7981 7982	*	2.2	*	2.9		3.5	3.9	4.2 5.5	4.8	**	6.3	
Flat head B	ISO 7050	DIN 7972 7983	*	2.2	*	2.9		3.5	3.9	4.2	4.8 5.5	**	6.3	
Oval head B	ISO 7051	DIN 7973	*	2.2	*			3.5	3.9	4.2	4.8 5.5	**	6.3	8

*** Screws for tungsten carbide inserts** **** Special screws**

Index	
ISO International standard	
DIN German standard	
M Metric screws	Thread diameter
M Set screw metric	Thread diameter
M Metric nut	Thread diameter
B Self tapping screw	Thread diameter
	Symbols
Tool drive = screwdriver socket	
for screws with internal drive	
Took drive = Nutdriver socket	
for screws with head drive	



Bits / Sockets for S size

TORX internal screw		T5	T6	T7	T8	T9	T10	T15	T20	T25	T27
	S(ref.mm)	1.42	1.7	2	2.32	2.5	2.74	3.28	3.86	4.43	4.99
	Screws(ref)	M1.5	M2	M2.5	M2.5	M3	M3/M3.5	M3.5/M4	M4/M5	M4.5/M5	M4.5/M5/M6
		T30	T40	T45	T50	T55	T60	T70	T80	T90	T100
	S(ref.mm)	5.52	6.65	7.82	8.84	11.23	13.26	15.54	17.58	19.95	22.16
	Screws(ref)	M6/M7	M7/M8	M8/M10	M10	M12	M14	M16	M18	M20	M22

SPLINE		M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
	S(ref.mm)	3.6	4.8	6	7.2	9.6	11.41	13.22	15.63	16.85	19.25
	Screws(ref)	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20

RIBLE		M5	M6	M7	M8	M9	M10	M12	M13	M14	M16
	S(ref.mm)	5	6	7	8	9	10	12	13	14	16
	W(ref.mm)	1.1	1.3	1.4	1.7	1.9	2.2	2.6	3	3.1	3.5
	Screws(ref)	M6	M8		M10	M10	M12				

IPR		IPR8	IPR9	IPR10	IPR15	IPR20	IPR25	IPR27	IPR30	IPR40	IPR45	IPR50	IPR55	IPR60
	S(ref.mm)	2.14	2.33	2.58	3.07	3.63	4.16	4.70	5.22	6.27	7.32	8.32	10.54	12.45

TORX external screw		E4	E5	E6	E7	E8	E10	E11	E12	E14	E16	E18	E20
	S(ref.mm)	3.83	4.72	5.69	6.17	7.47	9.37	10.03	11.12	12.85	14.71	16.64	18.41
	Screws(ref)	M3	M4	M5	M6	M6/M7	M8	M8/M10	M10	M12	M12	M14	M16
		E22	E24	E26	E28	E30	E32	E34	E36	E38	E40	E42	E44
	S(ref.mm)	20.24	22.1	23.85	25.65	27.38	29.16	30.96	32.82	34.67	36.37	38.2	39.98
	Screws(ref)	M18	M18/M20										

SQUARE		RB00	RB0	RB1	RB2	RB3	RB4
	S(ref.mm)	1.30	1.80	2.30	2.86	3.38	4.85



Torque Data

mm	mm	mm	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)					
			4.8 Torque N · m	5.8 Torque N · m	6.8 Torque N · m	8.8 Torque N · m	10.9 Torque N · m	12.9 Torque N · m
M3	5.5	2.5	0.64	0.8	0.91	1.21	1.79	2.09
M4	7	3	1.48	1.83	2.09	2.78	4.09	4.79
M5	8	4	2.93	3.62	4.14	5.5	8.1	9.5
M6	10	5	5	6.2	7.1	9.5	14	16.4
M8	13	6	12.3	15.2	17.4	23	34	40
M10	16	8	24	30	34	46	67	79
M12	18	10	42	52	59	79	116	136
M14	21	12	67	83	94	127	187	219
M16	24	14	105	130	148	198	291	341
M18	27	14	145	179	205	283	402	471
M20	30	17	206	254	291	402	570	667
M22	34	17	283	350	400	552	783	917
M24	36	19	354	438	500	691	981	1148
M27	41	19	525	649	741	1022	1452	1700
M30	46	22	712	880	1005	1387	1969	2305
M33	50	24	968	1195	1366	1884	2676	3132
M36	55	27	1242	1534	1754	2418	3435	4020
M39	60		1614	1994	2279	3139	4463	5223
M42	65	32	1995	2464	2816	3872	5515	6453
M45	70		2497	3085	3525	4847	6903	8079
M48	75	36	3013	3722	4254	5849	8330	9748
M52	80		3882	4795	5480	7535	10731	12558
M56	85	41	4839	5978	6832	9394	13379	15656
M60	90		6013	7428	8490	11673	16625	19455
M64	95	46	7233	8935	10212	14041	19998	23402

* In order not over-tighten the fastener, please refer manufacturer's service manual, or TORQUE DATA for tightening torque information
* Torque tightening is refer to “thread dimension” of screw, which is M3~M64 size mention above table

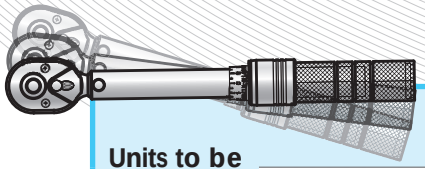

Torque Conversion

Units to be	Corresponding unit					
	in · lb	**ft · lb**	**kgf · cm**	**kgf · m**	**cN · m**	**N · m**
1 in · lb	1	0.083	1.152	0.0115	11.3	0.113
1 ft · lb	12	1	13.83	0.138	135.6	1.356
1 kgf · cm	0.868	0.072	1	0.01	9.807	0.098
1 kgf · m	86.8	7.233	100	1	980.7	9.807
1 cN · m	0.088	0.007	0.102	0.001	1	0.01
1 N · m	8.851	0.738	10.20	0.102	100	1

1 N · m = 0.738 ft · lb = 8.85 in · lb = 0.10 Kgf · m = 10.20 Kgf · cm



Torque Data

IMPERIAL

inch	threads per inch	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)			
		307A A	5	8	9
		Torque ft · lb	Torque ft · lb	Torque ft · lb	Torque ft · lb
Coarse Thread Series					
1/4	20	32 in · lb	76 in · lb	107 in · lb	126 in · lb
5/16	18	66 in · lb	157 in · lb	221 in · lb	259 in · lb
3/8	16	10	23	33	38
7/16	14	16	37	52	61
1/2	13	24	57	80	94
9/16	12	35	82	115	135
5/8	11	48	113	159	186
3/4	10	85	200	282	331
7/8	9	136	322	455	533
1	8	204	483	681	799
1-1/4	7	409	840	1363	1597
1-1/2	6	711	1462	2371	2779
Fine Thread Series					
1/4	28	37 in · lb	87 in · lb	123 in · lb	144 in · lb
5/16	24	73 in · lb	174 in · lb	245 in · lb	287 in · lb
3/8	24	11	26	37	43
7/16	20	18	41	58	68
1/2	20	27	64	90	105
9/16	18	39	91	128	151
5/8	18	54	127	180	211
3/4	16	94	223	315	369
7/8	14	150	355	502	588
1	14	229	542	765	896
1-1/4	12	453	930	1509	1768
1-1/2	12	800	1645	2668	3127

* note : Torque-Tension relationship for ASTM A307 Grade A(SAE J2), SAE J429 Grade 5, SAE J429 Grade 8 & FNL Grade 9 Bolts
* note : Torque values for 1/4" and 5/16" are in in·lb. All other torque values are in ft·lb

Hanger No. List

	Hanger No.	Suitable Size	Hanger No. (with product)
Socket Hanger for 1/4" DR. Socket	08782100 	1/4"DR. Socket	 KT No. & D1
Socket Hanger for 3/8" DR. Socket	08783100 	3/8"DR. Socket	 KT No. & D1
Socket Hanger for 1/2" DR. Socket	08784100 	1/2"DR. Socket	 KT No. & D1
Socket Hanger for 3/4" DR. Socket	08786100 	3/4"DR. Socket	 KT No. & D1
Hanger for 1/4" DR. Accessories	08782102 	1/4"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for 3/8" DR. Accessories	08783102 	3/8"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for 1/2" DR. Accessories	08784102 	1/2"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for Wrench	8781103 choose suitable hangers according to different sizes 	For example,1060 6~9mm	 KT No. & D1
Hanger for Wrench & Nut Spinner	8781100 choose suitable hangers according to different sizes 	For example,1060 10~19mm & nut spinner	 KT No. & D1
Hanger for Wrench	8781101 choose suitable hangers according to different sizes 	For example,1060 20~23mm	 KT No. & D1
Hanger for Wrench	8781102 choose suitable hangers according to different sizes 	For example,1060 24~32mm	 KT No. & D1
Hanger for Speed Wrench	087837(size)KT 	Speed wrench, open-side speed wrench size, 8~24mm	 KT No. & D1
Hanger for Screwdriver	8785100 choose suitable rubber rings according to different sizes 	Screwdriver, hex key, spline L-wrench, star L-wrench, L-type wrench, T-type wrench	 KT No. & D1
Hanger for Power Driving	8785001 	Power driving 9.5mm groove	 KT No. & D1

Index

10 xxx

1005APR.....450
1005GQ.....470
1006APR.....450
1006GPN.....452
1006PR.....451
1006PRN.....451
1009GPN.....452
1009PR.....451
1009PRN.....451
1010CMR.....N27
1010PR.....451
1011MQ.....376
1014GPN.....452
1015GQ.....470
1015MQ.....376
1015PQ.....376
1016PR.....451
1020-08.....317
1020-09.....317
1020-10 317
1020-11 317
1020-12 317
1020-13 317
1020-14 317
1020-15 317
1020-16 317
1020-17 317
1020-18 317
1020-19 317
1023EQ 376
1025PRN.....451
102500P 372
102500P.B 372
102500R 373
102500R.B 373
102501P 372
102501P.B 372
102501R 373
102501R.B 373
102501Z 373
102501Z.B 373
102502P 372
102502P.B 372
102502P-S1 381
102502H 372
102502H.B 372
102502R 373
102502R.B 373
102502Z 373
102502Z.B 373
102502Z-S1 381
102503H 372
102503H.B 372
102503P 372
102503P.B 372
102503R 373
102503R.B 373
102503S1 372
102503S1.B 372
102503Z 373
102503Z.B 373
102504H 372
102504H.B 372
102504M 372
102504P 372
102504P.B 372
102504S1.....372
102504S1.B 372
102504S2 372
102504S2.B 372
102505H 372
102505H.B 372
102505M 372
102505S1 372
102505S1.B 372
102506H 372
102506H.B 372
102506M 372
102506S1.....372
102506S1.B 372
102506T 372
102506T.B 372
102507H 372
102507H.B 372
102507S1 372
102507S1.B 372
102507T 372
102507T.B 372
102507U 372
102507U.B 372
102508H 372
102508H.B 372
102508M 372
102508S1 372
102508S1.B 372
102508S2 372
102508S2.B 372
102508T 372
102508T.B 372
102508U 372
102508U.B 372
102508V 372
102509T 372
102509T.B 372
102509U 372
102509U.B 372
102509V 372
102510H 372
102510H.B 372
102510M 372
102510T 372
102510T.B 372
102510T-S1 381
102510U 372
102510U.B 372
102510V 372
102512P 372
102512P.B 372
102515H 372
102515H.B 372
102515T 372
102515T.B 372
102515T-S1 381
102515U 372
102515U.B 372
102515V 372
102520T 372
102520T.B 372
102520T-S1 381
102520U 372
102520U.B 372
102520V 372
102525H 372
102525H.B 372
102525T 372
102525T.B 372
102525T-S1 381
102525U 372
102525U.B 372
102525V 372
102527T.....372
102527T.B 372
102527U 372
102527U.B 372
102527V 372
102530T 372
102530T.B 372
102530T-S1 381
102530U 372
102530U.B 372
102530V 372
102535S1 372
102535S1.B 372
102535T 372
102535T.B 372
102540T 372
102540T.B 372
102540U 372
102540U.B 372
102540V 372
102545S1 372
102545S1.B 372
102545T 372
102545T.B 372
102550T 372
102550T.B 372
102555S1 372
102555S1.B 372
102555S2 372
102555S2.B 372
102565S1 372
102565S1.B 372
1026CQ-AM 380
1031-10R 315
1031-11R 315
1031-12R 315
1031-13R 315
1031-14R 315
1031-15R 315
1031-16R 315
1031-17R 315
1031-18R 315
1031-19R 315
1031-22R 315
1031-24R 315
1031-26R 315
1031-27R 315
1031-30R 315
1031-32R 315
1031-33R.....315
1031-34R 315
1031-35R 315
1031-36R 315
1031-38R 315
1031-41R 315
1031-46R 315
1031-48R 315
1031-50R 315
1032CQ 381
1032CQ01 381
1035MR 391
1036MR 391
1036ZQ 471
1040CQ 376
1041CQ-EB N29
1042CQ 376
1043CQ 376
1044CQ 377
1044MR 391
1045MR 392
1045MR01-EB N28
1048MR 378
1049CQ..... 392
1060-06 306
1060-07 306
1060-08 306
1060-09 306
1060-10 306
1060-11 306
1060-12 306
1060-13 306
1060-14 306
1060-15 306
1060-16 306
1060-17 306
1060-18 306
1060-19 306
1060-20 306
1060-21 306
1060-22 306
1060-23 306
1060-24 306
1060-25 306
1060-26 306
1060-27 306
1060-28 306
1060-29 306
1060-30 306
1060-32 306
1060-55 306
1061-06 303
1061-07 303
1061-08 303
1061-09 303
1061-10 303
1061-11 303
1061-12 303
1061-13 303
1061-14 303
1061-15 303
1061-16 303
1061-17 303
1061-18 303
1061-19 303
1061-20 303
1061-21 303
1061-22 303
1061-23 303
1061-24 303
1061-25 303
1061-26 303
1061-27 303
1061-28 303
1061-29 303
1061-30 303
1061-32 303
1062-06 304
1062-07 304
1062-08 304
1062-09 304
1062-10 304
1062-11 304
1062-12 304
1062-13 304
1062-14 304
1062-15 304
1062-16 304
1062-17 304
1062-18 304
1062-19 304
1062-20 304
1062-21 304
1062-22 304
1062-23 304
1062-24 304
1062-25 304
1062-26 304
1062-27 304
1062-28 304
1062-29 304
1062-30 304
1062-32 304
1063-06 308
1063-08 308
1063-11 308
1063-14 308
1063-15 308
1063-16 308
1063-18 308
1063-21 308
1063-22 308
1063-30 308
1063-32 308
1067-06 308
1067-07 308
1067-08 308
1067-09 308
1067-10 308
1067-11 308
1067-12 308
1067-13 308
1067-14 308
1067-15 308
1067-16 308
1067-17 308
1067-18 308
1067-19 308
1067-20 308
1067-21 308
1067-22 308
1067-23 308
1067-24 308
1067-25 308
1067-26 308
1067-27 308
1067-28 308
1067-29 308
1067-30 308
1067-32 308
1071-33 306
1071-34 306
1071-35 306
1071-36 306
1071-38 306
1071-41 306
1071-42 306
1071-44 306
1071-46 306
1071-48 306
1071-50 306
1071-55 306
1071-60 306
1071-65 306
1071-70 306
1071-75 306
1071-80 306
1071-85 306
1080-06 325
1080-07 325
1080-08 325
1080-09 325
1080-10 325
1080-11 325
1080-12 325
1080-13 325
1080-14 325
1080-15 325
1080-16 325
1080-17 325
1080-18 325
1080-19 325
1080-20 325
1080-21 325
1080-22 325
1080-23 325
1080-24 325
1080-25 325
1080-26 325
1080-27 325
1080-28 325
1080-29 325
1080-30 325
1080-32 325
1081-06 325
1081-07 325
1081-08 325
1081-09 325
1081-10 325
1081-11 325
1081-12 325
1081-13 325
1081-14 325
1081-15 325
1081-16 325
1081-17 325
1081-18 325
1081-19 325
1081-20 325
1081-21 325
1081-22 325
1081-23 325
1081-24 325
1081-25 325
1081-26 325
1081-27 325
1081-28 325
1081-29 325
1081-30 325
1081-32 325
1084-08 324
1084-09 324
1084-10 324
1084-11 324
1084-12 324
1084-13 324
1084-14 324
1084-15 324
1084-16 324
1084-17 324
1084-18 324
1084-19 324
1090PR1 450
10A0-24 318
10A0-27 318
10A0-30 318
10A0-32 318
10A0-36 318
10A0-41 318
10A0-46 318
10A0-50 318
10A0-55 318
10A0-60 318
10A0-65 318
10A0-70 318
10A0-75 318
10A0-80 318
10A0-85 318
10A0-90 318
10A0-95 318
10A0-A0 318
10A0-A5 318
10A0-B0 318
10A0-B5 318
10A0-C0 318
10A0-C5 318
10B0-24 318
10B0-26 318
10B0-27 318
10B0-30 318
10B0-32 318
10B0-36 318
10B0-41 318
10B0-46 318
10B0-50 318
10B0-55 318
10B0-60 318
10B0-65 318
10B0-70 318
10B0-75 318
10B0-80 318
10B0-85 318
10B0-90 318
10B0-95 318
10B0-A0 318

Index

10B0-A5 318
10B0-B0 318
10B0-B5 318
10B0-C0 318
10C0-24 318
10C0-27 318
10C0-30 318
10C0-32 318
10C0-36 318
10C0-41 318
10C0-46 318
10C0-50 318
10C0-55 318
10C0-60 318
10C0-65 318
10D0-08 309
10D0-09 309
10D0-10 309
10D0-11 309
10D0-12 309
10D0-13 309
10D0-14 309
10D0-15 309
10D0-16 309
10D0-17 309
10D0-18 309
10D0-19 309
10F0-17P 309
10F0-19P 309
10F0-21P 309
10F0-22P 309
10F0-23P 309
10F0-24P 309
10F0-26P 309
10F0-27P 309
10F0-29P 309
10F0-30P 309
10F0-32P 309
10F0-36P 309
10F0-38P 309
10F0-41P 309
10F0-46P 309
10F0-50P 309
10F0-55P 309
10F0-60P 309
10F0-65P 309
10F0-70P 309
10F0-75P 309
10F0VE-07..... 409
10F0VE-08..... 409
10F0VE-09..... 409
10F0VE-10..... 409
10F0VE-11..... 409
10F0VE-12..... 409
10F0VE-13..... 409
10F0VE-14..... 409
10F0VE-15..... 409
10F0VE-16..... 409
10F0VE-17..... 409
10F0VE-18..... 409
10F0VE-19..... 409
10F0VE-20..... 409
10F0VE-21..... 409
10F0VE-22..... 409
10F0VE-23..... 409
10F0VE-24..... 409
10G0VE-07..... 409
10G0VE-08..... 409
10G0VE-09..... 409
10G0VE-10..... 409
10G0VE-11..... 409
10G0VE-12..... 409
10G0VE-13..... 409
10G0VE-14..... 409
10G0VE-15..... 409
10G0VE-16..... 409
10G0VE-17..... 409
10G0VE-18..... 409
10G0VE-19..... 409
10G0VE-21..... 409
10G0VE-22..... 409
10G0VE-24..... 409

11 xxx

1106MR 310
1106MR01 310
1108MR 310
1108SR 310
11101SQ 390
11104PR 452
11104PR10 452
1110MR 310
1110SR 310
1112MR 310
1112MRN 310
1112SR 310
111946 318
112002MR 395
112003MR 395
112004MR 395
112005MR 395
112006MR 395
112007MR 395
112008MR 395
112010MR 395
112015MR 395
112025MR 395
11205SQ 465
11208SQ 465
11225SQ 466
112261 318
112310R 396
112315R 396
112320R 396
112325R 396
112327R 396
112330R 396
112340R 396
112345R 396
112350R 396
112502MR 393
112502SR 393
112503MR 393
112503SR 393
112504MR 393
112504SR 393
112505MR 393
112505SR 393
112506MR 393
112506SR 393
112507MR 393
112508MR 393
112508SR 393
112510MR 393
112510SR 393
112512MR 393
112512SR 393
112514MR 393
112515MR 393
112516SR 393
112517MR 393
112518SR 393
112519MR 393
112522MR 393
112525MR 393
112525SR 393
112576 318
112605MR 394
112606MR 394
112608MR 394
112610MR 394
112612MR 394
112710R 396
112715R 396
112720R 396
112725R 396
112727R 396
112730R 396
112740R 396
112745R 396
112750R 396
113002MR 395
113002SR 395
113003MR 395
113003SR 395
113004MR 395
113004SR 395
113005MR 395
113005SR 395
113006MR 395
113006SR 395
113007SR 395
113008MR 395
113008SR 395
113010MR 395
113010SR 395
113012SR 395
113015MR 395
113025MR 395
113025SR 395
11305SQ 546
113086 318
11310SQ 465
11311MQ 471
11325SQ..... 472
11328SQ..... 472
11406SQ N40
11409SQ02..... 453
11409SQ03..... 453
11409SQ04..... 453
11409SQ05..... 453
11409SQ06..... 453
11409SQ08 453
11427SQ02..... 453
11427SQ03..... 453
11427SQ04..... 453
11427SQ05 453
11427SQ06..... 453
11427SQ08 453
114310R 396
114315R 396
114320R 396
114325R 396
114327R 396
114330R 396
114340R 396
114345R 396
114350R 396
114502MR 393
114502SR 393
114503SR 393
114504SR 393
114505SR 393
114506SR 393
114508SR 393
114510SR 393
114512SR 393
114516SR 393
114518SR 393
114520SR 393
114524SR 393
114525SR 393
114503MR 393
114504MR 393
114505MR 393
114506MR 393
114507MR 393
114508MR 393
114510MR 393
114515MR 393
114525MR 393
114555MR 393
114605MR 394
114606MR 394
114608MR 394
114610MR 394
114612MR 394
114710R 396
114715R 396
114720R 396
114725R 396
114727R 396
114730R 396
114740R 396
114745R 396
114750R 396
115002MR 401
115003MR 401
115004MR 401
115005MR 401
115006MR 401
115008MR 401
115010MR 401
115025MR 401
11509SQ05..... 453
11527SQ05..... 453
115310R 402
115315R 402
115320R 402
115325R 402
115327R 402
115330R 402
115340R 402
115345R 402
115350R 402
1153A05R 403
1153A06R 403
1153A07R 403
1153A08R 403
1153A09R 403
1153A10R 403
1153A15R 403
1153A20R 403
115502MR 401
115503MR 401
115503SR 401
115504MR 401
115504SR 401
115505MR 401
115505SR 401
115506MR 401
115506SR 401
115508MR 401
115508SR 401
115510MR 401
115510SR 401
115512SR 401
115525MR 401
115525SR 401
115H05M-10 330
115H06M-10 330
115H07M-10 330
115H08M-10 330
115H08M-14 330
115H09M-10 330
115H10M-10 330
115H10M-14 330
115H11M-10 330
115H12M-10 330
115H13M-10 330
115H13M-14 330
116002MR 400
116003MR 400
116004MR 400
116005MR 400
116006MR 400
116007MR 400
116008MR 400
116010MR 400
116025MR 400
116310R 400
116310TR 400
116315TR 400
116320TR 400
116325TR..... 400
116327TR..... 400
116330TR..... 400
116340TR..... 400
116345TR..... 400
116350R 400
116350TR..... 400
1163A05R 403
1163A06R 403
1163A07R 403
1163A08R 403
1163A09R 403
1163A10R 403
1163A15R 403
1163A20R 403
116502MR 400
116503MR 400
116504MR 400
116505MR 400
116506MR 400
116507MR 400
116508MR 400
116510MR 400
116525MR 400
118406M 330
118407M 330
118408M 330
118409M 330
118410M 330
118411M 330
118412M 330
118413M 330
118414M 330
118417M 330
118508M 330
118509M 330
118510M 330
118511M 330
118512M 330
118513M 330
118514M 330
118517M 330
118519M 330
119502M 403
119503M 403
119504M 403
119505M 403
119506M 403
119508M 403
119510M 403
119525M 403
11A310R 402
11A315R 402
11A320R 402
11A325R 402
11A327R 402
11A330R 402
11A340R 402

12 xxx

12007MRN 319
1207MR 307
1207SR 307
1208MR 307
1210MR 307
12107MRN 320
12107MRN01..... 320
12109MRS01 .....N23
1211MR 307
1211MRN 307
1211SR 307
1211SR01 307
1211SR02 307
12112MRN 320
12112MRS02 .....N23
12114MRN 320
1212MR 307
1212MR01 307
1213SRN..... 307
1214MR 307
1214MR01 307
1214MRN..... 307
1214MRN01 307
1214MRN05 307
1214SR 307
1214SRN01 307
1215MR 307
1215MR01 307
1215MR02 307
1215MRN01 307
1215MRN02 307
1216SR 307
1216SRN 307
1218MR01 307
1218MRN 307
122A07MRN01.... 321
122A07MRN02.... 321
122A07SRN 321
122A08SRS N23
122A09MRS01 ....N23
122A12MRN 321
122A12MRS02 .....N23
122A14MRN 321
1224CRN 307
1226MR 307
1226MRN 307
1266MR 308
12706MR 322
1271MR 308
1271MRN 308
1272MR 308
1275MR 308
1275MRN 308
1282MR 309
12916MQ1 473
12939MQ1 473
12939MQ-A 473
12939MQ-A03 .. 473
12939SQ1 473
12939SQ-A 473
12939SQ-A03 .. 473
1296MRN 307
12A0MRN 303
12A09MRS01 .....N23
12A1MRN 303
12A2MRS02 .....N23
12A3MRN 303
12A4MRN 303
12B4MRN 303
12C7MRN01 303
12C8MRN 303
12D06MRS..... 305
12D09MRN 304
12D09MRS01 .....N23
12D10MRN 304
12D12MRS 305
12D12MRS01 .....N23
12D13MRN 304
12D14MRN05.... 304
12D15MRN..... 304
12D15MRN01.... 304
12D18MRN..... 304

Index

12D21MRN N22
12D26MRN.....304
12FVE08MRN..409
12FVE10MRN..409

13 xxx

13012MR 320
13013MR 320
1306MR 316
1306MRN 316
1306SR 316
131101P 386
131102P 386
131103P 386
13113MR 320
131501P 386
131502P 386
131503P 386
1317012PN 370
1317012ZN 370
1317046SN 370
1317057SN 370
1317115TN 370
1317225TN 370
1317340TN 370
1317401PN 370
131744BHN 370
1317501ZN 370
131755BHN 370
1317602PN 370
131766BHN 370
1317702ZN 370
132A13MR 321
134501P 386
134502P 386
134503P 386
1360012P 373
1360022P 373
1360022Z 373
1360023P 373
1360023Z 373
1360451P 373
1360451Z 373
1360552P 373
1360552Z 373
1360703P 373
136501P 386
136502P 386
136503P 386
13A6502P 386
13B6502P 386

14 xxx

1406PR 316
14103GP 274
14108SRN 323
14110003 364
14110104 364
14110204 364
14110204-E* 364
14110205-E* 364
14110206 364
14110206-E* 364
14110208-E* 364
14110214 364
14110306 364
14110308 364
14120303 364
14120404 364
14120806 364
14120808 364
14125504 364
14126504 364
14126504-E* 364
14126506 364
14126506-E* 364
14126514 364
14210023 360
14210104 360
14210112 360
14210116 360
14210132 360
14210204 360
14210206 360
14210212 360
14210214 360
14210216 360
14210306 360
14220303 360
14220404 360
14220503 360
14220504 360
14220512 360
14220516 360
14220806 360
14220807 360
14220808 360
14221008 360
14225503 360
14225504 360
14225505 360
14225506 360
14226504 360
14226506 360
14226512 360
14226514 360
14226516 360
14230602 361
14230702 361
14230803 361
14230903 361
14231003 361
14231503 361
14231510 361
14232004 361
14232010 361
14232504 361
14232510 361
14232704 361
14233005 361
14233010 361
14234006 361
14240206 361
14270803 361
14270903 361
14271003 361
14271503 361
14272004 361
14272504 361
14272704 361
14273005 361
14274006 361
14280023 361
14280104 361
14280132 361
14280204 361
14280306 361
14311003 419
14311015 419
14311103 419
14311115 419
14312003 419
14312015 419
14313003 419
14313015 419
14320615 419
14320815 419
14321003 419
14321015 419
14321503 419
14321515 419
14321803 419
14321815 419
14322003 419
14322015 419
14322503 419
14322515 419
14323003 419
14323015 419
14323503 419
14323515 419
14324003 419
14324015 419
14330403 419
14330415 419
14330503 419
14330515 419
14330603 419
14330615 419
14330703 419
14330715 419
14330803 419
14330815 419
14330902 419
14330903 419
14331002 419
14331003 419
14331502 419
14331503 419
14332002 419
14332003 419
1450-04 371
1450-05 371
1450-06 371
1450-07 371
1450-08 371
1450-09 371
1450-10 371
1450-11 371
1450-12 371
1450-13 371
1450-45 371
1450-55 371
1453-05 371
1453-06 371
1453-07 371
1453-08 371
1453-10 371
14610103 365
14610204 365
14610206 365
14610306 365
14620806 365
14620807 365
14621008 365
14621012 365
14621210 365
14625504 365
14626504 365
14626506 365
14710003 411
14710104 411
14710204 411
14710306 411
14720303 411
14720404 411
14720807 411
14722503 411
14723504 411
14725505 411
14726506 411
14740105 411
14740206 411
14780003 411
14780104 411
14780204 411
14780306 411
147E0104..... 411
147E0204..... 411
14810103 366
14810204 366
14810204-E* 366
14810205 366
14810205-E* 366
14810306 366
14810412 366
14825503 367
14826504 367
14826504-E* 367
14826505-E* 367
14826506 367
14820806 367
14821012 367
14A10132 363
14A10204 363
14A10214 363
14A10306 363
14A20303 363
14A20404 363
14A20808 363
14A25504 363
14A25505 363
14A26506 363
14A26514 363
14A80132 363
14A80204 363
14B10103 366
14B10204 366
14B10206 366
14B10306 366
14B20807 366
14B25504 366
14B26506 366

15 xxx

15001012P 324
15001113P 324
15001214P 324
15001317P 324
15001415P 324
15001417P 324
15001719P 324
15001721P 324
15001921P 324
15001922P 324
15001924P 324
15002123P 324
15002224P 324
15002326P 324
15002427P 324
15002430P 324
15002632P 324
15002730P 324
15002732P 324
15003032P 324
15003236P 324
15003638P 324
15003641P 324
15003841P 324
151001P 386
151002P 386
151003P 386
151501P 386
151502P 386
151503P 386
155001P 386
155002P 386
155003P 386
15631612 330
15631615 330
15631618 330
15631818 330
15632112 330
15632115 330
15632118 330
15661615 330
15661618 330
15661818 330
15662115 330
157501P 386
157502P 386
157503P 386
1586-09 546
158902ERA.....383
1596-09 546

16 xxx

1606MR 311
1609MR 311
1611MR 311
163604H 374
163605H 374
163605M 375
163606H 374
163606M 375
163607H 374
163608H 374
163608M 375
163609H 374
163609M 375
163610E 375
163610H 374
163610M 375
163610T 374
163610U 375
163612H 374
163612M 375
163614M 375
163615E 375
163615T 374
163615U 375
163620E 375
163620T 374
163620U 375
163625E 375
163625T 374
163625U 375
163627E 375
163627T 374
163627U 375
163630E 375
163630T 374
163630U 375
163640E 375
163640T 374
163640U 375
163645E 375
163645T 374
163645U 375
163650E 375
163650T 374
163650U 375
163655E 375
163655T 374
163655U 375
163660E 375
163660T 374
163660U 375
168004H 374
168005H 374
168005M 375
168006H 374
168006M 375
168007H 374
168008H 374
168008M 375
168009H 374
168009M 375
168010E 375
168010H 374
168010M 375
168010T 374
168010U 375
168012H 374
168012M 375
168014M 375
168015E 375
168015T 374
168015U 375
168020E 375
168020T 374
168020U 375
168025E 375
168025T 374
168025U 375
168027E 375
168027T 374
168027U 375
168030E 375
168030T 374
168030U 375
168040E 375
168040T 374
168040U 375
168045E 375
168045T 374
168045U 375
168050E 375
168050T 374
168050U 375
168055E 375
168055T 374
168055U 375
168060E 375
168060T 374
168060U 375

17 xxx

1706MR 312
1707SR 312
1708MR 312
1708MR01 312
1710MR 312
1712MR 312
1712MRN 312
1712MRN01 312
174010H 229
174010H 239
174012H 229
174012H 239
174014H 229
174014H 239
174017H 229
174017H 239
174019H 229
174019H 239
174022H 229
174022H 239

18 xxx

1805MR 325
1808MR 325
1812MR 325
181202P 373
181203P 373
1826MR 325
183203H 373
183204H 373
183205H 373
183206H 373
183207H 373
183208H 373
183210H 373
183212H 373
183215T 374
183220T 374
183225T 374
183227T 374

Index .....

183230T 374
183240T 374
183245T 374
183250T 374
183601P 373
183602P 373
183602Z 374
183603P 373
183603Z 374
183604H 373
183604P 373
183604Z 374
183605H 373
183606H 373
183607H 373
183608H 373
183608S 373
183609S 373
183610H 373
183610S 373
183611S 373
183612H 373
183612S 373
183614H 373
183614S 373
183620T 374
183625T 374
183627T 374
183630T 374
183635T 374
183640T 374
183645T 374
183650T 374
183655T 374
183660T 374
1842MR 324
187015T 374
187020T 374
187025T 374
187027T 374
187030T 374
187040T 374
187045T 374
187050T 374
188002P 373
188003P 373
188004P 373
188008S 373
188010S 373
188012S 373

19 xxx

19000607 310
19000708 310
19000809 310
19000810 310
19000911 310
19001011 310
19001012 310
19001113 310
19001213 310
19001214 310
19001314 310
19001317 310
19001415 310
19001417 310
19001617 310
19001618 310
19001719 310
19001819 310
19001921 310
19001922 310
19002022 310
19002123 310
19002224 310
19002326 310
19002426 310
19002427 310
19002430 310
19002528 310
19002632 310
19002729 310
19002730 310
19002732 310
19003032 310
19003036 310
19003236 310
19003436 310
19003641 310
19004146 310
19005507 310
19100607 317
19100809 317
19100810 317
19101011 317
19101012 317
19101213 317
19101214 317
19101415 317
19101417 317
19101617 317
19101719 317
19101819 317
19101921 317
19102022 317
19102123 317
19102427 317
1912MR 325
1912MRN 325
19200608 316
19200711 316
19201012 316
19201418 316
19201622 316
19202024 316
1926MR 325
19300810 316
19300911 316
19301011 316
19301012 316
19301113 316
19301213 316
19301214 316
19301315 316
19301417 316
19301719 316
19301922 316
19312224 317
19312427 317
19313032 317
19500810 314
19501012 314
19501113 314
19501214 314
19501315 314
19501417 314
19501618 314
19501719 314
19501922 314
195404R 239
195419H 239
195419H 244
195422H 239
195422H 244
195424H 239
195424H 244
195427H 239
195427H 244
195430H 239
195430H 244
195432H 239
195432H 244
19600607 311
19600809 311
19600810 311
19601011 311
19601012 311
19601113 311
19601213 311
19601214 311
19601415 311
19601417 311
19601617 311
19601719 311
19601819 311
19601921 311
19602022 311
19602123 311
19602224 311
19602326 311
19602426 311
19602427 311
19602732 311
19603032 311
19611415 311
19611617 311
19611819 311
19700607 312
19700809 312
19700810 312
19701011 312
19701012 312
19701113 312
19701213 312
19701214 312
19701314 312
19701415 312
19701417 312
19701617 312
19701719 312
19701819 312
19701921 312
19701922 312
19702022 312
19702123 312
19702224 312
19702326 312
19702426 312
19702427 312
19702528 312
19703032 312
199104R 328
19911722 328
199306R 328
19932433 328
19932427 328
19961721 328
19980016 329
19991921 329
19991921A 329
199920R 329
19992224 329
19992224A 329
19992427 329
19992427A 329
19992432 329
19992432A 329
199925R 329
19992730 329
19992730A 329
19992732 329
19992732A 329
19992733 329
19992733A 329
19992833 329
19992833A 329
19993032 329
19993032A 329
19993233 329
19993233A 329
19993238 329
19993238A 329
19993821 329
19993821A 329
19993822 329
19993822A 329
19994121L 329
19994121LA 329
19A00607 319
19A00809 319
19A01011 319
19A01213 319
19A01415 319
19A01617 319
19A01819 319
19A02022 319
19A02123 319
19A02426 319
19A02528 319
19A02729 319
19A03032 319
19A0-09 319
19A0-15 319
19B00810 313
19B01011 313
19B01012 313
19B01113 313
19B01214 313
19B01315 313
19B01417 313
19B01618 313
19B01719 313
19B01921 313
19B02224 313
19C00607 313
19C00809 313
19C01011 313
19C01213 313
19C01415 313
19C01617 313
19C01819 313
19C02022 313
19C02123 313
19C02426 313
19C02528 313
19C03032 313

1A xxx

1A06MR.....317

1B xxx

1B06MR.....317

1C xxx

1C08MR 313
1C12MR 313

1F xxx

1F06MRN.....314

1E xxx

1E10MR 315
1E11MR 315

20 xxx

20002UB 397
20107MR01 395
20107SR 395
20108MR 395
20109MR 395
20109MRU 397
20109MW N25
20109MW-S N25
20119MR01 395
20110MR 395
201101X 132
201102X 132
201103X 132
201104X 132
201208X 132
201235X 132
201255X 132
20129SR 395
201308X 133
201309X 133
201310X 133
201315X 133
201320X 133
201325X 133
201327X 133
201330X 133
201340X 133
201503MX 132
201504MX 132
201505MX 132
201506MX 132
201506SX 132
201508MX 132
201508SX 132
201510MX 132
201510SX 132
201801X 133
201802X 133
201803X 133
201804X 133
2019MR 143
2019SR 143
201A09MR 397
201B09MR 398
20208MR 393
20208MR01 394
20208SR01 394
20209MR 393
20209SR02 393
2020H0MR.....394
2021MR 144
20210MR 394
20218MR 393
20219MR 393
20219SR 393
2027MRE 144
2030CR 145
20307PR 399
20308PR 399
20309PR 399
2031MR 145
203101 133
203102 133
203103 133
203104 133
20317MR 399
20318PR 399
20319PR 399
20319PRU 397
203204 133
203207 133
203208 133
203210 133
203235 133
203255 133
203265 133
203308 133
203309 133
203310 133
203315 133
203320 133
203325 133
203327 133
203330 133
203340 133
203503 133
203504 133
203504S N16
203505 133
203505S N16
203506 133
203506S N16
203507 133
203507S N16
203508 133
203508S N16
203510 133
203510S N16
203512S N16
2035VE03 406
2035VE04 406
2035VE05 406
2035VE06 406
203708 133
203709 133
203710 133
203715 133
203720 133
203725 133
203727 133
203730 133
203740 133
203A19PR.....397
20407PR 399
20409PR 399
20419PR 399
2044SRV 147
2048MRV 148
204B29PR.....398
20505PR01 394
20515PR01 394
20A16MR 399
20A17MR 399

21 xxx

2104PR 142
2107PR 142
2109PR 142
21108MR 402
2114TR N16
2119PR 142
21-20-07MR 459
21-20-101 459
21-20-102 459
21208MR 402
21208SR 402
2121-12 579
2121-18 579
2121A-15.....579
2121A-18.....579
2124-18 580
2126A-18 580
2127-06M 465
2127-08M 465
2127-11M 465
2127-14M 465
2127-18M 465
2127A-06M 465
2127A-08M 465
2127A-11M 465
2127A-14M 465
2127A-18M 465
2127A-24M 465
2127A-33M 465
2127A-50M 465
2127PR 141
2127SR N16
2128-26 580
2128PR 383
2129-24 580
21-30-09MR 459
21309PR 402
213312DF 140
2138PR 383

Index

2141 141
2142 141
2166DF 377
2176DF.....N15
2177DF 140
2178DF 140
2178TG 140
2178VE-05 406
2179DF 140
21A107 332

22 xxx

22106MR 401
22108MR 401
22118MR 401
22208MR 401
22218MR 401
2221-02 139
2221-03 139
2221-04 139
2221-06 139
2221-10 139
2221-12 139
2221VE-04..... 406
2221VE-06..... 406
2223-02 139
2223-04 139
22306TR 401
22309TR 401
223004M..... 132
223005M..... 132
223006M..... 132
223007M..... 132
223008M..... 132
223009M..... 132
223010M..... 132
223011M..... 132
223012M..... 132
223013M..... 132
223014M..... 132
223045M 132
223055M 132
22319TR 401
223504M 131
223505M 131
223505S 131
223506M 131
223506S 131
223507M 131
223507S 131
223508M 131
223508S 131
223509M 131
223509S 131
223510M 131
223510S 131
223511M 131
223511S 131
223512M 131
223512S 131
223513M 131
223514M 131
223514S 131
223515M 131
223516S 131
223518S 131
223545M 131
223555M 131
227504M 132
227505M 132
227506M 132
227507M 132
227508M 132
2293-02 140
2293-03 140
2293-04 140
2293-06 140

23 xxx

231008M 132
231010M 132
231010S 132
231012S 132
2311-06 140
2311-12 140
2311-18 140
2311MR 141
2312-06..... 140
2313MR 142
23208MR..... 402
233004M 131
233005M 131
233005S 131
233006M 131
233006S 131
233007M 131
233007S 131
233008M 131
233008S 131
233009M 131
233009S 131
233010M 131
233010S 131
233011M 131
233011S 131
233012M 131
233012S 131
233013M 131
233014M 131
233014S 131
233015S 131
233016S 131
233045M 131
233055M 131
23308PR 403
2331SRV..... 147
233504M 131
233505M 131
233505S 131
233506M 131
233506S 131
233507M 131
233507S 131
233508M 131
233508S 131
233509M 131
233509S 131
233510M 131
233510S 131
233511M 131
233511S 131
233512M 131
233512S 131
233513M 131
233514M 131
233514S 131
233515M 131
233515S 131
233516S 131
233518S 131
233532M 131
233545M 131
233555M 131
2335VE05M..... 406
2335VE06M..... 406
2335VE07M..... 406
2335VE08M..... 406
2335VE09M..... 406
2335VE10M..... 406
2335VE11M..... 406
2335VE12M..... 406
2335VE13M..... 406
2335VE14M..... 406
237504M 132
237505M 132
237506M 132
237507M 132
237508M 132
237510M 132

24 xxx

24110204 364
24110214 364
24308PR 403
24311030 420
24311140 420
24312020 420
24330610 420
24330715 420
24330820 420
24330915 420
2452-05F 140
2452DK 140
2452DK 141
2453-05F 141

25 xxx

2501MR 139
2509MR 141
2509SR 141
2510SR 142
2511MR 142
2513MR 141
2513MRD1 141
2515MR 139
2516MR 143
2516MRV03 146
2516SR 143
2518MR 143
2518MR01 143
2518SR 143
2519MR 143
2519SR 143
2521MR 144
2524MRV 146
2525MRE 144
2526MR 145
2526SR 145
2527MRE..... 144
2528MRV 147
2530CR 145
2531MR 145
2534MRV 147
253504M 220
253505M 220
253506M 220
253507M 220
253510M 220
253513M 220
253514M 220
253545M 220
253555M 220
2539MR 145
2539MRV04 .....N26
2539MR-AM N24
2540MR 146
2544SRV..... 147
2547MR-EB N28
2548MRV..... 148
2549MR-EB N29
2550MRV..... 148
2551MR 146
2551MR01 146
2553MRV..... 148
2553MRV01 149
2555MR 377
2565MRV 149
2571-45..... 141
2575MR 146
25VE01MRV..... 406

27 xxx

2725-55F 136
2725-55G 136
2725DK 136
2745 139
2746..... 378
2747.....N14
2747DR N14
2752-06G 136
2752DK 136
2752-45G 136
2755-55G 136
2755DK 136
2760-04 138
2760DK01 138
2761-55F 137
2761-55P 137
2761DK 137
2769-55F 137
2769-55P 137
2769DK 137
276A-04G 138
276ADK 138
276B-0225..... 135
2771-55F 137
2771-55G 137
2771DK 137
2771VE-55..... 406
2773-55GS..... 134
2773DK..... 134
2774-55F 137
2774-55G 137
2774DK 137
2779-55F 137
2779-55G 137
2779DK 137
2781-06P 138
2781DK 138
2789-06F..... 138
2789DK 138
2792 140
2793 .....N15

28 xxx

2813..... 140
2863P..... 220

30 xxx

30106AMRB 363
30107AMRB 363
30115MR 362
30116AMRB 363
30117MR 362
30118MR 362
30127MR 362
3013MR 160
3013SR 160
3020MR 162
3020MR02 162
30206AMRB 366
30206MR 365
3020SR 162
3020SR02 162
302102 156
302103 156
302104 156
302205 156
302208 156
302210 156
302308 156
302309 156
302310 156
302315 156
302320 156
302325 156
302327 156
302330 156
302340 156
302345 156
302350 156
3023MR 163
3023MRV11..... 164
3024MR 163
3024SR 163
302503 156
302504 156
302505 156
302506 156
302507 156
302508 156
302509 156
302510 156
302512 156
3025VE04 407
3025VE05 407
3025VE06 407
3025VE08 407
3025VE10 407
3026VE N29
302708 156
302709 156
302710 156
302715 156
302720 156
302725 156
302727 156
302730 156
302740 156
302745 156
302750 156
3027MR 163
3027SR 163
302D08 156
302D09 156
302D10 156
302D15 156
302D20 156
302D25 156
302D27 156
302D30 156
302D40 156
302D45 156
302D50 156
302D55 156
302D60 156
30307PR 362
30309PR 362
30315PR 362
30316PR 362
30317PR 362
30319PR 362
3032SRV..... 165
3033MRV..... 165
3034MR 163
3036CR 164
303906 156
303907 156
303908 156
303909 156
303910 156
305101 221
305102 221
305103 221
305104 221
305208 221
305210 221
305255 221
305310 222
305315 222
305320 222
305325 222
305327 222
305330 222
305340 222
305345 222
305350 222
305355 222
305360 222
3054MR 166
305504M 221
305505M 221
305504S..... 221
305505S 221
305506M 221
305506S 221
305507M 221
305507S 221
305508M 221
305508S 221
305510M 221
305510S 221
305512M 221
305512S 221
305514M 221
305516M 221
305516S 221
305517M 221
305545S 221
3055CR.....N13
30605MR 412
30606MR..... 412
30607MR 412
30607MR02 412
30615MR 412
30617MR 412
306320 222
306325 222
306327 222
306330 222
306340 222
306345 222
306350 222
306355 222
306504M 222
306505M 222
306506M 222
306508M 222
306510M 222
30914AY 578

31 xxx

3103PR 162
3105PR 161
3106PR 160
3108PR8 161
3109PR8 161
31107MR 362
31116MR 362
3113PR 162
3116PR 160
3119PR8 161
31216MR..... 362
3121PR 161
3129PR 160
3131PR8 161
31416MR 368
31419MR 421
31427MR..... 369
3146PR 161
314708S 222
314710M 222
314710S 222
314808S 160
314810S 160
314810M 160
3149PR8 161
31512MR 368

Index

31512MR01 368
31516MR 368
31519MR 368
3178VE-08 407

32 xxx

3203 327
3203 532
320300 327
320300 532
320301 327
320301 532
3203A0 327
3203A0 532
3204 327
3204 532
320540 532
320560 532
320600 327
320600 532
320670 327
320670 532
320760 532
32108MR 420
32118MR 420
3213MR 162
3214-35 463
3214-60 463
321510M 150
321512M 150
32209MR 420
32218MR 420
3221-03 159
3221-06 159
3221-10 159
3221-16 159
3221-18 159
3221-24 159
3221VE-06 407
3221VE-10 407
3223-02 159
3223-03 159
3223-06 159
3223-10 159
3223-14 159
323007M 151
323008M 151
323008S 151
323009M 151
323010M 151
323010S 151
323011M 151
323012M 151
323012S 151
323013M 151
323014M 151
323014S 151
323015M 151
323016M 151
323016S 151
323017M 151
323018M 151
323018S 151
323019M 151
323020S 151
323021M 151
323022M 151
323022S 151
323024M 151
323024S 151
323026S 151
323028S 151
323030S 151
323032S 151
32308PR 420
32309PR 420
323506M 151
323507M 151
323508M 151
323508S 151
323509M 151
323510M 151
323510S 151
323511M 151
323512M 151
323512S 151
323513M 151
323514M 151
323514S 151
323515M 151
323516M 151
323516S 151
323517M 151
323518M 151
323518S 151
323519M 151
323520S 151
323521M 151
323522M 151
323522S 151
323524M 151
323524S 151
323526S 151
323528S 151
323530S 151
323532S 151
3235VE08M 407
3235VE10M 407
3235VE12M 407
3235VE14M 407
32518MR 370
32518MR01 371
32518MR02 371
32526MRN..... 379
32540MR.....N26
3260-03P 222
3260-04P 222
3260-05P 222
3260-06P 222
3260-08P 222
3260-10P 222
32607MR 420
327504M 151
327505M 151
327506M 151
327507M 151
327508M 151
327510M 151
327511M 151
327512M 151
327514M 151
327516M 151
327518M 151
32808MR..... 379
32809MR 377
3293-03 159
3293-06 159
3293-10 159

33 xxx

33108MR 362
3311-06 159
3311-12 159
33121 269
33122 269
333006M 150
333007M 150
333008M 150
333008S 150
333009M 150
333010M 150
333010S 150
333011M 150
333011S 150
333012M 150
333012S 150
333013M 150
333014M 150
333014S 150
333015M 150
333015S 150
333016M 150
333016S 150
333017M 150
333018M 150
333018S 150
333019M 150
333019S 150
333020M 150
333020S 150
333021M 150
333022M 150
333022S 150
333023M 150
333024M 150
333024S 150
333026S 150
333028S 150
333030S 150
333032S 150
333506M 150
333507M 150
333508M 150
333508S 150
333509M 150
333510M 150
333510S 150
333511M 150
333511S 150
333512M 150
333512S 150
333513M 150
333514M 150
333514S 150
333515M 150
333515S 150
333516M 150
333516S 150
333517M 150
333518M 150
333518S 150
333519M 150
333519S 150
333520M 150
333520S 150
333521M 150
333522M 150
333522S 150
333523M 150
333524M 150
333524S 150
333526S 150
333528S 150
333530S 150
333532S 150
3335VE06M 407
3335VE07M 407
3335VE08M 407
3335VE09M 407
3335VE10M 407
3335VE11M 407
3335VE12M 407
3335VE13M 407
3335VE14M 407
3335VE15M 407
3335VE16M 407
3335VE17M 407
3335VE18M 407
3335VE19M 407
3335VE20M 407
3335VE21M 407
3335VE22M 407
3335VE24M 407
333E N17
33411-040 258
33411-041 258
33411-050 258
33411-051 258
33411-71 274
33412-050 258
33412-051 258
33421-040 258
33421-041 258
33431-050 257
33431-051 257
33431-065 259
33461-100 255
33461-101 255
33481-095 260
33481-096 260
33491-030 256
33491-031 256
335008M 154
335009M 154
335010M 154
335011M 154
335012M 154
335013M 154
335014M 154
335015M 154
335016M 154
335017M 154
335018M 154
335019M 154
335108M 154
335109M 154
335110M 154
335111M 154
335112M 154
335113M 154
335114M 154
335115M 154
335116M 154
335117M 154
335118M 154
335119M 154
33611-055 259
33611-056 259
33621-075 259
33621-076 259
33622-075 259
33622-076 259
33631-110 260
33631-111 260
33632-110 260
33632-111 260
33671-160 262
33672-160 262
33681-100 260
33681-101 260
337504M 151
337505M 151
337506M 151
337507M 151
337508M 151
337510M 151
337511M 151
337512M 151
337514M 151
337516M 151
337518M 151
33811-150 263
33812-150 263
33831-180 263
33832-180 263
33841-180 261
33842-180 261
33851-120 261
33851-121 261
33851-250 265
33852-120 261
33852-121 261
33852-250 265
33861-200 264
33862-200 264
33871-160 262
33872-160 262
33911-250 265
33912-250 265
33921-300 265
33922-300 265

34 xxx

3406MP 223
34102-040M 556
34111-1DG 294
34111-1EG 294
34111-2DG 294
34111-2EG 294
3419PP 223
34207-1A 292
34211-3DG 294
34223-1A 289
34223-1B 289
34223-1C 289
34223-1DK1 289
34262-1CG 279
34262-1DG 279
34262-1DK 279
34262-1EG 279
34262-1FG..... 279
34262-1GG 279
34262-2DG 279
34262-3DG 279
34266-1FG N20
34366-1FG N20
34466-1FG N20
34466-2FG N20
34466-3FG N20
34666-1DK N20
34666-1FG N20
34666-2FG N20
34666-3DK N20
34666-3FG N20
3426A-1DG 282
3426A-1DK 282
3426A-1DK 284
3426A-1DK01 .. 282
3426A-1DK01 .. 284
3426A-1DK02 .. 282
3426A-1DK02 .. 284
3426A-1EG 282
3426A-2DG 282
3426A-2EG 282
3426C-1DF 281
3426C-1DK..... 281
3426C-2DF 281
3426E-1DK 287
3426E-1HG 287
34307-1A 292
34307-1A 549
34323-1A 289
34323-1B 289
34323-1C 289
34323-1DK1 289
34323-2A 289
34323-2B 289
34323-2C 289
34323-2DK1 289
3432F-1DK 288
3432F-1KF 288
3432F-3KF 288
343506M 220
343507M 220
343508M 220
343508S 221
343509M 220
343510M 220
343510S 221
343511M 220
343512M 220
343512S 221
343513M 220
343514M 220
343514S 221
343515M 220
343516M 220
343516S 221
343517M 220
343518M 220
343518S 221
343519M 220
343520M 220
343520S 221
343521M 220
343522M 220
343522S 221
343523M 220
343524M 220
343524S 221
343526S 221
343528S 221
34362-1CG 279
34362-1CG 549
34362-1DG 279
34362-1DK 279
34362-1EG 279
34362-2FG 279
34362-1GG 279
34362-2CG 279
34362-2CG 549
34362-2DG 279
34362-2DG 549
34362-2DK..... 279
34362-2EG 279
34362-2GG 279
34362-3DG 279
34362-3DG 549
34367-2AG 291
34367-2DK 291
3436A-1DK 284
3436A-1DK01 ... 284
3436A-1DK02 ... 284
3436A-2DG 282
3436A-2DK 282
3436A-2DK 284
3436A-2DK01..... 282
3436A-2DK01..... 284
3436A-2DK02 ... 282
3436A-2DK02 ... 284
3436A-2EG 282
3436C-1DF 281
3436C-1DK..... 281
3436C-2DF 281
3436E-1DK..... 287
3436E-1HG 287
3436E-2HG 287
3436E-3HG 287
34387-2DK 291
34407-1A 292
34407T-1A 292
34417-1A N21
34423-1A 289
34423-1B 289
34423-1C 289
34423-1DK1 289

Index

34423-2A 289
34423-2B 289
34423-2C 289
34423-3DK 289
344251A12MR 289
3442F-1KF 288
3442F-3KF 288
34440 294
34440A 294
3445G-1FB 290
34462-1CG 279
34462-1DG 279
34462-1DK..... 279
34462-1EG 279
34462-1FG 279
34462-1GG 279
34462-2CG 279
34462-2DG 279
34462-3DG..... 279
34462-3DK..... 279
34462-4DG 279
34462-2EG 279
34462-2FG 279
34462-2GG 279
34462-3GG 279
34464-1DK 288
34464-1FG 288
34464-2FG 288
34467-1AG 291
34467-1DK 291
3446A-1DG 282
3446A-1DK 282
3446A-1DK01 .. 282
3446A-1DK01 .. 284
3446A-1DK02 .. 282
3446A-1DK 284
3446A-1DK02 .. 282
3446A-1EG 282
3446A-2DG 282
3446A-2EG 282
3446E-1DK 287
3446E-1HG 287
3446E-2HG 287
3446E-3HG 287
34486 295
34486-05A 295
34486-P03 295
34487-1DK 291
34488 295
34488-05A 295
34488-26 296
34488-26DK 296
34488-P03 295
34501107M 284
34501108M 284
34501108S 284
34501109M 284
34501110M 284
34501110S 284
34501111M 284
34501112M 284
34501112S 284
34501113M 284
34501114M 284
34501114S 284
34501115M 284
34501116M 284
34501116S 284
34501117M 284
34501118M 284
34501118S 284
34501119M 284
34501120S 284
34501121M 284
34501122M 284
34501122S 284
34501124M 284
34501124S 284
34501127M 284
34501130M 284
34501132M 284
34501136M 284
34501213M 285
34501214M 285
34501215M 285
34501216M 285
34501216S 285
34501217M 285
34501218M 285
34501218S 285
34501219M 285
34501220S 285
34501221M 285
34501222M 285
34501222S 285
34501223M 285
34501224M 285
34501224S 285
34501225M 285
34501226M 285
34501226S 285
34501227M 285
34501228S 285
34501230M 285
34501230S 285
34501232M 285
34501232S 285
34501234M 285
34501236M 285
34501236S 285
34501238M 285
34501240M 285
34501240S 285
34501241M 285
34501248S 285
34501410M..... 285
34501411M..... 285
34501412M..... 285
34501413M 285
34501414M 285
34501416M 285
34501417M 285
34501418M 285
34501419M 285
34501421M 285
34501422M..... 285
34502107M 285
34502108M 285
34502108S 285
34502110M 285
34502110S 285
34502111M 285
34502112M 285
34502112S 285
34502113M 285
34502114M 285
34502114S 285
34502115M 285
34502116M 285
34502116S 285
34502117M 285
34502118M 285
34502118S 285
34502119M 285
34502120S 285
34502121M 285
34502122M 285
34502122S 285
34502124S 285
34502126S 285
34502128S 285
34502213M 286
34502214M 286
34502215M 286
34502216M 286
34502216S 286
34502217M 286
34502218M 286
34502218S 286
34502219M 286
34502220S 286
34502221M 286
34502222M 286
34502224M 286
34502224S 286
34502227M 286
34502230M 286
34502232M 286
34502234M 286
34502236M 286
34502241M 286
34503102R 284
34503103R 284
34503104R 284
34503203R 284
34503204R 284
34503206R 284
34504236M N19
34504245M N19
34504255M N19
34504262M N19
34504275M N19
34504290M N19
34505102R N19
34505201R N19
34510 286
345101E08MR .. 286
345102D08MR .. 286
345102E08MR .. 286
345104D08MR .. 286
34512-1CG 283
34512-1DG 283
34512-1EG 283
34512-1FG 283
34512-2CG 283
34512-2DG 283
34512-2EG 283
34512-2FG 283
34512-3CG 283
34512-3DG 283
34512-3EG 283
34512-3FG 283
34512-4DG 283
3452-08F 159
3452-10F 159
34520 286
345201D11MR .. 286
345201E11MR .. 286
345202C11MR .. 286
345202D11MR .. 286
345202E11MR .. 286
345203D11MR .. 286
345203E11MR .. 286
34522-1CG 283
34522-1DG 283
34522-1EG 283
34522-1FG 283
34522-2CG 283
34522-2DG 283
34522-2EG 283
34522-2FG 283
34522-3CG 283
34522-3DG 283
34522-3EG 283
34522-3FG 283
34522-4DG 283
34522-5DG 283
34522-6DG 283
34522-7DG 283
34522-8DG 283
34522-9DG 283
3452407MR N19
3452DK 159
3453-08F 159
3453DK 159
34607-1A 293
3465G-1FB 290
3465G-2FB 290
3465G-3FB 290
34660 294
34660A 294
34662-1CG 279
34662-1DG 279
34662-1DK 279
34662-1EG 279
34662-1GG 279
34662-2CG 279
34662-2DG 279
34662-2EG 279
34662-2FG 279
34662-2GG 279
34662-3CG 279
34662-3DG 279
34662-3DK1 279
34662-3EG 279
34662-4EG 279
34662-3GG 279
3466A-1DK 284
3466A-1DK01 284
3466E-1DK 287
3466E-1HG 287
3466E-2HG 287
34688 295
34688-05A 295
34688-P01 295
34688-P02 295
34688-P03 295
3485G-1DB 290
3485G-2DB 290
34862-1CG 279
34862-1DG 279
34862-1EG 279
34862-1GG 279
34862-2CF 280
34862-2CG 280
34862-2DF 280
34862-2DG 280
34862-2DK 279
34862-2DK 280
34862-2EF 280
34862-2EG 280
34862-2FF 280
34862-1FG 279
34862-2FG 280
34862-2GG 280
34862-3CF 281
34862-3DK 281
34862-3DK90 281
34862-3DK91 281
34862-3DK92 281
34862-3FF 281
3488A03MP 297

35 xxx

3508MR 162
3508MR10 160
3508SR 162
35105MR 364
35107MR 364
3511-06 332
3511-10 332
35114MR 367
35114MR01 367
35116MR01 364
3513MR 160
3520MR 162
3520MR02 162
35208MR 365
3523MR 163
3523MRV10..... 164
3523MRV11 164
3524MR 163
3527MR 163
3533MRV..... 165
3534MR 163
353506M 220
353507M 220
353508M 220
353508S 220
353509M 220
353510M 220
353510S 220
353511M 220
353512M 220
353512S 220
353513M 220
353514M 220
353514S 220
353515M 220
353516M 220
353516S 220
353517M 220
353518M 220
353518S 220
353519M 220
353520S 220
353522S 220
353524S 220
3537MR 164
3545MRV 165
3568MR 166
3571-08 159
357505M 221
357506M 221
357507M 221
357508M 221
357510M 221
357512M 221
357514M 221
35VE01MRV..... 407

36 xxx

3609MR10 154
3611-04R 326
3611-06P 326
3611-06R 326
3611-08P 326
3611-08R 326
3611-10P 326
3611-10R 326
3611-12P 326
3611-12R 326
3611-15HP 326
3611-15HR 326
3611-18HP 326
3611-18HR 326
3611-24HP 326
3611-24HR 326
3611VE-06..... 409
3611VE-08..... 409
3611VE-10..... 409
3611VE-12..... 409
3612MR 154
3614-08R 326
3616-10 327
3616S-08P N22
3616S-14P N22
3619MR10..... 154
36206MR 367
363016 153
363021 153
3631-10R 326
363516 153
363521 153
3641-35 327
3641-50 327
3641-80 327
3641-C0 327
3641-I0 327
365014B 152
365016A 152
365016B 152
366021 153
366516 153
366521 153
367018 153
367021 153
367514 153
367516 153
367518 153
367521 153
36A014 152
36B014 152
36B018 152
36B514 152
36C014 152
36D014 152

37 xxx

3709MR10 155
3707SR10 155
3716MR 153
372108M 323
372110S 323
372111M 323
372112M 323
372112S 323
372113M 323
372114M 323
372114S 323
372115M 323
372116M 323
372116S 323
372117M 323
372118M 323
372118S 323
372120S 323
372122S 323
372124S 323
37221-030 269
37221-031 269
37235-030 270
37235-031 270
3725-08F 157
3725-08G 157
3725DK 157
373008M 319
373009M 319
373010M 319
373011M 319
373012M 319
373013M 319
373014M 319
373015M 319
373016M 319
373017M 319
373018M 319
373019M 319
373021M 319
373022M 319
373024M 319
373108M 320
373109M 320
373110M 320
373111M 320
373112M 320

Index .....

373113M 320
373114M 320
373115M 320
373116M 320
373117M 320
373118M 320
373119M 320
373121M 320
373122M 320
373124M 320
373127M 320
373130M 320
373132M 320
373202H 323
373202R 323
373203R 323
373204R 323
37321-050 269
37321-051 269
373225H 323
37323-080 270
37323-081 270
37334-080 269
37334-081 269
37335-030 270
37335-075 270
37360809M 322
37361011M 322
37361013M 322
37361213M 322
37361415M 322
37361618M 322
37361719M 322
37370607M 322
37370809M 322
37371011M 322
37371213M 322
37371415M 322
37371618M 322
37371719M 322
37372123M 322
37372224M 322
373810M 322
373811M 322
373812M 322
373813M 322
373814M 322
373815M 322
373A07M 321
373A08M 321
373A09M 321
373A10M 321
373A10S 321
373A11M 321
373A12M 321
373A12S 321
373A13M 321
373A14M 321
373A14S 321
373A15M 321
373A16M 321
373A16S 321
373A17M 321
373A18M 321
373A18S 321
373A19M 321
373A20S 321
373A21M 321
373A22M 321
373A22S 321
373A24M 321
373A24S 321
373A28S 321
373A30S 321
37423-080 270
37423-081 270
37434-080 269
37434-081 269
37435-075 270
37435-076 270
375010M 155
375011M 155
375012M 155
375012S 155
375013M 155
375014M 155
375014S 155
375015M 155
375016M 155
375016S 155
375017M 155
375018M 155
375018S 155
375019M 155
375020S 155
375022S 155
375024S 155
3752-09G 157
3752DK 157
3755-08G 157
3755DK 157
3760-45 157
3760DK01 157
3761-08F 158
3761-08P 158
3769-08F 158
3769-08P 158
3769DK 158
3771-08G 158
3771DK 158
3771VE-08 407
3774-08G 158
3774DK 158
3779-08F 158
3779-08G 158
3779DK 158
3781-11F 159
3781-11P 159
3781DK 159
378508M 153
378509M 153
378510M 153
378512M 153
378514M 153
378516M 153
3792 160
3793 ..... N15
3794 160
3795-18 332
3795-24 332
3795-30 332
3796P 222

38 xxx

3812 160
3814 160
3814 549
3862P 222
3864P 222
3893EW N16
3893EW-01 ..... N16
3893EW-02 ..... N16

39 xxx

39123010M 472
39123012M 472
39124012M 472

3E xxx

3E07PR N17

40 xxx

4010MR 181
4010SR 181
4012MR 185
4012SR 185
401408M 169
401409M 169
401410M 169
401411M 169
401412M 169
401413M 169
401414M 169
401419M 169
401505M 228
401506M 228
401507M 228
401508M 228
401508S 228
401509M 228
401510M 228
401510S 228
401512M 228
401512S 228
401513M 228
401514M 228
401516S 228
401517M 228
401519M 228
4016SR 185
402102 172
402103 172
402104 172
402208 172
402210 172
402212 172
402214 172
402216 172
402320 173
402325 173
402327 173
402330 173
402340 173
402345 173
402350 173
402355 173
402360 173
402370 173
4024MR 186
4024SR 186
4025VE04 408
4025VE05 408
4025VE06 408
4025VE08 408
4025VE10 408
402503 172
402504 172
402505 172
402506 172
402506S 172
402507 172
402507S 172
402508 172
402508S 172
402509 172
402509S 172
402510 172
402510S 172
402511 172
402512 172
402512S 172
402514 172
402514S 172
402516S 172
402517 172
402518S 172
402519 172
402520S 172
402524S 172
402605 172
402606 172
402608 172
402610 172
402612 172
402614 172
402616 172
402618 172
4026MR 188
4026MR03 188
4026MR04 188
4026SR 188
4026SR03 188
402720 173
402725 173
402727 173
402730 173
402740 173
402745 173
402750 173
402755 173
402760 173
4028MR 187
4028SR 187
402A10 173
402B16 173
402B18 173
4030CR 189
4030CR01 189
4031MR 186
4031SR 186
4032MR 187
4032SR 187
403320 173
403325 173
403327 173
403330 173
403340 173
403345 173
403350 173
403355 173
403360 173
403370 173
4033MR 186
4033MR03 189
4033SR 186
4034MR 189
4034MR06 189
403504 172
403505 172
403506 172
403507 172
403508 172
403509 172
403510 172
403511 172
403512 172
403514 172
403517 172
403519 172
4035VE04 408
4035VE05 408
4035VE06 408
4035VE08 408
4035VE10 408
403605 172
403606 172
403608 172
403610 172
403612 172
403614 172
403720 173
403725 173
403727 173
403730 173
403740 173
403745 173
403750 173
403755 173
403760 173
404108 173
4042CR 190
4042CR02 190
4044CR 190
404605 172
404607 172
404608 172
404610 172
404612 172
404614 172
4047MR 191
404904 173
404905 173
404906 173
404907 173
404908 173
404909 173
404910 173
404912 173
404913 173
404914 173
404916 173
404925 173
405320 228
405325 228
405327 228
405330 228
405340 228
405345 228
405350 228
405355 228
405360 228
405370 228
405504M 228
405505M 228
405506M 228
405506S 228
405507M 228
405508M 228
405508S 228
405510M 228
405510S 228
405512M 228
405512S 228
405513M 228
405514M 228
405514S 228
405516M 228
405516S 228
405517M 228
405518M 228
405519M 228
405608M 228
405610M 228
405612M 228
40603GP 410
406325 228
406327 228
406330 228
406340 228
406345 228
406350 228
406355 228
406360 228
406504M 229
406505M 229
406506M 229
406508M 229
406510M 229
406512M 229
406514M 229
406608 172
406609 172
406610 172
406612 172
406614 172
406616 172
4066MR 170
4066SR 170
4072MR 168
4072SR 168
407505M 229
407506M 229
407508M 229
407510M 229
407512M 229
407514M 229
409616M 229
40D006 172
40D008 172
40D010 172
40D506 172
40D508 172
40D510 172

41 xxx

41026MR 102
41026MRD 102
4104PR 178
4105PR 182
4106PR 181
4108FR 192
4108PR10 182
4109PR 184
4109PR10 182
4110PR 184
4110PR10 181
4110SR10 181
4111FR 192
4112FR 192
4116FR01 ..... N17
4116PR 182
4117PR 184
4118MR 181
4119PR 184
4119PR10 182
4120PR 184
4120PR10 182
4121-11GR 178
4126PR 182
4128PR 184
4136PR 182
414708S 229
414710M 229
414710S 229
414808S 179
414810M 179
414810S 179
4148PR10 181
414A08S 229
41526MR 102
41526MRD 102
41517MRV 103
41517MRVD 103
41542MRV 103
41542MRVD 103
4178VE-08 408

42 xxx

4208MR 183
4208MR10 181
4208SR 183
42104GP 343
42104GP01 343
42107GX 441
42114GP 344
42116GP 344
4213MR 183
42124GP 343
42124GP01 343

Index

42124GP04 343
4215MR 183
42154GP 344
4216MR 183
4220MR 185
4221-18 178
4221-24 178
4221-30 178
4221-36 178
42213GP01 343
4223-02R 178
4223-05R 178
4223-10R 178
4223MR..... N13
4224MR 187
423008M 168
423009M 168
423010M 168
423010S 168
423011M 168
423012M 168
423012S 168
423013M 168
423014M 168
423014S 168
423015M 168
423016M 168
423016S 168
423017M 168
423018M 168
423018S 168
423019M 168
423020M 168
423020S 168
423021M 168
423022M 168
423022S 168
423023M 168
423024M 168
423024S 168
423025M 168
423026M 168
423026S 168
423027M 168
423028M 168
423028S 168
423029M 168
423030M 168
423030S 168
423032M 168
423032S 168
423033M 168
423034M 168
423034S 168
423036M 168
423036S 168
423038S 168
423040S 168
423508M 169
423509M 169
423510M 169
423510S 169
423511M 169
423512M 169
423512S 169
423513M 169
423514M 169
423514S 169
423515M 169
423516M 169
423516S 169
423517M 169
423518M 169
423518S 169
423519M 169
4251VE-05 408
4251VE-10 408
423520M 169
423520S 169
423521M 169
423522M 169
423522S 169
423523M 169
423524M 169
423524S 169
423525M 169
423526M 169
423526S 169
423527M 169
423528M 169
423528S 169
423529M 169
423530M 169
423530S 169
423532M 169
423532S 169
423533M 169
423534M 169
423534S 169
423536M 169
423536S 169
423538M 169
423538S 169
423540S 169
423541M 169
423542S 169
423544S 169
423546S 169
423548S 169
424508M 169
424509M 169
424510M 169
424512M 169
424513M 169
42503PR 345
42504PR 345
424514M 169
4251-02R 178
4251-03R 178
4251-04R 178
4251-05R 178
4251-06R 178
4251-08R 178
4251-10R 178
425508M 169
425509M 169
425510M 169
425512M 169
425513M 169
425514M 169
4260-03P 229
4260-04P 229
4260-05P 229
4260-06P 229
4260-08P 229
4260-10P 229
4260-12P 229
4260-16P 229
4269-08-90 230
4269-08-A0 230
4269-08-B0 230
4269-08-C0 230
4269-08-D5 230
4269-08-F0 230
4269-08-G0 230
4269-08-H5 230
4269-08-J0 230
4269-08-K0 230
427508M 170
427510M 170
427512M 170
427514M 170
427516M 170
427518M 170
427520M 170
427522M 170
427524M 170
4293-02 178
4293-05 178
4293-10 178

43 xxx

4306MRN 192
4308MR 183
4308MR10 181
4311-16F 178
4311-16G 178
4311MR 181
4313MR01 183
4315MR 183
4316MR 183
4320MR 185
4324MR 187
43240115Y 578
4325MR 188
43250115Y 578
43260115Y 578
43270115Y 578
43290115Y 578
43280212 577
432A0113 579
432A0213 579
433008MR 167
433009MR 167
433010MR 167
433010SR 167
433011MR 167
433012MR 167
433012SR 167
433013MR 167
433013SR 167
433014MR 167
433014SR 167
433015MR 167
433015SR 167
433016MR 167
433016SR 167
433017MR 167
433018MR 167
433018SR 167
433019MR 167
433019SR 167
433020MR 167
433020SR 167
433021MR 167
433022MR 167
433022SR 167
433023MR 167
433024MR 167
433024SR 167
433025MR 167
433025SR 167
433026MR 167
433026SR 167
433027MR 167
433028MR 167
433028SR 167
433029MR 167
433030MR 167
433030SR 167
433032MR 167
433032SR 167
433033MR 167
433034MR 167
433034SR 167
433036MR 167
433036SR 167
433038SR 167
433040SR 167
433044SR 167
43350175Y N27
43350175Y 582
433506MR 167
433507MR 167
433508MR 167
433509MR 167
433510MR 167
433510SR 167
433511MR 167
433512MR 167
433512SR 167
433513MR 167
433514MR 167
433514SR 167
433515MR 167
433515SR 167
433516MR 167
433516SR 167
433517MR 167
433518MR 167
433518SR 167
433519MR 167
433519SR 167
433520MR 167
433520SR 167
433521MR 167
433522MR 167
433522SR 167
433523MR 167
433524MR 167
433524SR 167
433525MR 167
433525SR 167
433526MR 167
433526SR 167
433527MR 167
433528MR 167
433528SR 167
433529MR 167
433530MR 167
433530SR 167
433532MR 167
433532SR 167
433533MR 167
433534MR 167
433534SR 167
433536MR 167
433536SR 167
433538MR 167
433538SR 167
433539MR 167
433540SR 167
433541MR 167
433546MR 167
4335VE08M 408
4335VE10M 408
4335VE11M 408
4335VE12M 408
4335VE13M 408
4335VE14M 408
4335VE15M 408
4335VE16M 408
4335VE17M 408
4335VE18M 408
4335VE19M 408
4335VE20M 408
4335VE21M 408
4335VE22M 408
4335VE24M 408
4335VE27M 408
4335VE30M 408
4335VE32M 408
43360175Y N27
43360175Y 582
43370175Y N27
43370175Y 582
43390175Y N27
43390175Y 582
433E N17
437508M 170
437510M 170
437511M 170
437512M 170
437514M 170
437516M 170
437518M 170
437520M 170
437522M 170
437524M 170

44 xxx

4405MXL N19
4407MP 235
4408MP 232
4408SP 232
4410MP 233
4410MP01 233
4410SP 233
44106AMP01 ... N18
44108AMP01 ... N18
44116MP 266
44116MP04 266
44116MP10 266
44118MP 266
44118MP04 266
44118MP10 266
4412MP 232
4413MP 233
4414MP 232
4414SP 232
441517M 227
441519M 227
441521M 227
441522M 227
4415MP 233
4415MP03 233
4416SP 233
4417PP 235
4418MP 235
4419MP 233
4423MP 232
443008M 225
443009M 225
443010M 225
443011M 225
443012M 225
443013M 225
443014M 225
443015M 225
443016M 225
443017M 225
443018M 225
443019M 225
443020M 225
443020S 225
443021M 225
443022M 225
443023M 225
443024M 225
443024S 225
443027M 225
443028S 225
443030M 225
443030S 225
443032M 225
443032S 225
443034S 225
443036M 225
443036S 225
443040S 225
443042S 225
443048S 225
443508M 225
443509M 225
443510M 225
443510S 225
443511M 225
443512M 225
443512S 225
443513M 225
443514M 225
443514S 225
443515M 225
443516M 225
443516S 225
443517M 225
443518M 225
443518S 225
443519M 225
443520M 225
443520S 225
443521M 225
443522M 225
443522S 225
443523M 225
443524M 225
443524S 225
443525M 225
443526M 225
443526S 225
443527M 225
443528M 225
443528S 225
443529M 225
443530M 225
443530S 225
443532M 225
443532S 225
443533M 225
443534M 225
443534S 226
443536M 225
443536S 226
443538M 225
443538S 226
443540S 226
443541M 225
443542S 226
443546M 225
4440MP 234
4440SP 234
4452-15FR 178
4452-18FR 178
4452-24FR 178
4452DK 178
4452DK1 178
4453-15F..... 178
4453-18F..... 178
4457MP 235
4461-24G N17
4462-18F 179
4462-24F 179
4462DK 179
4466MP 226
4466MP-A 226
4466MP-DA 226
4466MP-DB 226
4466SP 226
4466SP-A 226
4466SP-D 226
4467PP 235
4472MP 224
4472MP-A 224
4472MP-D 224
4472SP 224
4472SP-A 224

Index

4472SP-D 224
4476MP 235
44801AMP 267
44801AMP01 267
44801BMP 267
44801FMP 267
44801FMP01 267
44802AMP 267
44802BMP 267
44802FMP 267
44803AMP 268
44803BMP 268
44803FMP 268
4481PP1 230
44904MP N18
44905MP 234
44906MP 234
44K732M 216
44K738M 216
44K745M 216
44K752M 216
44K758M 216
44K832M 216
44K838M 216
44K845M 216
44K852M 216
44K858M 216
44K928M 215
44K932M 215
44K938M 215

45 xxx

4501MR 184
4503MR 329
4505MR 192
4505SR 192
4506MR 329
4510MR 181
4510SR 181
4511-06 332
4511-10 332
45115PP 582
4511MR 184
4511SR 184
4512MR 185
4512SR 185
4516MR 185
4516SR 185
45211PP 582
4523MRV01 191
4524MR 186
4524MRV04 ..... N13
4524SR 186
452513M 224
452514M 224
452517M 224
452519M 224
452521M 224
452522M 224
452524M 224
4526MR 188
4526MR03 188
4526MR15 191
4526SR 188
4526SR03 188
4528MR 187
4528SR 187
453008M 223
453009M 223
453010M 223
453011M 223
453012M 223
453013M 223
453014M 223
453015M 223
453016M 223
453016S 223
453017M 223
453018M 223
453018S 223
453019M 223
453020M 223
453020S 223
453021M 223
453022M 223
453022S 223
453023M 223
453024M 223
453024S 223
453025M 223
453026M 223
453026S 223
453027M 223
453028M 223
453028S 223
453029M 223
453030M 223
453030S 223
453032M 223
453032S 223
453033M 223
453034M 223
453034S 223
453036M 223
453036S 223
453038M 223
453038S 223
453041M 223
4531MR 186
4531SR 186
4532MR 187
4532SR 187
4533MR 186
4533MR03 189
4533SR 186
4534MR 189
4534MR06 189
453508M 224
453509M 224
453510M 224
453510S 224
453511M 224
453512M 224
453512S 224
453513M 224
453514M 224
453514S 224
453515M 224
453516M 224
453516S 224
453517M 224
453518M 224
453518S 224
453519M 224
453520M 224
453520S 224
453521M 224
453522M 224
453522S 224
453523M 224
453524M 224
453524S 224
453525M 224
453526M 224
453526S 224
453527M 224
453528M 224
453528S 224
453529M 224
453530M 224
453530S 224
453532M 224
453532S 224
453533M 224
453534M 224
453534S 224
453535M 224
453536M 224
453536S 224
453537M 224
453538M 224
453538S 224
453539M 224
453540S 224
453541M 224
453546M 224
4535MR 190
4542CR 190
4542CR02 190
4544CR 190
4547MR 191
4566MR 170
4572-10 179
4572-12 179
4572DK 179
4572MR 168
4572SR 168
4573-10R 179
4573DK 179
457510M 228
457512M 228
457514M 228
457516M 228
457518M 228
457520M 228
4581-10 179
4583-12R 179
4584-12R 179
45VE01MRV 408

46 xxx

463014RC 171
463014RC 549
463016R 171
463016R 549
463021R 171
463021R 549
463514RC 171
463514RC 549
463516R 171
463516R 549
463521R 171
463521R 549
466016 171
466016 549
466021 171
466021 549
466516 171
466516 549
466521 171
466521 549
467014C 171
467016 171
467021 171
467514C 171
467516 171
467521 171

47 xxx

4724-01 357
4724-11G 357
4724DK 357
4725-10FR 174
4725-10GR 174
4725-12BR 174
4725-12FR 174
4725-12GR 174
4725DKR01 174
4752-12G 175
4752DK 175
4755-10G 174
4755DK 174
4756-10G 174
4756DK 174
4760-05 175
4760-05G 175
4760DK01 175
4762-10F 175
4762-10G 175
4762-10P 175
4762-15G 175
4762DK 175
4768-10F 175
4768-10G 175
4768-10P 175
4768-15F 175
4768-15G 175
4768DK 175
4771-10BR 175
4771-10FR 175
4771-10GR 175
4771DK 175
4771VE-10 408
4772-10F 176
4772DK01 176
4773-10GS 177
4773-22GS N12
4773DK 177
4774-10F 176
4774-10G 176
4774DK 176
4779-10BR 176
4779-10FR 176
4779-10GR 176
4779DK01 176
4781-12F 176
4781DK 176
4791R 179
4793 ..... N15
4794 179
4795-18 332
4795-36 332
4796P 231
4797P 231
4798P 231
4799P 231
479AP 231

48 xxx

4813 179
4815MP04 234
4815MP05 234
4816 179
48280180 577
483510M 226
483511M 226
483512M 226
483513M 226
483514M 226
483516M 226
483517M 226
483519M 226
483521M 226
483522M 226
483523M 226
483524M 226
483526M 226
483527M 226
483530M 226
483535M 226
4844R 180
4863P 231
4866P 231
4873P 231

49 xxx

49151719M 227
49151921M 227
49152122M 227
49152123M 227
49152426S 227
493008M 226
493009M 226
493010M 226
493011M 226
493012M 226
493013M 226
493014M 226
493015M 226
493016M 226
493017M 226
493018M 226
493019M 226
493020M 226
493021M 226
493022M 226
493023M 226
493024M 226
493027M 226
493030M 226
493032M 226
493036M 226
493510M 226
493510S 227
493511M 226
493512M 226
493512S 227
493513M 226
493514M 226
493514S 227
493516M 227
493516S 227
493517M 227
493518S 227
493519M 227
493520S 227
493521M 227
493522M 227
493522S 227
493523M 227
493524M 227
493524S 227
493526M 227
493526S 227
493527M 227
493528S 227
493530M 227
493530S 227
493532S 227
493534S 227
493536S 227
493538S 227
493540S 227
494515M 227
494517M 227
494519M 227
494521M 227
494522M 227
495517MX 227
495519MX 227
495521MX 227

4B xxx

4B5510M 229
4B5511M 229
4B5512M 229
4B5512S 229
4B5513M 229
4B5514M 229
4B5514S 229
4B5515M 229
4B5516M 229
4B5516S 229
4B5517M 229
4B5518S 229
4B5520S 229
4B5521M 229
4B5522M 229
4B5522S 229
4B5526S 229
4B5528S 229
4B5530S 229

4E xxx

4E08PR N17

50 xxx

5022MR 200
5022SR 200
502503H 372
502503H.B 372
502504H 372
502504H.B 372
502505H 372
502505H.B 372
502506H 372
502506H.B 372
502507H 372
502507H.B 372
502508H 372
502508H.B 372
502509H 372
502509H.B 372
502510H 372
502510H.B 372
5039CR 200
5060-08 306
5060-10 306
5060-12 306
5060-14 306
5060-16 306
5060-18 306
5060-20 306
5060-22 306
5060-24 306
5060-26 306
5060-28 306
5060-30 306
5060-32 306
5060-34 306
5060-36 306
5060-40 306
5063-14 308
5063-16 308
5063-18 308
5071-42 306
5071-44 306
5071-46 306
5071-48 306
5071-50 306
5071-52 306
5071-54 306
5071-56 306
5071-58 306
5071-60 306
5071-62 306
5071-64 306
5084-16 324
5084-18 324

51 xxx

5169PR 377

54 xxx

5450-08 371
5450-10 371

55 xxx

5522MR 200

57 xxx

Index

572210M 331
572212M 331
574208M 331
574212M 331
574213M 331
574214M 331
575208M 331
575210M 331
575212M 331
575213M 331
575214M 331
575217M 331
576208M 331
576210M 331
576213M 331
576214M 331
576217M 331
577406M 331
577407M 331
577408M 331
577409M 331
577410M 331
577411M 331
577412M 331
577413M 331
577414M 331
577415M 331
577416M 331
577417M 331
577418M 331
577419M 331

59 xxx

59000810 310
59001012 310
59001214 310
59001416 310
59001618 310
59001820 310
59002022 310
59002224 310
59002628 310
59003032 310
59003034 310
59003236 310
59003640 310
59301012 316
59301214 316
59301618 316
59301820 316
59302224 316
59302428 316
59601214 311
59601618 311
59602022 311
59602428 311
59603032 311
59700810 312
59701012 312
59701214 312
59701416 312
59701618 312
59701820 312
59702022 312
59702224 312
59702428 312
59702628 312
59703032 312
59703436 312
59703640 312
59703842 312

60 xxx

6011-05R 344
6011-07N 344
6011-07R 344
6011-10N 344
6011-10R 344
6012-07N 344
6012-10N 344
6013-10R 344
6014MR 196
6014MR12 197
601514M 239
601517M 239
601519M 239
601521M 239
601522M 239
601524M 239
601527M 239
6016MR 196
6016SR 196
602360 195
602370 195
602380 195
602390 195
6023A0 195
6023MR 197
6023SR 197
602514 195
602517 195
602519 195
602522 195
6031-07N 344
6031-07R 344
6031-10N 344
6031-10R 344
609616M 239
609616M10H 239
609616M12H 239
609616M14H 239
609616M17H 239
609616M19H 239
609616M22H 239
609622M 239
609622M19H 239
609622M22H 239
609622M24H 239
609622M27H 239
609622M30H 239
609622M32H..... 239

61 xxx

6111-06 337
6111-07 337
6111-08 337
6112-09 337
6114-05 337
6116-07A 410
6116-08A 410
6121-06X 346
6121-09X 346
6131-12 340
6131-12P01 340
6131-14 340
6131-14P01 340
6131-18 340
6131-18P01 340
6131-24 340
6131-24P01 340
6131-30 340
6131-30P01 340
6131-36 340
6131-36P01 340
6131-42 340
6131-42P01 340
6133-08 340
6141-06C 434
6141-08C 434
6146-08A 410

62 xxx

6207-05 416
6211-06 337
6213-06 337
6214-05 337
6214-45 337
6216-06A 410
6217-05 416
6224CR 197
6226CR 197
623030M 194
623032M 194
623033M 194
623036M 194
623039M 194
623041M 194
623046M 194
623050M 194
6231-07 337
6232-08 337
623517M 194
623518M 194
623519M 194
623520M 194
623521M 194
623522M 194
623523M 194
623524M 194
623525M 194
623526M 194
623527M 194
623528M 194
623529M 194
623530M 194
623531M 194
623532M 194
623533M 194
623534M 194
623535M 194
623536M 194
623537M 194
623538M 194
623539M 194
623540M 194
623541M 194
623542M 194
623543M 194
623544M 194
623545M 194
623546M 194
623547M 194
623548M 194
623549M 194
623550M 194
623551M 194
623552M 194
623553M 194
623554M 194
623555M 194
623556M 194
623557M 194
623558M 194
623559M 194
623560M 194
623563M 194
623565M 194
623570M 194
6236-07A 410
6247-05 416
6251-04 195
6251-08 195
6251-16 195
6260-04 240
6260-04P 240
6260-07 240
6260-07P 240
6260-10 240
6260-10P 240
6260-13 240
6260-13P 240
6271-05C 417
6271-65C 417

63 xxx

6311-06 338
6311-08 338
6313-06 338
6314-05 338
6314MR 196
6314MR12 197
6315-06 345
6315-09 345
6316MR 196
6317-06 417
6318-08A 410
6319-11C 338
6323MR 197
6329-13C 338
633017M 193
633019M 193
633021M 193
633022M 193
633022S 193
633023M 193
633024M 193
633024S 193
633026M 193
633026S 193
633027M 193
633028M 193
633028S 193
633029M 193
633030M 193
633030S 193
633032M 193
633032S 193
633033M 193
633034M 193
633034S 193
633035M 193
633036M 193
633036S 193
633038M 193
633038S 193
633040S 193
633041M 193
633042M 193
633042S 193
633044S 193
633046M 193
633046S 193
633048M 193
633048S 193
633050M 193
633054M 193
633055M 193
633050S 193
633052S 193
633054S 193
633056S 193
633058M 193
633058S 193
633060M 193
633060S 193
633062S 193
633063M 193
633064S 193
633065M 193
633066S 193
633068S 193
633070M 193
633070S 193
633072S 193
633074S 193
633076S 193
633078S 193
633080S 193
633082S 193
633084S 193
633086S 193
633088S 193
6331-06 339
6331-08 339
6334-05 338
633517M 194
633518M 194
633519M 194
633520M 194
633521M 194
633522M 194
633523M 194
633524M 194
633525M 194
633526M 194
633527M 194
633528M 194
633529M 194
633530M 194
633531M 194
633532M 194
633533M 194
633534M 194
633535M 194
633536M 194
633537M 194
633538M 194
633539M 194
633540M 194
633541M 194
633542M 194
633543M 194
633544M 194
633545M 194
633546M 194
633547M 194
633548M 194
633549M 194
633550M 194
633551M 194
633552M 194
633553M 194
633554M 194
633555M 194
633556M 194
633557M 194
633558M 194
633559M 194
633560M 194
633562M 194
633563M 194
633564M 194
633565M 194
633570M 194
6336-08A 410
6337-06 418
6339-13C 338
6347-05 418
6367-06 417
6377-55 417
63A7-05 418
63B7-05 418

64 xxx

6408MP 241
6408MP10 241
6408SP10 241
6409MP 241
6409MP03 241
6409SP10 241
6410MP 241
6410SP 241
6411-06 339
64114FMP 268
64114AMP 268
64114BMP 268
6411MP 240
6431-10C 339
6431-11C 339
643519M 237
643521M 237
643522M 237
643523M 237
643524M 237
643524S 237
643525M 237
643526M 237
643526S 237
643527M 237
643528M 237
643528S 237
643529M 237
643530M 237
643530S 237
643532M 237
643532S 237
643533M 237
643534M 237
643534S 237
643535M 237
643536M 237
643536S 237
643538M 237
643538S 237
643540M 237
643540S 237
643541M 237
643542M 237
643542S 237
643543M 237
643544M 237
643544S 237
643546M 237
643546S 237
643548M 237
643548S 237
643550M 237
643550S 237
643552S 237
643554S 237
643555M 237
643556S 237
643558S 237
643560M 237
643560S 237
643562S 237
643564S 237
643565M 237
6452-18F 195
6452-30F 195
6452DK 195
6462-40P N17
6462DK N17
6463-08C 339
647518M 238
647520M 238
647522M 238
647524M 238
64801AMP 268
64801BMP 268
64801FMP 268
6482-24G 195
6482DK 195
64K765M 216
64K770M 216
64K775M 216
64K780M 216
64K865M 216

Index

64K870M 216
64K875M 216
64K880M 216
64K975M 215

65 xxx

651017M 235
651018M 235
651019M 235
651021M 235
651022M 235
651023M 235
651024M 235
651026M 235
651027M 235
651028M 235
651029M 235
651030M 235
6511-10 340
6511-10C 340
6511-13C 340
6511-17C 340
651417M 238
651419M 238
651420M 238
651421M 238
651514M 236
651515M 236
651516M 236
651517M 236
651518M 236
651519M 236
651521M 236
651522M 236
651523M 236
651524M 236
651525M 236
651526M 236
651527M 236
651528M 236
651529M 236
651530M 236
6516-10 339
6516-10C 339
6516-10A 410
6517-08C 339
6517-10C 339
6517-12C 339
6518-10C 341
6521-13 353
6521-16 353
6521-21 353
6521-26 353
653017M 236
653019M 236
653021M 236
653022M 236
653023M 236
653024M 236
653026M 236
653027M 236
653028M 236
653029M 236
653030M 236
653032M 236
653033M 236
653034M 236
653035M 236
653036M 236
653038M 236
653040M 236
653041M 236
653042M 236
653046M 236
653063M 236
653065M 236
653070M 236
6531-10 353
6531-12 353
6531-14 353
6531-18 353
6531-24 353
6531-36 353
6531-48 353
6532-08 354
6532-10 354
6532-12 354
6532-14 354
6532-18 354
6532-24 354
6532-36 354
6532-48 354
6533-10L 354
6533-12L 354
6533-14L 354
6533-18L 354
6533-24L 354
6533-36L 354
6533-48L 354
653513M 236
653517M 236
653518M 236
653519M 236
653521M 236
653522M 236
653522S 237
653523M 236
653524M 236
653524S 237
653526M 236
653526S 237
653527M 236
653528M 236
653528S 237
653529M 236
653530M 236
653530S 237
653531M 236
653532M 236
653532S 237
653533M 236
653534M 236
653534S 237
653535M 236
653536M 236
653536S 237
653538M 236
653538S 237
653540M 236
653540S 237
653541M 236
653542M 236
653542S 237
653543M 236
653544M 236
653544S 237
653545M 236
653546M 236
653546S 237
653548M 236
653548S 237
653550M 236
653550S 237
653552M 236
653552S 237
653554M 236
653554S 237
653555M 236
653556S 237
653557M 236
653558M 236
653558S 237
653560M 236
653560S 237
653562S 237
653563M 236
653564S 237
653565M 236
653566S 237
653568S 237
653570M 236
653570S 237
653572S 237
653574S 237
653576S 237
6541-14L 354
6541-18L 354
6572-20 196
6572DK 196
657524M 238
657526M 238
657528M 238
657530M 238
657532M 238
6581-12 196
6581-18 196
6585-19 196
65SS-07 343

66 xxx

6605-08 345
6615-06 346
6615-11 346
6615-18 346
6625-06 346
6625-11 346
6625-18 346
6655-09 345
6665-09 345
66SB-07 342
66SS-07 342
66HB-07 342
66HS-07 342

67 xxx

6711-06 339
6716-06A 410
6721-10 443
6724-20F 195
6724DK 195
6732-09 443
6741-06 443
6751-44 437
6755-05 438
6756-05 438
6761-07 437
6762-08 437
6778-20FS 195
6778DK 195
6779-20F 195
6779DK 195
6781-85 441
6781P0A 441
6781P0B 441
6781P0C 441
6781P0D 441
6781P0F 441
6781P0H 441
6791 196
6797 239
6797P 239
6798 239
6798P 239
67A1-07 437
67B1-06 438
67B2-05 439
67B3-55 439
67BA1-08 ..... N35
6BB11 ..... N36
6BC141-1 ..... N36
6BC141A N36
67E2-08 439
67F1-08 441
67G 442
67G0005 441
67G1-09 442
67G1P01 442
67GB-09 442
67GBP01 442
67GG-09 442
67GH-09 442
67GHP01 441
67GHP01 442
67GJ-09 442
67GJP01 441
67GJP01 442
67GK-09 442
67GKP01 441
67GKP01 442
67GL-09 442
67GLP01 441
67GLP01 442
67GN-09 441
67GN-09 442
67GNP01 441
67GNP01 442
67HB-07 342
67HS-07 342
67SB-07 342
67SS-07 342

68 xxx

6814 196
6818 196
683517M 238
683519M 238
683521M 238
683522M 238
683523M 238
683524M 238
683526M 238
683527M 238
683529M 238
683530M 238
683532M 238
6864 240
6864P 240
6868 240
6868P 240
6874 240
6874P 240
68GB-01 582
68GB-02 582
68GR-01 582
68GS-11 582
68GS-16 582
68GQ-01 582
68GQ-02 582
68HB-05 342
68HB-07 342
68HB-07L 343
68HB-10 342
68HS-05 342
68HS-07 342
68HS-10 342
68RB-01 582
68RR-01 582
68RS-11 582
68RS-16 582
68RQ-01 582
68SB-05 342
68SB-07 342
68SB-10 342
68SS-05 342
68SS-07 342
68SS-10 342
68ZZ-01 582
68ZZ-02 582

69 xxx

6921-05 337
6921-05C 337
6921-06 337
6921-06C 337
6921-07 337
6921-07C 337
6927-05 416
693519M 238
693521M 238
693522M 238
693523M 238
693524M 238
693524S 238
693526M 238
693526S 238
693527M 238
693528S 238
693529M 238
693530M 238
693530S 238
693532M 238
693532S 238
693534S 238
693536S 238
693538S 238
693540S 238

6A xxx

6AB12-55 433
6AB13-06 433
6AB14-06 ..... N33
6AB14-65 ..... N33
6AB21-65 433
6AB31-75 433
6AB31-85 433
6AB33-95 ..... N34
6AC51-26 444
6AC52-12 444
6AD10-325 434
6AD10-3P01 434
6AD16-500 434
6AD17-150 434
6AD23-400 434
6AF11-125 423
6AF21-165 423
6AG11-20 424
6AH01-1 424
6AH01-2 424
6AH01-3 424
6AH01-4 424
6AH11 424
6AH12 424
6AH13 424
6AH14 424

6B xxx

6BB11 ..... N20
6BC100 423
6BC200 423
6BC210A 421
6BC210B 421
6BC210C 421
6BC210D 421
6BC210F 421
6BC23-1 421
6BC23A 421
6BC23B 421
6BC23C 421
6BC23D 421
6BC23F 421
6BC24A 421
6BC24B 421
6BC24C 421
6BC24F 421
6BC26-1 421
6BC26-3 421
6BC26A 421
6BC26B 421
6BC26C 421
6BC26F 421
6BC3007 422
6BC372 422
6BC372-1 422
6BC372-2 422
6BC372-3 422
6BC372-4 422
6BC372-5 422
6BD11 422
6BD22 422
6BE11-07 423
6BE12-07 423
6BE16-07 423
6BF11-17 422
6BF21-17 422
6BH21 ..... N37
6BH21-01 ..... N37
6BH21-02 ..... N37
6BJ21 ..... N37
6BJ901 ..... N37

6C xxx

6CB02 430
6CB21 430
6CB31 428
6CB41 429

70 xxx

7003MR 209
7010MR 210
7011MR 203
7028MR 211
7053MR01 212
7077MR 205
7081MR 206
7082MR 204
7087MR 207
7096MR 202
7098MR 208

71 xxx

711002P 382
711002P-S1 384
711102H 382
711102H-S1 384
711103H 382
711103H-S1 384
711104H 382
711104H-S1 384
711105H 382
711105H-S1 384
711106H 382
711106H-S1 384
711107H 382
711107H-S1 384
711108H 382
711110H 382
711110T 382
711110T-S1 384
711110U 383
711110U-S1 385
711115T 382
711115T-S1 384
711115U 383
711115U-S1 385
711120T 382
711120T-S1 384
711120U 383
711120U-S1 385
711125H 382

Index

711125H-S1 384
711125T 382
711125T-S1 384
711125U 383
711125U-S1 385
711127T 382
711127T-S1 384
711127U 383
711127U-S1 385
711130T 382
711130T-S1 384
711130U 383
711130U-S1 385
711140T 382
711140T-S1 384
711140U 383
711140U-S1 385
7112PR 199
7113PR 199
711501P 382
711501P-S1 384
711502H 382
711502P 382
711502P-S1 384
711503H 382
711503P 382
711503P-S1 384
711504H 382
711505H 382
711505H-S1 384
711506H 382
711506T 382
711506T-S1 384
711507H 382
711507H-S1 384
711507T 382
711507T-S1 384
711508H 382
711508T 382
711508T-S1 384
711509T 382
711509T-S1 384
711510T 382
711510T-S1 384
711512SH 382
711512SH-S1 ... 384
711515T 382
711515T-S1 384
711520T 382
711520T-S1 384
711525T 382
711525T-S1 384
711527T 382
711527T-S1 384
711530T 382
711530T-S1 384
711540T 382
711540T-S1 384
7120PR 199
7120PR01 199
715000P 382
715000P-S1 384
715001P 382
715001P-S1 384
715002P 382
715002P-S1 384
715003P 382
715003P-S1 384
715004P 382
715004P-S1 384
715000R 383
715000R-S1 385
715001R 383
715001R-S1 385
715001Z 383
715001Z-S1 385
715002H 382
715002H-S1 384
715002R 383
715002R-S1 385
715002Z 383
715002Z-S1 385
715003H 382
715003H-S1 384
715003R 383
715003R-S1 385
715003S1 382
715003S1-S1 384
715003Z 383
715003Z-S1 385
715004H 382
715004H-S1 384
715004S1 382
715004S1-S1 384
715004S2 382
715004S2-S1 384
715005H 382
715005H-S1 384
715005S1 382
715005S1-S1 384
715006H 382
715006H-S1 384
715006S1 382
715006S1-S1 384
715006T 382
715006T-S1 384
715006U 383
715006U-S1 385
715007H 382
715007H-S1 384
715007T 382
715007T-S1 384
715007U 383
715007U-S1 385
715008H 382
715008H-S1 384
715008T 382
715008T-S1 384
715008U 383
715008U-S1 385
715009T 382
715009T-S1 384
715009U 383
715009U-S1 385
715010T 382
715010T-S1 384
715010U 383
715010U-S1 385
715012SH 382
715012SH-S1 384
715014SH 382
715014SH-S1 384
715015T 382
715015T-S1 384
715015U 383
715015U-S1 385
715020T 382
715020T-S1 384
715020U 383
715020U-S1 385
715025H 382
715025H-S1 384
715025T 382
715025T-S1 384
715025U 383
715025U-S1 385
715027T 382
715027T-S1 384
715027U 383
715027U-S1 385
715030T 382
715030T-S1 384
715030U 383
715030U-S1 385
715035S1 382
715035S1-S1 384
715040T 382
715040T-S1 384
715040U 383
715040U-S1 385
715045S1 382
715045S1-S1 384
715050T 382
715050T-S1 384
715055S1 382
715055S1-S1 384
715055S2 382
715055S2-S1 384
715065S1 382
715065S1-S1 384
716502P 382
716502P-S1 384
717000R 383
717000R-S1 385
717001P 382
717001P-S1 384
717001R 383
717001R-S1 385
717001Z 383
717001Z-S1 385
717002H 382
717002P 382
717002P-S1 384
717002R 383
717002R-S1 385
717002Z 383
717002Z-S1 385
717003H 382
717003P 382
717003P-S1 384
717003R 383
717003R-S1 385
717003Z 383
717003Z-S1 385
717004H 382
717005H 382
717005H-S1 384
717006H 382
717006H-S1 384
717006T 382
717006T-S1 384
717007H 382
717007H-S1 384
717007T 382
717007T-S1 384
717008H 382
717008T 382
717008T-S1 384
717009T 382
717009T-S1 384
717010T 382
717010T-S1 384
717010U 383
717010U-S1 385
717015T 382
717015T-S1 384
717015U 383
717015U-S1 385
717020T 382
717020T-S1 384
717020U 383
717020U-S1 385
717025H 382
717025T 382
717025T-S1 384
717025U 383
717025U-S1 385
717027T 382
717027T-S1 384
717027U 383
717027U-S1 385
717030T 382
717030T-S1 384
717030U 383
717030U-S1 385
717040T 382
717040T-S1 384
717040U 383
717040U-S1 385
719001P 382
719001P-S1 384
719001Z 383
719001Z-S1 385
719002P 382
719002P-S1 384
719002Z 383
719002Z-S1 385
719003P 382
719003P-S1 384
719003Z 383
719003Z-S1 385

72 xxx

721102P 383
721102P-S1 385
726502P 383
726502P-S1 385
727502P 383
727502P-S1 385

73 xxx

731101P 383
731101P-S1 385
731102P 383
731102P-S1 385
731103P 383
731103P-S1 385
731152P 386
731502P 383
731502P-S1 385
731503P 383
731503P-S1 385
731552P 386
734501P 383
734501P-S1 385
734502P 383
734502P-S1 385
734503P 383
734503P-S1 385
734551P 386
734552P 386
736501P 383
736501P-S1 385
736502P 383
736502P-S1 385
736503P 383
736503P-S1 385
736552P 386

74 xxx

74010 468
74020 468
74030 468
74040 468
74060 468
741002P 383
741002P-S1 385
7411PP 232
741502P 383
741502P-S1 385
742002P 383
74250 468
74260 468
74270 468
743002P 383
743003P 383
74410 469
74412 469
74414 469
74416 469
745002P 383
745002P-S1 385
74512 469
74514 469
74613 469
747501P 383
747501P-S1 385
747502P 383
747502P-S1 385
747503P 383
747503P-S1 385
74A00..... 463

75 xxx

750-100 386
750-150 386
750-50A 386
750-60 386
750-75 386
75035-06..... 471
7503MR 209
751-60 386
751-75 386
75101-08G 470
75101-10G 470
75102-08G 470
75102-10G 470
7510MR 210
7511MR 203
75135-06..... 471
752-100 387
752-150 387
752-300 387
752-60 387
752-75 387
75201-08G 470
75201-10G 470
75202-08G 470
75202-10G 470
75235-06..... 471
7528MR 211
7528MR01 211
75302-08G 470
75302-10G 470
753-63 387
753A-370..... 387
75335-06..... 471
754-90 387
75402-08G 470
75402-10G 470
75435-06..... 471
755-300 387
755-400 387
75501-08G 470
75501-10G 470
75502-08G 470
75502-10G 470
75535-06..... 471
7553MR01 212
7558MR 200
7577MR 205
7581MR 206
7581MR01 206
7582MR 204
7587MR 207
7587MR01 207
7587SR 207
7596MR 202
7598MR 208
759-140 387
75A105M 388
75A106M 388
75A108M 388
75A110M 388
75A112M 388
75A114M 388
75A116M 388

76 xxx

7601012M 388
7601013M 388
7605512M 388
7606508S 388
7606510S 388
7606512M 388
7606512S 388
7607510M 388
76103-04 449
76104-05 449
76104-74G 451
76105-06 449
76106-74G 451
76108-74G 451
7611006M 388
7611008M 388
76110-74G 451
7611010M 388
7611012M 388
7611013M 388
7611014M 388
7611506M 388
7611507M 388
7611508M 388
7611510M 388
7611512M 388
7611513M 388
7611514M 388
7612006M 388
7612008M 388
7612010M..... 388
7612012M 388
7612014M 388
76125-74G 451
7614208S 388
7614210S 388
7614512S 388
7616505M 388
7616506M 388
7616507M 388
7616508M 388
7616508S 388
7616510M 388
7616510S 388
7616512M 388
7616513M 388
7616512S 388
7616514M 388
7616514S 388
76210-10 450
76213-04 450
76215-05 450
76217-06 450
76218-75G 451
76219-75G 451
76220-84G 451
76222-84G 451
76220-07 450
76223-08 450
76224-10 450
76226-12 450
76301-05 449
76302-05 449
76302-74G 451
76303-05 449
76303-74G 451
76304-05 449
76304-74G 451

Index

76305-05 449
76305-74G 451
76306-05 449
76306-74G 451
76307-05 449
76308-05 449
76308-74G 451
76309-06 449
76310-06 449
76402-45 450
76402-55G 451
76403-05 450
76403-06 450
76403-06G 451
76404-06 450
76404-07G 451
76405-65 450
76405-08G 451
76406-07 450
76406-84G 451
76407-84G 451
76408-08 450
76408-88G 451
76409-88G 451
76410-85 450
76410-09G 451
76410-14G 451
76412-09 450
76412-10G 451
76412-14G 451
7641206P N50
76414-10 450
76414-11G 451
76414-14G 451
76416-12G 451
76416-14G 451
76505-05..... 450
76717-05 452
76721-06 452
76724-08 452
76729-10 452
76804-05 452
76807-06 452
76B808M 389
76B809M 389
76B812M 389
76B813M 389
76B814M 389
76B815M 389
76B816M 389
76B817M 389
76B819M 389
76B821M 389
76C1108M 389
76C1109M 389
76C1110M 389
76C1111M 389
76C1112M 389
76C1113M 389
76C1114M 389
76C1117M 389
76C1119M 389
76C1121M 389
76C1123M 389
76C1124M 389

77 xxx

7702-25 389
7702-50 389
7702-75 389
7703-50 389
7704-50 389
77131-06 462
77131-08 462
77141-06 462
77141-08 462
77328-26 462
77335-25 462
77340-20 462
7743-56 389
7744-60 389
7773GS N14

78 xxx

7811-08 448
7811-12 448
7811-16 448
7811-24 448
7811-32 448
7811-40 448
7821-30 448
7821-50 448
7821-80 448
7822-30 448
7822-40 448
7822-45 448
7822-50 448
7823-10 448
7823-15 448
7823-20 448
7833-10 448
7833-12 448
7833-15 448
7833-20 448
7834-50 448
7842-22 449
7842-28 449
7842-35 449
7842-45 449
7842-60 449
7848-60 449
7848-80 449
7851-08 449
7851-16 449
7851-24 449
7851-32 449
7851-40 449
7851-48 449
7851-64 449
7852-23 448
7852-55 448
7861-08 448
7861-16 448
7861-20 448
7861-24 448

79 xxx

79062-12 461
79063-06 462
79063-12 462
79063-20 462
79063-40 462
79093-02M 460
79093-03C 460
79093-03M 460
79093-05C 460
79093-05M 460
79093-05M1 460
79093-08M..... 460
79093-08C..... 460
79094-02M 460
79094-03C 460
79094-03M 460
79094-05C 460
79094-05C1 460
79094-05M 460
79094-08M 460
79094-08C 460
79095-05M 460
79095-05M-S 460
7911-12 469
7912-0111 350
7912-21 350
7912-22 350
7912-23 350
7912-2311 350
7913-42 353
7913-4211 353
7913A-63 353
7913A-6311..... 353
7913B-35 352
7913B-3511..... 352
7914A-35 351
7914A-0111..... 351
7914C-70 351
7914C-7021 351
7915-30 351
7915-3011..... 351
7915A-19 352
7915A-28 352
7916-0111..... 352
7916-12M 352
7916-15M 352
7916-21M 352
7916-22M 352
7918-A0 350
7918-A011..... 350
7921-12 470
7932-04 435
7933-45 435
7935-08 .....N34
7939A N29
7941-08 436
7945-07P01 .....N35
7946-07 .....N35
7946-07-S N35
7962-03 456
7962-04 456
7962-06 456
7962-08 456
7962-12 456
7962B-05 456
7962B-06 456
7962B-08 456
7962B-10 456
7962B-35 456
7963-03 456
7963-04 456
7963-06 456
7963-08 456
7963-12 456
7962B1PR 456
796401MR 458
7965-02 .....N39
79711 459
7971-07 435
7971-07P02 435
79721 459
79731 460
7977-07 436
7977-07-S 436
7977-07P02 436
7978-07..... 435
7978-07-S 435
7978-07P02 435
79815 487
79831 488
79832 488
79833 488
79900-04 271
79900-10 271
79900-13 271
79900-20 271
79901-04 271
79901-10 271
79901-13 271
79901-20 271
79910-10 273
79910-15 273
79911-10 273
79911-15 273
79912-10 273
79912-15 273
79953-10 272
79953-15 272
79960-10 272
79960-15 272
79960-20 272
79962-10 272
79962-15 272
79962-20 272
79982-06 271
79982-10 271
799A0-23C 273
799A0-33C 273
799A0-43C 273
799A1-23C 273
799A1-33C 273
79A21-30 463
79A22-30..... 463
79B1-01..... 369

7A xxx

7AA105 .....N41

7C xxx

7CA0107M 355
7CA0110S 355
7CA0606S 356
7CA0606S1 356
7CA11-12S 356
7CA11-15M 356
7CA11-16M 356
7CA11-16S 356
7CA11-20S 356
7CA11-24S 356
7CA15-10M 357
7CA22BP01 355
7CA22BP10M .. 355
7CA22P01 355
7CA22P20S 355
7CA61-A01 356
7CA61-A011 356
7CA61-A02 356
7CA61-A021 356
7CA61-A03 356
7CA61-A031 356
7CA61-A04 356
7CA61-A041 356
7CA61-B01 356
7CA61-B011 356
7CA61-B02 356
7CA61-B021 356
7CA61-B03 356
7CA61-B031 356
7CA61-B04 356
7CA61-B041 356
7CA61P01 356
7CA61P02 356
7CA61P03 356
7CA81-30H N41
7CA82-30 .....N41

7D xxx

7DM1160 461

7E xxx

7E61001 471
7E111 391
7E111 392
7E12115M-1 .....N27
7E12120M-1 .....N27
7E12125M-1 .....N27
7E12130M-1 .....N27
7E12132M-1 .....N27
7E12135M-1 .....N27
7E12140M-1 .....N27
7E12145M-1 .....N27
7E12150M-1 .....N27
7E12155M-1 .....N27
7E51180-60 390
7E51180-80 390

7H xxx

7HA03 357
7HA11 357
7HA21 .....N27

7K xxx

7K09MP 216
7K09MP01 216

80 xxx

8015MR 199
801519M 244
8015SR 199
809622M 244
809622M19H 244
809622M22H 244
809622M24H 244
809622M27H 244
809622M30H 244
809622M32H 244

82 xxx

820001 57
820002 57
820003 57
820005 57
820011 57
8251-08 198
8251-16 198
8260-07 245
8260-07P 245
8260-10 245
8260-10P 245
8260-13 245
8260-13P 245
827011 57

83 xxx

833036M 198
833038M 198
833041M 198
833046M 198
833046S 198
833048S 198
833050M 198
833054M 198
833054S 198
833055M 198
833058M 198
833060M 198
833060S 198
833063M 198
833064S 198
833065M 198
833067M 198
833070M 198
833071M 198
833072S 198
833075M 198
833076S 198
833077M 198
833080M 198
833084S 198
833094S 198
8330A0S 198

84 xxx

8404MP..... 246
84087637BKT 31
8408MP 246
8408MP02 246
8409MP 246
8410MP 246
8410SP 246
843524M 243
843527M 243
843528M 243
843530M 243
843530S 243
843532M 243
843532S 243
843533M 243
843534M 243
843534S 243
843535M 243
843536M 243
843536S 243
843538M 243
843538S 243
843540M 243
843540S 243
843541M 243
843542M 243
843542S 243
843544S 243
843546M 243
843546S 243
843548M 243
843548S 243
843550M 243
843550S 243
843552M 243
843552S 243
843554M 243
843554S 243
843555M 243
843556S 243
843558M 243
843558S 243
843560M 243
843560S 243
843562S 243
843564S 243
843565M 243
843566S 243
843568S 243
843570S 243
843570M 243
843572S 243
8462-40P N17
8462DK N17
84700002B 57
84700003B 57
84700011B 57

85 xxx

851417M 243
851419M 243
851420M 243
851421M 243
851422M 243
851426S 243
852421M 243
853417M 244
853419M 244
853421M 244
853519M 242
853521M 242
853522M 242
853523M 242
853524M 242
853524S 242
853525M 242
853526M 242
853526S 242
853527M 242
853528M 242
853528S 242
853529M 242

Index

853530M 242
853530S 242
853532M 242
853532S 242
853533M 242
853534M 242
853534S 242
853535M 242
853536M 242
853536S 242
853537M 242
853538M 242
853538S 242
853540M 242
853540S 242
853541M 242
853542M 242
853542S 242
853544M 242
853544S 242
853545M 242
853546M 242
853546S 242
853548M 242
853548S 242
853550M 242
853550S 242
853552M 242
853552S 242
853553M 242
853554M 242
853554S 242
853555M 242
853556S 242
853558M 242
853558S 242
853560M 242
853560S 242
853562S 242
853563M 242
853564S 242
853565M 242
853566M 242
853566S 242
853568M 242
853568S 242
853570M 242
853570S 242
853571M 242
853572S 242
853574S 242
853575M 242
853576S 242
853578S 242
853580M 242
853580S 242
853582S 242
853584S 242
853585M 242
853586S 242
853588S 242
853590M 242
853590S 242
853595M 242
853592S 242
853594S 242
853596S 242
8535A0S 242
8535A0M 242
8535A4S 242
8535A8S 242
8535B2S 242
85451735M..... 244
85451941M..... 244
85452038M..... 244
85452041M..... 244
85452141M..... 244
8572-25 198
8572DK 198
8581-26 198

87 xxx

870208 142
870311 161
870406 142
870406 161
870406 182
870410 182
870422 142
870422 161
870422 182
87102 603
87103 603
87104 369
87104 602
87105 602
871061A 275
871061A 603
871061B 275
871061B 603
871061F 275
871061F 603
87107..... 602
87108 452
87108 603
87110 602
87111 602
87118 460
87118 603
87119 603
8711B 450
8711B 603
8711B-1 450
87125 602
87137 53
87140 603
8714101B N9
87152 602
87153 602
87154 601
87154-01..... 275
87154-01..... 601
87155 456
87156 275
87156 601
87156A 275
87156A 601
87157-06 .....N22
87157-09 .....N22
87162 485
87163 485
8720 142
87201 49
87203..... 601
8720813D1..... 142
8730 161
87301-36..... 601
87301-494A 601
87301-496A 601
87301-498A 601
87301-499A 601
87306A 601
87306-36-B 601
87307A 601
8730811D1..... 161
87352 375
87352 603
8740 182
87401-2 51
87401-3 51
87401-3H 51
87402 52
87404 52
87405-1 55
87405-2 55
87405-3 55
87405-9 55
87407 52
87408 52
8740809D1..... 182
87411-6B 50
87411-9B 50
87417-10B 50
87419-5B 50
87421-3B 51
87422-3B 51
87430A-K 34
87430A5-1BP 34
87430A5-7B 31
87431-5BE 34
87432-15 31
87432-17 31
87432-23 31
87432-24 31
87432-31 31
87432-32 31
87432-33 31
87432-34 31
87432-41 31
87432-52 31
87432-5B 33
87432-5B-B 33
87432-5B-G 33
87432-5G 35
87432-5G-B 35
87432-5G-G 35
87434-7B 33
87434-7B-B 33
87434-7B-G 33
87434-7G 35
87434-7G-B..... 35
87434-7G-G 35
87435-13B 34
87437-8B 33
87437-8B-B 33
87437-8B-G 33
87437-10B..... 33
87437-10B-B..... 33
87437-10B-G..... 33
87438-3B 33
87438-3B-B 33
87438-3B-G 33
87441-1B 46
87441-3B 46
87446-3B-KR 47
87446-3B-KB 47
87452B-B..... 58
87452C-B..... 58
87462-7G-KB..... 36
87502 49
87502-01 48
87502-02 48
87502-050 48
87502-051 48
87502-054 48
87502-058 48
87502-061 48
87502-064 48
87502-068 48
87502-11 48
87502-12 48
87502P01 49
87502P02 48
87502P03 48
87502P011 49
87502P012 49
87512 49
8760 196
8760807D1 196
87632-5B 39
87632-5B-B 39
87632-5B-G 39
87634-7B 39
87634-7B-B 39
87634-7B-G 39
87711C 53
87721B 53
87722B 53
87723B N11
87724D N10
87731D N10
87732D N10
87733D N10
8779-32F 198
8779DK 198
87934-31 41
87934-32 41
87934-7BF 41
87934-7BF-B 41
87934-7BF-G 41
8797 245
8797P 245
87A05 52
87A051 52
87A05-KB 52
87A051-KB 52
87A08 52
87C23-B 583
87C24-B 584
87C25-B 584
87C34-3B-B N6
87D11-01A-KB 25
87D11-01A-KG 25
87D11-02A-KB 24
87D11-02A-KG 24
87D11-03A-KB 26
87D11-03A-KG 26
87D11-04A-KB 26
87D11-04A-KG 26
87D11-05A-10 29
87D11-05A-KB 26
87D11-05A-KG 26
87D11-06A-B 27
87D11-06A-G 27
87D11-071A-B 28
87D11-071A-G 28
87D11-08A 27
87D11-08SA 27
87D11-09A 27
87D11-09SA 27
87D11-10A 27
87D11-10SA 27
87D11-11A-KB 27
87D11-11A-KG 27
87D11-12A-KB 27
87D11-12A-KG 27
87D11-13A-KB 28
87D11-13A-KG 28
87D11-14A 29
87D11-14SA 29
87D11-15A-KB 28
87D11-15A-KG 28
87D11-16A-B 29
87D11-16A-G 29
87D11-17A-KB 25
87D11-17A-KG 25
87D11-18A-KB 25
87D11-18A-KG 25
87D11-19A-KB N3
87D11-19A-KG N3
87D11-20A-K N5
87D11-20LA-K N5
87D11-21A-KB N2
87D11-21A-KG N2
87D11-22A-KB N3
87D11-22A-KG N3
87D11-23A-KB N4
87D11-23A-KG N4
87D11-24A-K N4
87D11-25A-KB N5
87D11-25A-KG N5
87D11-26A-K N6
87D11A-KB 23
87D11A-KG 23
87D11X01SA-KB .. 19
87D11X01SA-KG . 19
87D11X02SA-KB .. 20
87D11X02SA-KG . 20
87D11X03A-KB ... 21
87D11X03A-KG ... 21
87D11X04A-KB ... 22
87D11X04A-KG ... 22
87D11X05A-KB ... 22
87D11X05A-KG ... 22
87D11X06A-KB..... 28
87D11X06A-KG..... 28
87D11X06SA-KB .. 28
87D11X06SA-KG . 28
87E02-051A 29
87E02-053A 29
87E02-061A 29
87E02-063A 29
87G001DQ-BK 44
87G11-4B-BK 44
87G31-7B-BK 45
87G33-7B-KB 37
87G33-7H-KB..... N7
87G41-B 46

88 xxx

8816 198
883524M 243
883527M 243
883529M 243
883530M 243
883532M 243
883533M 243
883534M 243
883535M 243
883536M 243
883538M 243
883541M 243
8866 245
8866P 245
8869 245
8869P 245

9- xxx

9-1011GP 122
9-10112MR 118
9-10112MRV 75
9-10115MR 113
9-102A12MR 118
9-102A15MR 113
9-1044CQV 84
9-1112MRV 79
9-1205MR 110
9-12110MR 122
9-12120MR 113
9-1215MR03 127
9-1216MR 110
9-1216MR01 110
9-1216MR03 110
9-1217MR 126
9-1218MR 110
9-1219MR01 110
9-1220MRV 78
9-1272MR 111
9-1282MR 111
9-12A1MR 123
9-12A1MRV 79
9-12C7MR 121
9-12D20MRV 78
9-12FVE15MRV N31
9-12FVG15MRV ...N31
9-1303MR 117
9-1606MR 126
9-1606MR01 126
9-1608MR 111
9-1609MR 111
9-1709MR 111
9-1711MR 112
9-1716MR 126
9-1812MR 112
9-1838MR 112
9-1905MR 117
9-1905MR 314
9-1912MR 112
9-1C08MR 113
9-20110MR 118
9-2044SRV 81
9-2048MRV 81
9-21-20-07MRV .. 84
9-22108MR 115
9-22108MRV 80
9-22124MRV50 72
9-22308TR 115
9-22308TRV 80
9-2331SRV 74
9-2516MRV03 85
9-2524MRV 85
9-2526MR 117
9-2528MRV 85
9-2534MRV 74
9-2544SRV 81
9-2548CR 105
9-2548CR01 105
9-2548CRV 68
9-2548MRV 81
9-2550MRV 76
9-2553MRV 82
9-2553MRV01 82
9-2565MRV 74
9-25VE01MRV N30
9-30106MR 126
9-30110CR 116
9-30206MR 126
9-30208MRV..... 80
9-30216MRV 84
9-3023MR01..... 108
9-3023MRV11 .. 82
9-30612MRV N31
9-30904AY 121
9-30904AY 578
9-30904AYV 75
9-30909AY 121
9-30909AY 579
9-30909AYV N6
9-31006MR 125
9-31106MR 118
9-31124MRV 73
9-31110MR 116
9-31110MRV..... 81
9-31909PR 116
9-31919MR 119
9-31920MRV 72
9-34128FR 116
9-3523MR 108
9-3523MRV10 82
9-3523MRV11 82
9-3544MRV 76
9-35VE01MRV N30
9-3612MR 121
9-40102GP 105
9-40102GPV 68
9-40103GP 118
9-40104GPV 83

Index

9-40112GPV 68
9-40113GPV 83
9-40122GPV 68
9-40203GP 126
9-4026MR02 104
9-40207GP 114
9-40207GP01 114
9-4029CR 127
9-4057MR 120
9-40604GP 114
9-40605GPV N32
9-40606GPV N32
9-40618GP 122
9-4116FR 126
9-4116FR03 126
9-4119PR 117
9-4120PR 117
9-4128FR 118
9-4129PRV 74
9-4138PR 120
9-4138PRV 74
9-4143FRV 75
9-4147PRV 83
9-4156PR 127
9-42102GPV 68
9-42114GP 105
9-42114GPV 68
9-42116GPV 79
9-42144GP 114
9-4219MR 125
9-4219MR07 125
9-4219SR08 125
9-4221MRV 76
9-4235MR 123
9-4319MR 125
9-4319MR01 125
9-4319MR02 125
9-4319MR05 125
9-4328MR 108
9-4333MR 108
9-4333MR03 108
9-4335MR 123
9-4338MR 124
9-4338MR01 124
9-4338MR03 124
9-4401MPV 83
9-4419MPV 78
9-44214GPV 83
9-4427MP 120
9-4429MPV 75
9-4435MP 123
9-44803AMPV 71
9-44803AMPV01 . 71
9-44805AMPV 71
9-4516MR 107
9-4522MR 107
9-4526MR 104
9-4526MRV05 76
9-4527MRV02 77
9-4537MRV 77
9-4557MR 120
9-45VE01MRV N30
9-45VE02MRV N32
9-4827MP 120
9-5575MR 109
9-55VE01MRV N31
9-6010MR 127
9-6010MR01..... 127
9-6314MRV 70
9-6414MP 123
9-6414MPV 78
9-6414SP 123
9-7069CR 104
9-7069CR01 104
9-7069CRV 67
9-7078CR 104
9-7078CR01 104
9-7128PR 120
9-7128PRV 75
9-7537MR 109
9-7540MR 109
9-7560MRV01 77
9-7576MR 119
9-9003MRV01 70
9-90103PP 115
9-90103PP01 115
9-90103PP02 115
9-90103RR 115
9-90104GP 124
9-90106SR 115
9-90109MN 113
9-90111MR 127
9-90113MA 125
9-90114MR 122
9-90115MR 126
9-90118PRV 84
9-90119MRV 79
9-90120MR 126
9-90121MR 124
9-90125MR 126
9-90126MR 124
9-90128SR 105
9-90129CR 106
9-90129CRV 69
9-90131MR 110
9-90135MRV 83
9-90135SRV 83
9-90138CR 106
9-90145CRV 69
9-90154CR 107
9-90154CR01 107
9-90205GN 114
9-90205GN01 114
9-90217GRV 72
9-90220MR 106
9-90220MR01 106
9-90305TQV 84
9-90305TQV01 84
9-90310MR 116
9-90315MR 112
9-90329CR 106
9-90408TQ 119
9-9040SRV 77
9-90413TQV 73
9-9077CRV 67
9-91016MR 122
9-91026PR 117
9-91113SRV 85
9-91120MR 113
9-91122MRV 72
9-91124MRV 73
9-91126SRV 69
9-91131MRV 69
9-91190CRV 80
9-91217MRV 73
9-93523MR 109
9-94435MP 119
9-94437MRV 71
9-99430MFV 70
9-99430MFV01 70

90 xxx

901-068MR 93
901-069MR 93
901-073MR 93
902-062MR 96
902-062MRD 96
902-065MR 97
902-065MRD 97
902-068MR 97
902-068MRD 97
902-084MR01 98
902-084MRD01 .. 98
902-084SR 98
902-084SRD 98
902-089MR01 99
902-089MRD01 .. 99
902-103MR 99
902-103MRD 99
902-109MR 100
902-109MRD 100
902-132CR 100
902-132CRD 100
902-164MR 96
902-164MRD 96
90217PQ 424
90217PQ01 424
90217PQ02 424
90217PQ03 424
9033CR 201
90401 231
90402 231
90403 240
9043MR 213
90404 240
90405 240
90405 245
90406 245
9052-001MRV..... N8
9052-002MRV..... N9
90601 231
90602 231
90603 240
90604 240
90605 245
90606 245
90607 240
90608 222
90609 222
9063MR 201
9063MR01 201
908-077CR 101
908-077CRD 101

91 xxx

91000M 180
91038MY01 425
911-000CR 94
911-000CR02 94
911-000CRV 65
911-002CR 94
911-003CR 95
911-003CR01 95
911-004CRV 65
9113PR.....N15
91230 420
91232 370
91333MQ 425
91422 601
91431 449
91431 602
91432 602
91451-01A 275
91451-01A 603
91451-01B 275
91451-01B 603
91451-01F 275
91451-01F 603
91522H 449
91528H 449
91535H 449
91545H 449
91560H 449
91522S 449
91528S 449
91535S 449
91545S 449
91560S 449
919-001CRV 66

92 xxx

92543MR 215
92543MR01 215
9260-13 246
9260-13P 246

93 xxx

932-000MR 90
932-000MRD 90
932-000MR-B 90
932-000MR-G 90
932-008MR 91
932-008MRD 91
932-008MR-B 91
932-008MR-G 91
932-009MR 87
932-009MRD 87
932-009MR-B 87
932-009MR-G 87
932-010MR 88
932-010MRD 88
932-010MR-B 88
932-010MR-G 88
934-001MR 92
934-001MRD 92
934-001MR-B 92
934-001MR-G 92
934-010MRV 61
934-010MRV 492
934-010MRVD..... 61
934-010MRVD..... 492
934-010MRV-B.. 61
934-010MRV-B..... 492
934-010MRV-G 61
934-010MRV-G..... 492
934-011MRV..... 62
934-011MRVD... 62
934-011MRV-B... 62
934-011MRV-G.. 62
934-019MRV 63
934-019MRVD 63
934-019MRV-B ... 63
934-019MRV-G ... 63
934-235MRV..... 60
934-235MRVD.... 60
934-235MRV-B.... 60
934-235MRV-G.. 60
935-525CRV 64
935-525CRVD 64

94 xxx

941-101MRD 89
941-101MR 89

95 xxx

9519MR50 214
953532M 247
953533M 247
953534M 247
953536M 247
953538M 247
953541M 247
953542M 247
953546M 247
953550M 247
953555M 247
953560M 247
953564S 247
953565M 247
953566S 247
953568S 247
953570M 247
953570S 247
953572S 247
953574S 247
953575M 247
953576S 247
953578S 247
953580M 247
953580S 247
953582S 247
953584S 247
953585M 247
953586S 247
953588S 247
953590M 247
953590S 247
953592S 247
953594S 247
953595M 247
953596S 247
953598S 247
9535A0M 247
9535A0S 247
9535A2S 247
9535A4S 247
9535A5M 247
9535A6S 247
9535A8S 247
9535B0M 247
9535B0S 247
9535B2S 247
9535B4S 247
9535B5M 247
9535B6S 247
9535B8S 247
9535C0M 247
9535C0S 247
9535C2S 247
9535C4S 247
9535C5M 247
9535C6S 247
9535C8S 247
9535D0M 247
9535D0S 247
9535D2S 247
9535D4S 247
9535D5M 247
9535D6S 247
9535D8S 247
9535E0M 247
9535E0S 247
9535E2S 247
9535E4S 247
9535E8S 247
9535F0M 247
9535F2S 247
9535F6S 247
9535G0S 247
9535G4S 247
9535G8S 247
9535J2S 247
9543MR 213
9563MR 201
9563MR01 201

96 xxx

9632-000MR 90
9632-000MR-B 90
9632-000MR-G 90
9632-008MR 91
9632-008MR-B 91
9632-008MR-G 91
9632-009MR 87
9632-009MR-B 87
9632-009MR-G 87
9632-010MR 88
9632-010MR-B 88
9632-010MR-G 88
9634-001MR 92
9634-001MR-B 92
9634-001MR-G 92
9634-008MR 91
9634-008MR-B 91
9634-008MR-G 91
9634-009MR 87
9634-009MR-B 87
9634-009MR-G 87
9634-010MR 88
9634-010MR-B 88
9634-010MR-G 88
9634-010MRV 61
9634-010MRV 492
9634-010MRV-B ... 61
9634-010MRV-B ... 492
9634-010MRV-G... 61
9634-010MRV-G... 492
9634-011MRV 62
9634-011MRV-B.. 62
9634-011MRV-G.. 62
9634-019MRV 63
9634-019MRV-B... 63
9634-019MRV-G... 63
9634-235MRV 60
9634-235MRV-B... 60
9634-235MRV-G... 60
9641-101MR 89
9644-101MR 89

97 xxx

97121PQ 424

98 xxx

9868 246
9868P 246

99 xxx

9934F-000MR 90
9934F-000MR-B.... 90
9934F-000MR-G... 90
9934F-001MR 92
9934F-001MR-B ... 92
9934F-001MR-G... 92
9934F-008MR 91
9934F-008MR-B ... 91
9934F-008MR-G... 91
9934F-009MR 87
9934F-009MR-B ... 87
9934F-009MR-G... 87
9934F-010MR 88
9934F-010MR-B ... 88
9934F-010MR-G.....88
9934F-010MRV 61
9934F-010MRV 492
9934F-010MRV-B...61
9934F-010MRV-B. 492
9934F-010MRV-G...61
9934F-010MRV-G. 492
9934F-011MRV 62
9934F-011MRV-B...62
9934F-011MRV-G...62
9934F-019MRV.....63
9934F-019MRV-B...63
9934F-019MRV-G...63
9934F-235MRV 60
9934F-235MRV-B...60
9934F-235MRV-G...60

9A xxx

9A05-062MR 96
9A05-062MR-KB.....96
9A05-065MR 97
9A05-065MR-KB.....97
9A05-068MR 97
9A05-068MR-KB.....97
9A05-084MR01.....98
9A05-084MR01-KB...98
9A05-084SR 98
9A05-084SR-KB 98
9A05-089MR01 99

Index

9A05-089MR01-KB...99
9A05-103MR 99
9A05-103MR-KB.....99
9A05-109MR 100
9A05-109MR-KB... 100
9A05-132CR 100
9A05-132CR-KB.... 100
9A05-164MR 96
9A05-164MR-KB 96
9AA11 527
9AA13 527
9AA15 528
9AA16 527
9AA17 528
9AA21 527
9AA25 528
9AA31 528
9AA32 528
9AB11 529
9AB12 529
9AC125-32 530
9AC125-40 530
9AC175-32 530
9AC175-40 530
9AC175-66 530
9AC231-54 .....N51
9AC2315DK N51
9AD11 530
9AE0-6414 533
9AE0-7414 533
9AE1-6414 533
9AE2002 533
9AE2004 534
9AE2016 535
9AE2-10615 539
9AE2-10815 539
9AE2-10818 539
9AE2-6514 533
9AE2-6567 533
9AE2-6606 534
9AE2-6606 535
9AE2-7476 535
9AE2-7608 534
9AE2-7608 535
9AE2-7612 535
9AE2-7614 534
9AE2-7614 535
9AE2-8616 535
9AE2-8618 535
9AE2-9210 535
9AE2-9315 534
9AE2-9315 535
9AE2-9345 535
9AE2-9618 535
9AE2-10615 535
9AE2-10815 535
9AE2-10818 535
9AE221 535
9AE221 536
9AE221 538
9AE31-73 530
9AE31-85 530
9AE31-95 530
9AE31-111 530
9AE31-121 530
9AE31-134 530
9AE32-110 531
9AE32-155 531
9AE33-110 531
9AE33-110-S 531
9AE33-155 531
9AE42 538
9AE423 539
9AE423 538
9AE43 538
9AE433 536
9AE433 538
9AE52 538
9AE52-110 538
9AE53-115 538
9AE6002 534
9AE6030 536
9AE6-6514 534
9AE6-6514 536
9AE6-6514A 533
9AE6-6567 534
9AE6-6567 536
9AE6-6606 536
9AE6-6814 536
9AE6-7314 536
9AE6-7414 533
9AE6-7415 536
9AE6-7476 536
9AE6-7577 536
9AE6-7608 536
9AE6-7612 536
9AE6-7614 536
9AE6-7630 536
9AE6-7815 536
9AE6-8015 536
9AE6-8082 536
9AE6-8414 533
9AE6-8616 536
9AE6-8618 536
9AE6-9015 536
9AE6-9210 536
9AE6-9315 536
9AE6-9336 536
9AE6-9345 536
9AE6-9515 536
9AE6-9618 536
9AE6-10015 536
9AE6-10615 536
9AE6-10815 536
9AE6-10818 536
9AE71-90 539
9AE71-115 539
9AE71-140 539
9AE72 539
9AE8006 537
9AE8-24 537
9AE8-27 537
9AE8-30 537
9AE8-32 537
9AE8-36 537
9AE8-38 537
9AF11-15 539
9AF11-30 539
9AF11-60 539
9AF113 539
9AG11 540
9AG13 540
9AH12 541
9AH025 541
9AH0311 541
9AH0321 542
9AH0331 542
9AH31 541
9AH41 .....N48
9AJ017 542
9AJ3122 542
9AJ3122A 542
9AJ3127 542
9AJ3222 542
9AJ3322 542
9AJ4122 542
9AJ4227 542
9AJ4229 542
9AJ4322 542
9AK11 542
9AK21 543
9AL11 543
9AL12 543
9AM010 543
9AM011 543
9AM012 543
9AN021 540
9AN4128 .....N49
9AN4227 .....N49
9AN43 .....N50
9AP100 544
9AP120 544
9AP160 544
9AR11 544
9AR21 544
9AR29-S 544
9AS11 544
9AT1002E 504
9AT1002E 518
9AT1007E 519
9AT1009E 494
9AT1010E 497
9AT1010E 502
9AT1018E 493
9AT1021E 502
9AT1026E 506
9AT1102E 495
9AT1103E 515
9AT1104E 515
9AT1105E 507
9AT1106E 495
9AT1108E 497
9AT1112E 501
9AT1202 500
9AT1202 519
9AT1206E 496
9AT1306E 525
9AT1406E 506
9AT1506E 525
9AT1606E 499
9AT1706E 499
9AT1-A01 517
9AT1-A02 500
9AT1-A03 511
9AT1-A04 518
9AT1-E01 505
9AT1-E01 509
9AT2004E 514
9AT2004E 520
9AT2005E 513
9AT2005E 520
9AT2006E 493
9AT2006E 504
9AT2006E 508
9AT2007E 501
9AT2007E 509
9AT2007E 513
9AT2007E 521
9AT2008E 510
9AT2008E 512
9AT2008E 521
9AT2010E 517
9AT2011E 507
9AT2012E 516
9AT2026E 503
9AT2106E 496
9AT2106E 509
9AT2106E 522
9AT2107E 498
9AT2-A01 503
9AT2-A01 505
9AT2-A01 508
9AT2-A01 511
9AT2-A01 522
9AT2-C01 507
9AT2-C01 518
9AT2-D01 500
9AT2-D01 510
9AT2-D01 522
9AT2-E01 523
9AT3-A01 523
9AT3-A02 523
9AT3-A03 511
9AT3-A04 524
9AT3-B01 524
9AT3-F01 524
9AT3-F02 524
9AT3-E01 508
9AT3-E02 503
9AT3-E02 505
9AT3-E02 512
9AW4901 546
9AW4911 546

9B xxx

9BA01 457
9BA02 458
9BA03 458
9BA11 546
9BA21 457
9BA21P01 457
9BA21P011 457
9BA21P02 457
9BA21P03 457
9BA21P04 457
9BA21P05 457
9BA21P06 457
9BA21P07 457
9BA22 457
9BA22P01 457
9BA22P011 457
9BA22P02 457
9BA22P04 457
9BA31 458
9BA32 458
9BA33 458
9BA41 547
9BB11 547
9BB12 547
9BB13 548
9BB31 548
9BB42 548
9BC11 549
9BC121 549
9BC122 549
9BC124 549
9BC21 549
9BC22 549
9BC23 550
9BC24A 550
9BC25 550
9BC251A01 .....N51
9BC26 551
9BC32 551
9BC32P021 .....N49
9BC5001MR N49
9BC5107M N49
9BC5108M N49
9BC5109M N49
9BC5110M N49
9BC5111M N49
9BD101 551
9BE11 552
9BE21 552
9BE41 552
9BE42 552
9BE43 552
9BE44 552
9BE45 552
9BE52 553
9BE62 553
9BE63 553
9BF11 554
9BF21 554
9BF31 554
9BF33 .....N48
9BG11 554
9BJ11 555
9BK11 555
9BK31 555
9BK32 555
9BK41 555
9BK41-20 555
9BK41-28 555
9BK41-38 555
9BK41-53 555
9BK41-65 555
9BK41-73 556
9BK43 555
9BK43-65 555
9BK7008 561
9BK7009 561
9BK711 561
9BK72 561
9BK72-12 561
9BK72-13 561
9BK72-14 561
9BK72-16 561
9BK72-22 561
9BK72-28 561
9BK73-14 561
9BK73-22 561
9BM120 556
9BM2-01 272
9BM2-01 557
9BM2-02 272
9BM2-02 557
9BM2110 272
9BM2110 557
9BM2111 272
9BM2111 557
9BM2210 272
9BM2210 557
9BM2210A 272
9BM2210A 557
9BM2211 272
9BM2211 557
9BM2211A 272
9BM2211A 557
9BM811 556
9BP11 548
9BP21 548
9BQ01 564
9BQ11 564
9BT250 564
9BT2100 564
9BU111 562
9BU111T 562
9BU112 562
9BU112T 562
9BU1432T 562
9BU1531T 562
9BU1532T 562
9BU241 563
9BU241T 563
9BU242 563
9BU242T 563
9BU251 563
9BU251T 563
9BU252 563
9BU252T 563
9BU41 564
9BU8109 271
9BU8109 563
9BU8112 271
9BU8112 563
9BU8209 271
9BU8209 563
9BU8212 271
9BU8212 563
9BV1420 270
9BV1420T 271
9BW0120 558
9BW0123 558
9BW0220 558
9BW0221 558
9BW4501 560
9BW4502 560
9BW4801 560

9C xxx

9CD14 569
9CD21 569
9CD31 570
9CF-107 566
9CF110 565
9CF120 565
9CF130 565
9CF131 565
9CF132 565
9CF-207 566
9CF210 565
9CF220 566
9CF230 566
9CF240 566
9CF241 566
9CF-307 566
9CH01 567
9CH212 567
9CI016 569
9CJ013 568
9CJ023 568
9CJ033 569
9CJ1112 567
9CJ1120 567
9CJ1130 568
9CJ2112 568
9CJ2120 568
9CJ2212 568
9CJ3104 568
9CJ3105 568
9CJ3106 569
9CJ61-40 569
9CK-101 575
9CM01 567
9CM11 567
9CM209 567
9CM212 567
9CW01 570
9CW11 570
9CW12 570
9CW13 570
9CW21 570
9CW22 570
9CZ101 576
9CZ201-S N39

9D xxx

9DA022 571
9DA103 571
9DA104 571
9DB201 571
9DC22 572
9DC23 571
9DC242 572
9DC243 572
9DC51 .....N54
9DD21 573
9DD22 .....N51
9DH11 573
9DM1361 427
9DM1381 427
9DM1A1 573
9DM2351 428
9DN12 430
9DP1101 574
9DP1301 574

Index

9DP1302 574
9DP2301 574
9DP3201 575
9DT11 575
9DT11-1 575
9DT11-2 575
9DT11-3 575
9DT11-4 575
9DT11-5 575
9DT11-6 575
9DT11-7 575
9DT11-8 575
9DT11-9 575
9DT11-10 575
9DT11-11 575
9DT11-12 575

9H xxx

9HBE083 553
9HBE4-30 552
9HBE4-39 552
9HBE4-47 552
9HBE4-58 552
9HBE4-62 552
9HBE4-67 552
9HBE81 553
9HBL11-05 557
9HBL12-05 557
9HBN01 554

9T xxx

9TA242A N42
9TA242B N42
9TA242D N42
9TA251A 482
9TA251B 482
9TA251D 482
9TA261A 479
9TA261B 479
9TA261D 479
9TA263 479
9TA265 480
9TA266 480
9TA267W N43
9TA268A N44
9TA268B N44
9TA268D N44
9TA27A 478
9TA27B 478
9TA27D 478
9TA28 487
9TA281 481
9TA281 487
9TA33A 482
9TA33B 482
9TA33D 482
9TA34A N45
9TA34B N45
9TA34D N45
9TA34P01 ..... N45
9TA42A 483
9TA42B 483
9TA42D 483
9TA44W 483
9TA45A 484
9TA46A 484
9TA521 481
9TA52A 486
9TA52B 486
9TA52D 486
9TA53 ..... N45
9TA54 ..... N46
9TA56 ..... N46
9TA71W N47
9TA92WA N47
9TA92WB N47
9TA92WD N47
9TB225 576
9TB500 576
9TBA600 ..... N52
9TBA600P031 ..... N52
9TBA600P032 ..... N52
9TBA600P033 ..... N52
9TBA600P034 ..... N52
9TBA600P035 ..... N52
9TBA650 576
9TC101 576
9TD014MR 467
9TD034MR 467
9TD035MR 467
9TD036MR 467
9TD062 466
9TD064 466
9TD164MR N50
9TD165MR N50
9TD401-06M 467
9TD401-08M 467
9TD401-10M 467
9TD401-12M 467
9TD403-10M 467
9TD403-12M 467
9TD403-13M 467
9TD403-14M 467
9TD403-17M 467
9TD403-19M 467
9TD403-21M 467
9TD403-22M 467
9TD403-23M 467
9TD403-24M 467
9TD403-27M 467
9TD404-0619M 467
9TD406 ..... N50
9TD601 466
9TD602 466
9TD603 466
9TD604 466
9TE11 464
9TE41 230
9TE41 602
9TG11 583
9TG12 583
9TG21 583
9TH21XL 275
9TH21XL 464
9TH31-XL 275
9TH31-XL 464
9TH31-2L 275
9TH31-2L 464
9TH41-L N38
9TH41-XL N38
9TH42-XL N38
9TH42-XXL N38
9TH43-XL N38
9TH43-XXL N38
9TH44-XL N39
9TH44-XXL N39
9TH45-XL N39
9TH45-XXL N39
9TK014 577
9TK024 577
9TK034 577
9TK108 577
9TK112 577
9TK118 577
9TK124 577
9TK225A 577
9TK225B 577
9TK236A 577
9TK236B 577
9TK306 577
9TK312 577
9TK316 577
9TK320 577
9TP11 584
9TP12 584
9TP22 584
9TQ02 581
9TQ11 ..... N53
9TQ12 ..... N53
9TQ21 581
9TQ31 576
9TT11-18 585
9TT21-03 585
9TT31-20 585
9TU11-20 587
9TU21-20 587
9TV12-020 586
9TV12-021 586
9TV13-100 586
9TV21-09 586
9TW21-20 587
9TZ11-04 464
9TZ11-05 464
9TZ11-06 464
9TZ11-08 464
9TZ11-10 464
9TZ11-12 464

9X xxx

9XAH1 540

A5 xxx

A535041M 248
A535046M 248
A535050M 248
A535051M 248
A535055M 248
A535057M 248
A535060M 248
A535065M 248
A535070M 248
A535075M 248
A535076M 248
A535076S 248
A535077M 248
A535078S 248
A535080M 248
A535080S 248
A535082S 248
A535084S 248
A535085M 248
A535086M 248
A535088S 248
A535090M 248
A535090S 248
A535094S 248
A535095M 248
A535096S 248
A535100M 248
A535100S 248
A535105M 248
A535108S 248
A535110M 248
A535112S 248
A535115M 248
A535120M 248
A535120S 248
A535124S 248
A535125M 248
A535126S 248
A535130M 248
A535132S 248
A535135M 248
A535136S 248
A535138S 248
A535140M 248
A535144S 248
A535145M 248
A535148S 248
A535150M 248
A535155M 248
A535156S 248
A535160M 248
A535160S 248
A535164S 248
A535165M 248
A535168S 248
A535170M 248
A535172S 248
A535175M 248
A535180M 248
A535180S 248
A535184S 248
A535185M 248
A535188S 248
A535190M 248
A535192S 248
A535196S 248
A535200M 248
A535200S 248
A535204S 248
A535208S 248
A535210M 248
A535212S 248
A535215M 248
A535216S 248
A535220S 248
A535224S 248
A535225M 248
A535235M 248
A535240S 248
A535244S 248
A535252S 248
A535256S 248

AD xxx

ADCV-01 600
ADCV-02 600
ADFLAG 600
ADFLAG1 600
ADFLAG2 600
ADSTK21KT 600
ADSTK22KT 600
ADSTK23KT 600
ADSTK31KT 600
ADSTK-C1 600
ADSTK-H2 600
ADVT-02 601

B5 xxx

B535105M 249
B535110M 249
B535115M 249
B535120M 249
B535125M 249
B535130M 249
B535132S 249
B535135M 249
B535136S 249
B535140M 249
B535140S 249
B535144S 249
B535145M 249
B535148S 249
B535150M 249
B535152S 249
B535156S 249
B535160M 249
B535160S 249
B535164S 249
B535165M 249
B535168S 249
B535170M 249
B535172S 249
B535175M 249
B535176S 249
B535180M 249
B535180S 249
B535184S 249
B535185M 249
B535188S 249
B535190M 249
B535192S 249
B535196S 249
B535200M 249
B535200S 249
B535204S 249
B535208S 249
B535210M 249
B535212S 249
B535215M 249
B535216S 249
B535220S 249
B535224S 249
B535225M 249
B535228S 249
B535232S 249
B535235M 249
B535236S 249
B535240S 249
B535244S 249
B535248S 249
B535252S 249
B535256S 249
B535260S 249
B535264S 249
B535268S 249
B535272S 249
B535276S 249
B535280S 249
B535284S 249

P xxx

P34462-1DG02 ..... N55
P9TA0212A 480
P9TA5002 481

SC xxx

SC7083MR 590
SC7096MR 591
SC7010MR 592
SC7396MR 590
SC7510MR 592
SC7583MR 590
SC7596MR 591
SC9043MR 593
SC9543MR 593

ST xxx

ST112012MR 594
ST112014MR 594
ST112017MR 594
ST112019MR 594
ST114512MR 594
ST114514MR 594
ST114517MR 594
ST114519MR 594
ST20109MR 595
ST20203MR 595
ST20203SR 595
ST20207MY 594
ST20208MY 594
ST20209MR 594
ST20213MR 594
ST20219MR 594
ST20219MY 594
ST20419PR 595
ST2346MR 589
ST4028MR 589
ST4028SR 589
ST4528MR 589
ST4528SR 589
ST87432-5B 595
ST87434-7B 595

SY xxx

SY-10A 275
SY-20A 275
SY-210H 274
SY-210M 274
SY-211F 274
SY-211H 274
SY-211M 274
SY-220H 274
SY-221H 274
SY-221M 274
SY-221F 274
SY-230M 274
SY-231M 274
SY-231F 274
SY-260M 274
SY-310H 274
SY-311H 274
SY-320H 274
SY-321H 274
SY-410H 274
SY-411H 274
SY-421M 274

TS xxx

TC001 ..... N55
TS00108 596
TS00208 597

WS xxx

WSB012802-5 559
WSB013006-5 559
WSB022701-5 559
WSN043601-5 559
WSN043602-5 559
WSN143601-5 559
WSN143602-5 559

ZD xxx

ZD101-100C 474
ZD101-336C 474

ZS xxx

ZS104 598
ZS107 598
ZS108 599
ZS109-L 598
ZS109-XL 598
ZS109-2L 598
ZS109-3L 598
ZS110 599
ZS111-M 599
ZS111-L 599
ZS111-XL 599
ZS111-2L 599
ZS111-3L 599
ZS111A-S 599
ZS111A-M 599
ZS111A-L 599
ZS111A-XL 599
ZS111A-2L 599
ZS111A-3L 599
ZS112-L 598
ZS112-XL 598
ZS112-2L 598
ZS112-3L 598
ZS115 600
ZS115-1 600
ZS116 599
ZS119 599
ZS120-S 599
ZS141-S 598
ZS141-M 598
ZS141-L 598
ZS141-XL 598
ZS141-2L 598
ZS141-3L 598

Index

ZS142B-S 599
ZS142B-M 599
ZS142B-L 599
ZS142B-XL 599
ZS142B-2L 599
ZS142B-3L 599
ZS142G-S 599
ZS142G-M 599
ZS142G-L 599
ZS142G-XL 599
ZS142G-2L 599
ZS142G-3L 599
ZS142W-S 599
ZS142W-M 599
ZS142W-L 599
ZS142W-XL 599
ZS142W-2L 599
ZS142W-3L 599
ZS146-S 598
ZS146-M 598
ZS146-L 598
ZS146-XL 598
ZS146-2L 598
ZS153A 599
ZS155 .....N54
ZS155A N54
ZS306 598
ZS402 598
ZS405 598
ZS408 598
ZS409 598
ZS410 598
ZS411 598
ZS511 599
ZS514 598
ZS517 598
ZS522 599
ZS524 599
ZS533 599
ZS539..... 599
ZS540 599
ZS572 599
ZS605 599

ZV xxx

ZV011 298
ZV011A 298
ZV011B 298
ZV011D 298
ZV012 298
ZV012A 298
ZV012B 298
ZV012D 298
ZV013 298
ZV013A 298
ZV013B 298
ZV013D 298

Notes .....

Notes .....

KING TONY Tools Corporation

Green Space for The Mind

The tall rich green grasses around us grow and give us a sense of a fresh, free feeling, as the gentle winds blow. As the tall grasses grow to reach the blue sky, so do our desires, minds, and work to reach the highest quality of service.

- KING TONY reserve the revising right to the listing product in this catalogue for improving or technical reasons.
- All products listed in catalogues before this version are null and void unless items confirming remain available by KING TONY.
- Do not copy or extract any listing in the cataloque without our approval.



Quality
Innovation
Health
Enjoyment



KING TONY TOOLS CO.,LTD.

http://www.kingtony.com
service@kingtony.com.tw

facebook YouTube
king tony

Instagram
kingtonytools

CAT2023-0